



Contact Tracing App with Simplified WiFi Fingerprinting Model

6CCS3PRJ Final Project Report

Author: Xinran Tao

Supervisor: Dr Andrew Coles

Student ID: 1834437

March 3, 2023

Abstract

COVID-19 struck the globe at the beginning of 2020. To reduce the damage dealt by the pandemic, the UK government launched the track and trace programme. One of the most crucial measures taken is the development of the contact tracing app. This dissertation will present a contact tracing app based on the simplified WiFi fingerprinting model as the main content. It aims to provide insights into a new design idea for the contact tracing app and discuss the possibility and potential for a low-cost contact tracing model based on WiFi. Additionally, a basic background introduction of WiFi localisation, the Flutter framework, and current contact tracing apps will be given.

Furthermore, professional issues related to the project will also be discussed. A conclusion will be drawn about which technology between WiFi and Bluetooth Low Energy (BLE) is better as the core of contact tracing at the end of the dissertation. Possible future work on the project will also be listed in the same chapter.

Originality Avowal

I verify that I am the sole author of this report, except where explicitly stated to the contrary.
I grant the right to King's College London to make paper and electronic copies of the submitted work for purposes of marking, plagiarism detection and archival, and to upload a copy of the work to Turnitin or another trusted plagiarism detection service. I confirm this report does not exceed 25,000 words.

Xinran Tao

March 3, 2023

Acknowledgements

I would like to thank my supervisor, Dr Andrew Coles, who has provided me with very beneficial suggestions on my dissertation writing and prototype building. I would also like to thank Michael Ebenstein for providing great help for testing and debugging the prototype.

Contents

1	Introduction	3
1.1	Motivations	4
1.2	Reasons for Targeting Android	4
1.3	Objectives	5
1.4	Dissertation Overview	6
2	Background	7
2.1	Models	7
2.2	WiFi Positioning System Applications	12
2.3	Framework	12
2.4	Database	13
2.5	Current Contact Tracing App & Security	14
3	Requirements & Specification	16
3.1	Overview	16
3.2	Requirements	16
3.3	Specification	19
4	Design	24
4.1	Overview	24
4.2	Limitation	24
4.3	Use Cases	26
4.4	System Architecture	30
4.5	WiFi RSSI Matching Algorithm	31
5	Implementation	39
5.1	Overview	39
5.2	Class Structure	40
5.3	Functional Requirements Implementation	41
5.4	Non-functional Requirements Implementation	48
6	Testing & Experiments	51
6.1	Overview	51
6.2	Functional Testing	51
6.3	Non-functional Testing	56
6.4	Parameters Tuning	60

6.5	Experiment with Other Algorithms	62
7	Evaluation	64
7.1	Overview	64
7.2	Simplified WiFi Fingerprinting Model Evaluation	64
7.3	Requirements Evaluation	65
8	Professional Issues	69
8.1	Overview	69
8.2	Professional	69
8.3	Legal	69
8.4	Social & Ethical	70
9	Conclusion and Future Work	71
9.1	Conclusion	71
9.2	Future Work	72
	Bibliography	76
A	User Guide	77
A.1	Running the Contact Tracing App Prototype	77
A.2	Running Test Files	93
B	Source Code	94
B.1	Dart: Code for App	96
B.2	Python: Code for Test	163
C	Raw Test Data	170
C.1	WiFi Matching Algorithm Runtime on Samsung Device	170
C.2	WiFi Scans in My Room	173
C.3	WiFi Scans in the Kitchen	182
C.4	WiFi Scans in the Hallway	188
C.5	WiFi Scans outside the 6th Floor Elevator	204
C.6	WiFi Scans in the Room Nextdoor	229
C.7	WiFi Scans in the Hallway Upstairs	230
C.8	WiFi Scans in the Hallway Downstairs	272

Chapter 1

Introduction

At the beginning of 2020, a pandemic, namely COVID-19, struck the globe and caused a huge economic loss worldwide. So far, there are more than 4.26 million cases and 120,000 deaths within the United Kingdom (UK) [7]. To recover from the coronavirus's damage, the UK government started a programme called United Kingdom National Health Service (NHS) Test and Trace (NHSTT). There are four key goals this programme is aiming to achieve: "1. increase the availability and speed of testing 2. identify possible close contacts of those who test positive, and asking those close contacts to isolate 3. rapidly identify and contain outbreaks 4. enable the government to learn about infection rates and respond appropriately." [1]

One of the critical measures taken is the implementation of the Contact Tracing App by the NHS to push forward this programme. Each UK citizen is encouraged to download the app on the phone. The app allows two types of contact tracing methods, automatic and manual. The automatic tracing runs the Bluetooth scanning in the background. When two users are spending more than 15 minutes together within a 2 meters' range, and one of the users is tested positive for coronavirus later on (within nine days), the other user will be notified to self-isolate. On the other hand, the manual method works by scanning the Quick Response (QR) code before checking in a hospitality venue like a shop, hospital or restaurant. Then when other users entering this area, they will receive the risky tier notification[5].

There are some significant issues with the app. User privacy is a considerable concern when user's personal data are involved. To ensure app security, the UK government decided to shift the original app to a model based on Apple and Google's technology, which means that epidemiologists have fewer data to access. Additionally, Apple has restrictions on third-party apps' use of Bluetooth. As a result, the reaching rate of users who had transferred to the

contact tracing system was 75.0% on Android and only 4% on iPhones. Moreover, the distance calculations are weaker with this new model. Under some circumstances, the phone cannot differentiate users within a three-meter range[12].

1.1 Motivations

The working principle behind the NHS contact tracing app is to determine the proximity within 2 meters for 15 minutes based on the Bluetooth Low Energy received signal strength indicator (RSSI). Another type of signal source, WiFi, can also be used for the same purpose. WiFi signals are typically used for indoor localisation. Much research has already been done to develop localisation models with high accuracy based on WiFi. Its potential on contact tracing is worth exploring.

Apart from the technicality, the design of the current app is aiming at government data collection. Therefore, functions that contribute to "track and trace", such as entering test results, checking symptoms, and venue check-in, are straightforward for users to handle. However, if a user wants to know more information or rules about COVID-19, it is not very easy to find answers in the app. The current app provides extra guidance to users by scattering links to different government websites within the app, which will be opened in a browser. This approach requires internet access, which means users cannot search for a question offline. Furthermore, users often have to browse through a long page of information before finding the section relevant to what they want to find.

Ultimately, COVID-19 guidance is what matters to users as a contact tracing app. Currently, the app feels merely like a government's protocol instead of a helpful guidance tool. Therefore, this project aims to present a new version of the app that improves the user experience on top of achieving the "track and trace" goal. In this case, users are more likely to check on the app, increasing the reaching rate.

1.2 Reasons for Targeting Android

On the Android operating system, each app can initiate four scans per 2 minutes when running in the foreground and one scan per 30 minutes when running in the background. When the number of scans passes the limit, the last scan result is returned by the Android application programming interface (API). The government has the authority to overwrite the background activity's scanning limit to reach the required frequency, which is three scans per 15 minutes.

Unfortunately, there are not any software solutions for Apple devices due to their data restrictions policy. Therefore, the background scanning function of the contact tracing app is only valid on Android devices.

As for a non-government Android developer, the setting can be changed on the device to allow unlimited scans when the app is running in the foreground. Therefore, the WiFi scanning process will be demonstrated as a foreground activity. In a natural production environment, the same process will run in the background but with authority to make enough scans.

1.3 Objectives

This project's primary goal is to build a contract tracing app, where the "track and trace" is purely achieved with WiFi scans. The concept of a user-friendly app should be fulfilled. The main functions of the app that must be implemented are listed as followed:

- Identify those who have been in contact with someone who has tested positive and notify both of them to self-isolate.
- A symptoms list where users can keep track of their symptoms. Self-isolation notifications will be sent to those who have shown COVID-19 symptoms.
- Buttons linked to websites where users can check their local COVID-19 tiers, as well as a heat map and statistics.
- A common question section where users can look up commonly asked questions related to COVID-19.
- Include a secure, anonymous login method to protect user data.
- An easily comprehensible and visually pleasing user interface (UI).

The secondary aim is to discuss the possibility and potential of a low-cost WiFi matching algorithm through data collections and experiments. A confusion matrix should be drawn to help with parameters tuning and demonstrate parameters to achieve the best result. The best result means to maximise true positives and minimise false positives. In other words, the parameters should be tuned such that the models show whether people are in the same room correctly. When people are not in the same room, the probability of returning true is as low as possible.

1.4 Dissertation Overview

Background information on WiFi localisation, prototype framework, and current contact tracking apps will be given in chapter 2. Requirements and specification for the project will be listed in chapter 3. The prototype design and its limitation will be explained in chapter 4. Implementation details following each requirement will be given in chapter 5. Testing based on the specification and experiments with WiFi contact matching models will be shown in chapter 6. Chapter 7 evaluates different aspects of the project. Professional issues and measurements related to this project will be discussed in chapter 8. Furthermore, chapter 9 will give a conclusion drawn from doing the project and a list of possible future work.

Chapter 2

Background

2.1 Models

2.1.1 WiFi Positioning System Overview

WiFi Positioning System is a popular indoor localisation technique. It is only a good location indicator indoor because the WiFi signal measurements are highly inaccurate outdoor due to its high frequency and short transmission radius[19]. As suggested by the research on the urban outdoor performance of the WiFi localisation[13], even with the more accurate approach adapted, the average error is 23.5m which is far from what is required. The best method to locate a user outdoor is still using GPS. A hybrid method combining WiFi and GPS should be considered if an app is to track a user's indoor and outdoor location. Both models compensate for each other's inaccuracy in the opposite environment.

There are a few WiFi indoor positioning models, and they can be categorised into received signal strength (RSS) based and time and space attributes of the received signal based (TSARS). Ones that belong to the first category are trilateration, approximate perception, and fingerprinting. Ones that belong to the second category are the angle of arrival (AOA), time difference of arrival (TDOA), and time of arrival (TOA).

2.1.2 RSS Based

Received signal strength indicator (RSSI), or signal strength for short, is commonly used for indoor localisation. Since the signal strength attenuates according to the inverse-square law, the distance between APs and the user can be estimated with a propagation model[15][3]. Once the distances are obtained, trilateration can be employed. One drawback of this approach is

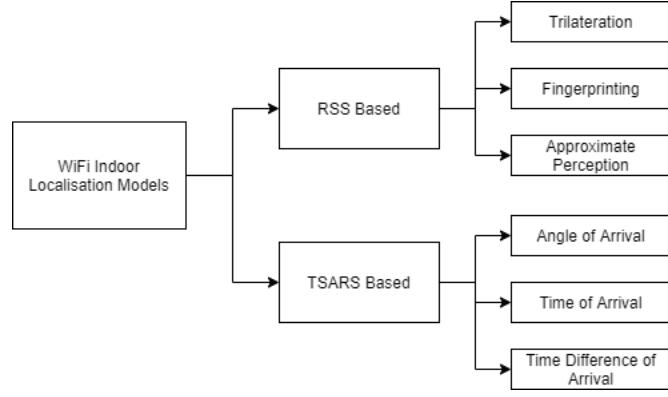


Figure 2.1: WiFi Indoor Positioning Classification

that its accuracy (median of 2-4m)[4] is not consistent. The phone's signal strength might fluctuate due to the state change of the location and the orientation.

RSS based models are the main focus of this project. Since the RSSI of a signal can be directly returned by the Android API, it makes the RSS models feasible to implement.

Trilateration

Trilateration requires the exact coordinates of access points (AP) as the precondition. The coordinate of the signal receiver is then determined by Miquel's theorem, which states that if three circles are intersecting with each other, they only have one intersection point [16].

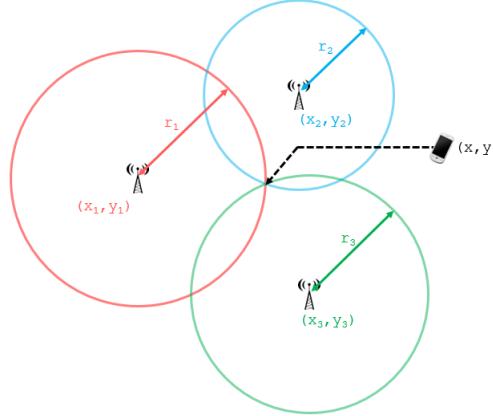


Figure 2.2: 2D Model for Cell Phone Trilateration¹

Figure 2.2 uses simplified 2D diagram to explain how this model locates a user. The coordinate of the mobile user is (x, y) and the coordinates of three signal towers are (x_1, y_1) , (x_2, y_2) ,

¹<https://www.101computing.net/cell-phone-trilateration-algorithm>

and (x_3, y_3) separately. We can form three equations with Pythagorean theorem[17]:

$$(x - x_1) + (y - y_1) = r_1^2 \quad (2.1)$$

$$(x - x_2) + (y - y_2) = r_2^2 \quad (2.2)$$

$$(x - x_3) + (y - y_3) = r_3^2 \quad (2.3)$$

The expansions of the above equations are:

$$x^2 + x_1^2 - 2xx_1 + y^2 + y_1^2 - 2yy_1 = r_1^2 \quad (2.4)$$

$$x^2 + x_2^2 - 2xx_2 + y^2 + y_2^2 - 2yy_2 = r_2^2 \quad (2.5)$$

$$x^2 + x_3^2 - 2xx_3 + y^2 + y_3^2 - 2yy_3 = r_3^2 \quad (2.6)$$

The subtraction equation of (2.5) from (2.4) is:

$$2(x_2 - x_1)x + 2(y_2 - y_1)y + x_1^2 - x_2^2 + y_1^2 - y_2^2 = r_1^2 - r_2^2 \quad (2.7)$$

which can be rewritten into:

$$2(x_2 - x_1)x + 2(y_2 - y_1)y = r_1^2 - r_2^2 - x_1^2 + x_2^2 - y_1^2 + y_2^2 \quad (2.8)$$

Apply the same rule to get equation (2.5) – (2.6):

$$2(x_3 - x_2)x + 2(y_3 - y_2)y = r_2^2 - r_3^2 - x_2^2 + x_3^2 - y_2^2 + y_3^2 \quad (2.9)$$

Replace $2(x_2 - x_1)$ with A, $2(y_2 - y_1)$ with B, $r_1^2 - r_2^2 - x_1^2 + x_2^2 - y_1^2 + y_2^2$ with C, $2(x_3 - x_2)$ with D, $2(y_3 - y_2)$ with E, $r_2^2 - r_3^2 - x_2^2 + x_3^2 - y_2^2 + y_3^2$ with F:

$$Ax + By = C \quad (2.10)$$

$$Dx + Ey = F \quad (2.11)$$

Rearrange (2.10) and (2.11) to get:

$$x = \frac{BF - CE}{BD - AE} \quad (2.12)$$

$$y = \frac{AF - CD}{AE - BD} \quad (2.13)$$

where A, B, C, D, E, F are constants.

Fingerprinting

There are 2 phases of fingerprinting, which are offline and online. The offline phase is also called WiFi RSS fingerprinting, of which the purpose is data collection. Typically, a radio map is built. The indoor environment to be measured is divided into received points (RP) or girds. At each RP, signals emitting from APs are recorded. The raw fingerprints are filtered by a filtering algorithm then stored in a database; hence the radio map. Then in the online phase, a positioning algorithm, either deterministic or probabilistic, is run to match the real-time signal measurement to signals in the database. The deterministic positioning algorithm usually employs a machine learning model, such as K-nearest neighbour (KNN) and neural network, to relate signal measurements to an RP. The probabilistic positioning algorithm differs from the deterministic positioning algorithm by storing the probability distribution of signal strength over a certain time in the database, then calculate the user's location by the Bayesian theory system based on signal strength[19].

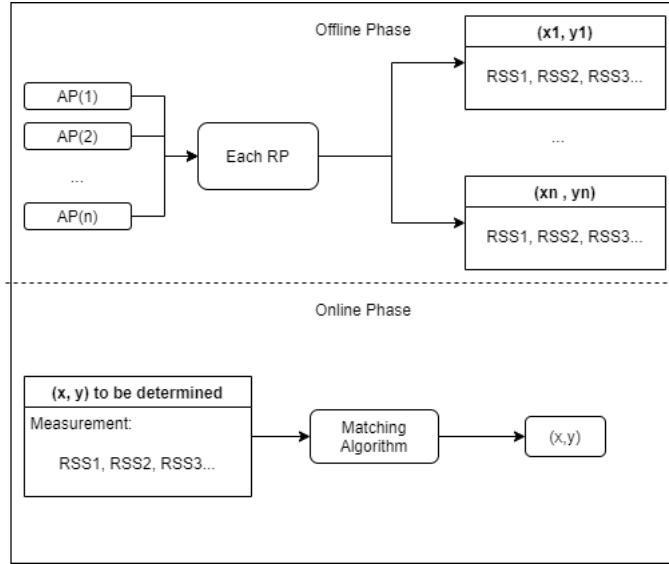


Figure 2.3: WiFi Fingerprinting

Plenty of research has been done on fingerprinting. The mean accuracy of determining a user's location can reach 3.46m with a standard deviation of 2.46m[20] in an experiment environment, which provides a plausible indicator of the proximity between users. However, it is unrealistic to ask the contact tracing app users to collect data for constructing radio maps

manually. A more feasible way can be considered. Instead of acquiring the exact coordinate of a user, the app can be built to identify whether users are in the same room, indicating contact situations. As shown in the research based on collecting fingerprint's important access points[9], with the optimal parameters, the highest success rate of recognising users in the same room is 85.9%. A modified version of the algorithm is implemented in this project based on this idea.

Approximate Perception

The approximate perception requires the user to connect the mobile device to a WiFi network. The network is then seen as the user's location. This method is straightforward to implement but also highly inaccurate. Therefore, it will not be considered for this project.

2.1.3 TSARS Based

TSARS based models are briefly introduced in this section. Though these models are much more accurate than RSS based models, most of them are not directly supported by Android API. Moreover, the BLE RSS used by existing contact tracing apps, which suffers from the same problems as those with WiFi RSS, implies that RSS is accurate enough for indicating contacts between users. Therefore, TSARS based models will not be considered for this project.

Angle of Arrival (AoA)

Angle of Arrival (AOA) refers to the method that the position of a mobile device is determined by the direction of the incoming signals from other transmitters whose locations are known[3].

Time of Arrival (ToA)

Time of Arrival (TOA) method measures the round-trip time (RTT) of a signal[3]. Android API contains a library that allows measuring WiFi locations with RTT. However, not many AP and phone models support this feature as it is still in development. Android RTT, nonetheless, will be kept as a reference.

Time Difference of Arrival (TDoA)

Time Difference of Arrival (TDoA) is very similar to ToA. It also uses the time difference of arrival time. The difference is that TDoA eliminates the synchronization requirement[3].

2.2 WiFi Positioning System Applications

As mentioned in section 2.1.1, WiFi localisation is only used for indoor location-aware applications. It is very trendy, and its usage is not limited to contact tracing. Some typical applications include augmented reality, social networking, health care monitoring, personal tracking, inventory control[18].

WiFi indoor tracking typically includes placing processing units that can localise all WiFi devices inside the same floor of a building[11]. Data are collected in a centralised database, and data processing is usually done on the server². When individuals need to be tracked, client-based positioning is also used. For example, a company employee can have an app installed on the phone to track his/her location within the office in case of emergency.

2.3 Framework

2.3.1 Flutter

The development kit used for the app is Flutter. It is created by Google and used for cross-platform app development. The first official release of Flutter was in December 2018. Platforms supported by Flutter are Android, iOS, Linux, Mac, Windows, Google Fuchsia[2], and the web from a single codebase[14]. Though Flutter uses the Android Emulator from Android Studio, it is much more lightweight. Flutter uses Dart as the programming language, and it can be written in any code editors other than Android Studio or IntelliJ IDE. The way to set up a UI in Flutter is by building different Widget trees, much like Hypertext Markup Language (HTML) and built-in Cascading Style Sheets (CSS). A Widget is the basic building block for app rendering. It can be a visible component such as a button or an image. It can also be an invisible component that wraps around other components and provides a structure for its internal components. There is a stateless *Widget* that does not change in contents over time. There is also a stateful *Widget* in which some elements, like WiFi listings scanned, might change.

Flutter executes all Dart codes in an isolate. An isolate owns a memory space in the device and runs a single thread with an event loop. Multiple, possibly nested, isolates can be created explicitly, but they cannot directly share each other's memory. To communicate between isolates, callback functions need to be created. Callback functions are the only way an isolate can retrieve function return values from another isolate. The isolate approach's

²<https://www.infsoft.com/solutions/application-fields/indoor-tracking>

advantage is that developers do not need to manually resolve locking issues that might arise from having multiple threads. If a particular isolate's memory is not in use, it means that it is not being mutated. Suppose a function takes a considerable amount of time to execute, like retrieving data from a database. In that case, it must be marked as asynchronous to notify the event loop to finish processing this function first before going on to other functions waiting in the queue.

Flutter also supports plenty of plugins that add more features to the existing framework. Details of the essential plugins used for this project will be given according to this dissertation.

Dart is currently being migrated to a new phase called Null Safety. Intuitively, this is an update where Flutter developers do not need to worry about handling null variables anymore. The null safety environment makes the development process much faster and more reliable. An issue that comes with the migration is that some plugins are not yet compatible with the newest Flutter version. One of the cases worth mentioning is the `firebase_messaging` plugin, which supports background push notifications. The source code contains a skeleton file called `message_handler.dart`, which uses this plugin and cannot be fully implemented due to incompatibility.

2.3.2 Firebase

Firebase is a platform developed by Google that provides various functionalities for mobile and web applications, including authentication, database, hosting, machine learning, push notifications, A/B testing, analytic. Firebase functions which are used in this project will be described in detail in the according to sections of this dissertation.

Flutter interacts with Firebase through different plugins. While all Firebase functions are network response events that take some time to finish, they require network access and need to be marked as asynchronous in Flutter codes.

2.4 Database

A database is an organised collection of information, namely data. End users manipulate data through the database management system (DBMS). There are two types of databases: the relational database and the non-relational (NoSQL) database. The former saves data as rows and columns in a series of tables, where each column is an attribute and each row is a piece of data. The latter saves data in several ways, such as a map with key-value pairs, document,

graph, or wide column. It is schema-free. The NoSQL database's unique structure indicates that this type of database is more flexible and more straightforward than the traditional relational database.

This project's Databases are all of type NoSQL, including Firestore, Sembast, and User Preference. Firestore is an online database being part of the functionality provided by Firebase. It is used to store the WiFi scans of those users who have tested COVID-19 positive. Sembast and User Preference are both Flutter plugins. They are used to store users' scans locally and maintain the app's state.

2.5 Current Contact Tracing App & Security

To keep track of the development of COVID-19, many countries have adopted the contact tracing app method. A central part of the app is to measure the proximity between users. Some apps track users' locations with the global positioning system (GPS) and having low accuracy indoor. A solution to this issue is the NHS's approach, Bluetooth Low Energy (BLE). In this case, the proximity is deduced from the BLE received signal strength (RSS). However, experiments have shown that the BLE RSS can be substantially affected by the model of the device used, the relative orientation of devices, absorption by human bodies or objects, and radio wave reflection from the surrounding [8].

The other main part of contact tracing apps is tracking. If a user is reported positive on COVID-19 testing, other users who have matching BLE scans with this user will be notified and recorded. There are centralised and decentralised approaches. The centralised approach involves a back-end server that assigns a unique identifier (pseudonym) to each user. From this pseudonym, a frequently-changing pseudonymous proximity identifier is derived and broadcast to nearby devices through BLE. The server does the contact matching. On the other hand, the decentralised approach generates the pseudonyms, namely Rolling Proximity Identifiers (RPI), locally and broadcasts the identifiers to nearby BLE devices. The matching algorithm is done on the device[10].

The difference between the two approaches suggests that the centralised approach exposes higher security risks. The back-end server controls individual proximity identifiers and matching algorithms; hence, it can gain access to users' personal information.

Though all contact tracing method variations mentioned above have improvements yet to be done, the better approach among them should be chosen for this project. Considering the complexity of the full implementation of what is in use in reality and the limitation of resources,

a simple modified prototype is created to present the idea. For security concerns, all online user data are managed by Firebase. Users get their unique identifiers from Firebase authentication. Furthermore, the contact matching is done on each device.

Chapter 3

Requirements & Specification

3.1 Overview

The primary aim of this project is to implement a user-friendly contact tracing app based on WiFi localisation. More specifically, it should determine whether users have been in contact with each other with high accuracy. Furthermore, it should also be a valuable tool to guide users during different scenarios (either the user is healthy and needs general guidance or the user needs to self-isolate).

3.2 Requirements

3.2.1 User Requirements

User requirements specify what the user expects the app's functionality to be. Users can do the following with the app:

- U1 - Users can only log in to the app anonymously.
- U2 - Users can record the COVID-19 test result.
- U3 - Users can record COVID-19 symptoms.
- U4 - Users can record the COVID-19 symptoms appearing date.
- U5 - Users can book a rapid lateral flow test when they are not advised to self-isolate.
- U6 - Users can book a COVID-19 test when they are advised to self-isolate.
- U7 - Users can apply for an isolation note when they are advised to self-isolate.

- U8 - Users can check the local COVID-19 tier.
- U9 - Users can check the UK COVID-19 heat map and view the statistics.
- U10 - Users can look up commonly asked questions about COVID-19.
- U11 - Users can turn on/off the WiFi contact tracing activity.

3.2.2 Functional Requirements

Functional requirements describe the app's features and functions. The app must include the following functionality:

- F1 - A button should be at the sign-in page to allow users to sign in to the app anonymously.
- F2 - The app can display a "healthy" page when the user is not advised to self-isolate.
- F3 - The app can display an "infected" page with a countdown when the user is tested positive.
- F4 - The app can display a "sick" page with a countdown when the user has recorded one of the COVID-19 symptoms.
- F5 - The app can display a "contacted" page with a countdown when the user has been in contact with someone who tested positive.
- F6 - Local WiFi scans within 14 days should be uploaded to the cloud database once the user's state is infected.
- F7 - On the "healthy" page, there should be a button allowing the user to book a rapid lateral flow test.
- F8 - In any of the "infected", "sick", and "contacted" pages, there should be buttons allowing the user to book a COVID-19 test and to get an isolation note on the government's website.
- F9 - Clear graphical representations should be used to demonstrate the user's state (healthy, infected, sick, contacted) as well as the countdown at the main page.
- F10 - The WiFi scanning and matching process, which is supposed to run in the background, should be moved to the foreground (with UI) as a demonstration.

- F11 - COVID-19 symptoms should be shown as tick boxes for users to choose from.
- F12 - A button should allow users to check the local COVID-19 tier on the government's website.
- F13 - A button should allow users to check the UK COVID-19 heat map and statistics on the CovidLiveUK website.
- F14 - Common questions should be shown as an expandable list to allow users to click on. Users can view the answer to a question after expanding the question tile.
- F15 - A search bar should be in the common question section to allow users to search for specific questions.
- F16 - The page should be shown to notify the user when he/she is trying to access a website without having a network connection.
- F17 - A form of notification should be shown to the user after a button is tapped and its function executed.
- F18 - An optional date picker should be added before users record their COVID-19 symptoms.

3.2.3 Non-functional Requirements

Non-functional requirements describe the app's quality attributes.

Security

The security requirements aim for protecting users' personal information.

- NS1 - The anonymous user sign-in function should be handled by Google's Firebase.
- NS2 - The user's WiFi scans are uploaded to the cloud Firestore only when he/she is tested positive.
- NS3 - The WiFi scans matching for detecting COVID-19 contacts is done locally; hence the cloud Firestore does not have any access to a user's contact or location information.
- NS4 - No personal user information other than WiFi scans and the app state is stored. If a user wants to check information about the neighbourhood on the website, he/she would have to type in the postcode each time.
- NS5 - The all local databases are cleared when the app is deleted.

Robustness

The robustness requirements aim to improve the user experience by handling potential errors.

- NR1 - All functions which interact with local or cloud databases are marked as "async", which means that the system has to finish executing the function before moving onto the next one.
- NR2 - Only one database instance can be created while the app is running to avoid unwanted modification of user data.
- NR3 - The whole app should be kept up to date with the latest Flutter version, which supports null safety.
- NR4 - The app should not freeze at any moment of the run time.

Performance

The performance requirements aim to maintain the efficiency of the app.

- NP1 - While the app is running, it should not slow down the Android operating system to a noticeable scale.
- NP2 - The WiFi scans matching should be efficient enough to be done after scanning three times everything in 15 minutes.

Usability

The usability requirements aim to create a user-friendly environment in the app.

- NU1 - The style (background colours and fonts) of the app should be consistent.
- NU2 - Interactive buttons should be designed and shown in a way that users can easily understand what they do and use them.
- NU3 - Each page should not have a long script of words to overwhelm users. The information should be conveyed straightforwardly.

3.3 Specification

Requirement codes will be used to represent requirements stated above, where F corresponds to functional requirements, NS are non-functional-security requirements, NR corresponds to non-

functional-robustness requirements, NP corresponds to non-functional-performance requirements, and NU corresponds to non-functional-usability requirements. User requirements are not stated in this section because meeting functional and non-functional requirements automatically satisfies them.

Each requirement is classified into an *Importance* category. There are four categories: Very High, High, Moderate, and Low, separately. Requirements in the Very High category are the ones that allow the app to reach its purpose and should be tested thoroughly. Furthermore, requirements in the High category significantly support the Very High category. Additionally, the Moderate category includes requirements that increase the efficiency and usability of the app. Lastly, the Low category requirements are unimportant functionality-wise, but they can make the app more engaging.

Requirement	Importance	Success Criteria
F1	High	The user can get a unique user ID generated by Firebase authentication after clicking the anonymous sign-in button.
F2 - F5	High	The main page switches to the correct page according to the current user state (healthy, infected, sick, contacted). Among the states where the user needs to self-isolate, the hierarchy is infected, sick, then contacted.
F6	Very High	Local WiFi scans within 14 days are uploaded to the cloud database (i.e., the current user's scan data are visible on the Firestore) after tapping the toggle infection state button to the infection state.
F7	Moderate	The user is navigated to the rapid lateral flow test booking web page within the app after tapping it.
F8	Moderate	The user is navigated to either the COVID-19 test booking or the isolation note web page after tapping the according to buttons.
F9	High	Countdown is shown correctly once the user is notified to self-isolate.

F10	Very High	1. The matching algorithm is clearly demonstrated. 2. WiFi signals can be scanned, stored, and viewed in the local database. 3. Cloud user data can be downloaded. 4. Matching parameters can be adjusted. 5. After running the algorithm, results can be stored and viewed in the local database. 6. The matching algorithm can be turned on and off.
F11	High	Each COVID-19 symptom can be ticked in the list, and "sick" is included in the user's state.
F12	Moderate	The tier checking web page is opened in the app after tapping the button.
F13	Moderate	The heat map web page is opened in the app after tapping the button.
F14	High	Common questions are shown as expansion list tiles. After tapping each question, the tile expanded, and the answer to that question is shown.
F15	Moderate	A search bar is placed on top of the common questions section. When a string is typed in the text field, the questions contain that string is filtered out and shown to the user. The search bar is not case sensitive.
F16	Low	The "no internet connection" page is shown when the user is trying to access a web page without having any internet connection.
F17	Moderate	A Flutter <i>Snackbar</i> is shown after tapping a button.
F18	High	Users can pick the symptoms appearing date before recording. The selection starts from 10 days before the current date up to the current date. If there is a need to self-isolate, the countdown is set to begin at ten days after the date specified.
NS1	Very High	The sign-in authentication is purely handled by Firebase. After tapping the sign-in button, the unique ID assigned to a user is visible on Firebase.

NS2	Very High	There is nowhere else in the app (other than the WiFi matching algorithm breakdown section for the developer's view) that a user's WiFi scans can be uploaded to the cloud other than tapping the toggle infection state button.
NS3	Very High	The matching algorithm is run successfully, but the Firebase back-end cannot see any matching information.
NS4	Very High	Only WiFi scans and user preferences (i.e. app state) are stored locally. The matching results are stored as well, but for the developer's view only.
NS5	Very High	After signing out (which is only a developer's option) and signing back in, or deleting the app and reinstalling it, all previous scans are wiped out and cannot be seen in the developer's local database view.
NR1	Very High	The app does not freeze, and all database interaction codes are marked as async.
NR2	High	Employ the singleton design pattern for building the local database.
NR3	Moderate	The command "flutter -version" returns the latest Flutter and Dart versions.
NR4	Very High	The app still works when frequently tapping all buttons available in any of its view.
NP1	Moderate	There is no noticeable freeze or frame rate drop when running the app.
NP2	Very High	Matching results returned successfully after one scan per 5 minutes.
NU1	Low	The style of the app is consistent.
NU2	Moderate	The purpose of each button is clearly stated by its name. Buttons are in moderate sizes.
NU3	Moderate	On each page, the descriptions' length do not exceed half a page.

Table 3.1: Specification Table

Chapter 4

Design

4.1 Overview

The design chapter aims to describe how the app works on an abstract level. Users are classified into two types. The first type is those who are healthy. The second type is those who need to self-isolate. The app design should provide helpful features for both types of users.

Since this app is a prototype, it includes two features that are only visible to developers. Those features are log out and WiFi matching steps breakdown view. Details will be given in the according to section.

4.2 Limitation

4.2.1 Android Background Activity Limitation

In reality, the WiFi track and trace should be done in the background. Within a 15-minute interval, three scans should be made on average to provide reasonable user contact indications. However, Android API only allows normal end-users to make one scan per half an hour in the background. There is no way to get around this limitation. The government authorises the NHS contact tracing app; hence it can bypass this protocol and satisfy the requirement.

Considering the issue stated above, the best way to demonstrate the WiFi track and trace concept is to move the process to the foreground. In Android's developer setting, the limit on the number of foreground scans can be removed.

4.2.2 Flutter Plugin Bugs

Flutter is a newly developed app framework by Google. It was officially released in December 2018, which means it only has been in the community for less than three years. Though Flutter's popularity proliferates, it is still not mature than other older frameworks such as React Native. There are some known bugs in Flutter by the time this dissertation is written:

1. The background push notification plugin, *firebase_messaging*¹, does not support the latest Flutter version.
2. The *slide_countdown_clock*² does plugin not display the correct number given some time duration.

The older Flutter version did not have issue 1 mentioned above. The implementation of the background push notification was fairly straightforward. Therefore, issue 1 is to include a .dart file that includes the skeleton code needed for the background push notification function. This solution aims to demonstrate the WiFi matching activity flow, given that it does not violate the principle of keeping up to date with the latest Flutter version. Unfortunately, there is no solution for issue 2 at the moment. Self-isolation countdown must be displayed as the F9 (table 3.1) success criteria.

On the other hand, Flutter has dominant advantages, which made it the target framework used for this project. The most convenient one is that Flutter enables quick UI building, which allows the prototype's primary focus to be on the WiFi contact tracing algorithm. Additionally, the rich and well-documented Flutter widgets library provides solutions for usability requirements. In the long run, if this project is taken further to be migrated on the iOS, web, or desktop platform, modification of UI codes will be unnecessary since they come from the same codebase.

4.2.3 Signal Strength Fluctuation

WiFi signal strength measurements suffer from the same issues as those of Bluetooth. They fluctuate massively due to the model of the measuring device, device antenna orientation, signals absorption and reflection by objects [8]. Since the current BLE contact tracing app calculates distances between people based on BLE RSS, the fluctuation directly affects the contact matching algorithm's accuracy. To construct a system that produces proximity predictions within

¹https://pub.dev/packages/firebase_messaging

²https://pub.dev/packages/slides_countdown_clock

a 2-meter precision, a large amount of data will have to be collected at each indoor location. However, it is highly impractical to ask normal app users to do so beforehand. Apart from the fingerprinting technique, if the distances between users were to be calculated directly by RSS, the free space path loss equation would have to be employed. All of such equations require the unit of the RSS to be in dB. However, Android API only provides RSSI, which has the unit of dBm. Unfortunately, there is no way to convert between the two units; hence the distance calculation is impossible.

The solution to this issue is to implement a simplified matching algorithm that does not base contact predictions on RSS but still provide a reasonable indication. Details of the algorithm are given in section 4.5.

4.3 Use Cases

As stated in this chapter’s overview, normal users and developers have different views when using the app. The developer version will be presented as the outcome of this project. The reason for this decision is that it emphasises illustrating the WiFi matching algorithm, which is the core idea. Furthermore, it is much easier to remove developer functions for standard use cases than the other way. In a real production environment, the developer view will be available in Flutter debug mode, while the normal user view will be available in the release mode.

4.3.1 Normal Use Cases

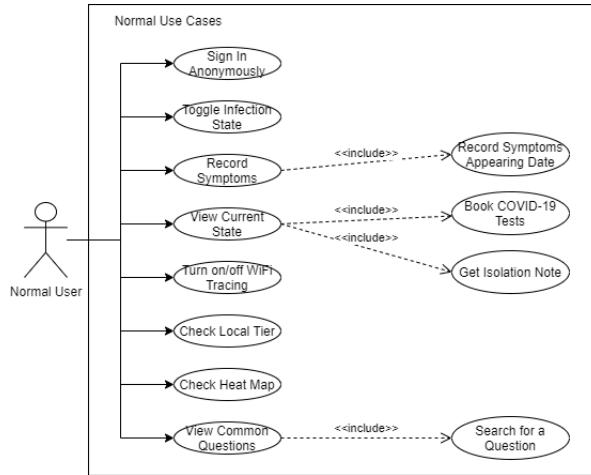


Figure 4.1: User Case Diagram for Normal User

When the app is downloaded, the welcoming page is shown to the user. A button is also

shown to allow the user to sign in anonymously. This design is for security concern. In this case, users do not need to provide any personal information before entering the main page. The individual user is only identified by the unique user ID assigned by Firebase authentication.

After signing in, the user can see the main page of the app. The main page display changes according to the current user's state. A user state is defined as:

- The current health condition (healthy, infected, or sick) plus the COVID-19 contact situation, and
- The countdown timer if advised to self-isolate. Self-isolation is compulsory when the user is infected, sick, or contacted. In other words, other than being in the healthy state, the user always needs to self-isolate.

The user can book a rapid lateral flow test on the healthy page by tapping the booking button. The user can book either a Polymerase chain reaction test or get an isolation note on any other pages. The reason for the difference in test booking type is that rapid lateral flow tests are only suitable for people who do not have any symptoms and have not been contacted by COVID-19 positive patients³. Since the user needs to self-isolate in states other than healthy, he/she might face a situation where he/she cannot work from home. The isolation note is used as proof for work exemption. The user can also toggle the infection state by tapping the button on the main page. In reality, when the user is tested positive for COVID-19, he/she must record this information by entering the test code in the NHS app. For simplicity, test code is not needed for this prototype.

As a standard option for contact tracing app users, the WiFi tracing can be turned on and off on the WiFi Tracing page. Once the start button is tapped, the whole WiFi matching algorithm will run every 5 minutes in the foreground.

Furthermore, the user can record his/her symptoms. Before doing so, a symptom appearing date checking page is shown. If the user can remember the exact date (within ten days prior to the current date), he/she can enter it. The date checking is for the isolation countdown calculation. If the user shows any symptoms, the isolation is due ten days after the symptoms appearing date. If the user cannot remember the date, the current date is taken as default.

Use cases Check Local Tier and Check Heat Map are very similar to each other. Once the user taps on the corresponding button, he/she will be led to the local tier⁴ or heat map⁵ web

³<https://www.gov.uk/get-coronavirus-test>

⁴<https://www.gov.uk/guidance/national-lockdown-stay-at-home>

⁵<https://www.covidlive.co.uk/>

page. These two options are given because they are highly relevant to tracking the COVID-19 development. They can provide beneficial information if the user wants to plan outdoor activities. If the device has no internet connection, a Loss Connection page will be shown instead.

Last but not least is the View Common Questions use case. The reason for the design of it is very straightforward. If the user is not satisfied with the information provided by all previous use cases, he/she can search for a specific question in mind. The user can either browse through a list of all common questions, or type in the search bar a unique one. A few questions are added to the common questions section for demonstration. More questions can be easily added in the production environment.

4.3.2 Developer Use Cases

Developer use cases differ from normal use cases by adding the sign-out and the check detailed matching steps functions. These two functions aim to conduct testing, which can not be done in the normal user view.

Normal users are not allowed to sign out because one unique user ID is meant to represent one individual user. Once the user signs back in the app, the unique user ID changes and all previous data will be lost. However, a developer needs to go back to the sign-in page for the following reasons:

- Tests need to be conducted to check the link between the sign-in page and the main page.
- Tests need to be conducted to ensure all previous user data are cleared once signed out.
- There should be a way to view and modify the sign's UI design in the page.

The use case Check Detailed WiFi Matching Steps is achieved by placing a button linked to the algorithm details page on the turn on/off WiFi tracing page. The button is only visible when the WiFi tracing is off to avoid event loop concurrent issues since there are functions that interrupt the WiFi matching. The WiFi matching algorithm is displayed in step cards divided into the offline phase section and the online phase section. Some step cards contain buttons that can initiate or interrupt part of the algorithm. For the interruption functions, buttons should be designed to work after long presses to avoid unwanted effects. The algorithm design will be explained in section 4.5

Use cases in the offline section are Make 1 WiFi Scan, View Current WiFi Scan, Store Current WiFi Scan, View Local Scan Database, Clear Local Scan Database, Upload Local

Scan Database, and Clear Cloud Scan Database. One thing worth mentioning is uploading to and clearing data in the cloud database. They do not belong to the matching algorithm and will only be triggered once the user toggles the infection state in the normal use case. It is simply more convenient to put them together with other testing functions so that developers do not have to switch in and out of the page.

The rest of the use cases, Set WiFi Matching Parameters, Run WiFi Matching Algorithm Once, and Clear Matching Results Database, all belong to the online phase. Parameters to be tuned for the matching algorithm include the filter percentage and the similarity threshold, which will be explained in section 4.5. Tapping the parameters setting button triggers an alert dialog that has two slide bars, both with a range of 0.0 to 1.0. The default value for both parameters is 0.0. Running the algorithm takes the parameters set previously and run the matching algorithm between the scans in the local database and all scans in the cloud database. When the algorithm finishes its execution, an alert dialog is shown with matching results. The developer can choose to save those results in the result database by tapping whether this matching is correct or discard them. Finally, the result database can be viewed and cleared.

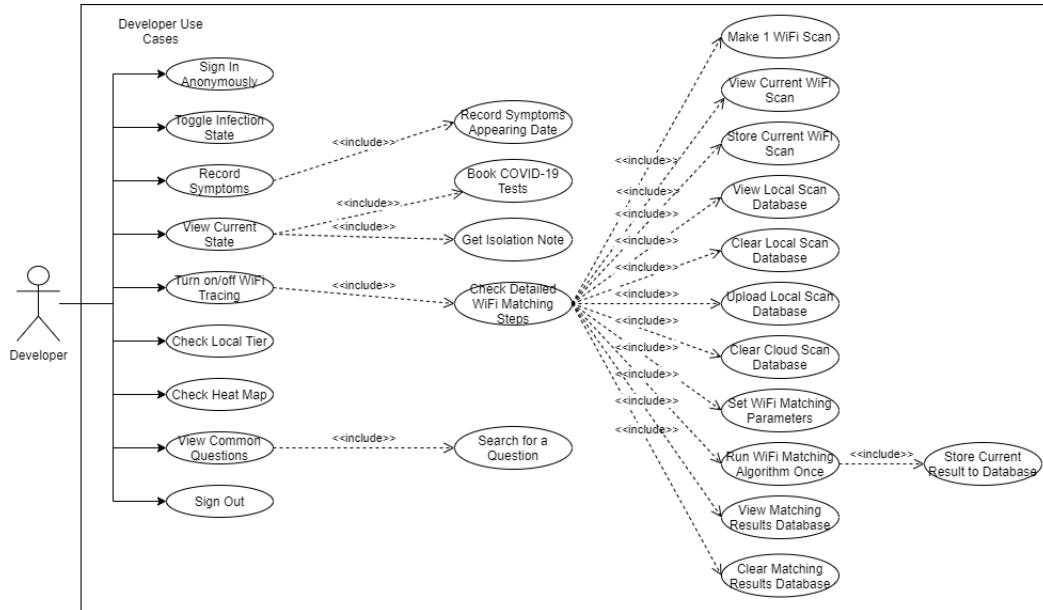


Figure 4.2: User Case Diagram for Developer

4.4 System Architecture

A system architecture diagram shown in figure 4.3 demonstrates how this prototype's subsystems interact. Figures coloured in blue represent parts only developers have access to. If there is a line linking two elements, these two elements can interact with each other by the method stated on the line. If one or both elements are composite, it means that all sub-elements can use the interaction method. An area enclosed by dash lines is a subsystem. Subsystems are divided into UI layer, app state layer, WiFi background activity layer, and database layer. Since there is only a single thread running in the app, layers are connected in a top-down fashion instead of in parallel.

4.4.1 UI Layer

The UI layer contains elements that app users can see and interact with. The UI distinguishes it from the web page view by having all functions implemented in the source code. The web page view is simply a Flutter plugin called *webview_flutter*⁶ which allows users to browse and interact with websites within the app.

The main page is in the display hierarchy of infected, sick, contacted, and healthy. It can be interpreted as a state machine, where it listens to the User Preference changes. For example, if the user is tested positive, having COVID-19 symptoms, and contacted simultaneously, the page will only show that he/she is infected. On the other hand, the healthy page is shown only when no other states are being true.

4.4.2 App State Layer

Components in the app state layer keep track of the state of the app. All components from outside this layer interact with it through the plugin *shared_preferences*⁷, usually refer to as the User Preference. Advantages of using the User Preference is listed as followed:

- It is very efficient to store single pieces of information about the user since a database is not initialised. Data are not retrieved by long traditional database commands.
- User Preference methods can be called in any class without having to create an object.
- The app is easily restored when reopening.

⁶https://pub.dev/packages/webview_flutter

⁷https://pub.dev/packages/shared_preferences

Components from other layers make changes to the User Preference and call the method to refresh the main page. The main page manager will then reflect the changes made in the User Preference by altering the UI.

4.4.3 WiFi Background Activity Layer

This layer is handled by a class called *WiFiBackgroundActivityManager*. It initiates a repetitive timer to run the algorithm described in section 4.5 for every 5 minutes if the user turned on the background activity (stored in the User Preference). Once a user who has not been contacted has three consecutive matches, the contacted state is set to true.

4.4.4 Database Layer

The local database is the Flutter plugin *sembast*⁸ and the cloud database is *cloud-firebase*⁹. To avoid opening multiple local databases, a singleton design pattern is used when using Sembast. Details of the implementation will be given in chapter 5.

4.5 WiFi RSSI Matching Algorithm

The objective of the algorithm design, as mentioned in section 1.3, is to be sensible with low cost. Therefore, machine learning (ML) models should not be included as data collection in the scale of the COVID-19 population is very expensive. Nevertheless, the possibility of using ML should be discussed. Details will be given in the following sections.

4.5.1 Version 1: Baseline Random Algorithm

Many limitations make the original fingerprinting and trilateration algorithms impractical for this project, as stated in section 4.2. However, to determine whether an alternative implementation is sensible, a random model needs to be built as a reference. If the alternative model's performance is tested to be better than the random model, it is evident to say that the alternative is effective.

The pseudo code of the random algorithm is shown in algorithm 1.

⁸<https://pub.dev/packages/sembast>

⁹https://pub.dev/packages/cloud_firestore

Algorithm 1: RANDOM_BOOLEAN

Output: A Boolean value

```
begin
    randomInt ← randomly pick an integer between 0 and 1;
    if randomInt ≥ 0 then
        | return true;
    end
    else
        | return false;
    end
end
```

4.5.2 Version 2: Simplified Fingerprinting Algorithm

The WiFi matching algorithm implemented in this project is a modified version of WiFi fingerprinting. It also contains an online phase and an offline phase. Nonetheless, those 2 phases are simplified; hence, the algorithm's result is to determine whether users are in the same room. Ideally, the app should detect whether the proximity between 2 users is within 2 meters; it is impossible to be done under the signal strength limitation mentioned in section 4.2.3. It is still a sensible solution as though the body of the algorithm is a modification of the fingerprinting technique, and it takes on the concept of WiFi trilateration. Trilateration suggests that 3 APs with the strongest signals detected by the measuring device are enough for locating a user in a 2D space. In other words, a user can be located using a set of APs with a size of at least 3. Therefore, this is what has been designed in this section. The accuracy of this algorithm for both indoor and outdoor localisation will be discussed in chapter 6.

In the offline phase, it is impractical to ask contact tracing app users to provide a map of their surrounding areas. Not to mention asking them to conduct any data collection. The simplified offline phase is solely scanning WiFi signals and storing scan results to the local database. A scan result contains a list of WiFi signals. Each signal is a composite of its Service Set Identifier (SSID), Basic Service Set Identifiers (BSSID), Received Signal Strength Indicator (RSSI), and frequency. Unlike the original fingerprinting method, WiFi scans are not filtered by RSSI before putting in the database. This is because:

- There are no machine learning training steps involved in the simplified online phase. The noise is insignificant to the output.
- It is difficult to determine an effective filtering threshold since there is only one scan

made per matching. In other words, there is not enough data (scan results). Filtering can potentially result in the loss of accuracy.

This offline phase design can be run easily in the background without creating any user interruption.

The machine learning model cannot be trained in the online phase due to the lack of enough data provided by each scan. However, the exact coordinates of users are not needed for contact detection. Combine this consideration with the signal strength variation limitation mentioned in section 4.2.3, the online matching works as shown in the algorithm pseudo-code 2. The pseudo-code of the $\text{COMPUTE_SIMILARITY}(L_1, L_2, \delta)$, which is used in $\text{Find_Match}(S, T, \delta, \theta)$, is shown in algorithm 3. The function $\text{GroupByTimestamp}(S)$ takes a set of WiFi scans and group the data by their timestamps to produce a map of timestamp-list of WiFi scans pairs. The function $\text{FilterByRssi}(L, \delta)$ takes in a list of WiFi scans L , sort them by their RSSI in descending order and return only the top δ percent. This step is necessary because even a single scan contains noise, which may affect the matching result's accuracy. δ needs to be tuned so that the accuracy of the whole algorithm is the highest.

In the initialisation step of Algorithm 3, lists returned from $\text{FilterByRssi}(L, \delta)$ are converted to contain only the BSSID of each scan. Then the similarity is calculated by counting how many scans are in both lists. The assumption under this design is to treat users being in the same enclosed area (room) as being in close contact. Tests have been done before designing this algorithm to show that WiFi scans, with their RSSI satisfying the δ requirement, made in different rooms:

- Are consistent in the same room;
- Vary if changed to a different room.

Let M be the number of scans in the local database, N be the number of scans from the cloud database. The run time of $\text{Find_Match}(S, T, \delta, \theta)$ is $O(MN)$.

4.5.3 Version 3: Decision Tree Classifier Algorithm

This algorithm will only be implemented in the testing phase. Details of the implementation can be found in section 6.5.2.

This algorithm's general idea is to transform scans into data with recognisable features labelled with locations where they are made and fit them into a decision tree classifier. Algorithm 4 demonstrates how scans are converted to such data.

getScanComparison(scanA, scanB, N) is a function that takes a scan from location A, a scan from location B, and an integer. It returns a data point, with features being the information obtained from those parameters. Note that location A and B can be the same. Scan A and scan B correspond to a scan made by the user and a scan from the cloud database, respectively. When comparing the two scans, a data point in such format is created and fed into the decision tree classifier to output a Boolean indicating whether there is a match.

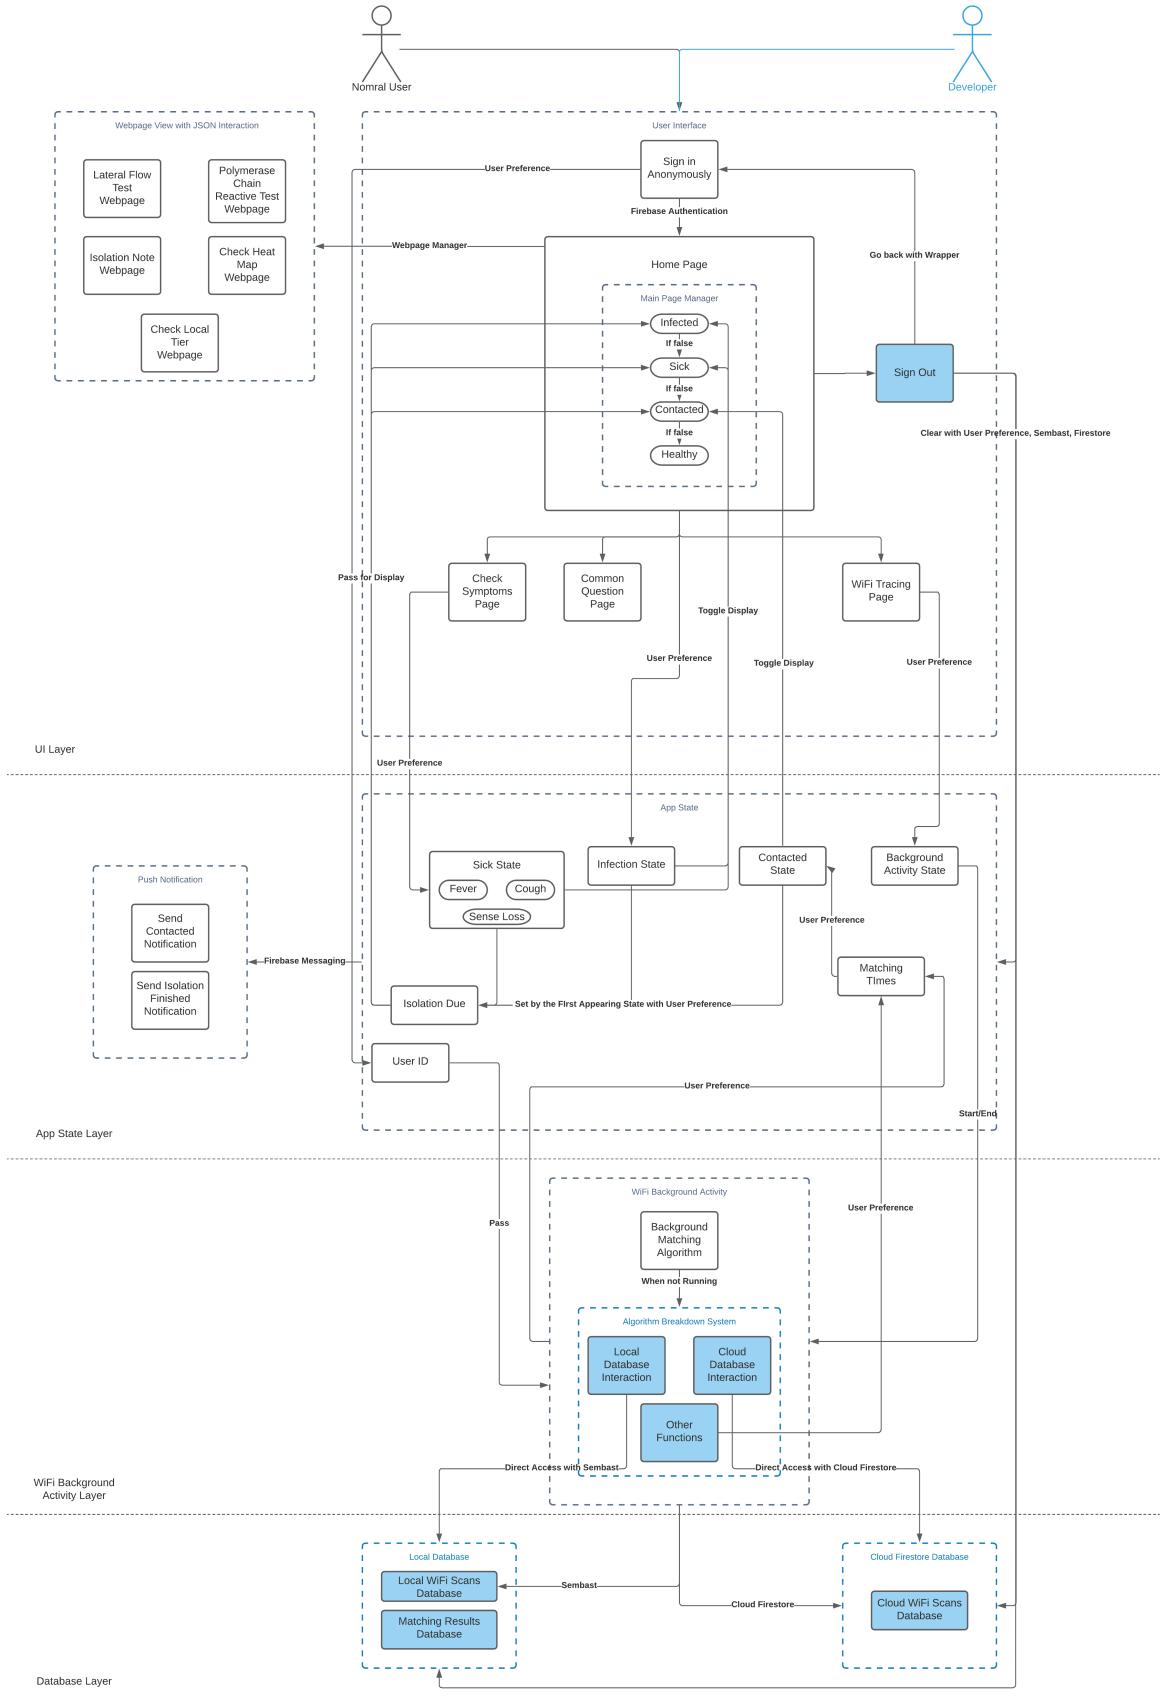


Figure 4.3: System Architecture Diagram

Algorithm 2: Find_Match(S, T, δ, θ)

Input : S , a String of the current user's ID;
 T , a Duration for matching;
 δ , a double of the filtering percentage;
 θ , a double of the similarity threshold;

Output: A Boolean of whether a matched contact has found

begin

similarity $\leftarrow 0$;

$L1 \leftarrow$ a list of all scans from the local database;

$L2 \leftarrow$ a list of scans other than scans stored under S from the cloud database;

$S1 \leftarrow \emptyset$;

$S2 \leftarrow \emptyset$;

for $l1 \in L1$ **do**

$ts1 \leftarrow l1.ts$;

for $l2 \in L2$ **do**

$ts2 \leftarrow l2.ts$;

if $|ts1 - ts2| \leq T$ **then**

$S1 \leftarrow l1$;

$S2 \leftarrow l2$;

end

end

end

$M1 \leftarrow GroupByTimestamp(S1)$;

$M2 \leftarrow GroupByTimestamp(S2)$;

for $m1 \in M1$ **do**

for $m2 \in M2$ **do**

if $|m1.key - m2.key| \leq T$ **then**

similarity = COMPUTE_SIMILARITY($m1.value, m2.value, \delta$);

end

if $similarity \leq \theta$ **then**

return *true*;

end

end

end

return *false*;

end

Algorithm 3: COMPUTE_SIMILARITY(L_1, L_2, δ)

Input : L_1 , a list of WiFi scans from the local database;
 L_2 , a list of WiFi scans from the cloud database;
 δ , a double of the filtering percentage;

Output: A double of the similarity

begin

```
    similarity ← 0;
     $FL_1 \leftarrow FilterByRssi(L_1, \delta).map(e \Rightarrow e.bssid);$ 
     $FL_2 \leftarrow FilterByRssi(L_2, \delta).map(e \Rightarrow e.bssid);$ 
    if  $FL_1.length \leq FL_2.length$  then
        increment ←  $1/FL_1.length;$ 
        for  $fl_1 \in FL_1$  do
            if  $fl_1 \in FL_2$  then
                | similarity ← similarity + increment;
            end
        end
    end
    else
        increment =  $1/FL_2.length;$ 
        for  $fl_2 \in FL_2$  do
            if  $fl_2 \in FL_1$  then
                | similarity ← similarity + increment;
            end
        end
    end
    return similarity;
end
```

Algorithm 4: DATA_CONVERTER_FOR_DECISION_TREE(S, N)

Input : S , a 3D list of scans across different locations, where each location contains scans grouped by timestamps, and each scan contains a list of WiFi signals.; N , the number of signals selected from each scan.;

Output: X , a data set of scans;
 y , a label set for X ;

begin

```
 $X \leftarrow \emptyset;$ 
 $y \leftarrow \emptyset;$ 
for  $i \in S.length$  do
    for  $j \in S[i].length$  do
         $scanA \leftarrow S[i][j];$ 
        for  $k \in S.length$  do
             $label \leftarrow i == k;$ 
            for  $m \in S[k].length$  do
                 $scanB \leftarrow S[k][m];$ 
                 $X \leftarrow X \cup getScanComparison(scanA, scanB, N);$ 
                 $y \leftarrow y \cup label;$ 
            end
        end
    end
end
return  $X, y$ 
```

end

Chapter 5

Implementation

5.1 Overview

This chapter will give implementation details about how functional and non-functional requirements in table 3.1 with the design in chapter 4. Implemented features do not necessarily follow the exact plan as mentioned in section 4.2.

The development process uses a Feature-Driven Development approach because the app building process is the same as the chapters presented in this dissertation. At first, background research was conducted in chapter 2 to grasp the concepts of contact tracing apps and WiFi localisation. An overall model of the contact tracing app prototype was constructed based on the research to lay down a foundation of this project, as explained in section 1.3. A list of app features and their specifications were then clarified in chapter 3. A general plan of implementation timing on each feature also came with the last step. The higher the importance of a feature, the more time was spent on coding and testing it. After that, the design in chapter 4 was made according to the features. Finally, the actual implementation and testing were done and will be presented in this and the next chapter.

GitHub¹ is used as the version control tool for this project. As for the text editor, Visual Studio Code (VS Code)² was chosen instead of IntelliJ³ because VS Code is much more lightweight which fits the characteristics of the Flutter framework.

¹<https://github.com/>

²<https://code.visualstudio.com/>

³<https://www.jetbrains.com/idea/>

5.2 Class Structure

Below is a list of main source code folders which implement the main functionality of the app:

- models - which defines the data models used in this project.
- services - which creates the databases and initialises Firebase functions for this project.
The User Preference is included in this folder.
- screens - which contains the UI codes for different pages as well as their sub-components.

A simplified *WidgetTree* is shown in figure 5.1 to demonstrate how to navigate between different widgets. Each time a new widget is drawn, it will be pushed up to the *WidgetStack* which means the parent widgets will not be destroyed. The widget on the top of the stack is displayed. The

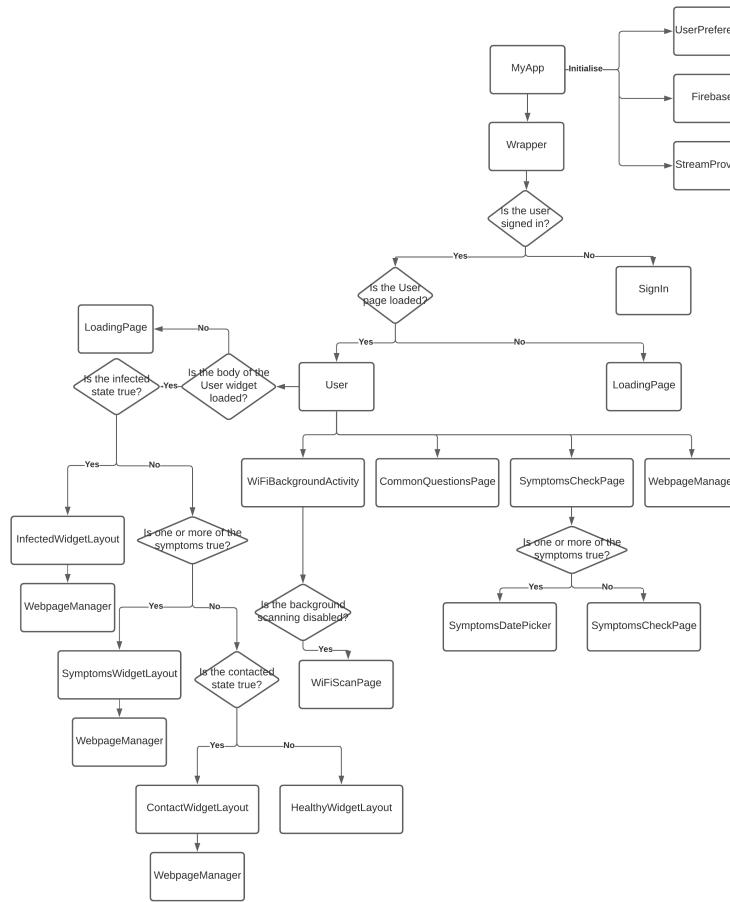


Figure 5.1: Widget Tree Diagram

root widget is MyApp which initialises external databases like Firebase and User Preference. Parameters and functions are passed from a parent widget to a child widget. Every time a

child widget tries to modify the parent widget, it must use the passed down functions. Such functions include *refresh()*, which allows a child widget to re-render a parent widget.

5.3 Functional Requirements Implementation

Functional requirements implementation will be explained according to their importance (table 3.1). The importance of a requirement does not correlate to the order of its implementation. The Very High category includes F6, F10; the High category includes F1 - F5, F9, F11, F14, F18; the Moderate category includes F7, F8, F12, F13, F15, F17; the Low category includes F16.

5.3.1 Very High Category

F6

F6 is uploading the user scans to the cloud when the infection state is true, and deleting scans from the cloud when the infection state is false. This requirement is the foundation of F10 because if data cannot be uploaded successfully, matching is impossible.

In the class *UserHomePage*, a *floatingActionButton* is placed in the widget tree. The function *toggleInfectionState()* is called when the button is tapped. What this function does is first set the Boolean field *infectionState* in User Preference⁴ (also known as *SharedPreferences*) to the opposite of the original value; hence the name *toggle*. At this point, whether the current infection state is true or false is unknown. Therefore, *handleCloudInfectionData()* is called to check:

```
if the infection state is true then
    storeScansWithin14DaysInCloudDatabase()
else
    delete scans from the Cloud the the current user ID
end if
```

A snack bar is shown to notify users about whether the scans are uploaded deleted. The function *storeScansWithin14DaysInCloudDatabase()* retrieves scans made within 14 days from the local database; convert them into a format that can be stored in Firestore; then upload. The upload is done by initiating the *CloudDatabase(uid)* class, where *uid* is the current user ID. *CloudDatabase* is a class that contains all functions that interact with the

⁴https://pub.dev/packages/shared_preferences

Firestore. The `updateUserData()` function in the class is for updating the user data (scans) under the uid. It takes a map of type `<String, List<Map>>` as the storing data type. Figure 5.2 is a screenshot of how data look like in Firestore. The collection `users` contains a list of user

The screenshot shows the Firebase Cloud Firestore interface. On the left, there's a sidebar with project settings and various services like Authentication, Firestore, Realtime Database, Storage, Hosting, Functions, and Machine Learning. The main area is titled 'Cloud Firestore' and has tabs for Data, Rules, Indexes, and Usage. Under the Data tab, it shows a hierarchy: prj-wifi-scanning > users > WJN15PdLMSogGusEiWWAag84Lyv2. This document has fields: 'start collection', 'Add document', 'users' (which points to another document with fields: 'start collection', 'Add field', '2021-03-28 20:19:35.046629', '0' (with sub-fields: 'bssid: "94:83:c4:05:c0:f6"', 'dateTIme: "2021-03-28 20:19:35.046629"', 'frequency: 2437', 'rssi: -34', 'ssid: "GL-MT300N-V2-0f6"'), '1' (with sub-fields: 'bssid: "04:da:d2:9c:32:a1"', 'dateTIme: "2021-03-28 20:19:35.046629"', 'frequency: 2437', 'rssi: -67', 'ssid: "UNITE-Staff"'), and '2' (with sub-fields: 'bssid: "04:da:d2:9c:3c:84"'). There are also 'Go to docs' and help icons at the top right.

Figure 5.2: Firestore Screenshot

IDs. Each user ID has fields in terms of maps in the form of a timestamp list of WiFi scans pairs.

F10

F10 is demonstrating the WiFi matching algorithm, which is the core of this project. As mentioned in section 4.2.1, the whole background activity part was moved to the foreground. In the source code, the folder `demo` contains all files for this requirement. The implementation contains several atomic features:

- User View UI: A user can tap a button on the main page to be navigated to this branch. The UI is a Flutter material layout called *Scaffold*⁵. The *AppBar*⁶ of the *Scaffold* has one button to start running the matching algorithm and another button to stop it. The body of *Scaffold* changes according to whether the algorithm is running. By default, the matching algorithm automatically starts when the user starts using the app.
- WiFi Matching Algorithm: The main algorithm is implemented in the class *WifiMatching*. The function `matchFingerprints()` corresponds to algorithm 2. The function

⁵<https://api.flutter.dev/flutter/material/Scaffold-class.html>

⁶<https://api.flutter.dev/flutter/material/AppBar-class.html>

computeSimilarityBetweenLists() corresponds to algorithm 3. The class gets other user's scans from the cloud through calling *CloudDatabase(uid : uid)*.

getAllScansFromCloudMadeByOtherUsers(). The other thing worth mentioning is that Flutter does not have a native library to initiate WiFi scanning. The scanning is done by using the native Android *WifiManager*⁷ API through a plugin called *wifi*⁸. Some functions within this plugin was manually modified in order to get WiFi RSSI in raw dbm.

- Repetition of WiFi Matching Algorithm: In order to run this algorithm every 5 minutes and also by default, a *Timer*⁹ needs to be set up once the main page is rendered. The *Timer* object can be passed down to the child branch (the WiFi matching page) of the main page branch. The singleton data structure is deployed to avoid running multiple timers in the background and losing references to stop them. In the class *WiFiBackgroundActivityManager*, a private constructor is set up so that a *Timer* can only be created from within the class. All functions within that class check whether there is an existing object first before executing. Only when the timer object is null can a new object be created. Functions in the class also detect whether a non-contacted user has three consecutive matchings. If that is the case, the contact state will be set to true; the main page is also refreshed to reflect the change. The user is also supposed to receive a push notification about the situation, but this cannot be realised due to limitation 4.2.2.

When the user exits the app, the timer stops.

- Developer View UI: A developer has access to more features when the WiFi matching algorithm is not running. In this case, a *FloatingActionButton*¹⁰ becomes visible at the bottom of the screen. It leads the developer to the algorithm cards page.
- WiFi Matching Step Card: Each card's format is defined in the class *StepCard*. A card has a title, a description, and possibly some buttons.
- WiFi Matching Steps: This section's main view has a *BottomNavigationBar*, which allows the developer to switch between online phase steps and offline phase steps. A step card represents a single step. Some step cards also have buttons that correspond to the description of that step. This section can be used as a detailed algorithm demonstration and a parameter tuning and data collecting section. Note that the parameters set here

⁷<https://developer.android.com/reference/android/net/wifi/WifiManager>

⁸<https://github.com/once10301/wifi>

⁹<https://api.flutter.dev/flutter/dart-async/Timer-class.html>

¹⁰<https://api.flutter.dev/flutter/material/FloatingActionButton-class.html>

will not affect the actual matching parameters in feature 5.3.1 of F10. In other words, this feature and feature 5.3.1 work independently.

5.3.2 High Category

F1

A button is placed at the sign in page with the title "CONTINUE". The anonymous sign in function is provided by the class *AuthService* which makes use of plugins *firebase_auth*¹¹ and *firebase_core*¹² to communicate with Firebase.

F2

The starting state of the app is healthy. Other states, including infected, sick (fever, cough, sense loss), and contacted, are all false at the beginning. It also means that the app shows healthy on the main page only when other states are false. Additionally, the countdown is not shown on the healthy page because the user does not need to self-isolate in this case.

F3

A *FloatingActionButton* which can be accessed in any state at the main paged called *ToggleInfectionState* is placed. As shown in Figure 4.3, it is linked to the app state layer. Tapping this button calls the *setInfectionState()* method of the User Preference to toggle the infection state and refresh the main page. Note that when the infection state is toggled to false, sick (fever, cough, sense loss) and contacted states are automatically set to false at the same time. The reason for this setting is that if a user is tested COVID-19 positive then cured, he/she is undoubtedly healthy. It also means that he/she is facing the risk of being sick, contacted, and even infected again.

F4

COVID-19 symptoms include High Temperature (fever), New, Continuous Cough, and Loss or Change to Sense of Smell or Taste. Each symptom has its field in the User Preference, which by default is false. Once the user taps on one or multiple symptoms, the field will be set to true. One tap triggers one time of refresh on the main page to show the sick page.

¹¹https://pub.dev/packages/firebase_auth

¹²https://pub.dev/packages/firebase_core

F5

As described in the Repetition of WiFi Matching Algorithm feature, once the system detects the user to have three consecutive contact matches, the contacted state will be set to true, and the main page will reflect the change. In other words, the user has no control over this state once the WiFi background matching is turned on.

F9

Each state is shown with a JSON picture, some descriptions, and a countdown.

As mentioned in section 4.4.1, healthy, sick, contacted, and infected states are displayed in the hierarchy of

infected → sick → contacted → healthy

with the infected state having the highest hierarchy.

Note that the countdown due is a field of String data type in the User Preference with default value an empty String. This field is only set by the first self-isolation scenario. For example, if the user has a contact match first, then he/she also records symptoms in the app. The system will try to set isolation dues in both cases. However, the isolation due will only take on the contacted state's value because it appeared first.

F11

A *Column*¹³ of *CheckboxListTile*¹⁴ filled with COVID-19 symptoms is shown to the user after he/she has passed the date picking page.

F14

Users can be navigated to the common question page after tapping the "Common Questions" button on the main page. Users can see a list of questions and tap on them to view answers. Questions are instances from the class *QuestionCard*. The class contains a constructor that takes two inputs: a String of question and a String of answer. The the inputs are inserted into a *ExpansionTile*¹⁵.

¹³<https://api.flutter.dev/flutter/widgets/Column-class.html>

¹⁴<https://api.flutter.dev/flutter/material/CheckboxListTile-class.html>

¹⁵<https://api.flutter.dev/flutter/material/ExpansionTile-class.html>

F18

It is essential to know when a user catches the symptoms so that the isolation countdown can be set up correctly. When a user tries to record his/her symptoms, he/she will be led to the page named *SymptomsAppearingDate*. A question says, "If you are feeling uncomfortable at the moment, can you remember when the symptom occurred?" is displayed on the screen. If the user can remember the answer, he/she can tap on the "Yes, I can" button; if not, the "No, I can't" button is the option.

The "Yes" button initiates a *showDatePicker*¹⁶ function which contains a calendar UI. The user can only choose from the range nine days before the current date up to the current date. This constraint is because, for example, if symptoms occurred on 1 March (assuming the time is 00:00), which is nine days before the current date, he/she would have to self-isolate until 11 March. The start date indicates that the countdown should finish on 11 March (at 00:00) since that would be ten days already. Note the limitation mentioned in section 4.2.2; if the countdown is set to 6 days before the current date, it cannot be displayed correctly. This is an issue due to the *slide_countdown_clock*¹⁷ plugin. On the other hand, the "No" button takes the current date as the starting date of the symptoms; hence the isolation due will be set 10 days after the current date.

Note that if the user has recorded one or multiple symptoms and returned to the main page, the date picker page will not be shown again when he/she revisits the symptoms page.

5.3.3 Moderate Category

F7

A *ElevatedButton*¹⁸ with the name "Book a Quick Test" is shown to users on the main page with the healthy state. Tapping the button navigates users to the government's lateral flow test booking website by an instance of the *WebpageManager* class. This function requires a network connection.

F8

2 *ElevatedButton* are placed in the main page with sick, infected, and contacted states, namely "Book a Test" and "Get an Isolation Note" separately. Tapping the "Book a Test" button

¹⁶<https://api.flutter.dev/flutter/material/showDatePicker.html>

¹⁷https://pub.dev/packages/slайде_countdown_clock

¹⁸<https://api.flutter.dev/flutter/material/ElevatedButton-class.html>

leads users to the government's PCR test booking site¹⁹. The "Get an Isolation Note" button navigates users to the isolation note web page²⁰ instead. Both actions are handled by *WebpageManager* and require an internet connection.

F12

The button for this feature navigates users to the government's COVID-19 rules website²¹.

By the time the tier checking feature was designed, the UK was in national lockdown, and the tier system was still employed. However, the government rules towards COVID-19 change frequently, and so do the guidance contents on the website. Essentially, this design is for users who want to know what they are allowed to do under each tier. Now all users have applied the same rules, which also satisfies the purpose of the design.

F13

A button that leads users to the UK COVID-19 heat map website is placed on the main page. Users can interact with the web page and type in their postcodes to check COVID-19 statistics in their local areas.

F15

There is a search bar on the top of the common questions page in which users can type a specific question. When a non-empty String is detected in the *TextField*²², it is converted into the lower case so that the search bar is not case sensitive. A function *_searchController* then filter out question cards whose question fields contain the input String and display them on the screen. Those questions which are not selected are hidden from the view.

F17

Each time a user taps on a button whose functions do not include a change of UI on the page the user is viewing, a *SnackBar*²³ is shown on the bottom of the screen to notify the user about what has happened. For example, when the user toggles the infection state to true, a *SnackBar* says "Scans within 14 days have been uploaded to cloud." appears.

¹⁹<https://self-referral.test-for-coronavirus.service.gov.uk/antigen/essential-worker>

²⁰<https://111.nhs.uk/isolation-note/screener-question>

²¹<https://www.gov.uk/guidance/covid-19-coronavirus-restrictions-what-you-can-and-cannot-do>

²²<https://api.flutter.dev/flutter/material/TextField-class.html>

²³<https://flutter.dev/docs/cookbook/design/snackbars>

5.3.4 Low Category

F16

The original Android API already has a function of indicating the error when a user is trying to access a website without a network connection. However, the style of the UI for that function is inconsistent with the app design. Therefore, a loss of network connection page is created, and the page still serves the same function.

5.4 Non-functional Requirements Implementation

5.4.1 Security

The categories of all security non-functional requirements are Very High since the biggest concern with current contact tracing apps is the possible leaking of users' personal data. Therefore, the app was implemented so that Firebase only knows about:

- Users' unique IDs. However, Firebase cannot link each ID to an individual device nor the user.
- Scans under each unique ID, if they are uploaded.

Only the following data are stored locally:

- Scans made every 5 minutes.
- The app state for resuming. This includes the user ID, infection state, contacted state, sick state, isolation due, contact matching times, and background activity state.

In other words, only the device itself stores personal information about users. The cloud's scans were deleted immediately when they were no longer needed (when the user's infection state was toggled back to false). On top of that, scans can only be uploaded if the user chooses to record his/her infection state. The upload is automatic once the infection state is toggled to true, since this is part of the core WiFi matching algorithm. Nonetheless, in a realistic production environment, users will have to agree with usage terms and conditions beforehand, which grant this contact tracing app the right to upload WiFi scans by that function. Apart from the data collection, the WiFi matching algorithm is also done locally so that users' social contacts are not exposed.

5.4.2 Robustness

Having high robustness means that the app also faces fewer or zero errors which might badly affect the main functionality. One good thing is that Flutter is migrating to a null safety environment, which means that developers do not need to handle null pointer issues manually. However, the migration has not yet completed, and some plugin bugs still exist as mentioned in section 4.2.2. It is, therefore, a good practice to keep the Flutter version up to date to use the null safety feature but having bugs fixed at the same time; hence this is what has been done in this project.

Other than updating the framework, the coding style also contributes to the robustness of the app. When read and write into either the local or the cloud database, the *Future*²⁴ class was written to wrap around the return type of the method and the *async*²⁵ keyword was added before the body of the method. Though database functions still run without those keywords, this type of asynchronous programming style ensures a database function can be finished before executing the next function.

Additionally, when dealing with *Timer* or database instances, it was made sure that only one instance was created. Otherwise, potential issues, including incorrect matching calculation, colossal battery drain, and unwanted database modification, can happen.

5.4.3 Performance

High performance means that the user experience of the app will be smooth, which indicates the coding style is efficient. The only way to validate requirements under this category is by testing. All testing details will be given in chapter 6.

5.4.4 Usability

Usability is a measurement of how easy it is for users to use the app. Though it does not affect the app's main functionality, part of the goal for this project is to ensure the app is user-friendly.

One big problem with the NHS contact tracing app is that each page contains way too much information. It is challenging to capture the essential message in a pool of texts. Therefore, the app's design was chosen to be neat and accurate, with much more interactive elements to guide users. On the main page, each state is represented by a large JSON picture to inform the user clearly. The countdown also provides a precise isolation duration instead of a vague

²⁴<https://api.flutter.dev/flutter/dart-async/Future-class.html>

²⁵<https://dart.dev/codelabs/async-await>

days count.

Except for the main page, the text descriptions on other pages do not exceed half the screen length. The redundant parts are reduced to buttons that directly lead users to the relevant websites to the current contents.

Lastly, the style of the app is consistent. The same fonts and colour theme were used throughout the app so that none of the pages would appear discordant.

Chapter 6

Testing & Experiments

6.1 Overview

The testing will be carried out according to the order specified in table 3.1. The last part of this chapter will dive deep into the WiFi matching algorithm parameters tuning process. Some functions, such as print statements, were added for testing and experiments but removed in the final submission of the project.

2 Android devices were used for testing, and their models are shown in table 6.1. Though

	Brand	Model	Size	Resolution	Processor	Cores	RAM
Device 1	Samsung	SM-N986B	6.87"	2316*1080	Exynos 990	8	11 GB
Device 2	HUAWEI	ANE-LX1	5.83"	2280*1080	hi6250	8	4 GB

Table 6.1: Device Specifications Table

different phone models were used, and the WiFi RSSI measured might vary due to this factor as mentioned in limitation 4.2.3, the set of APs with the strongest RSSI were still the same. Therefore, it did not affect the outcome of the WiFi matching algorithm. Furthermore, performance and UI tests could be run on two devices as a comparison. Nonetheless, most tests were done on the Samsung device because it had better specifications to run faster.

6.2 Functional Testing

6.2.1 F1

The class *AuthService* is responsible for communicating with Firebase Authentication and get the unique user ID assigned to the current user. Every other classes will have to create

instances of this class if they want to listen to the authentication changes. Therefore, a print statement was added to write the user ID in the terminal once a user was signed in. The terminal successfully printed the user ID, and the corresponding information was shown on Firebase Authentication website. The main page was entered after signing in.

6.2.2 F2-5

Since the content shown on the main page is determined by fields stored in the User Preference, each time the User Preference is modified, the corresponding field value was printed out in the terminal. The terminal showed correct values. The UI of the main screen also switched correctly.

6.2.3 F6

After tapping the "Toggle Infection State" button, all local scans under the current user ID can be seen on cloud Firestore.

6.2.4 F7

After tapping the "Book a Quick Test" button with a stable network connection, the government's lateral rapid flow test website was shown on the screen. All interactive elements on the website also functioned.

6.2.5 F8

After tapping the "Book a Test" and "Get an Isolation Note" buttons with a stable network connection, the government's PCR test and isolation note web pages were shown on the screen. All interactive elements on the website functioned.

6.2.6 F9

This function was tested in different scenarios by tapping the corresponding setting buttons, given that buttons could successfully change fields values in the User Preference:

1. Only a single self-isolation fields (from sick, infected, and contacted states) was set to true without picking a date;

2. All different combinations of self-isolation fields were set to true without picking a date, which was sick and infected, sick and contacted, infected and contacted, sick and infected and contacted;
3. Among the three fields (fever, cough, sense loss) in the sick state, one or more were set to true by selecting a specific date.

Since toggling the infection state to false sets all states to false, it was used to reset all states back to the default value.

For test 1, the infection state was toggled to true. The main page showed the infected page, and the countdown started from 10 days after the current date. Then one and more of the symptoms boxes were clicked without a date picking under the default states. The main page showed the sick page, and the countdown was also correct. Lastly, again under the default states, a fake piece of data was created to allow the algorithm returned a match. The main page showed the contacted state, and the countdown was still correct.

For test 2, those combinations were tried out as stated in test 1 but without setting states back to default within a combination. The main page showed the correct UI, and the countdown only started from the first isolation due as expected.

For test 3, no other states were changed but only the sick state. One or more of the sick state fields were selected after picking all dates from the available range. Due to the limitation explained in section 4.2.2, print statements were added in the source code to get the exact length of the isolation duration. Results showed that the duration was calculated correctly; hence test 3 passed.

6.2.7 F10

F10 is the core feature of the project, and it contains both the normal user functions and developer functions. Before testing this feature, the *matchInterval* parameter, which determines the interval between each WiFi matching algorithm, was changed from 5 minutes to 5 seconds so that results could be obtained much quicker.

Normal User Functions Testing

A normal user can only turn on/off the WiFi matching activity without seeing the process. The functionality needed to be tested in this part are listed as followed:

1. When the app was just downloaded, the WiFi matching should run by default.

2. In the "WiFi Background" page, tapping the stop button should set the *isScanning* field in the User Preference to false; tapping the start button should set it to true instead.
3. The UI should change according to the *isScanning* field values so that the user can know whether the matching is running.
4. The *contactedState* in the User Preference should only be set to true if the user has three consecutive matches.
5. The UI of the main page (in the default state) should change to the contacted page once the *contactedState* is true.

Test methods and results for functionality 1-5 are listed as followed:

1. Within the *Timer* function, which was executed every 5 seconds, a print statement was inserted. The app was deleted and reinstalled. After signing in, the print statement could be seen in the terminal every 5 seconds, which showed that the matching algorithm was running by default.
2. After tapping the stop button on the "WiFi Background" page, nothing was printed in the terminal anymore. Since the algorithm only executes when the *isScanning* field is true, it stopped running as expected. Then the start button was pressed, print statements reappeared in the terminal to show the algorithm execution.
3. From test 2, it was observed that the UI changed to the correct view.
4.
 - No Match Case: At first, the cloud database was cleared to ensure that no match was possible. The matching algorithm was then left to run. Each time the *matchingTimes* field in the User Preference was printed in the terminal to show 0, meaning no match had been found.
 - Match Case: The local scans databases were cleared before testing to prevent incorrect results. Two testing devices were then left to run the WiFi matching algorithm to collect more than three scans in the same room without uploading any scans to the cloud. After that, scans were uploaded from one device by toggling the infection state to true. The terminal then started to print out matching times increment statements. When it reached 3, the contacted state in User Preference was set to true, and an isolation due was updated.
5. In the Match Case above, the UI of the main page changed to indicate the contacted state as expected.

Developer Functions Testing

The developers feature part, or the algorithm breakdown details part, was easier to test because all function outcomes could be seen from the phone screen. When doing so, the automatic WiFi matching algorithm was turned off.

1. The "Check Out Matching Steps" button could be seen from the "WiFi Background" page when the WiFi matching was turned off. Tapping the button successfully navigated to the "WiFi Matching Steps" page.
2. Cards belonged to the online phase, and the offline phase were divided by the *BottomNavigationBar*. Titles, descriptions, and buttons of cards could be viewed.
3. All buttons in the "WiFi Matching Steps" page were pressed, and the observation has shown that they were all working as expected.

6.2.8 F11

After passing the "Symptoms Appearing Date" page, a list of symptoms was shown in the form of tick boxes. After ticking a box, the corresponding field of the User Preference was printed to show true. Deselecting a box changed the field back to false.

6.2.9 F12

After tapping the "Check Local Tier" button with a stable network connection, the government's guidance website was shown on the screen. All interactive elements on the website also functioned.

6.2.10 F13

After tapping the "Check Heat Map" button with a stable network connection, the CovidLiveUK website was shown on the screen. All interactive elements on the website also functioned.

6.2.11 F14

Questions listed in the Common Questions section were folded when the page was just rendered. After tapping on each one of them, it expanded, and the answer was shown correctly. There was no text overflow on the page.

6.2.12 F15

The search bar was seen on the top of the Common Questions section. Words with both upper and lower cases were typed in, and the correct questions were filtered out and displayed.

6.2.13 F16

The device was set to flying mode before the testing. Each *WebpageManager* element (Book a Test page, Book a Quick Test page, Get an Isolation Note page, Check Local Tier page, Check Heat Map page) was entered. The Loss Connection page was shown in all cases.

6.2.14 F17

After tapping "Toggle Infection State", "Scan WiFi", "Store Current Scan", "Upload to Cloud" and long pressing "Clear Local Database", "Clear Current User's Cloud Data", "Clear Result Database" buttons, *SnackBar* was shown on the bottom of the screen to notify the results of the functions.

6.2.15 F18

A *DatePicker* was shown after tapping the "Yes, I can" buttons on the "Symptoms Appearing Date" page. After choosing a date, the printed value of the date variable was shown to be correct. The isolation duration was also printed in the terminal and turned out to be correct.

6.3 Non-functional Testing

6.3.1 Security

The requirements code for this section is NS in table 3.1.

When implementing the project design, NS1-NS4 were followed strictly. While testing related functions, the Firebase website was opened, and new data were only seen in the cases listed below.

NS1

There was only one sign-in button, and it used the Firebase authentication method. After tapping the button, a new user ID was seen.

NS2

In normal use cases, *storeScansWithin14DaysInCloudDatabase()* function was only called after toggling the infection state to true. After tapping, the output was seen as shown in picture 5.2.

NS3

In developer use cases, local scans were uploaded by taping the "Upload to Cloud" button. Since this part will be removed if the prototype was released, it did not threaten user security.

NS4

Only 3 data model classes were created, which were *CustomisedWifi*, *CustomisedUser*, and *CustomisedResult*. The only way to interact with local databases was to initialise instances of data model types. Therefore, NS4 success criteria were satisfied automatically.

NS5

Signing out and deleting the app were done after inserting some data into all local databases. When signing back in or re-downloading the app, no data were seen in any databases. This was regarded as passing the NS5 success criteria.

6.3.2 Robustness

The requirements code for this section is NR in table 3.1.

NR1

During the implementation phase, if a *Future* function was used without marking it as *async*, error messages would be seen in the terminal. In other words, threading errors were handled by the compiler and solved. Additionally, the final version of the prototype never froze during use. Therefore, NR1 was considered to be successful.

NR2

Singleton pattern was employed in the database definition class *AppDatabase*.

NR3

After running the command "flutter -version" in the terminal, the following statements were printed:

```
Flutter 2.1.0-12.1.pre • channel dev • https://github.com/flutter/flutter.git
Framework • revision 8264cb3e8a (3 weeks ago) • 2021-03-10 12:37:57 -0800
Engine • revision 711ab3fda0
Tools • Dart 2.13.0 (build 2.13.0-116.0.dev)
```

The latest version of Flutter was installed.

NR4

Buttons that needed to be targeted were the ones that interacted with databases since they were most likely to cause issues. More specifically, "Toggle Infection State", "start/end WiFi matching algorithm" buttons were frequently tapped in random orders. No glitches were found during the testing; hence NR4 was a success.

6.3.3 Performance

The requirements code for this section is NP in table 3.1.

An important thing to note about performance testing is that the WiFi matching runtime has a positive correlation to sizes of the local and cloud databases since there are more data to compare. An ideal way of testing would be to generate large test data sets based on real-life contact situations for running the matching algorithm. However, past research about average daily contact numbers per person does not apply anymore due to the pandemic. Moreover, current information about contacting situations changes frequently depending on the government's COVID-19 rules. Therefore, it is challenging to determine acceptable data sets sizes, hence an ideal performance. It is also impractical to run long-term tests over days due to limitation 4.2.1.

Based on the above rationale, only small data sets were tested in the foreground. Further improvements can be made if access to real-world COVID-19 contact databases is granted.

NP1

This feature's success partially depends on NP2 since functions other than the WiFi matching activity can all run in linear time. A walkthrough of the app on both the Samsung and HUAWEI devices was done after it was installed. There was no noticeable pause once a page was fully

loaded. The Samsung device could load a page faster than the HUAWEI device, which was expected.

NP2

The local database of the two testing devices was cleared before testing this feature. The *matchInterval* was set to be 5 seconds. A *Stopwatch*¹ was added inside the timer to record the runtime of the WiFi matching algorithm. It was run on both the Samsung and HUAWEI devices for the initial three scans. Then scans from the HUAWEI device was uploaded to the cloud.

In the case of having a match, results had shown that the average run time over 100 scans on the Samsung device was 0.645s. In the case of not having a match, data in the cloud database were not removed, but the local database was cleared on the Samsung device. Results, in this case, produced an average of 0.693s over 100 scans.

As seen in graph 6.1, the runtime in both cases are very similar. This outcome is reasonable because each scan in the local database would still have to compare to each scan in the cloud database. However, both runtimes show increasing trends over the runs due to the accumulation of scans in the local database. This increase can be exponential in real life due to new data added per *matchInterval* in both the cloud and the local databases plus hardware with less computational power.

Under the test standard set in section 6.3.3, this feature implementation was considered to be acceptable.

6.3.4 Usability

The requirements code for this section is NU in table 3.1.

NU1

The background colours of this app were set to be the same on each page. Fonts used throughout the app were also consistent. This requirement is satisfied.

NU2

The primary function of each button was concluded into less than five words and set as the title. Buttons were set to sizes that were easy to press and visually pleasing.

¹<https://api.flutter.dev/flutter/dart-core/Stopwatch-class.html>

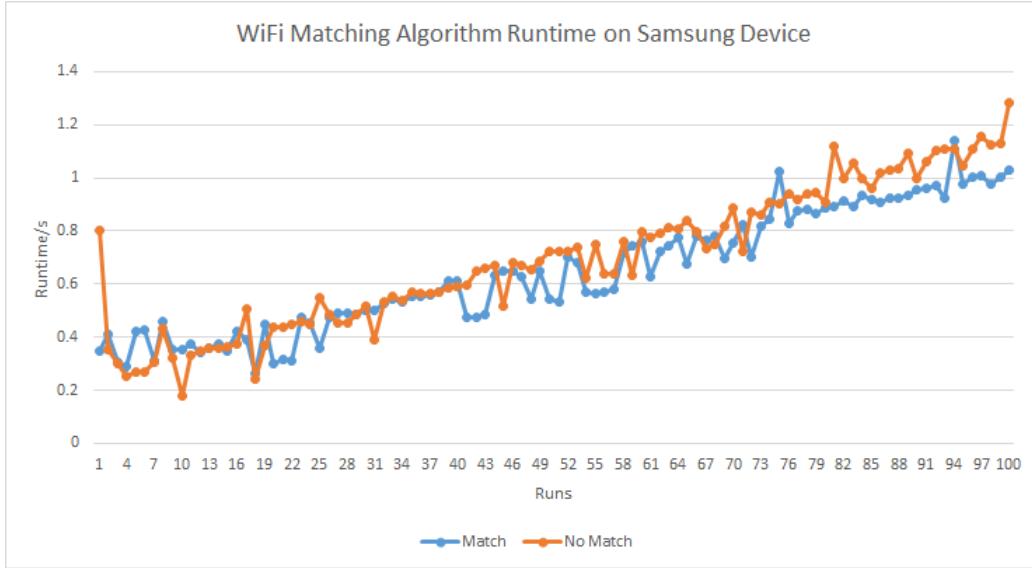


Figure 6.1: WiFi Matching Algorithm Runtime on Samsung Device

NU3

The pages which contained the most words were the WiFi algorithm breakdown view. Among all cards, Step 3 in the online phase had the most texts (including texts on buttons) of 49 words. According to the research done on the average reading speed[6], an adult can read around 200 words per minute. This means that the app's most wordy page can be read within $49 \div 200 \times 60 = 14.7\text{s}$. Logically, other pages only require less than 14.7s to read. The number of words on each page reaches the success criteria of this requirement.

6.4 Parameters Tuning

In this section, experiments were carried out using the WiFi matching algorithm developer functions. There were two parameters to be tuned for the WiFi matching algorithm, which were *filterPercentage* and *similarityThreshold*. As demonstrated in algorithm 2 and 3, *similarityThreshold* was the percentage of how similar 2 sets of WiFi BSSID were going to be considered as a match; *filterPercentage* was the percentage of how many WiFi signals were kept within a scan descendingly ordered by RSSI.

The tuning aimed to maximise true positive and minimise false positive.

6.4.1 Data Collection

Data were collected across different floors/rooms inside a UNITE student accommodation. At each location, ten scans were made and stored as a text file. Raw data can be found in Appendix C. Unfortunately, scans in other buildings could not be collected due to COVID-19 restrictions. Outdoor data were not collected for consideration because, as mentioned in chapter 2, WiFi localisation is only suitable for indoor.

6.4.2 Tuning Method

Data were converted from the .txt files to a 3D list in the format of [room[scan[signal]]]. The Python library *geneticalgorithm*² is used for parameters tuning. The idea is to obtain an objective function from the number of true positives (TP) and false positives (FP). The default setting of *geneticalgorithm* is to minimise the value returned from the objective function. Therefore, the objective function was defined as $\alpha FP - \beta TP$, where α and β were weights. The complete implementation of this part can be found in Appendix B.2.1.

Table 6.2 is a diagram of outcomes from different objective functions. Results show that when α and β have the same value, there are many FP. This is also the case when α is 0 and β is 1. In other words, when trying to achieve maximising TP and minimising FP simultaneously, FP does not affect the outcome. A large number of FP is not ideal because the increase of FP will also increase the cost for app users, such as creating unnecessary self-isolation periods. A good model should always try to prioritise minimising FP. The final row of table 6.2 shows the result for only considering minimising FP. It is very close to the real-life situation, where there is much more TN than TP. Therefore, *filterPercentage* and *similarityThreshold* from this row should be used in the simplified fingerprinting algorithm for the prototype.

The precision in this case is 0.711 and the recall is 0.0922.

Objective Function	filterPercentage	similarityThreshold	TP	FP	TN	FN
FP-TP	0.92116652	0.012094	857	3548	924	0
-TP	0.94605785	0.01525309	857	3548	924	0
FP	0.84022877	0.97232887	79	32	4440	778

Table 6.2: Simplified Fingerprinting Algorithm Test Data

²<https://pypi.org/project/geneticalgorithm/>

6.5 Experiment with Other Algorithms

The same .txt files were used and converted for this part as they were in section 6.4. The source code can be found in Appendix B.2.2. Both the random and the decision tree classifier algorithm do not include the parameters tuning process. Therefore, the confusion matrix for each one of them can be constructed directly from executing the function.

6.5.1 Random Algorithm

The data set for the random model is a list of combinations between scans. If scan A and scan B were made in the same location, then the tuple (Scan A, Scan B) is labelled with true; Otherwise, it is labelled with false. A list of Boolean values with the same length as the data set is generated with algorithm 1. This list was compared with the list of actual labels.

The confusion matrix changed each time after being constructed and this was expected. After 10,000 runs, the result was summarised in table 6.3. FP was significantly larger than TP and TN was significantly larger than FN. The average precision is 0.161 and the average recall is 0.5.

Value	Max	Min	Mean	Standard Deviation (3 decimal places)
TP	492	378	428.5979	14.549
FP	2362	2107	2235.8180	33.635
TN	2365	2110	2236.1892	33.635
FN	479	365	428.4021	14.549

Table 6.3: Random Model Test Data Summary

6.5.2 Decision Tree Classifier Algorithm

The segment of code implementing algorithm 4 is shown in listing 1. The code was run in JupyterLab and hence it was not wrapped in a function definition. The parameter N for algorithm 4 was directly modified inside the body of the function.

Each data point contains the following features:

- The first n signals of scan A;
- The first n signals of scan B;
- The length of scan A;
- The length of scan B.

```

X2 = []
y2 = []

for i in range(len(scans)):
    for j in range(len(scans[i])):
        for k in range(len(scans)):
            label = i==k
            for m in range(len(scans[k])):
                #The first n signals taken from each scan
                n=3
                X2.append(
                    np.concatenate([
                        scans[i][j][:n],
                        scans[k][m][:n]
                    ]).flatten().tolist() + [
                        len(scans[i][j]),
                        len(scans[k][m])
                    ])
                )
            y2.append(label)

```

Listing 1: Data Converter for Decision Tree Classifier

If only the first two features were used, it would be difficult to distinguish scans made from different rooms on the same floor because the sets of routers with the strongest signals were very similar; hence some more information from a scan needed to be included. That was the reason why the last two features were added.

The confusion matrix got from this model is shown in table 6.4. FP was eliminated. Compared to results obtained from the simplified fingerprinting model, the number of TP and TN increased, and the FN number decreased. The precision of the decision tree model is 1, and the recall is 0.557. Therefore, the decision tree model has the best performance among the other two models on the same test data set as expected.

TP	FP	TN	FN
477	0	4472	380

Table 6.4: Decision Tree Classifier Model Test Data

Chapter 7

Evaluation

7.1 Overview

This chapter will evaluate the outcome of the project. In general, the project objectives are achieved. However, issues still exist in different aspects. Details will be given in the following sections.

7.2 Simplified WiFi Fingerprinting Model Evaluation

Since the simplified WiFi fingerprinting model does not produce a distance approximation between users due to limitation 4.2.3, its accuracy cannot be defined by an exact number. Instead, confusion matrices were drawn in section 6.4 and 6.5 to determine the quality of this model.

Table 7.1 shows the precision and recall values of different models. The optimal set of values of the simplified fingerprinting model is used. In terms of the test data set, precision means how many of the predictions indicate two scans are made in the same room are correct. On the other hand, recall means how many cases of 2 scans are made in the same room are identified.

The simplified fingerprinting model misses a lot of TP as it tries to be "cautious" about saying two scans are made from the same room. However, the correctness (0.711) of the identified positive cases is much higher than that (0.161) of the random model. Plausible reasons for this outcome are:

- Sets of APs with the strongest SS across different small rooms within the same floor of the student accommodation are very similar. The model fails to distinguish between them.

- Noises of scans interfere with the algorithm.

The decision tree is the ideal model among the 3, as it is 100% correct in identifying whether two scans are made in the same room. However, it still misses out around half (0.443) of the positive cases. In conclusion, the simplified fingerprinting model works if sets of APs with the strongest SS are distinctive in different rooms.

One thing worth mentioning is that the decision tree model faces overfitting, and so does the simplified WiFi fingerprinting model. Unfortunately, overfitting is inevitable due to resource limitation. If more training data can be collected, improvements can be made on both models.

In reality, if the decision tree model was to be employed, data collection across different rooms in different buildings must be done in advance. The model cannot correctly predict completely new input data. However, that will be no different from the offline phase of the original fingerprinting model, hence violating this project's "low cost" objective. On the other hand, the simplified fingerprinting model provides a more general matching approach since parameters can be adjusted to fit the large environment. Data collection cost reduces massively compared to other models with ML. The low recall issue can potentially be less severe as APs in households might be very distinctive. If COVID-19 contact data are needed for statistical purposes, a function f can be designed to scale up the number of positive cases from the simplified fingerprinting model.

Model	Precision	Recall
Random	0.161	0.5
Simplified Fingerprinting	0.711	0.0922
Decision Tree	1	0.557

Table 7.1: Precision and Recall Table of Different Models

7.3 Requirements Evaluation

7.3.1 User Requirements

User requirements are the baseline features the prototype must include. The design of functional and non-functional requirements are aiming to serve user requirements. It follows that if those requirements are implemented successfully, user requirements will be automatically satisfied. Nonetheless, a walkthrough was done on the finished prototype to validate all user requirements, and no related issues were found. Therefore, the app implementation is regarded as a success on the basic level.

7.3.2 Functional Requirements

Most functional requirements are satisfied with the Flutter framework and related plugins.

Requirements that failed to achieve due to limitations mentioned in section 4.2 are:

- WiFi matching algorithm should run every 5 minutes in the background. This requirement cannot be done as Android API has a limitation with the number of WiFi scans that can be made in the background. Only a maximum of 1 scan can be made per half an hour.
- The countdown from the isolation due should be displayed correctly. This cannot be done as it used the *slide_countdown_clock* plugin, which has a known bug of displaying issue.
- Background push notifications should be sent when the isolation countdown is over. The recommended and also most common solution to this requirement is using Firebase Messaging. However, this plugin is not compatible with other Firebase functions; hence the requirement cannot be achieved.

The background push notification requirement was not listed in table 3.1 because this was known before writing chapter 3. It would be pointless to include a requirement that could not be realised.

7.3.3 Non-Functional Requirements

Security

Apart from the WiFi matching algorithm, security requirements are equally essential as they are the primary concerns of existing contact tracing apps. All requirements of this part stated in table 3.1 are satisfied. Suppose a malicious attacker is trying to gain unauthorised access to user data. In that case, he/she will have to either log in to the Firebase admin account or retrieve data directly from the user's device. In both cases, an individual user stays anonymous.

However, there is a compromise between user security and contact matching accuracy. The original WiFi indoor localisation models require either a clear layout of the room plus scans at each coordinate or the coordinates of APs. Therefore, a much more accurate WiFi indoor localisation model can be developed if users can provide WiFi scans labelled with their coordinates when they enter a new enclosed area. This is not ideal as it contradicts the principle of staying anonymous. A cross-reference can be easily done to find out the user's live location. Nonetheless, it also requires users to spend much effort using the app since users need to manually label the coordinates indoors.

The accuracy of the simplified WiFi fingerprinting model in this project will be evaluated in section 7.2.

Robustness

Unit tests have been done to debug all functional requirements. Appropriate data structures were also used during implementation to prevent multiple databases and timers creation. However, due to time and resources limit, large scale tests were not done.

One potential issue might arise with the performance of the WiFi matching algorithm. As shown in figure 6.1, the physical runtime of the algorithm on the Samsung device shows a trend of increase by each run. It might eventually exceed 5 minutes when matching with large local and cloud databases. In that case, concurrent issues will occur, which might freeze the whole app.

Performance

The physical runtime of functions varies depending on the device's hardware environment. Despite the WiFi matching algorithm, functions which take the longest time to execute are the ones interacting with databases and loading web pages. Nevertheless, their runtime is linear; hence the key performance determining factor is the WiFi matching algorithm.

As mentioned in section 7.3.3, the simplified WiFi fingerprinting algorithm's performance increases over each run. It can be exponential when new scans are constantly added to both local and cloud databases. If the physical runtime exceeds 5 minutes, the simplified WiFi matching algorithm can not be considered as working.

The upper bound of the algorithm where it still works is only meaningful in the context of reality. It might be the case that the algorithm can return values within a certain amount of time, or it might already take more than 5 minutes to compare one local scan with the cloud database. If a sensible approximation of the number of data collected in the cloud database can be made, it is still possible to determine an upper bound. However, access to the realistic contact tracing app database is not granted. Therefore, the upper bound is unknown. The conclusion is the simplified WiFi fingerprinting algorithm can undoubtedly work on a small scale.

Usability

Whether usability requirements are achieved depends on individual taste. However, basic requirements, including app style consistency and clear instructions and button naming, are ensured.

Chapter 8

Professional Issues

8.1 Overview

This project produces a prototype of the contact tracing app, and the professional concerns are massively reduced from a product that will be put into the market. Nevertheless, some primary professional, legal, and social and ethical issues will be discussed based on the Code of Conduct & Code of Good Practice principles issued by the British Computer Society.

8.2 Professional

The source code of the prototype is documented where necessary. The code structure is also maintained in a readable fashion. In this case, the next person who is reading the code can understand the logic more quickly. The app's UI design aims to be neat and professional, which reflects the purpose of a contact tracing app.

8.3 Legal

All third-party resources are declared in this project to avoid plagiarism. The General Data Protection Regulation (GDPR) is taken into account during the app implementation. The principle of data minimisation¹ states that:

- We only collect personal data we actually need for our specified purposes.
- We have sufficient personal data to properly fulfil those purposes.

¹<https://ico.org.uk/for-organisations/guide-to-data-protection/guide-to-the-general-data-protection-regulation-gdpr/principles/data-minimisation/>

- We periodically review the data we hold, and delete anything we don't need.

Therefore, only necessary app user data are stored locally and remotely in this project to ensure security and privacy. If WiFi scans of a user are no longer needed, the scans will be deleted from the cloud database. Users will also be notified about any usage of personal data.

8.4 Social & Ethical

Pictures and texts included in the app respect individuals from different political, ethnic, and social backgrounds. No biased comments are made about any particular groups.

Chapter 9

Conclusion and Future Work

9.1 Conclusion

The simplified WiFi fingerprinting model's potential and how it can be applied in reality is explained in section 7.2. Nonetheless, a general conclusion should be drawn from comparing BLE and WiFi contact tracing models.

One significant advantage of the current contact tracing app is that BLE can directly broadcast to adjacent devices, and the distances between devices can be directly calculated from BLE RSS. While with WiFi, since the AP is not the device itself, proximity between devices cannot be calculated directly from RSS. This makes the WiFi contact tracing model fundamentally more complicated than the BLE model.

In terms of localisation, WiFi has two major branches, as shown in figure 2.1. No matter which branch is chosen, proximity between users can only be determined by the *Euclidean* distances between users' coordinates. Constructing such mapping for every household in a country is merely impractical.

Nonetheless, WiFi contact tracing is only suitable for indoor environments, as mentioned in section 2.1.1, while BLE still works outdoor. Nevertheless, WiFi RSS faces the same issues with BLE RSS. Though it can be argued that contact tracing is only necessary indoor since the COVID-19 transmission rate is much lower outdoor, it is still good practice to develop a model which can cope with both situations.

In general, BLE RSS is a better technique than WiFi localisation for building a contact tracing app, as it has a significantly lower implementation cost and higher compatibility in outdoor environments. Nonetheless, WiFi localisation for contact tracing can be considered in a hybrid

method (such as combining with GPS) which covers its shortage in outdoor environments.

9.2 Future Work

If more time and resources are allowed, improvements can be made on the current project to mature. There are several categories on which this project can be further enhanced.

9.2.1 WiFi Contact Tracing Model

The simplified WiFi fingerprinting model's accuracy largely relies on the two parameters, which are *filterPercentage* and *similarityThreshold*. If more data can be collected to generalise WiFi scans distribution, the parameters can be tuned to adapt broader situations.

In reality, if WiFi is used for contact tracing, the ideal models which satisfy the 2-meter accuracy requirement are still the original fingerprinting model or trilateration. While gradually collecting data for building models of each (type of) household, the simplified WiFi fingerprinting can be used as a supplement.

Additionally, since the WiFi scanning activity cannot run every 5 minutes in the background, related tests such as background hardware consumption cannot be done. If the authority of breaking this limit is granted, a more comprehensive evaluation for the simplified WiFi fingerprinting model can be conducted.

9.2.2 Database Management

Regarding this project's scale, cloud and local databases are simply set up, but no other automatic data cleaning functions are implemented.

It is still essential to clean up both the cloud and local databases to increase the WiFi matching algorithm's efficiency when the scale of a data set is enormous. However, some old scans data might be needed for statistical purposes. Therefore, it will be plausible to have two cloud databases. One keeps the scans within 14 days for the contact matching algorithm, and the other simply stores all scan data.

9.2.3 UI Design

The UI design is based on the screen size of the Samsung device listed in table 6.1. Pictures and fonts sizes were hard-coded for fast UI display. As a result, when the app is installed on a device with a smaller screen size, UI overflow issues might occur. In other words, part of

the widgets or texts might be hidden below the screen. However, this does not affect the main functionality of the app. This issue can be easily resolved if more time is given to the project.

Other than fixing the UI, introduction pages can also be added before the sign-in page to provide more guidance on using the app.

9.2.4 Legality

This project only produces a prototype of the contact tracing app; hence detailed legislative procedures are omitted.

In a production environment, since user WiFi scans data will be automatically uploaded to the cloud once the infection state becomes true, it is necessary to notify the user about this action. Other than showing a *Snackbar* at the bottom of the main page once the "Toggle Infection State" button is pressed, a user agreement page should be shown before the sign-in page. This page should include legal terms and conditions written by professionals for using the app. A user can only proceed to the main page if he/she agrees with the terms.

9.2.5 Flutter Plugin

Since Flutter is a developing framework, some issues have not yet been fixed as mentioned in section 4.2.2. This results in:

- Not able to implement background push notifications.
- Isolation countdown not displaying correctly.

Though there are alternative solutions to the issues above, it will take an unnecessarily long time to be carried out. Moreover, since Flutter has a prevalent and active platform, the Flutter community will likely resolve those bugs in the near future. By then, the solution will simply be updating the current plugins.

References

- [1] B. Adam, J. Deborah, and F. Caroline. NHS Test and Trace: the journey so far. https://www.health.org.uk/publications/long-reads/nhs-test-and-trace-the-journey-so-far?gclid=CjwKCAiA_eb-BRB2EiwAGBnXXga4f3r6p32ZAC1590sW8SVYFmi04S81s6uhz_fwADoVhuqk7T1RWRoCVjAQAvD_BwE#lf-section-97056-anchor, 2020.
- [2] R. Amadeo. Google’s “Fuchsia” smartphone OS dumps Linux, has a wild new UI. <https://arstechnica.com/gadgets/2017/05/googles-fuchsia-smartphone-os-dumps-linux-has-a-wild-new-ui/>, 2017.
- [3] Atreyi Bose and Chuan Heng Foh. A practical path loss model for indoor wifi positioning enhancement. In *2007 6th International Conference on Information, Communications Signal Processing*, pages 1–5, 2007.
- [4] P. Bahl and V. N. Padmanabhan. Radar: an in-building rf-based user location and tracking system. In *Proceedings IEEE INFOCOM 2000. Conference on Computer Communications. Nineteenth Annual Joint Conference of the IEEE Computer and Communications Societies (Cat. No.00CH37064)*, volume 2, pages 775–784 vol.2, 2000.
- [5] BBC News. Coronavirus: How does Covid-19 test-and-trace work? <https://www.bbc.co.uk/news/explainers-52442754>, 2020.
- [6] M. Brysbaert. How many words do we read per minute? a review and meta-analysis of reading rate. 2019.
- [7] CSSEGISandData. COVID-19 Data Repository by the Center for Systems Science and Engineering (CSSE) at Johns Hopkins University. <https://github.com/CSSEGISandData/COVID-19>, 2020.

- [8] J. L. Douglas and F. Stephen. Coronavirus contact tracing: Evaluating the potential of using bluetooth received signal strength for proximity detection. 50(4):66–74, 2020.
- [9] P. Jiang, Y. Zhang, W. Fu, H. Liu, and X. Su. Indoor mobile localization based on wi-fi fingerprint’s important access point. *International Journal of Distributed Sensor Networks*, 11(4):429104, 2015.
- [10] H. Jonas and M. Markus. Mind the gap: Security & privacy risks of contact tracing apps. 2020.
- [11] A. Kareem, M. Alrawi, and I. Al Attar. Smart inventory control system based on wireless sensor network. 08 2017.
- [12] L. Kelion. UK virus-tracing app switches to Apple-Google model. <https://www.bbc.co.uk/news/technology-53095336>, 2020.
- [13] B. Li, I. Quader, and A. Dempster. On outdoor positioning with wi-fi. *Journal of Global Positioning Systems*, 7:18–26, 06 2008.
- [14] M. Patel. Flutter Single Codebase to Build Your Dream Application for iOS and Android. <https://www.concettolabs.com/blog/flutter-single-codebase-application-for-ios-and-android/>, 2019.
- [15] S. Sadowski and P. Spachos. Rssi-based indoor localization with the internet of things. *IEEE Access*, 6:30149–30161, 2018.
- [16] Wikipedia. Miquel’s theorem — Wikipedia, the free encyclopedia. <http://en.wikipedia.org/w/index.php?title=Miquel%27s%20theorem&oldid=1003555355>, 2021. [Online; accessed 07-April-2021].
- [17] Wikipedia. Pythagorean theorem — Wikipedia, the free encyclopedia. <http://en.wikipedia.org/w/index.php?title=Pythagorean%20theorem&oldid=1008157619>, 2021. [Online; accessed 07-April-2021].
- [18] Wikipedia. Wi-Fi positioning system — Wikipedia, the free encyclopedia. <http://en.wikipedia.org/w/index.php?title=Wi-Fi%20positioning%20system&oldid=1014075537>, 2021. [Online; accessed 04-April-2021].
- [19] S. Xia, Y. Liu, G. Yuan, M. Zhu, and Z. Wang. Indoor fingerprint positioning based on wi-fi: An overview. *ISPRS International Journal of Geo-Information*, 6(5), 2017.

- [20] W. K. Zegeye, S. B. Amsalu, Y. Astatke, and F. Moazzami. Wifi rss fingerprinting indoor localization for mobile devices. In *2016 IEEE 7th Annual Ubiquitous Computing, Electronics Mobile Communication Conference (UEMCON)*, pages 1–6, 2016.

Appendix A

User Guide

A.1 Running the Contact Tracing App Prototype

A.1.1 Flutter Installation

Before running the Flutter project, the system environment must be set up. Please refer to the official Flutter website for installing Flutter on different operating systems. This is the link: <https://flutter.dev/docs/get-started/install>.

A.1.2 Text Editor Setup

Visual Studio Code is the recommended text editor for running this project, as it is lightweight. Nonetheless, other text editors can be used based on personal preferences. Please enter this link for more instructions: <https://flutter.dev/docs/get-started/editor?tab=vscode>.

A.1.3 Import and Run Project

After setting up the text editor, please unzip the source code file uploaded on KEATS and import the entire folder. Run `flutter pub get` in the terminal to install plugins. The `pubspec.yaml` file includes all plugins and assets for the app. Please also ensure that:


- Either an Android device on developer setting is connected to the computer;
- Or an Android emulator is enabled.

Pressing F5 in the Visual Studio Code editor can fast build the project.

A.1.4 Getting Started

App Icon

If the app is installed on a physical Android device, the following icon should be shown.

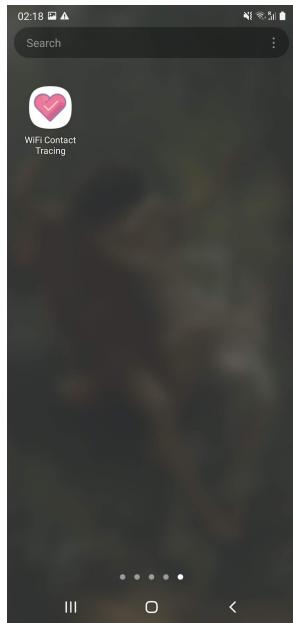

Sign In Page

Tapping the app icon enters the sign in page.


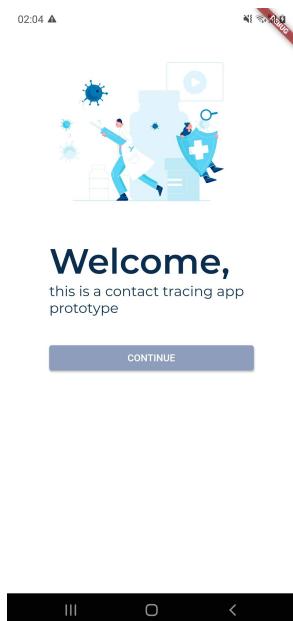


Figure A.1: Sign In Page

Home Page in Healthy State

Tapping the "CONTINUE" button on the sign in page enters the main page. The user ID can be seen in the terminal.

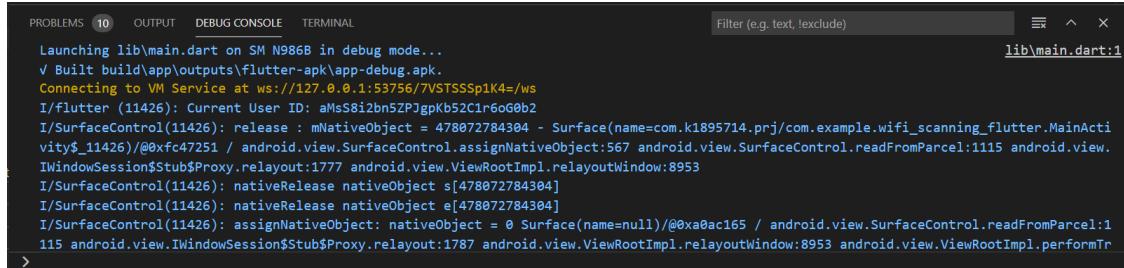

```
PROBLEMS 10 OUTPUT DEBUG CONSOLE TERMINAL
Launching lib\main.dart on SM N986B in debug mode...
V Built build\app\outputs\flutter-apk\app-debug.apk.
Connecting to VM Service at ws://127.0.0.1:53756/VTSSSSp1K4=/ws
I/flutter (11426): Current User ID: aMs58i2bn5ZPjgpkb52C1r6G0b2
I/SurfaceControl(11426): release : mNativeObject = 478072784304 - Surface(name=com.k1895714.prj/com.example.wifi_scanning_flutter.MainActivity$11426)@0xfc47251 / android.view.SurfaceControl.assignNativeObject:567 android.view.SurfaceControl.readFromParcel:1115 android.view.IWindowSession$Stub$Proxy.relayout:1777 android.view.ViewRootImpl.relayoutWindow:8953
I/SurfaceControl(11426): nativeRelease nativeObject s[478072784304]
I/SurfaceControl(11426): nativeRelease nativeObject e[478072784304]
I/SurfaceControl(11426): assignNativeObject: nativeObject = 0 Surface(name=null)@0xa0ac165 / android.view.SurfaceControl.readFromParcel:1115 android.view.IWindowSession$Stub$Proxy.relayout:1787 android.view.ViewRootImpl.relayoutWindow:8953 android.view.ViewRootImpl.performTr...
```

The default user state is healthy.

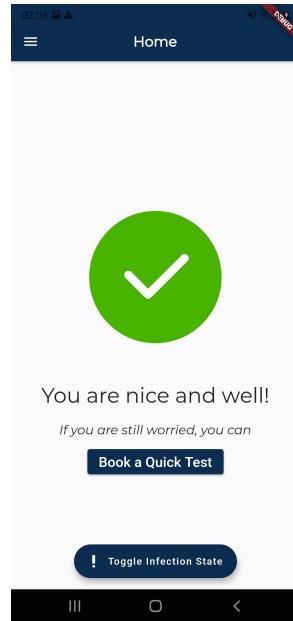


Figure A.2: Main Page in Healthy State

There are 3 buttons on this page:

- Drawer Button: Located on the top left of the screen. Opens a list of buttons which navigate to different pages, as shown in Figure A.3.
- Book a Quick Test: Opens the rapid lateral flow test booking web page, as shown in Figure A.4.
- Toggle Infection State: Toggles the infection state of the current user. The home pages changes to the infected state if the current state is healthy, as shown in section A.1.4.

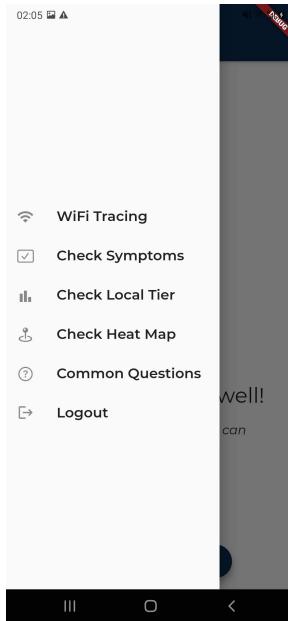


Figure A.3: Drawer

Note that tapping the "Logout" button will go back to the sign in page as shown in Figure A.1.

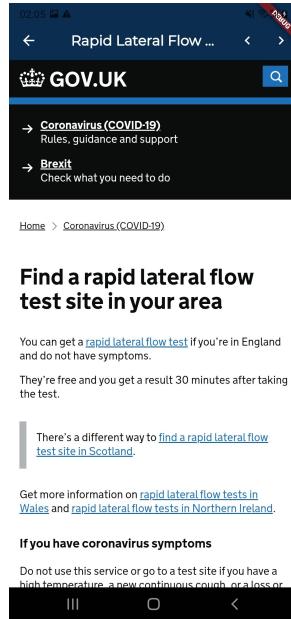


Figure A.4: Rapid Lateral Flow Test Web Page

Home Page in Infected State

WiFi scans within 14 days in the local database will be uploaded to the cloud database after toggling the infection state to true. In this state, pressing the "Toggle Infection State" button

will return to the healthy state shown in Figure A.2. There are 2 new buttons in the page of

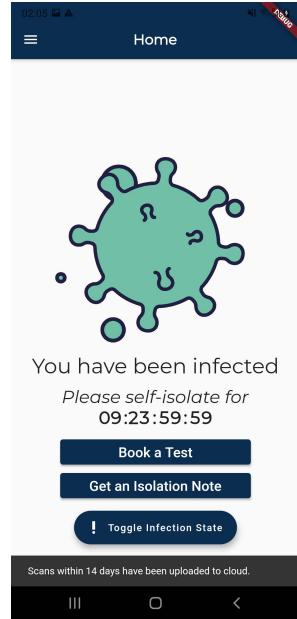


Figure A.5: Main Page in Infected State

infected state:

- Book a Test: Opens the polymerase chain reaction test booking web page, as shown in Figure A.6.
- Get an Isolation Note: Opens the isolation note application web page, as shown in Figure A.7.

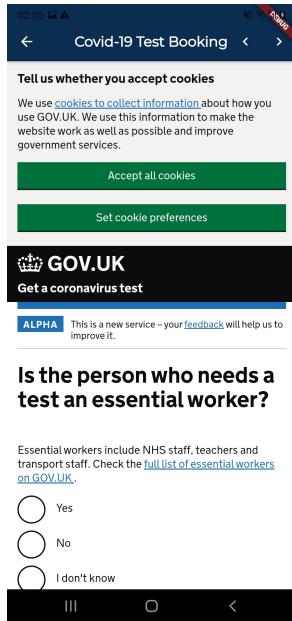


Figure A.6: Polymerase Chain Reaction Test Booking Web Page

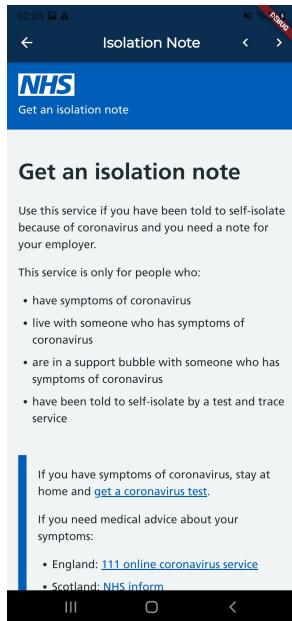


Figure A.7: Isolation Note Application Web Page

Home Page in Sick State

After ticking one or more symptoms as shown in Figure A.18 and return to the main page, the main page will show a sick state. This can only happen if the infected state is false. Buttons in this state are the same as the ones in the infected state.

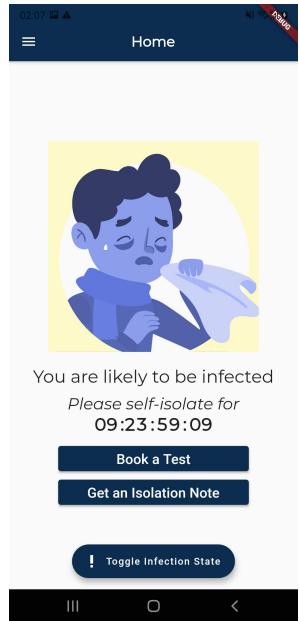


Figure A.8: Main Page in Sick State

Home Page in Contacted State

If the WiFi contact matching algorithm has detected three consecutive matches, the main page will show a contacted state. This can only happen if both the infected state and the sick state are false. Buttons in this state are the same as the ones in the infected state.

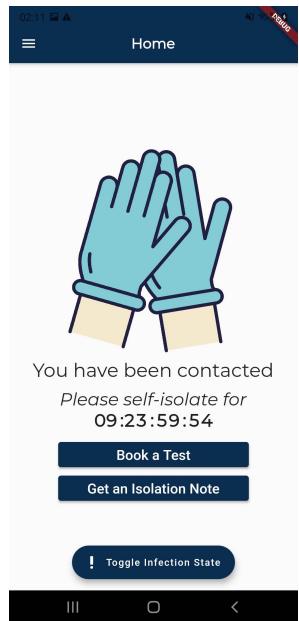


Figure A.9: Main Page in Contacted State

WiFi Tracing Page

After tapping the "WiFi Tracing" button as shown in Figure A.3, the WiFi Tracing page will be entered. By default, the WiFi tracing is running.



Figure A.10: WiFi Tracing Turned On

There 3 buttons on this page:

- Left Arrow: Located on the top left of the screen. Goes back to the main page.
- Start Triangle: Located on the top right of the screen. Starts the WiFi tracing, as shown in Figure A.10.
- Stop Square: Located on the top right of the screen. Stops the WiFi tracing, as shown in Figure A.11.



Figure A.11: WiFi Tracing Turned Off

There is an extra "Check Out Matching Steps" button which leads to the Matching Steps Page as shown in section A.1.4.

Matching Steps Page

Each step of the simplified WiFi fingerprinting model is shown in terms of cards. Some cards have buttons for testing.

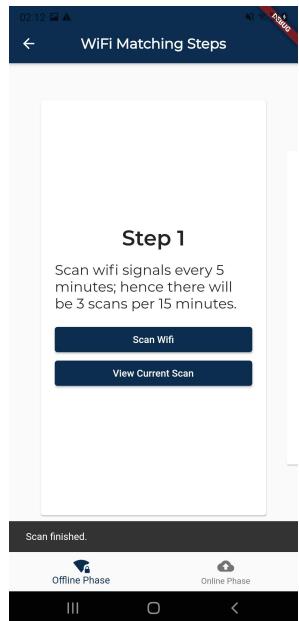


Figure A.12: Matching Steps Page

Other than the buttons on the cards, there are three other buttons on this page:

- Back Arrow: On the top left of the screen. Goes back to the WiFi Tracing page shown in section A.1.4.
- Offline Phase: On the bottom left of the screen. Shows cards for the offline phase of the model.
- Online Phase: On the bottom right of the screen. Shows cards for the online phase of the mode.

To run the final step (step 3 in the online phase), please press the buttons this order:

1. Set Parameters, as shown in Figure A.14. Please slide each bar to the intended number, and tap outside the dialog to save the setting.
2. Run the Algorithm, as shown in Figure A.15. A dialog will show the result of the matching. The "Positive" button means there should be matching, and the "Negative" button means there should not be matching. Pressing both the "Positive" and "Negative" buttons will save the result into the result database as shown in Figure A.16. Tap outside of the dialog will simply discard the current result.

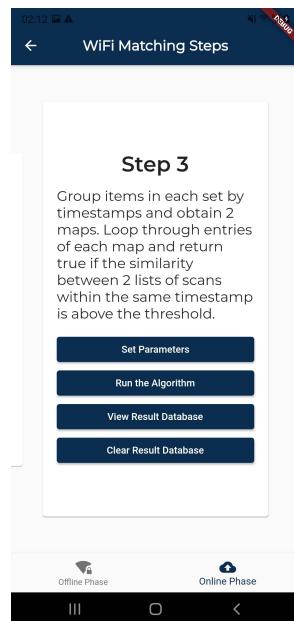


Figure A.13: Online Phase Matching Step 3

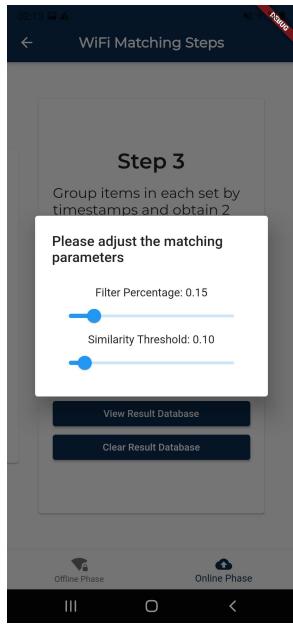


Figure A.14: Online Phase Matching Step 3 Set Parameters

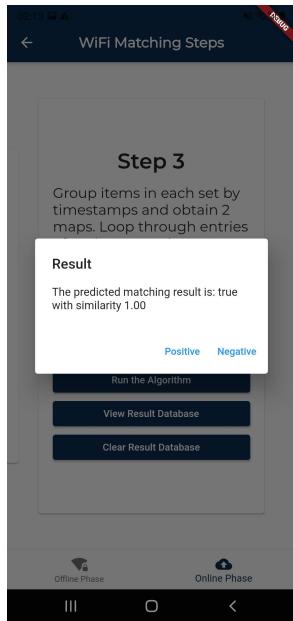


Figure A.15: Online Phase Matching Step 3 Run the Algorithm

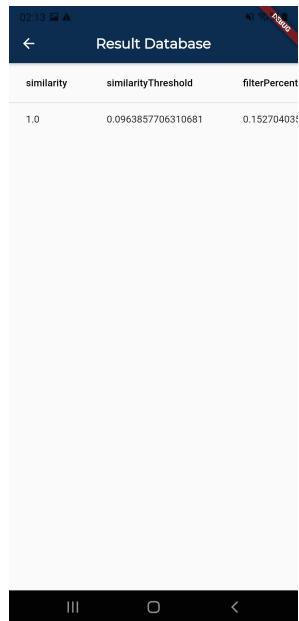


Figure A.16: Online Phase Matching Step 3 View Result Database

Check Symptoms Page

Tapping the "Check Symptoms" button in the Drawer as shown in Figure A.3 will navigate to the Check Symptoms page. Note that the symptoms date confirmation, as shown in Figure A.17, will be entered if the user's sick state is false (i.e. no symptoms have been ticked); otherwise, the symptoms picker page as shown in Figure A.18 will be entered instead. In the

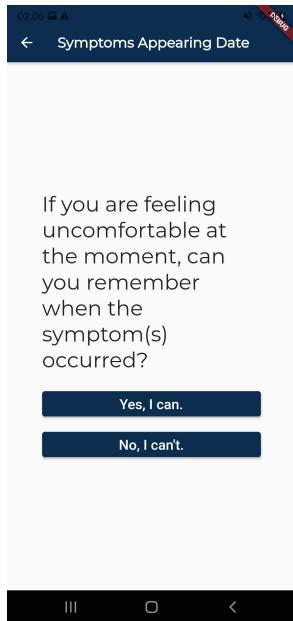


Figure A.17: Symptoms Date Confirmation

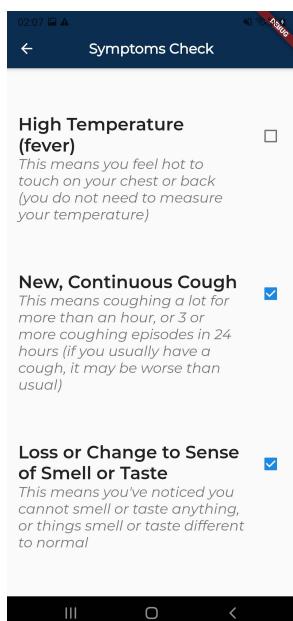


Figure A.18: Check Symptoms Page

symptoms data confirmation, if the "Yes, I can." button will open a *DatePicker* as shown in Figure A.19. The date can also be entered by text as shown in Figure A.20.

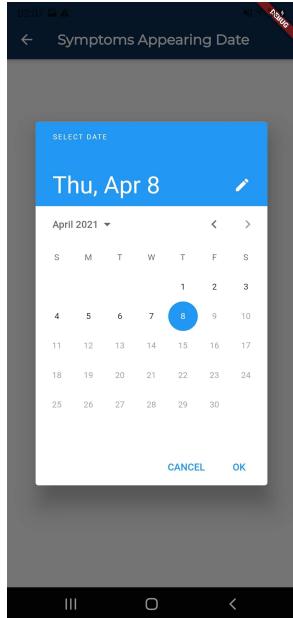


Figure A.19: Date Picker

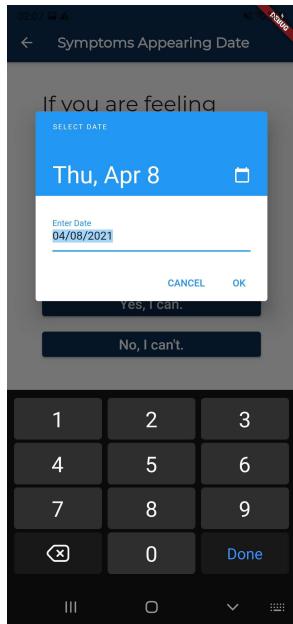


Figure A.20: Date Picker Text

Check Local Tier Page

Tapping the "Check Local Tier" button in the Drawer as shown in Figure A.3 will open a web page viewer showing the newest government's guidance.

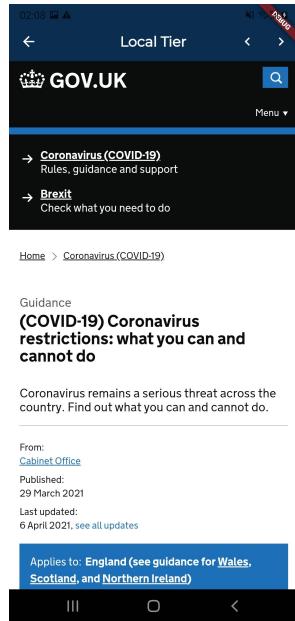


Figure A.21: Government Guidance Website

Check Heat Map Page

Tapping the "Check Heat Map" button in the Drawer as shown in Figure A.3 will open a web page viewer showing the COVID-19 heat map of the UK.

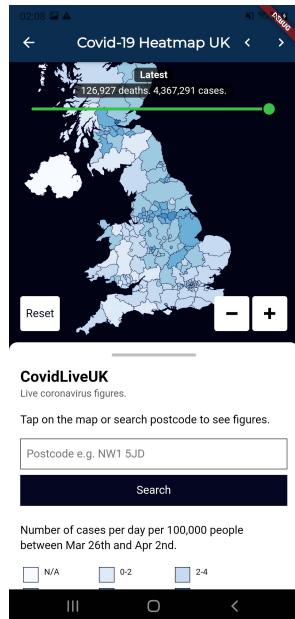


Figure A.22: COVID-19 Heat Map Website

Common Questions Page

Tapping the "Check Heat Map" button in the Drawer as shown in Figure A.3 will navigate to the Common Questions page. A specific question can be typed in the search bar on the top of



Figure A.23: Common Questions Page

the screen as shown in Figure A.24.

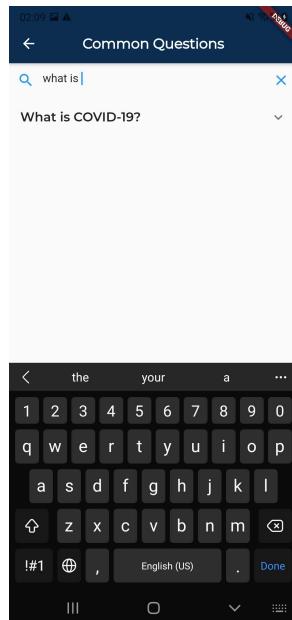


Figure A.24: Search Bar

A.2 Running Test Files

A.2.1 JupyterLab Installation

Please ensure that JupyterLab is installed on the computer before running test scripts. If the operating system is Windows, it will be easier to launch JupyterLab with Anaconda.

A.2.2 Getting Started

After unzipping the test scripts folder uploaded to KEATS, please import the entire folder to JupyterLab. The `simplified_fingerprinting.ipynb` file shows the parameters tuning and confusion matrix construction for the simplified WiFi fingerprinting model. The `algorithms_comparison.ipynb` file shows the construction of confusion matrices for both the random model and the decision tree model.

Please follow the comments in the files to run the scripts.

Appendix B

Source Code

Originality Avowal

I verify that I am the sole author of the programs contained in this folder, except where explicitly stated to the contrary.

Xinran Tao

March 3, 2023

B.1 Dart: Code for App

B.1.1 main.dart

```
1 import 'package:flutter/material.dart';
2 import 'package:flutter/services.dart';
3 import 'package:wifi_scanning_flutter/services/user_preference.dart';
4 import 'package:wifi_scanning_flutter/models/customised_user.dart';
5 import 'package:wifi_scanning_flutter/screens/wrapper.dart';
6 import 'package:wifi_scanning_flutter/services/auth.dart';
7 import 'package:provider/provider.dart';
8 import 'package:firebase_core/firebase_core.dart';

9
10 void main() async => {
11     WidgetsFlutterBinding.ensureInitialized(),
12     await Firebase.initializeApp(),
13     await UserPreference.init(),
14     runApp(MyApp()),
15 };
16
17 class MyApp extends StatelessWidget {
18     @override
19     Widget build(BuildContext context) {
20         SystemChrome.setSystemUIOverlayStyle(SystemUiOverlayStyle(
21             statusBarColor: Colors.transparent,
22         ));
23
24         return FutureBuilder(builder: (context, snapshot) {
25             //CustomisedUser is the User class in the tutorial
26             return StreamProvider<CustomisedUser>.value(
27                 value: AuthService().user,
28                 child: MaterialApp(home: Wrapper()),
29             );
30         });
31     }
32 }
```

B.1.2 Screens

sign_in.dart

```
1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:lottie/lottie.dart';
```

```

4 import 'package:wifi_scanning_flutter/services/auth.dart';
5
6
7
8 class SignIn extends StatefulWidget {
9     @override
10    _SignInState createState() => _SignInState();
11 }
12
13 class _SignInState extends State<SignIn> {
14     final Color kingsBackgroundColour = HexColor('#cdd7dc');
15     final Color kingsBlue = HexColor('#0a2d50');
16     final Color kingsPowderBlue = HexColor("#8d9ebc");
17
18     final AuthService _auth = AuthService();
19
20     @override
21     Widget build(BuildContext context) {
22         return Scaffold(
23             backgroundColor: Colors.white,
24             body: Container(
25                 padding: EdgeInsets.symmetric(vertical: 20.0, horizontal: 40.0),
26                 margin: EdgeInsets.all(20.0),
27                 alignment: Alignment.topCenter, //align the list view to the center of the screen
28                 child: ListView(
29                     shrinkWrap: true,
30                     children: [
31                         Lottie.asset(
32                             "assets/lottie/covid.json",
33                         ),
34                         SizedBox(height: 50.0, ),
35                         Text("Welcome,",
36                             style: TextStyle(
37                                 fontFamily: 'MontserratBold',
38                                 fontSize: 50,
39                                 color: kingsBlue,
40                             )),
41                         Text("this is a contact tracing app prototype",
42                             style: TextStyle(
43                                 fontFamily: 'MontserratRegular',
44                                 fontSize: 20,
45                                 color: kingsBlue
46                             ),
47                         ),
48                         SizedBox(height: 10.0, ),
49                         Align(

```

```

50         alignment: Alignment.centerRight,
51     ),
52     SizedBox(height: 25.0,),
53     ElevatedButton(
54         style: ButtonStyle(
55             backgroundColor: MaterialStateProperty.all<Color>(kingsPowderBlue),
56         ),
57         onPressed: () async {
58             dynamic result = await _auth.signInAnon();
59             if(result == null){
60                 print('Error Signing In');
61             }
62             else{
63                 print('Signed In');
64                 print(result.uid);
65             }
66         },
67         child: Text(
68             'CONTINUE',
69             style: TextStyle(
70                 color: Colors.white,
71             ),
72         ),
73         ),
74     ],
75     ),
76     ),
77 );
78 }
79 }
```

wrapper.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:wifi_scanning_flutter/screens/authenticate/sign_in.dart';
3 import 'package:wifi_scanning_flutter/services/user_preference.dart';
4 import 'package:wifi_scanning_flutter/models/customised_user.dart';
5 import 'package:provider/provider.dart';
6 import 'package:wifi_scanning_flutter/screens/loading.dart';
7 import 'package:wifi_scanning_flutter/screens/user/user.dart';

8
9 class Wrapper extends StatelessWidget {
10     @override
11     Widget build(BuildContext context) {
12         final user = Provider.of<CustomisedUser>(context);

```

```

13
14     if (user == null) {
15         return SignIn();
16     }
17     else {
18         print("Current User ID: " + user.uid);
19         return FutureBuilder(
20             future: UserPreference.setUsername(user.uid),
21             builder: (context, snapshot) {
22                 if (snapshot.connectionState == ConnectionState.done) {
23                     return User();
24                 }
25                 else {
26                     return LoadingPage();
27                 }
28             }
29         );
30     }
31 }
32 }
```

loading.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:loading_animations/loading_animations.dart';
4
5 class LoadingPage extends StatefulWidget {
6     LoadingPage({Key key}) : super(key: key);
7
8     @override
9     _LoadingPageState createState() => _LoadingPageState();
10 }
11
12 class _LoadingPageState extends State<LoadingPage> {
13     final Color kingsBlue = HexColor('#0a2d50');
14
15     @override
16     Widget build(BuildContext context) {
17         return Container(
18             child: Scaffold(
19                 body: Center(
20                     child: LoadingJumpingLine.circle(
21                         backgroundColor: kingsBlue,
22                         size: 100,
```

```
23         ),
24         ),
25         ),
26     );
27 }
28 }
```

no_internet.dart

```
1 import 'package:flutter/material.dart';
2 import 'package:lottie/lottie.dart';
3
4 class NoInternetPage extends StatefulWidget {
5     NoInternetPage({Key key}) : super(key: key);
6
7     @override
8     _NoInternetPageState createState() => _NoInternetPageState();
9 }
10
11 class _NoInternetPageState extends State<NoInternetPage> {
12     @override
13     Widget build(BuildContext context) {
14         return Container(
15             alignment: Alignment.center,
16             child: Column(
17                 mainAxisAlignment: MainAxisAlignment.center,
18                 children: [
19                     Lottie.asset(
20                         "assets/lottie/no-connection.json",
21                         height: 300,
22                     ),
23                     SizedBox(
24                         height: 10,
25                     ),
26                     Text(
27                         "No Internet Connection",
28                         style: TextStyle(fontFamily: "MontserratRegular", fontSize: 30),
29                     ),
30                 ],
31             )
32         );
33     }
34 }
```

user.dart

```
1  ///This is the home/main page of the app
2  import 'dart:async';
3
4  import 'package:collection/collection.dart';
5  import 'package:flutter/cupertino.dart';
6  import 'package:flutter/material.dart';
7  import 'package:hexcolor/hexcolor.dart';
8  import 'package:wifi_scanning_flutter/screens/demo/wifi_algorithm_page.dart';
9  import 'package:wifi_scanning_flutter/screens/loading.dart';
10 import 'package:wifi_scanning_flutter/screens/user/widgets/symptoms_date_page.dart';
11 import 'package:wifi_scanning_flutter/screens/user/widgets/wifi_background_manager.dart';
12 import 'package:wifi_scanning_flutter/services/user_preference.dart';
13 import 'package:wifi_scanning_flutter/services/database/wifi_dao.dart';
14 import 'package:wifi_scanning_flutter/models/customised_wifi.dart';
15 import 'package:wifi_scanning_flutter/screens/user/widgets/common_questions.dart';
16 import 'package:wifi_scanning_flutter/screens/user/widgets/symptom.dart';
17 import 'package:wifi_scanning_flutter/screens/user/widgets/webpageManager.dart';
18 import 'package:wifi_scanning_flutter/screens/user/contact_widget.dart';
19 import 'package:wifi_scanning_flutter/screens/user/healthy_widget.dart';
20 import 'package:wifi_scanning_flutter/screens/user/widgets/infected_widget.dart';
21 import 'package:wifi_scanning_flutter/screens/user/widgets/symptoms_widget.dart';
22 import 'package:wifi_scanning_flutter/services/auth.dart';
23 import 'package:wifi_scanning_flutter/services/database/cloud_database.dart';
24
25 class User extends StatefulWidget {
26     @override
27     State<StatefulWidget> createState() {
28         return new UserHomePage();
29     }
30 }
31
32 class UserHomePage extends State<User> {
33     final Color kingsBlue = HexColor('#0a2d50');
34     final AuthService _auth = AuthService();
35     WifiDao wifiDao = WifiDao();
36     //WiFi background activity manager singleton instance
37     WiFiBackgroundActivityManager wifiBackgroundActivityManager;
38     bool isScanning;
39     String userId = UserPreference.getUsername();
40
41     @override
42     void initState() {
43         super.initState();
44         wifiBackgroundActivityManager = WiFiBackgroundActivityManager(userId, refresh);
```

```

45     initialiseWiFiBackgroundTimer();
46 }
47
48 Future<void> initialiseWiFiBackgroundTimer() async {
49     isScanning = UserPreference.getWiFiBackgroundActivityState();
50     if (isScanning) {
51         await wifiBackgroundActivityManager.startTimer();
52     }
53 }
54
55 @override
56 Widget build(BuildContext context) {
57     return Scaffold(
58         appBar: AppBar(
59             title: Text(
60                 "Home",
61                 style: TextStyle(
62                     fontFamily: "MontserratRegular", fontWeight: FontWeight.w600),
63             ),
64             centerTitle: true,
65             backgroundColor: kingsBlue,
66         ),
67         drawer: Drawer(
68             child: Container(
69                 alignment: Alignment.center,
70                 child: ListView(
71                     padding: EdgeInsets.only(top: 50),
72                     shrinkWrap: true,
73                     children: <Widget>[
74                         ListTile(
75                             leading: Icon(CupertinoIcons.wifi),
76                             title: Text(
77                                 "WiFi Tracing",
78                                 style:
79                                     TextStyle(fontFamily: "MontserratBold", fontSize: 20),
80                             ),
81                             onTap: () {
82                                 isScanning = UserPreference.getWiFiBackgroundActivityState();
83                                 Navigator.push(
84                                     context,
85                                     new MaterialPageRoute(
86                                         builder: (context) => WiFiBackgroundActivity(
87                                             notifyParent: refresh,
88                                             isScanning: isScanning,
89                                             wifiBackgroundActivityManager: wifiBackgroundActivityManager
90                                         )
91                                 );
92                             }
93                         )
94                     ],
95                 ),
96             ),
97         ),
98     );
99 }

```

```

91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
        )
    );
},
),
ListTile(
    leading: Icon(CupertinoIcons.checkmark_rectangle),
    title: Text(
        "Check Symptoms",
        style:
            TextStyle(fontFamily: "MontserratBold", fontSize: 20),
),
    onTap: () async {
        //if the user has any symptoms, lead to the symptoms page
        //else lead to the date checker page
        if(UserPreference.getHasFever() ||
        UserPreference.getHasCough() ||
        UserPreference.getHasSenseLoss())){
            Navigator.push(
                context,
                new MaterialPageRoute(
                    builder: (context) => new SymptomsCheckPage(
                        notifyParent: refresh,
                    )
                )
            );
        }
        else {
            Navigator.push(
                context,
                new MaterialPageRoute(
                    builder: (context) => SymptomsDatePicker(notifyParent: refresh,)
                )
            );
        }
    },
),
ListTile(
    leading: Icon(CupertinoIcons.chart_bar_alt_fill),
    title: Text(
        "Check Local Tier",
        style:
            TextStyle(fontFamily: "MontserratBold", fontSize: 20),
),
    onTap: () async {
        Navigator.push(
            context,

```

```

137             new MaterialPageRoute(
138                 builder: (context) => WebpageManager(
139                     pageName: "tier",
140                 )));
141             },
142         ),
143         ListTile(
144             leading: Icon(CupertinoIcons.map_pin_ellipse),
145             title: Text(
146                 "Check Heat Map",
147                 style:
148                     TextStyle(fontFamily: "MontserratBold", fontSize: 20),
149                 ),
150             onTap: () async {
151                 Navigator.push(
152                     context,
153                     new MaterialPageRoute(
154                         builder: (context) => WebpageManager(
155                             pageName: "heatmap",
156                         )
157                         )
158                     );
159                 },
160             ),
161             ListTile(
162                 leading: Icon(CupertinoIcons.question_circle),
163                 title: Text(
164                     "Common Questions",
165                     style:
166                         TextStyle(fontFamily: "MontserratBold", fontSize: 20),
167                     ),
168                 onTap: () async {
169                     Navigator.push(
170                         context,
171                         new MaterialPageRoute(
172                             builder: (context) => CommonQuestionsPage()
173                             )
174                         );
175                     },
176                 ),
177                 ListTile(
178                     leading: Icon(Icons.logout),
179                     title: Text(
180                         "Logout",
181                         style:
182                             TextStyle(fontFamily: "MontserratBold", fontSize: 20),

```

```

183         ),
184         onTap: () async {
185             wifiBackgroundActivityManager.cancelTimer();
186             //if an account signs out, all data attached to this account should be
187             //deleted or reset
188             await wifiDao.deleteAll();
189             await clearSickStates();
190             await UserPreference.setMatchingTimes(0);
191             await _auth.signOut();
192             //Go back to sign in page by removing the top elements of the page stack
193             Navigator.popUntil(context, ModalRoute.withName("//"));
194         },
195     ),
196 ],
197 ),
198 ),
199 ),
200 body: FutureBuilder(
201     future: MainPageManager(context, refresh, clearSickStates).getMainPage(),
202     builder: (context, AsyncSnapshot<Widget> snapshot){
203         if(snapshot.connectionState == ConnectionState.done) {
204             return Center(
205                 child: snapshot.data,
206             );
207         }
208         else {
209             return LoadingPage();
210         }
211     },
212 ),
213 floatingActionButton: FloatingActionButton.extended(
214     icon: Icon(Icons.priority_high),
215     backgroundColor: kingsBlue,
216     label: Text("Toggle Infection State"),
217     onPressed: () async {
218         await toggleInfectionState();
219     },
220 ),
221 floatingActionButtonLocation: FloatingActionButtonLocation.centerFloat,
222 );
223 }
224
225 void refresh() {
226     setState(() {});
227 }
228

```

```

229 Future<void> clearSickStates() async {
230   //the matching times in UserPreference is not included as
231   //the user's sick state because it is independent
232   //of the user and should be handled in the background activity
233   await UserPreference.setContactedState(false);
234   await UserPreference.setInfectionState(false);
235   await UserPreference.setHasFever(false);
236   await UserPreference.setHasCough(false);
237   await UserPreference.setHasSenseLoss(false);
238   await UserPreference.setIsolationDue("");
239 }
240
241 Future<void> toggleInfectionState() async {
242   await UserPreference.setInfectionState(!UserPreference.getInfectionState());
243   //if the user if not infected after toggle, we need to set the isolation due
244   //back to none and update the preference
245   if (UserPreference.getInfectionState() == false) {
246     //The reason why we need to specifically set the all sick states back to none
247     //is that once the user is tested negative then he won't have any issues any more
248     await clearSickStates();
249     //When the user is healthy, he/she is facing the risk of being contacted again.
250     //Hence the matching algorithm fields need to be set back to default.
251     await UserPreference.setMatchingTimes(0);
252   }
253   //else if the user if infected after toggle and he's not in an isolation yet
254   //set the timer for 10 days
255   else if (UserPreference.getInfectionState() &&
256     UserPreference.getIsolationDue() == "") {
257     await UserPreference.setIsolationDue(
258       DateTime.now().add(Duration(days: 10)).toString());
259   }
260   handleCloudInfectionData();
261   refresh();
262 }
263
264 Future<void> handleCloudInfectionData() async {
265   if (UserPreference.getInfectionState()) {
266     storeScansWithin14DaysInCloudDatabase();
267     ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
268       content: Text("Scans within 14 days have been uploaded to cloud."),
269     ));
270   } else {
271     await CloudDatabase(uid: UserPreference.getUsername())
272       .deleteAllScansOfCurrentUser();
273     ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
274       content: Text("Scans in the cloud have been deleted."),

```

```

275         });
276     }
277 }
278
279 Future<void> storeScansWithin14DaysInCloudDatabase() async {
280     List<CustomisedWifi> wifiListInDatabase =
281         await wifiDao.getScansWithin14Days();
282     Map<String, List<CustomisedWifi>> groupedwifiList = groupBy(
283         wifiListInDatabase, (CustomisedWifi eachSignal) => eachSignal.dateTime);
284     Map<String, List<Map>> newGroupedWifiList = Map();
285     groupedwifiList.forEach((key, value) {
286         List<Map> newValue = [];
287         value.forEach((element) {
288             newValue.add(element.toMap());
289         });
290         newGroupedWifiList[key] = newValue;
291     });
292
293     await CloudDatabase(uid: UserPreference.getUsername())
294         .updateUserData(newGroupedWifiList);
295 }
296 }
297
298 ///This class decides which widget should be rendered based on
299 ///user states in User Preference
300 class MainPageManager {
301     BuildContext context;
302     Function refresh;
303     Function resetUserState;
304     MainPageManager(this.context, this.refresh, this.resetUserState);
305
306     Future<Widget> get MainPage() async {
307         Duration remainingIsolationTime = getRemainingTime();
308
309         if(remainingIsolationTime != Duration.zero){
310             if (UserPreference.getInfectionState()) {
311                 return InfectedWidgetLayout(refresh)
312                     .getWidgetWhenInfected(context, remainingIsolationTime);
313             }
314             else if (UserPreference.getHasFever() ||
315                 UserPreference.getHasCough() ||
316                 UserPreference.getHasSenseLoss()) {
317                 return SymptomsWidgetLayout(this.refresh)
318                     .getWidgetWhenGotSymptoms(context, remainingIsolationTime);
319             }
320             else if (UserPreference.getContactedState()) {

```

```

321         return ContactWidgetLayout(this.refresh)
322             .getWidgetWhenContacted(context, remainingIsolationTime);
323     }
324 }
325 //when the countdown is over, the user state should be cleared
326 resetUserState();
327 return HealthyWidgetLayout().getWidgetWhenHealthy(context);
328 }
329
330 //get the remaining time for the countdown display
331 Duration getRemainingTime() {
332     DateTime curTime = DateTime.now();
333     String expectedDue = UserPreference.getIsolationDue();
334     if (expectedDue != "") {
335         DateTime dueTime = DateTime.parse(expectedDue);
336         if (curTime.isBefore(dueTime)) {
337             return dueTime.difference(curTime);
338         }
339     }
340     //if when user gets back to the app, it's gone pass
341     //the isolation due date
342     return Duration.zero;
343 }
344 }
```

wifi_background_manager.dart

```

1 import 'dart:async';
2
3 import 'package:wifi/wifi.dart';
4 import 'package:wifi_scanning_flutter/screens/demo/db_operations.dart';
5 import 'package:wifi_scanning_flutter/screens/demo/widgets/wifi_matching.dart';
6 import 'package:wifi_scanning_flutter/services/user_preference.dart';
7
8 class WiFiBackgroundActivityManager {
9     DatabaseOperations databaseOperations = DatabaseOperations();
10    WifiMatching matcher = new WifiMatching();
11    Function refresh;
12    Timer timer;
13
14    //WiFi matching parameters
15    String userId;
16    double filterPercentage = 0.84022877;
17    double similarityThreshold = 0.97232887;
18    Duration matchInterval = Duration(minutes: 5);
```

```

19
20 //Singleton instance
21 static final WiFiBackgroundActivityManager _singleton = WiFiBackgroundActivityManager._();
22 // A private constructor which allows us to create instances of WiFiBackgroundActivityManager
23 // only from within the WiFiBackgroundActivityManager itself.
24 WiFiBackgroundActivityManager._();
25 //pass the refresh function into the constructor
26 factory WiFiBackgroundActivityManager(String userId, Function refresh MainPage){
27     _singleton.refresh = refresh MainPage;
28     _singleton.userId = userId;
29     return _singleton;
30 }
31
32 Future<void> startTimer() async {
33     //Since the timer function will not run immediately, findMatch needs to be called explicitly
34     await findMatch();
35     if(timer == null) {
36         timer = Timer.periodic(matchInterval, (timer) async {
37             print("Scanning...");
38             await findMatch();
39             int totalMatchingTimes = UserPreference.getMatchingTimes();
40             if(totalMatchingTimes >= 3){
41                 //the isolation due only needs to be set once
42                 if(totalMatchingTimes == 3 && UserPreference.getIsolationDue() == ""){
43                     await UserPreference.setIsolationDue(DateTime.now()
44                         .add(Duration(days: 10)).toString());
45                 }
46                 //When the user has 3 or more consecutive matching, the contacted state is set to true
47                 await UserPreference.setContactedState(true);
48             }
49             else{
50                 await UserPreference.setContactedState(false);
51             }
52             refresh();
53         });
54     }
55 }
56
57 void cancelTimer() {
58     if (timer != null) {
59         timer.cancel();
60         //Need to manually set the timer object to null because even when the timer is cancelled,
61         //there is still a timer object; hence new timer cannot be scheduled.
62         //Since timer is possibly null when cancel is called, if statement is needed to check
63         timer = null;
64     }

```

```

65    }
66
67    Future<void> findMatch() async {
68        List<WifiResult> wifiScans = await databaseOperations.scanWifi();
69        databaseOperations.storeScansInLocalDatabase(wifiScans);
70        bool hasMatch = await matcher
71            .matchFingerprints(userId, matchInterval, filterPercentage, similarityThreshold);
72        if(hasMatch) {
73            int totalMatchingTime = UserPreference.getMatchingTimes() + 1;
74            await UserPreference.setMatchingTimes(totalMatchingTime);
75            print("Total number of contact matching: " + totalMatchingTime.toString());
76        }
77        //Only clear the total matching time (when there aren't consecutive matching)
78        //for a user who hasn't been contacted
79        //Otherwise, it might accidentally remove the isolation countdown for the
80        //user who has been contacted
81        else if (!hasMatch && !UserPreference.getContactedState()){
82            await UserPreference.setMatchingTimes(0);
83            print("Total number of contact matching is set to 0");
84        }
85    }
86}

```

healthy_widget.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:lottie/lottie.dart';
4 import 'package:wifi_scanning_flutter/screens/user/widgets/webpageManager.dart';
5
6 class HealthyWidgetLayout {
7     final Color kingsBlue = HexColor('#0a2d50');
8
9     Widget getWidgetWhenHealthy(BuildContext context) {
10         return Container(
11             child: Column(
12                 mainAxisAlignment: MainAxisAlignment.center,
13                 children: [
14                     Lottie.asset("assets/lottie/healthengine-generic-tickbox.json",
15                         height: 300, repeat: false),
16                     Text(
17                         "You are nice and well!",
18                         style: TextStyle(fontFamily: "MontserratRegular", fontSize: 30),
19                     ),
20                     SizedBox(

```

```

21         height: 20,
22     ),
23     Text(
24         "If you are still worried, you can",
25         style: TextStyle(
26             fontFamily: "MontserratRegular",
27             fontStyle: FontStyle.italic,
28             fontSize: 18,
29             fontWeight: FontWeight.w500),
30     ),
31     SizedBox(
32         height: 10,
33     ),
34     ElevatedButton(
35         child: Text(
36             "Book a Quick Test",
37             style: TextStyle(fontSize: 20),
38         ),
39         style: ButtonStyle(
40             backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
41         ),
42         onPressed: () {
43             Navigator.push(
44                 context,
45                 new MaterialPageRoute(
46                     builder: (context) => WebpageManager(
47                         pageName: "quick_test",
48                     )));
49         },
50     ),
51 ],
52 ),
53 );
54 }
55 }

```

contact_widget.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:lottie/lottie.dart';
4 import 'package:slide_countdown_clock/slide_countdown_clock.dart';
5 import 'package:wifi_scanning_flutter/services/user_preference.dart';
6 import 'package:wifi_scanning_flutter/screens/user/widgets/webpageManager.dart';
7

```

```

8  class ContactWidgetLayout {
9    final Color kingsBlue = HexColor('#0a2d50');
10   final Function refresh MainPage;
11   ContactWidgetLayout(this.refresh MainPage);
12
13   Widget getWidgetWhenContacted(BuildContext context, Duration duration) {
14     return Container(
15       child: Column(
16         mainAxisAlignment: MainAxisAlignment.center,
17         children: [
18           Lottie.asset(
19             "assets/lottie/covid-contact.json",
20             height: 300,
21           ),
22           Text(
23             "You have been contacted",
24             style: TextStyle(fontFamily: "MontserratRegular", fontSize: 27),
25           ),
26           SizedBox(
27             height: 10,
28           ),
29           Text(
30             "Please self-isolate for",
31             style: TextStyle(
32               fontFamily: "MontserratRegular",
33               fontStyle: FontStyle.italic,
34               fontSize: 25),
35           ),
36           SlideCountdownClock(
37             duration: duration,
38             slideDirection: SlideDirection.Down,
39             separator: ":",
40             textStyle: TextStyle(
41               fontFamily: "MontserratRegular",
42               fontSize: 25,
43               fontWeight: FontWeight.bold,
44             ),
45             onDone: () async {
46               await UserPreference.setContactedState(false);
47               refresh MainPage();
48             },
49           ),
50           SizedBox(
51             height: 10,
52           ),
53           ListView(

```

```

54         padding: EdgeInsets.symmetric(horizontal: 70),
55         shrinkWrap: true,
56         children: [
57             ElevatedButton(
58                 child: Text(
59                     "Book a Test",
60                     style: TextStyle(fontSize: 20),
61                 ),
62                 style: ButtonStyle(
63                     backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
64                 ),
65                 onPressed: () {
66                     Navigator.push(
67                         context,
68                         new MaterialPageRoute(
69                             builder: (context) => WebpageManager(
70                                 pageName: "booking",
71                             )));
72                 },
73             ),
74             ElevatedButton(
75                 child: Text(
76                     "Get an Isolation Note",
77                     style: TextStyle(fontSize: 20),
78                 ),
79                 style: ButtonStyle(
80                     backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
81                 ),
82                 onPressed: () {
83                     Navigator.push(
84                         context,
85                         new MaterialPageRoute(
86                             builder: (context) => WebpageManager(
87                                 pageName: "isolation_note",
88                             )));
89                 },
90             ),
91             ],
92         ],
93     ],
94 );
95 );
96 }
97 }

```

symptoms_widget.dart

```
1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:lottie/lottie.dart';
4 import 'package:slide_countdown_clock/slide_countdown_clock.dart';
5 import 'package:wifi_scanning_flutter/services/user_preference.dart';
6 import 'package:wifi_scanning_flutter/screens/user/widgets/webpageManager.dart';

7
8 class SymptomsWidgetLayout {
9     final Color kingsBlue = HexColor('#0a2d50');
10    final Function refreshMainPage;

11
12    SymptomsWidgetLayout(this.refreshMainPage);

13
14    Widget getWidgetWhenGotSymptoms(BuildContext context, Duration duration) {
15        return Container(
16            child: Column(
17                mainAxisAlignment: MainAxisAlignment.center,
18                children: [
19                    Lottie.asset(
20                        "assets/lottie/corona-virus-sick.json",
21                        height: 300,
22                    ),
23                    SizedBox(
24                        height: 20,
25                    ),
26                    Text(
27                        "You are likely to be infected",
28                        style: TextStyle(fontFamily: "MontserratRegular", fontSize: 25),
29                    ),
30                    SizedBox(
31                        height: 10,
32                    ),
33                    Text(
34                        "Please self-isolate for",
35                        style: TextStyle(
36                            fontFamily: "MontserratRegular",
37                            fontStyle: FontStyle.italic,
38                            fontSize: 23),
39                    ),
40                    SlideCountdownClock(
41                        duration: duration,
42                        slideDirection: SlideDirection.Down,
43                        separator: ":",
44                        textStyle: TextStyle(
```

```

45         fontFamily: "MontserratRegular",
46         fontSize: 25,
47         fontWeight: FontWeight.bold,
48     ),
49     onDone: () async {
50         await UserPreference.setHasCough(false);
51         await UserPreference.setHasFever(false);
52         await UserPreference.setHasSenseLoss(false);
53         refresh MainPage();
54     },
55 ),
56 SizedBox(
57     height: 10,
58 ),
59 ListView(
60     padding: EdgeInsets.symmetric(horizontal: 70),
61     shrinkWrap: true,
62     children: [
63         ElevatedButton(
64             child: Text(
65                 "Book a Test",
66                 style: TextStyle(fontSize: 20),
67             ),
68             style: ButtonStyle(
69                 backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
70             ),
71             onPressed: () {
72                 Navigator.push(
73                     context,
74                     new MaterialPageRoute(
75                         builder: (context) => WebpageManager(
76                             pageName: "booking",
77                         )));
78             },
79         ),
80         ElevatedButton(
81             child: Text(
82                 "Get an Isolation Note",
83                 style: TextStyle(fontSize: 20),
84             ),
85             style: ButtonStyle(
86                 backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
87             ),
88             onPressed: () {
89                 Navigator.push(
90                     context,

```

```

91             new MaterialPageRoute(
92                 builder: (context) => WebpageManager(
93                     pageName: "isolation_note",
94                 )));
95         },
96     ),
97     ],
98     ],
99     ],
100    ),
101 );
102 }
103 }
```

infected_widget.dart

```

1 import 'package:flutter/cupertino.dart';
2 import 'package:flutter/material.dart';
3 import 'package:hexcolor/hexcolor.dart';
4 import 'package:lottie/lottie.dart';
5 import 'package:wifi_scanning_flutter/services/user_preference.dart';
6 import 'package:wifi_scanning_flutter/screens/user/widgets/webpageManager.dart';
7 import 'package:slide_countdown_clock/slайде_countdown_clock.dart';
8
9 class InfectedWidgetLayout {
10     final Color kingsBlue = HexColor('#0a2d50');
11     final Function refresh MainPage;
12
13     InfectedWidgetLayout(this.refresh MainPage);
14
15     Widget getWidgetWhenInfected(
16         BuildContext context, Duration isolationRemainingTime) {
17         return Container(
18             child: Column(
19                 mainAxisAlignment: MainAxisAlignment.center,
20                 children: [
21                     Lottie.asset(
22                         "assets/lottie/covid19.json",
23                         height: 300,
24                     ),
25                     Text(
26                         "You have been infected",
27                         style: TextStyle(fontFamily: "MontserratRegular", fontSize: 30),
28                     ),
29                     SizedBox(

```

```

30         height: 10,
31     ),
32     Text(
33         "Please self-isolate for",
34         style: TextStyle(
35             fontFamily: "MontserratRegular",
36             fontStyle: FontStyle.italic,
37             fontSize: 25),
38     ),
39     SlideCountdownClock(
40         duration: isolationRemainingTime,
41         slideDirection: SlideDirection.Down,
42         separator: ":",
43         textStyle: TextStyle(
44             fontFamily: "MontserratRegular",
45             fontSize: 25,
46             fontWeight: FontWeight.bold,
47         ),
48         onDone: () async {
49             await UserPreference.setInfectionState(false);
50             refreshMainPage();
51         },
52     ),
53     SizedBox(
54         height: 10,
55     ),
56     ListView(
57         padding: EdgeInsets.symmetric(horizontal: 70),
58         shrinkWrap: true,
59         children: [
60             ElevatedButton(
61                 child: Text(
62                     "Book a Test",
63                     style: TextStyle(fontSize: 20),
64                 ),
65                 style: ButtonStyle(
66                     backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
67                 ),
68                 onPressed: () {
69                     Navigator.push(
70                         context,
71                         new MaterialPageRoute(
72                             builder: (context) => WebpageManager(
73                                 pageName: "booking",
74                             )));
75             },

```

```

76
    ),
77     ElevatedButton(
78         child: Text(
79             "Get an Isolation Note",
80             style: TextStyle(fontSize: 20),
81         ),
82         style: ButtonStyle(
83             backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
84         ),
85         onPressed: () {
86             Navigator.push(
87                 context,
88                 new MaterialPageRoute(
89                     builder: (context) => WebpageManager(
90                         pageName: "isolation_note",
91                     )));
92         },
93     ],
94     ],
95     ],
96     ],
97     );
98 );
99 }
100 }
```

webpageManager.dart

```

1 //This is the class which handles the webpage view.
2 //The according webpage will be opened based on the parameter
3 //passed in from the constructor.
4 import 'dart:async';
5
6 import 'package:connectivity/connectivity.dart';
7 import 'package:flutter/material.dart';
8 import 'package:hexcolor/hexcolor.dart';
9 import 'package:tuple/tuple.dart';
10 import 'package:webview_flutter/webview_flutter.dart';
11 import 'package:wifi_scanning_flutter/screens/no_internet.dart';
12
13 class WebpageManager extends StatefulWidget {
14     final String pageName;
15     WebpageManager({Key key, this.pageName}) : super(key: key);
16
17     @override
```

```

18     _WebpageManagerState createState() => _WebpageManagerState();
19 }
20
21 class _WebpageManagerState extends State<WebpageManager> {
22     final Color kingsBlue = HexColor('#0a2d50');
23     final Color kingsPearlGrey = HexColor("cdd7dc");
24
25     final String TIER_TITLE = "Local Tier";
26     final String TIER_URL =
27         "https://www.gov.uk/guidance/covid-19-coronavirus-restrictions-what-you-can-and-cannot-do";
28     final String HEATMAP_TITLE = "Covid-19 Heatmap UK";
29     final String HEATMAP_URL = "https://www.covidlive.co.uk/";
30     final String BOOKING_TITLE = "Covid-19 Test Booking";
31     final String BOOKING_URL =
32         "https://self-referral.test-for-coronavirus.service.gov.uk/antigen/essential-worker";
33     final String QUICK_TEST_TITLE = "Rapid Lateral Flow Test";
34     final String QUICK_TEST_URL =
35         "https://www.gov.uk/find-covid-19-lateral-flow-test-site";
36     final String ISOLATION_NOTE_TITLE = "Isolation Note";
37     final String ISOLATION_NOTE_URL = "https://111.nhs.uk/isolation-note/screener-question";
38
39     Completer<WebViewController> _controller = Completer<WebViewController>();
40
41     Tuple2<String, String> getWebpage() {
42         switch (widget.pageName) {
43             case "heatmap":
44                 return Tuple2(HEATMAP_TITLE, HEATMAP_URL);
45                 break;
46             case "booking":
47                 return Tuple2(BOOKING_TITLE, BOOKING_URL);
48                 break;
49             case "quick_test":
50                 return Tuple2(QUICK_TEST_TITLE, QUICK_TEST_URL);
51                 break;
52             case "tier":
53                 return Tuple2(TIER_TITLE, TIER_URL);
54                 break;
55             case "isolation_note":
56                 return Tuple2(ISOLATION_NOTE_TITLE, ISOLATION_NOTE_URL);
57                 break;
58         }
59         return Tuple2("", "");
60     }
61
62     @override
63     Widget build(BuildContext context) {

```

```

64    return Scaffold(
65      appBar: AppBar(
66        title: Text(
67          getWebpage().item1,
68          style: TextStyle(
69            fontFamily: "MontserratRegular", fontWeight: FontWeight.w600),
70          ),
71        centerTitle: true,
72        backgroundColor: kingsBlue,
73        actions: <Widget>[
74          NavigationControls(_controller.future),
75          ],
76        ),
77        body: FutureBuilder(
78          future: Connectivity().checkConnectivity(),
79          builder:
80            (BuildContext context, AsyncSnapshot<ConnectivityResult> result) {
81              if (result.data == ConnectivityResult.none) {
82                return NoInternetPage();
83              } else {
84                return Container(
85                  child: WebView(
86                    javascriptMode: JavascriptMode.unrestricted,
87                    initialUrl: getWebpage().item2,
88                    onWebViewCreated: (WebViewController webViewController) {
89                      _controller.complete(webViewController);
90                    },
91                  ),
92                );
93              }
94            },
95          )
96        );
97      }
98    }
99
100   class NavigationControls extends StatelessWidget {
101     final Future<WebViewController> _webViewControllerFuture;
102     const NavigationControls(this._webViewControllerFuture);
103
104     @override
105     Widget build(BuildContext context) {
106       return FutureBuilder(
107         future: _webViewControllerFuture,
108         builder:
109           (BuildContext context, AsyncSnapshot<WebViewController> snapshot) {

```

```
110     final bool webViewReady =
111         snapshot.connectionState == ConnectionState.done;
112     final WebViewController controller = snapshot.data;
113     return Row(
114         children: <Widget>[
115             IconButton(
116                 icon: Icon(Icons.keyboard_arrow_left),
117                 onPressed: !webViewReady ? null : () async
118                 {
119                     if (await controller.canGoBack()) {
120                         controller.goBack();
121                     }
122                     else {
123                         ScaffoldMessenger.of(context)
124                             .showSnackBar(const SnackBar(
125                                 content: Text("This is the first page."),
126                             )
127                         );
128                     }
129                 }
130             ),
131             IconButton(
132                 icon: Icon(Icons.keyboard_arrow_right),
133                 onPressed: !webViewReady ? null : () async
134                 {
135                     if (await controller.canGoForward()) {
136                         controller.goForward();
137                     }
138                     else {
139                         ScaffoldMessenger.of(context)
140                             .showSnackBar(
141                                 const SnackBar(
142                                     content: Text("This is the last page."),
143                                     )
144                             );
145                     }
146                 }
147             ),
148         ],
149     );
150 );
151 );
152 }
153 }
```

symptoms_date_page.dart

```
1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:wifi_scanning_flutter/screens/user/widgets/symptom.dart';
4
5 class SymptomsDatePicker extends StatefulWidget {
6     final Function notifyParent;
7     SymptomsDatePicker({Key key, @required this.notifyParent}) : super(key: key);
8
9     @override
10    _SymptomsDatePickerState createState() => _SymptomsDatePickerState();
11 }
12
13 class _SymptomsDatePickerState extends State<SymptomsDatePicker> {
14     DateTime selectedDate = DateTime.now();
15     final Color kingsBlue = HexColor('#0a2d50');
16
17     @override
18     Widget build(BuildContext context) {
19         return Scaffold(
20             appBar: AppBar(
21                 title: Text(
22                     "Symptoms Appearing Date",
23                     style: TextStyle(
24                         fontFamily: "MontserratRegular", fontWeight: FontWeight.w600),
25                 ),
26                 backgroundColor: kingsBlue,
27             ),
28             body: Container(
29                 child: Center(
30                     child: ListView(
31                         shrinkWrap: true,
32                         padding: EdgeInsets.symmetric(horizontal: 50),
33                         children: [
34                             Text(
35                                 "If you are feeling uncomfortable at the moment, can you remember when the sympto",
36                                 style: TextStyle(
37                                     fontFamily: "MontserratRegular",
38                                     fontSize: 30
39                             ),
40                             SizedBox(height: 20),
41                             ElevatedButton(
42                                 child: Text(
43                                     "Yes, I can.",
44                                     style: TextStyle(
```

```

45             fontSize: 20
46         ),
47     ),
48     style: ButtonStyle(
49         backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
50     ),
51     onPressed: () async {
52         final DateTime newSelectedDate = await showDatePicker(
53             context: context,
54             initialDate: selectedDate,
55             firstDate: selectedDate.add(Duration(days: -9)),
56             lastDate: selectedDate,
57         );
58         if(newSelectedDate != null && newSelectedDate.isBefore(selectedDate)){
59             selectedDate = newSelectedDate;
60             print("The selected date: " + selectedDate.toString());
61             showSymptomsList();
62         }
63     },
64 ),
65 SizedBox(height: 10),
66 ElevatedButton(
67     child: Text(
68         "No, I can't.",
69         style: TextStyle(
70             fontSize: 20
71         ),
72     ),
73     style: ButtonStyle(
74         backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
75     onPressed: (){
76         showSymptomsList();
77     },
78 ),
79 ],
80 ),
81 ),
82 ),
83 );
84 }
85
86 showSymptomsList() {
87     Navigator.push(
88         context,
89         new MaterialPageRoute(
90             builder: (context) => new SymptomsCheckPage(

```

```

91         notifyParent: widget.notifyParent,
92         symptomsAppearingDate: selectedDate
93     )
94 )
95 );
96 }
97 }
```

symptom.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:wifi_scanning_flutter/services/user_preference.dart';
4
5 class SymptomsCheckPage extends StatefulWidget {
6     final Function() notifyParent;
7     final DateTime symptomsAppearingDate;
8     SymptomsCheckPage({Key key, @required this.notifyParent, this.symptomsAppearingDate})
9         : super(key: key);
10
11    @override
12        _SymptomsCheckPageState createState() => _SymptomsCheckPageState();
13    }
14
15 class _SymptomsCheckPageState extends State<SymptomsCheckPage> {
16     final Color kingsBlue = HexColor('#0a2d50');
17
18    @override
19        Widget build(BuildContext context) {
20            Future<void> setTimer() async {
21                if(UserPreference.getIsolationDue() == "") {
22                    if(widget.symptomsAppearingDate == null){
23                        UserPreference.setIsolationDue(DateTime.now().add(Duration(days: 10)).toString());
24                    }
25                    else {
26                        UserPreference.setIsolationDue(widget.symptomsAppearingDate
27                            .add(Duration(days: 10)).toString());
28                    }
29                }
30            }
31
32            return Scaffold(
33                appBar: AppBar(
34                    title: Text(
35                        "Symptoms Check",

```

```

36         style: TextStyle(
37             fontFamily: "MontserratRegular", fontWeight: FontWeight.w600),
38         ),
39         centerTitle: true,
40         backgroundColor: kingsBlue,
41     ),
42     body: Column(
43         mainAxisAlignment: MainAxisAlignment.spaceEvenly,
44         children: [
45             CheckboxListTile(
46                 title: Text(
47                     "High Temperature (fever)",
48                     style: TextStyle(
49                         fontFamily: "MontserratBold",
50                         fontSize: 25,
51                         fontWeight: FontWeight.w500),
52                 ),
53                 subtitle: Text(
54                     "This means you feel hot to touch on your chest or back (you do not need to measure
55                     style: TextStyle(
56                         fontFamily: "MontserratRegular",
57                         fontStyle: FontStyle.italic,
58                         fontSize: 20,
59                         fontWeight: FontWeight.w500),
60                 ),
61                 value: UserPreference.getHasFever(),
62                 onChanged: (bool val) async {
63                     setState(() {});
64                     await UserPreference.setHasFever(val);
65                     if(UserPreference.getHasFever()){
66                         await setTimer();
67                     }
68                     widget.notifyParent();
69                 },
70             ),
71             CheckboxListTile(
72                 title: Text(
73                     "New, Continuous Cough",
74                     style: TextStyle(
75                         fontFamily: "MontserratBold",
76                         fontSize: 25,
77                         fontWeight: FontWeight.w500),
78                 ),
79                 subtitle: Text(
80                     "This means coughing a lot for more than an hour, or 3 or more coughing episodes in
81                     style: TextStyle(

```

```

82             fontFamily: "MontserratRegular",
83             fontStyle: FontStyle.italic,
84             fontSize: 20,
85             fontWeight: FontWeight.w500),
86         ),
87         value: UserPreference.getHasCough(),
88         onChanged: (bool val) async {
89             setState(() {});
90             await UserPreference.setHasCough(val);
91             if(UserPreference.getHasCough()){
92                 setTimer();
93             }
94             widget.notifyParent();
95         },
96     ),
97     CheckboxListTile(
98         title: Text(
99             "Loss or Change to Sense of Smell or Taste",
100            style: TextStyle(
101                fontFamily: "MontserratBold",
102                fontSize: 25,
103                fontWeight: FontWeight.w500),
104            ),
105            subtitle: Text(
106                "This means you've noticed you cannot smell or taste anything, or things smell or ta
107                style: TextStyle(
108                    fontFamily: "MontserratRegular",
109                    fontStyle: FontStyle.italic,
110                    fontSize: 20,
111                    fontWeight: FontWeight.w500),
112                ),
113                value: UserPreference.getHasSenseLoss(),
114                onChanged: (bool val) async {
115                    setState(() {});
116                    await UserPreference.setHasSenseLoss(val);
117                    if(UserPreference.getHasSenseLoss()){
118                        await setTimer();
119                    }
120                    widget.notifyParent();
121                },
122            ],
123        ),
124    ),
125 );
126 }
127 }
```

question_card.dart

```
1 import 'package:flutter/cupertino.dart';
2 import 'package:flutter/material.dart';
3 import 'package:hexcolor/hexcolor.dart';
4
5 class QuestionCard {
6     //UI
7     final Color kingsBlue = HexColor('#0a2d50');
8     final GlobalKey expansionTileKey = GlobalKey();
9
10    final String question;
11    final String answer;
12
13    QuestionCard({this.question, this.answer});
14
15    void _scrollToSelectedContent({GlobalKey expansionTileKey}) {
16        final keyContext = expansionTileKey.currentContext;
17        if (keyContext != null) {
18            Future.delayed(Duration(milliseconds: 200)).then((value) {
19                Scrollable.ensureVisible(keyContext,
20                    duration: Duration(milliseconds: 200));
21            });
22        }
23    }
24
25    Widget getQuestionCard() {
26        return ExpansionTile(
27            key: expansionTileKey,
28            onExpansionChanged: (value) {
29                if (value) {
30                    _scrollToSelectedContent(expansionTileKey: expansionTileKey);
31                }
32            },
33            title: Text(
34                question,
35                style: TextStyle(
36                    fontFamily: "MontserratBold",
37                    fontSize: 18,
38                ),
39            ),
40            children: [
41                Container(
```

```

42         alignment: Alignment.centerLeft,
43         padding: EdgeInsets.symmetric(horizontal: 20),
44         child: Text(
45             answer,
46             style: TextStyle(
47                 fontFamily: "MontserratRegular",
48                 fontSize: 18,
49             ),
50         ),
51     ),
52 ],
53 );
54 }
55 }
```

common_questions.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:wifi_scanning_flutter/screens/user/widgets/question_card.dart';
4
5 class CommonQuestionsPage extends StatefulWidget {
6     CommonQuestionsPage({Key key}) : super(key: key);
7
8     @override
9     _CommonQuestionsPageState createState() => _CommonQuestionsPageState();
10 }
11
12 class _CommonQuestionsPageState extends State<CommonQuestionsPage> {
13     final Color kingsBlue = HexColor('#0a2d50');
14     TextEditingController _searchController = TextEditingController();
15
16     List<QuestionCard> questionCards = [
17         QuestionCard(question: "What is COVID-19?", answer:
18             """Coronaviruses (CoV) are a large family of viruses that cause illness ranging from the common cold to Severe Acute Respiratory Syndrome (SARS). The 2019 novel coronavirus is a new strain that has not been seen in humans until now and has caused a global pandemic. The virus has now been detected in several areas throughout China, along with countries across Asia, Europe, North America, South America, Africa, Australia, and Oceania. It is spread through respiratory droplets and smaller particles (known as aerosols) that can travel through the air for short distances. Symptoms include fever, dry cough, and tiredness. Most infected people will develop mild to moderate illness and recover without hospitalization. Some individuals, particularly the elderly and those with underlying health conditions, may experience more severe complications such as pneumonia or respiratory failure. There is currently no specific treatment for COVID-19, but supportive care and prevention measures like handwashing and social distancing are important. Research is ongoing to develop vaccines and treatments for the disease.""),
19         QuestionCard(question: "How does COVID-19 spread?", answer:
20             "Coronavirus is spread through the air by droplets and smaller particles (known as aerosols) that can travel through the air for short distances. It is primarily transmitted via respiratory droplets produced when an infected person coughs or sneezes. These droplets can land on surfaces and be transferred to other people's hands or faces. Other modes of transmission include direct contact with an infected person or through contaminated objects or surfaces. The virus can survive on various materials for several hours to days, depending on the type of surface and environmental conditions. Therefore, it is important to practice good hygiene, such as frequent handwashing and avoiding close proximity to infected individuals, to prevent the spread of the virus."),
21         QuestionCard(question: "What are the symptoms of COVID-19?", answer:
22             """COVID-19 affects different people in different ways. Most infected people will develop mild to moderate illness and recover without hospitalization. Some individuals, particularly the elderly and those with underlying health conditions, may experience more severe complications such as pneumonia or respiratory failure. Common symptoms include fever, dry cough, and tiredness. Other symptoms may include loss of taste or smell, muscle aches, and difficulty breathing. If you experience any of these symptoms, it is important to seek medical attention and follow local guidelines for self-isolation and testing.""),
23         QuestionCard(question: "\nMost common symptoms:\n- fever\n- dry cough\n- tiredness", answer:
24             """)
```

29
30 Less common symptoms:
31 - aches and pains.
32 - sore throat.
33 - diarrhoea.
34 - conjunctivitis.
35 - headache.
36 - loss of taste or smell.
37 - a rash on skin, or discolouration of fingers or toes.
38
39 Serious symptoms:
40 - difficulty breathing or shortness of breath.
41 - chest pain or pressure.
42 - loss of speech or movement.
43
44 Seek immediate medical attention if you have serious symptoms. Always call before visiting your do
45 \nPeople with mild symptoms who are otherwise healthy should manage their symptoms at home.
46 \nOn average it takes 5{6 days from when someone is infected with the virus for symptoms to show,
47 """),
48 QuestionCard(question: "What should I do if I have symptoms?", answer:
49 """- Get a test to check if you have coronavirus as soon as possible.
50 - You and anyone you live with should stay at home and not have visitors until you get your test re
51 """),
52 QuestionCard(question: "What can I do to prevent spreading of COVID-19?", answer:
53 """Coronavirus is spread through the air by droplets and smaller particles (known as aerosols) tha
54 \nWhat you can do:
55 - Wash your hands with soap and water often, for at least 20 seconds
56 - Use hand sanitiser gel if soap and water are not available
57 - Cover your mouth and nose with a tissue or your sleeve (not your hands) when you cough or sneeze
58 - Put used tissues in the bin immediately and wash your hands afterwards
59 - Clean objects and surfaces you touch often (such as door handles, kettles and phones) using your
60 - Consider wearing a face covering when in shared spaces
61 - Keep windows open in the room you're staying in and shared spaces as much as possible
62
63 What you can't do:
64 - Share towels, including hand towels and tea towels
65 """),
66 QuestionCard(question: "Where can I get help if it's an emergency?", answer:
67 """If the person who needs help is aged under 5, call 111.
68 \nOtherwise, call 999 if:
69 - Signs of a heart attack - pain like a very tight band, heavy weight or squeezing in the centre of
70 - Signs of a stroke - face drooping on one side, can't hold both arms up, difficulty speaking
71 - Severe difficulty breathing - not being able to get words out, choking or gasping
72 - Heavy bleeding - that won't stop
73 - Severe injuries - or deep cuts after a serious accident
74 - Seizure (fit) - someone is shaking or jerking because of a fit, or is unconscious (can't be woken

```

75     - Sudden, rapid swelling - of the eyes, lips, mouth, throat or tongue
76     """"),
77     QuestionCard(question: "What should I do if I have been advised to self-isolate?", answer:
78     """- Do not go to your work, school, GP surgery, hospital, or public areas, and do not use public
79     - Do not go out to get food and medicine - order it online or by phone, or ask someone to bring it
80     - Do not have visitors in your home, including friends and family, except for people providing ess
81     - Do not go out to exercise - exercise at home or in your garden"""),
82     QuestionCard(question: "Where can I get extra help?", answer:
83     """In England, contact the NHS volunteer responder service if there are no friends and family near
84     \nNHS volunteers are people in your community who have offered to help by picking up groceries, co
85     """"),
86   ];
87   List<Widget> resultCards = [];
88
89   @override
90   void initState() {
91     super.initState();
92     _searchController.addListener(_onSearchChanged);
93     setSearchResultList();
94   }
95
96   @override
97   void dispose() {
98     _searchController.removeListener(_onSearchChanged);
99     _searchController.dispose();
100    super.dispose();
101  }
102
103  void _onSearchChanged() {
104    setSearchResultList();
105  }
106
107  void setSearchResultList() {
108    List<Widget> showResults = [];
109    String query = _searchController.text.toLowerCase();
110    if(query != "") {
111      questionCards.forEach((element) {
112        String question = element.question.toLowerCase();
113        if(question.contains(query)){
114          showResults.add(element.getQuestionCard());
115        }
116      });
117    }
118    else {
119      showResults = List.from(questionCards.map((e) => e.getQuestionCard()));
120    }

```

```

121
122     setState(() {
123         resultCards = showResults;
124     });
125 }
126
127 @override
128 Widget build(BuildContext context) {
129     return Container(
130         child: Scaffold(
131             appBar: AppBar(
132                 title: Text(
133                     "Common Questions",
134                     style: TextStyle(
135                         fontFamily: "MontserratRegular", fontWeight: FontWeight.w600),
136                     ),
137                 centerTitle: true,
138                 backgroundColor: kingsBlue,
139             ),
140             body: ListView(
141                 shrinkWrap: true,
142                 primary: false,
143                 children: [
144                     TextField(
145                         controller: _searchController,
146                         autocorrect: true,
147                         decoration: InputDecoration(
148                             hintText: "Please enter your question",
149                             border: InputBorder.none,
150                             prefixIcon: Icon(Icons.search),
151                             suffixIcon: IconButton(
152                                 icon: Icon(Icons.clear),
153                                 onPressed: () {
154                                     _searchController.clear();
155                                 },
156                             ),
157                             ),
158                         ],
159                        addAll(resultCards),
160                     ),
161                 ),
162             );
163     }
164 }
```

wifi_algorithm_page.dart

```
1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:lottie/lottie.dart';
4 import 'package:wifi_scanning_flutter/screens/demo/db_operations.dart';
5 import 'package:wifi_scanning_flutter/screens/demo/widgets/wifi.dart';
6 import 'package:wifi_scanning_flutter/screens/demo/widgets/wifi_matching.dart';
7 import 'package:wifi_scanning_flutter/screens/user/wifi_background_manager.dart';
8 import 'package:wifi_scanning_flutter/services/user_preference.dart';
9 import 'package:loading_animations/loading_animations.dart';

10
11 class WiFiBackgroundActivity extends StatefulWidget {
12     final Function() notifyParent;
13     final WiFiBackgroundActivityManager wifiBackgroundActivityManager;
14     final bool isScanning;
15     WiFiBackgroundActivity({
16         Key key,
17         @required this.notifyParent,
18         @required this.isScanning,
19         @required this.wifiBackgroundActivityManager
20     }) : super(key: key);
21
22     @override
23     _WiFiBackgroundActivityState createState() => _WiFiBackgroundActivityState();
24 }

25
26 class _WiFiBackgroundActivityState extends State<WiFiBackgroundActivity> {
27     DatabaseOperations databaseOperations = DatabaseOperations();
28     WifiMatching matcher = new WifiMatching();
29     final Color kingsBlue = HexColor('#0a2d50');
30     bool isRunning;

31
32     @override
33     void initState() {
34         super.initState();
35         isRunning = widget.isScanning;
36     }

37
38     @override
39     Widget build(BuildContext context) {
40         return Scaffold(
41             appBar: AppBar(
42                 title: Text(
43                     "WiFi Background",
44                 ),
45             ),
46         );
47     }
48 }
```

```

44         style: TextStyle(
45             fontFamily: "MontserratRegular", fontWeight: FontWeight.w600
46         ),
47     ),
48     centerTitle: true,
49     backgroundColor: kingsBlue,
50     actions: [
51         IconButton(
52             icon: Icon(Icons.play_arrow),
53             onPressed: () async {
54                 setState(() {
55                     isRunning = true;
56                 });
57                 await UserPreference.setWiFiBackgroundActivityState(isRunning);
58                 await widget.wifiBackgroundActivityManager.
59                     startTimer();
60                 widget.notifyParent();
61             }
62         ),
63         IconButton(
64             icon: Icon(Icons.stop),
65             onPressed: () async {
66                 setState(() {
67                     isRunning = false;
68                 });
69                 await UserPreference.setWiFiBackgroundActivityState(isRunning);
70                 widget.wifiBackgroundActivityManager.cancelTimer();
71                 widget.notifyParent();
72             }
73         ),
74     ],
75 ),
76 body: mainPage(),
77 floatingActionButton: Visibility(
78     visible: !isRunning,
79     child: FloatingActionButton.extended(
80         icon: Icon(Icons.fact_check),
81         backgroundColor: kingsBlue,
82         label: Text("Check Out Matching Steps"),
83         onPressed: () {
84             Navigator.push(
85                 context,
86                 new MaterialPageRoute(
87                     builder: (context) => WifiScanPage(notifyParent: widget.notifyParent)
88                 )
89             );
90     );

```

```

90         },
91     ),
92   ),
93   floatingActionButtonLocation: FloatingActionButtonLocation.centerFloat,
94 );
95 }
96
97 Widget mainPage() {
98   if(isRunning) {
99     return Center(
100       child: Column(
101         mainAxisAlignment: MainAxisAlignment.center,
102         crossAxisAlignment: CrossAxisAlignment.center,
103         children: [
104           LoadingBouncingGrid.square(
105             backgroundColor: kingsBlue,
106             size: 100,
107           ),
108           SizedBox(height: 20,),
109           Text(
110             "The WiFi matching is running",
111             style: TextStyle(
112               fontFamily: "MontserratRegular", fontSize: 20
113             ),
114           ),
115         ],
116       )
117     );
118   }
119   else {
120     return Center(
121       child: Column(
122         mainAxisAlignment: MainAxisAlignment.center,
123         crossAxisAlignment: CrossAxisAlignment.center,
124         children: [
125           Lottie.asset("assets/lottie/stop.json",
126             height: 200,
127             repeat: false,
128           ),
129           SizedBox(height: 20,),
130           Text(
131             "The WiFi matching is not running",
132             style: TextStyle(
133               fontFamily: "MontserratRegular", fontSize: 20
134             ),
135           ),

```

```

136         ],
137     ),
138   );
139 }
140 }
141 }
```

db_operations.dart

```

1 import 'package:collection/collection.dart';
2 import 'package:wifi/wifi.dart';
3 import 'package:wifi_scanning_flutter/services/database/result_dao.dart';
4 import 'package:wifi_scanning_flutter/services/database/wifi_dao.dart';
5 import 'package:wifi_scanning_flutter/models/customised_result.dart';
6 import 'package:wifi_scanning_flutter/models/customised_wifi.dart';
7 import 'package:wifi_scanning_flutter/services/database/cloud_database.dart';
8
9 class DatabaseOperations {
10   WifiDao wifiDao = WifiDao();
11   ResultDao resultDao = ResultDao();
12
13   Future<List<WifiResult>> scanWifi() async {
14     return await Wifi.list('');
15   }
16
17   Future<void> storeScansInLocalDatabase(List<WifiResult> ssidList) async {
18     String timeStamp = DateTime.now().toString();
19     for (var i = 0; i < ssidList.length; i++) {
20       CustomisedWifi curWifi = new CustomisedWifi(timeStamp, ssidList[i].ssid,
21             ssidList[i].bssid, ssidList[i].level, ssidList[i].frequency);
22       await wifiDao.insert(curWifi);
23     }
24   }
25
26   Future<void> uploadScansToCloud(String userId) async {
27     List<CustomisedWifi> wifiListInDatabase =
28       await wifiDao.getAllSortedBy("dateTime");
29     Map<String, List<CustomisedWifi>> groupedwifiList = groupBy(
30       wifiListInDatabase, (CustomisedWifi eachSignal) => eachSignal.dateTime);
31     Map<String, List<Map>> newGroupedWifiList = Map();
32     groupedwifiList.forEach((key, value) {
33       List<Map> newValue = [];
34       value.forEach((element) {
35         newValue.add(element.toMap());
36       });
37     });
38   }
39 }
```

```

37         newGroupedWifiList[key] = newValue;
38     });
39
40     await CloudDatabase(uid: userId).updateUserData(newGroupedWifiList);
41 }
42
43 Future<void> insertResultToDb(CustomisedResult result) async {
44     await resultDao.insert(result);
45 }
46
47 Future<List<CustomisedWifi>> getLocalDbBy(String field) async {
48     return await wifiDao.getAllSortedBy(field);
49 }
50
51 Future<List<CustomisedResult>> getResultDbBy(String field) async {
52     return await resultDao.getAllSortedBy(field);
53 }
54
55 void clearLocalDatabase() {
56     wifiDao.deleteAll();
57 }
58
59 void clearResultDatabase() {
60     resultDao.deleteAll();
61 }
62
63 Future<void> clearCloudDatabase(String userId) async {
64     await CloudDatabase(uid: userId).deleteAllScansOfCurrentUser();
65 }
66 }

```

wifi.dart

```

1 import 'package:carousel_slider/carousel_slider.dart';
2 import 'package:flutter/material.dart';
3 import 'package:hexcolor/hexcolor.dart';
4 import 'package:wifi_scanning_flutter/services/user_preference.dart';
5 import 'package:wifi_scanning_flutter/screens/demo/widgets/cards.dart';
6
7 class WifiScanPage extends StatefulWidget {
8     final Function() notifyParent;
9     const WifiScanPage({Key wifiList, @required this.notifyParent})
10        : super(key: wifiList);
11
12     @override

```

```

13     _WifiScanPageState createState() => new _WifiScanPageState();
14 }
15
16 class _WifiScanPageState extends State<WifiScanPage> {
17     int bottomNavigationBarIdx = 0;
18     bool hasMatch;
19
20     @override
21     void initState() {
22         super.initState();
23     }
24
25     void _onItemTapped(int index) {
26         setState(() {
27             bottomNavigationBarIdx = index;
28         });
29     }
30
31     @override
32     Widget build(BuildContext context) {
33         final Color kingsBlue = HexColor('#0a2d50');
34
35         Future<void> changeUserState(bool hasMatch) async {
36             await UserPreference.setContactedState(hasMatch);
37             if(hasMatch && UserPreference.getIsolationDue() == ""){
38                 await UserPreference.setIsolationDue(DateTime.now().add(Duration(days: 10)).toString());
39             }
40         }
41
42         CardsCreator cardsCreator =
43             CardsCreator(changeUserState, widget.notifyParent);
44
45         List<Widget> _widgetOptions =
46             createBottomNavigatorBarWidgets(context, cardsCreator, UserPreference.getUsername());
47
48         return Scaffold(
49             appBar: AppBar(
50                 title: Text(
51                     "WiFi Matching Steps",
52                     style: TextStyle(
53                         fontFamily: "MontserratRegular", fontWeight: FontWeight.w600),
54                 ),
55                 centerTitle: true,
56                 backgroundColor: kingsBlue,
57             ),
58             body: Center(

```

```

59         child: _widgetOptions.elementAt(bottomNavigationBarIdx),
60     ),
61     bottomNavigationBar: BottomNavigationBar(
62       items: [
63         BottomNavigationBarItem(
64           icon: Icon(Icons.signal_wifi_4_bar_lock), label: "Offline Phase"),
65         BottomNavigationBarItem(
66           icon: Icon(Icons.cloud_upload), label: "Online Phase"),
67       ],
68       currentIndex: bottomNavigationBarIdx,
69       onTap: _onItemTapped,
70       selectedItemColor: kingsBlue,
71     ),
72   );
73 }
74
75 List<Widget> createBottomNavigatorBarWidgets(
76   BuildContext context, CardsCreator cardsCreator, String userId) {
77   List<Widget> widgets = [
78     Container(
79       child: Column(
80         mainAxisAlignment: MainAxisAlignment.center,
81         crossAxisAlignment: CrossAxisAlignment.center,
82         children: <Widget>[
83           CarouselSlider(
84             options: CarouselOptions(
85               height: 600,
86               viewportFraction: 0.8,
87               initialPage: 0,
88               enlargeCenterPage: true,
89               enableInfiniteScroll: false,
90             ),
91             items: cardsCreator.createOfflineStepCards(context, userId),
92           ),
93         ],
94       )),
95     Container(
96       child: Column(
97         mainAxisAlignment: MainAxisAlignment.center,
98         crossAxisAlignment: CrossAxisAlignment.center,
99         children: <Widget>[
100           CarouselSlider(
101             options: CarouselOptions(
102               height: 600,
103               viewportFraction: 0.8,
104               initialPage: 0,

```

```

105         enlargeCenterPage: true,
106         enableInfiniteScroll: false,
107     ),
108     items: cardsCreator.createOnlineStepCards(context, userId),
109   ),
110 ],
111 )),
112 ];
113 return widgets;
114 }
115 }

```

wifi_matching.dart

```

1 import 'package:collection/collection.dart';
2 import 'package:wifi_scanning_flutter/services/database/wifi_dao.dart';
3 import 'package:wifi_scanning_flutter/models/customised_wifi.dart';
4 import 'package:wifi_scanning_flutter/services/database/cloud_database.dart';
5
6 class WifiMatching {
7   WifiDao wifiDao = WifiDao();
8   double similarity = 0;
9
10  Future<bool> matchFingerprints(String uid, Duration timeSpan,
11    double filterPercentage, double similarityThreshold) async {
12    //Get raw data from cloud and local dbs5
13    List<CustomisedWifi> rawLocalWifiList =
14      await wifiDao.getAllSortedBy("dateTime");
15    List<CustomisedWifi> rawCloudWifiList =
16      await CloudDatabase(uid: uid).getAllScansFromCloudMadeByOtherUsers();
17
18    //Find all data in the cloud and local dbs that match each other's timestamp
19    //Datatype here is set because we don't my repetitive data
20    Set<CustomisedWifi> matchedCloudWifiList = {};
21    Set<CustomisedWifi> matchedLocalWifiList = {};
22    rawLocalWifiList.forEach((localScan) {
23      DateTime localTimestamp = DateTime.parse(localScan.dateTime);
24      rawCloudWifiList.forEach((cloudScan) {
25        DateTime cloudTimestamp = DateTime.parse(cloudScan.dateTime);
26        if (localTimestamp.difference(cloudTimestamp) <= timeSpan) {
27          matchedCloudWifiList.add(cloudScan);
28          matchedLocalWifiList.add(localScan);
29        }
30      });
31    });
32  });

```

```

32
33 //Group the lists by timestamps
34 Map<String, List<CustomisedWifi>> groupedCloudWifiList = groupBy(
35     matchedCloudWifiList,
36     (CustomisedWifi eachSignal) => eachSignal.dateTime);
37 Map<String, List<CustomisedWifi>> groupedLocalWifiList = groupBy(
38     matchedLocalWifiList,
39     (CustomisedWifi eachSignal) => eachSignal.dateTime);
40 //Dart does not support non-local returns,
41 //so returning from a callback won't break the loop. Dart forEach callback returns void.
42 //bool hasMatch = false;
43 for(var cloudScan in groupedCloudWifiList.entries){
44     DateTime cloudScanKey = DateTime.parse(cloudScan.key);
45     for(var localScan in groupedLocalWifiList.entries){
46         if (cloudScanKey.difference(DateTime.parse(localScan.key)) <= timeSpan){
47             similarity = computeSimilarityBetweenLists
48                 (cloudScan.value, localScan.value, filterPercentage);
49             if (similarity >= similarityThreshold) {
50                 return true;
51             }
52         }
53     }
54 }
55
56     return false;
57 }
58
59     double computeSimilarityBetweenLists(
60         List<CustomisedWifi> la, List<CustomisedWifi> lb, filterPercentage) {
61     List<String> filteredLstA =
62         filterWifiByRssi(la, filterPercentage).map((e) => e.bssid).toList();
63     List<String> filteredLstB =
64         filterWifiByRssi(lb, filterPercentage).map((e) => e.bssid).toList();
65
66     double similarity = 0;
67     if (filteredLstA.length <= filteredLstB.length) {
68         double increment = 1 / filteredLstA.length;
69         filteredLstA.forEach((element) {
70             if (filteredLstB.contains(element)) {
71                 similarity += increment;
72             }
73         });
74     } else {
75         double increment = 1 / filteredLstB.length;
76         filteredLstB.forEach((element) {
77             if (filteredLstA.contains(element)) {

```

```

78         similarity += increment;
79     }
80   });
81 }
82
83   return similarity;
84 }

85
86   List<CustomisedWifi> filterWifiByRssi(
87     List<CustomisedWifi> lst, filterPercentage) {
88     List<CustomisedWifi> temp = lst;
89     //sort the wifi list according to rssi in descending order
90     temp..sort((e1, e2) => e2.rssi.compareTo(e1.rssi));
91     //keep only the strongest n% in the list and return it
92     return temp.take((temp.length * filterPercentage).toInt()).toList();
93   }
94 }
```

step_card.dart

```

1 import 'package:flutter/material.dart';

2
3   class StepCard extends StatefulWidget {
4     final int stepNum;
5     final String description;
6     final List buttons;
7
8     StepCard({Key key, this.stepNum, this.description, this.buttons})
9       : super(key: key);
10
11    @override
12    _StepCardState createState() => _StepCardState();
13  }

14
15  class _StepCardState extends State<StepCard> {
16    @override
17    Widget build(BuildContext context) {
18      return Card(
19        child: Container(
20          padding: EdgeInsets.symmetric(horizontal: 20),
21          child: Column(
22            mainAxisAlignment: MainAxisAlignment.center,
23            mainAxisSize: MainAxisSize.max,
24            children: <Widget>[
25              Text(
```

```

26         "Step ${widget.stepNum.toString()}",
27         style: TextStyle(
28             fontFamily: "MontserratBold",
29             fontSize: 30,
30             fontWeight: FontWeight.w600),
31         ),
32         SizedBox(
33             height: 15,
34         ),
35         Text(
36             widget.description,
37             style: TextStyle(
38                 fontFamily: "MontserratRegular",
39                 fontSize: 20,
40             ),
41         ),
42         SizedBox(
43             height: 15,
44         ),
45         ListView.builder(
46             physics: NeverScrollableScrollPhysics(),
47             shrinkWrap: true,
48             itemCount: widget.buttons.length,
49             itemBuilder: (context, index) {
50                 return widget.buttons[index];
51             },
52         ],
53     ),
54 ),
55 );
56 }
57 }
```

cards.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:hexcolor/hexcolor.dart';
3 import 'package:tuple/tuple.dart';
4 import 'package:wifi/wifi.dart';
5 import 'package:wifi_scanning_flutter/models/customised_result.dart';
6 import 'package:wifi_scanning_flutter/models/customised_wifi.dart';
7 import 'package:wifi_scanning_flutter/screens/demo/db_operations.dart';
8 import 'package:wifi_scanning_flutter/screens/demo/widgets/dialogs.dart';
9 import 'package:wifi_scanning_flutter/screens/demo/widgets/wifi_matching.dart';
10
```

```

11 import 'step_card.dart';
12
13 class CardsCreator {
14     //2 methods to interact with parent widgets
15     //changeUserState is to change the Provider user state of WiFiScanPage
16     //refresh MainPage is for refreshing the main page once got the matching algorithm result
17     final Function changeUserState;
18     final Function refresh MainPage;
19     CardsCreator(this.changeUserState, this.refresh MainPage);
20     final Color kingsBlue = HexColor('#0a2d50');
21
22     DatabaseOperations databaseOperations = DatabaseOperations();
23     DialogsCreator dialogsCreator = DialogsCreator();
24     WifiMatching matcher = new WifiMatching();
25
26     List<WifiResult> ssidList = [];
27     List<CustomisedWifi> localDb = [];
28     List<CustomisedResult> resultDb = [];
29
30     double strongestNPercentInRssi = 0;
31     double similarityThr = 0;
32     bool hasMatch = false;
33     double similarity = 0;
34
35     List<Widget> createOnlineStepCards(BuildContext context, String userId) {
36         List<StepCard> stepCards = [
37             StepCard(
38                 stepNum: 1,
39                 description: "Download other users' scans from the cloud",
40                 buttons: [],
41             ),
42             StepCard(
43                 stepNum: 2,
44                 description:
45                     """For each scan in the local database, see if there is a scan from the cloud that is
46                     buttons: [],
47             ),
48             StepCard(
49                 stepNum: 3,
50                 description:
51                     """Group items in each set by timestamps and obtain 2 maps. Loop through entries of ea
52                 buttons: [
53                     ElevatedButton(
54                         child: Text("Set Parameters"),
55                         style: ButtonStyle(
56                             backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),

```

```

57         onPressed: () async {
58             Tuple2<double, double> params =
59                 await dialogsCreator.createParameterAdjustingDialog(context);
60             strongestNPercentInRssi = params.item1;
61             similarityThr = params.item2;
62         },
63     ),
64     ElevatedButton(
65         child: Text("Run the Algorithm"),
66         style: ButtonStyle(
67             backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
68         onPressed: () async {
69             hasMatch = await matcher.matchFingerprints(
70                 userId,
71                 Duration(minutes: 15),
72                 strongestNPercentInRssi,
73                 similarityThr);
74             similarity = matcher.similarity;
75             await dialogsCreator.createResultConfirmingDialog(context,
76                 hasMatch, strongestNPercentInRssi, similarityThr, similarity);
77             await changeUserState(hasMatch);
78             refresh MainPage();
79         },
80     ),
81     ElevatedButton(
82         child: Text("View Result Database"),
83         style: ButtonStyle(
84             backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
85         onPressed: () async {
86             resultDb = await databaseOperations.getResultDbBy("similarity");
87             Navigator.push(
88                 context,
89                 MaterialPageRoute(
90                     builder: (context) => Scaffold(
91                         appBar: AppBar(
92                             title: Text(
93                                 "Result Database",
94                                 style: TextStyle(
95                                     fontFamily: "MontserratRegular",
96                                     fontWeight: FontWeight.w600),
97                             ),
98                             centerTitle: true,
99                             backgroundColor: kingsBlue,
100                         ),
101                         body: InteractiveViewer(
102                             constrained: false,

```

```

103             child: DataTable(
104                 columns: [
105                     DataColumn(label: Text('similarity'),),
106                     DataColumn(label: Text('similarityThreshold')),
107                     DataColumn(label: Text('filterPercentage')),
108                     DataColumn(label: Text('prediction')),
109                     DataColumn(label: Text('truth')),
110                 ],
111                 rows: resultDb
112                     .map((e) => DataRow(cells: [
113                         DataCell(
114                             Text(e.similarity.toString()),
115                             DataCell(Text(e.similarityThreshold
116                                 .toString())),
117                             DataCell(Text(
118                                 e.filterPercentage.toString())),
119                             DataCell(
120                                 Text(e.prediction.toString()),
121                                 DataCell(Text(e.truth.toString()),
122                                     ]))
123                         .toList(),
124                     ),
125                 )));
126             },
127         ),
128         ElevatedButton(
129             child: Text("Clear Result Database"),
130             style: ButtonStyle(
131                 backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
132                 onPressed: () {},
133                 onLongPress: () {
134                     databaseOperations.clearResultDatabase();
135                     ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
136                         content: Text("Result database is cleared."),
137                     ));
138                 },
139             ),
140         ],
141     )
142 ];
143 return stepCards;
144 }
145
146 List<Widget> createOfflineStepCards(BuildContext context, String userId) {
147     List<StepCard> stepCards = [
148         StepCard(

```

```

149     stepNum: 1,
150     description: "Scan wifi signals every 5 minutes; hence there will be 3 scans per 15 minute
151     buttons: [
152       ElevatedButton(
153         child: Text("Scan Wifi"),
154         style: ButtonStyle(
155           backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
156           onPressed: () async {
157             ssidList = await databaseOperations.scanWifi();
158             ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
159               content: Text("Scan finished."),
160             ));
161           },
162         ),
163       ElevatedButton(
164         child: Text("View Current Scan"),
165         style: ButtonStyle(
166           backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
167           onPressed: () {
168             Navigator.push(
169               context,
170               MaterialPageRoute(
171                 builder: (context) => Scaffold(
172                   appBar: AppBar(
173                     title: Text(
174                       "Current Scan",
175                     style: TextStyle(
176                       fontFamily: "MontserratRegular",
177                       fontWeight: FontWeight.w600),
178                   ),
179                   centerTitle: true,
180                   backgroundColor: kingsBlue,
181                 )),
182                 body: InteractiveViewer(
183                   constrained: false,
184                   child: DataTable(
185                     columns: [
186                       DataColumn(label: Text('SSID')),
187                       DataColumn(label: Text('BSSID')),
188                       DataColumn(label: Text('RSSI')),
189                       DataColumn(label: Text('Frequency')),
190                     ],
191                     rows: ssidList
192                     .map((e) => DataRow(cells: [
193                       DataCell(Text(e.ssid)),
194                       DataCell(Text(e.bssid)),

```

```

195                               DataCell(Text(e.level.toString())),
196                               DataCell(
197                                   Text(e.frequency.toString()),
198                                   ]))
199                               .toList(),
200                               ),
201                               )));

202                           },
203                           ),
204                           ],
205                           ),
206                           StepCard(
207                               stepNum: 2,
208                               description: "Each scan is stored in the local database.",
209                               buttons: [
210                                   ElevatedButton(
211                                       child: Text("Store Current Scan"),
212                                       style: ButtonStyle(
213                                           backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
214                                       onPressed: () {
215                                           databaseOperations.storeScansInLocalDatabase(ssidList);
216                                           ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
217                                               content: Text("Current scan is stored.")),
218                                           );
219                                       },
220                                       ),
221                                   ElevatedButton(
222                                       child: Text("View Local Database"),
223                                       style: ButtonStyle(
224                                           backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
225                                       onPressed: () async {
226                                           localDb = await databaseOperations.getLocalDbBy("dateTime");
227                                           Navigator.push(
228                                               context,
229                                               MaterialPageRoute(
230                                                   builder: (context) => Scaffold(
231                                                       appBar: AppBar(
232                                                       title: Text(
233                                                       "Local Database",
234                                                       style: TextStyle(
235                                                       fontFamily: "MontserratRegular",
236                                                       fontWeight: FontWeight.w600),
237                                                       ),
238                                                       centerTitle: true,
239                                                       backgroundColor: kingsBlue,
240                                                       ),

```

```

241             body: InteractiveViewer(
242               constrained: false,
243               child: DataTable(
244                 columns: [
245                   DataColumn(label: Text('dateTime')),
246                   DataColumn(label: Text('BSSID')),
247                   DataColumn(label: Text('RSSI')),
248                 ],
249                 rows: localDb
250                   .map((e) => DataRow(cells: [
251                     DataCell(Text(e.dateTime)),
252                     DataCell(Text(e.bssid)),
253                     DataCell(Text(e.rssi.toString())),
254                   ]))
255                   .toList(),
256                 ),
257               )));
258           },
259         ),
260         ElevatedButton(
261           child: Text("Clear Local Database"),
262           style: ButtonStyle(
263             backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
264             onPressed: () {
265               //print("Please long press this button to make it work");
266             },
267             onLongPress: () {
268               databaseOperations.clearLocalDatabase();
269               ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
270                 content: Text("Local database is cleared."),
271               ));
272             },
273           ),
274         ],
275       ),
276       StepCard(
277         stepNum: 3,
278         description:
279           "Part of the scans from the local database will be uploaded to the cloud depending on
280         buttons: [
281           ElevatedButton(
282             child: Text("Upload to Cloud"),
283             style: ButtonStyle(
284               backgroundColor: MaterialStateProperty.all<Color>(kingsBlue),
285               onPressed: () {
286                 databaseOperations.uploadScansToCloud(userId);

```

```

287         ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
288             content: Text("Current local database has been uploaded."),
289         )));
290     },
291 ),
292 ElevatedButton(
293     child: Text("Clear Current User's Cloud Data"),
294     style: ButtonStyle(
295         backgroundColor: MaterialStateProperty.all<Color>(kingsBlue)),
296     onPressed: () {},
297     onLongPress: () {
298         databaseOperations.clearCloudDatabase(userId);
299         ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
300             content: Text("Current cloud database has been cleared."),
301         )));
302     },
303 ),
304 ],
305 );
306 ];
307 return stepCards;
308 }
309 }

```

dialogs.dart

```

1 import 'package:flutter/material.dart';
2 import 'package:wifi_scanning_flutter/models/customised_result.dart';
3 import 'package:wifi_scanning_flutter/screens/demo/db_operations.dart';
4 import 'package:tuple/tuple.dart';
5
6 class DialogsCreator {
7     DatabaseOperations databaseOperations = DatabaseOperations();
8
9     Future<void> createResultConfirmingDialog(BuildContext context, bool hasMatch,
10         double strongestNPercentInRssi, double similarityThr, double similarity) async {
11         return await showDialog(
12             context: context,
13             builder: (context) {
14                 return AlertDialog(
15                     title: Text("Result"),
16                     content: Text("The predicted matching result is: $hasMatch with similarity ${similarity}"),
17                     actions: [
18                         TextButton(
19                             onPressed: () async {

```

```

20             await databaseOperations.insertResultToDb(
21                 new CustomisedResult(strongestNPercentInRssi,
22                     similarityThr, similarity, hasMatch, true));
23             ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
24                 content: Text("This result has been saved."),
25             )));
26             Navigator.of(context).pop();
27         },
28         child: Text("Positive")),
29     TextButton(
30         onPressed: () async {
31             await databaseOperations.insertResultToDb(
32                 new CustomisedResult(strongestNPercentInRssi,
33                     similarityThr, similarity, hasMatch, false));
34             ScaffoldMessenger.of(context).showSnackBar(const SnackBar(
35                 content: Text("This result has been saved."),
36             )));
37             Navigator.of(context).pop();
38         },
39         child: Text("Negative")),
40     ],
41 );
42 );
43 }
44
45 double strongestNPercentInRssi = 0;
46 double similarityThr = 0;
47
48 Future<Tuple2<double, double>> createParameterAdjustingDialog(
49     BuildContext context) async {
50     await showDialog(
51         context: context,
52         builder: (context) {
53             double newStrongestNPercentInRssi = 0;
54             double newSimilarityThr = 0;
55             //need to wrap the dialog inside a stateful widget otherwise
56             //the sliders don't slide
57             return StatefulBuilder(builder: (context, setState) {
58                 return AlertDialog(
59                     title: Text("Please adjust the matching parameters"),
60                     content:
61                         Column(mainAxisSize: MainAxisSize.min, children: <Widget>[
62                             SizedBox(
63                                 height: 10.0,
64                             ),
65                             Text(

```

```

66         "Filter Percentage: ${strongestNPercentInRssi.toStringAsFixed(2)}",
67         Slider(
68             value: strongestNPercentInRssi,
69             min: 0,
70             max: 1,
71             onChanged: (double val) {
72                 //print(val.toString());
73                 setState(() {
74                     newStrongestNPercentInRssi = val;
75                     strongestNPercentInRssi = newStrongestNPercentInRssi;
76                 });
77             },
78         ),
79         Text(
80             "Similarity Threshold: ${similarityThr.toStringAsFixed(2)}",
81         Slider(
82             value: similarityThr,
83             min: 0,
84             max: 1,
85             onChanged: (double val) {
86                 //print(val.toString());
87                 setState(() {
88                     newSimilarityThr = val;
89                     similarityThr = newSimilarityThr;
90                 });
91             },
92         ],
93     );
94 );
95 return Tuple2<double, double>(strongestNPercentInRssi, similarityThr);
96 }
97 }

```

B.1.3 Services

user_preference.dart

```

1 import 'package:shared_preferences/shared_preferences.dart';
2
3 /*
4 This is a null safety class
5 */
6 class UserPreference {
7     static SharedPreferences _preferences;
8

```

```

9   static Future init() async => _preferences = await SharedPreferences.getInstance();
10
11  static Future setUsername(String userId) async {
12    await _preferences.setString("id", userId);
13  }
14
15  static String getUsername() {
16    final id = _preferences.getString("id");
17    return id == null ? "" : id;
18  }
19
20  static Future setInfectionState(bool isInfected) async {
21    await _preferences.setBool("infectionState", isInfected);
22  }
23
24  static bool getInfectionState() {
25    bool infection = _preferences.getBool("infectionState");
26    return infection == null ? false : infection;
27  }
28
29  static Future setContactedState(bool isContacted) async {
30    await _preferences.setBool("contactedState", isContacted);
31  }
32
33  static bool getContactedState() {
34    bool contacted = _preferences.getBool("contactedState");
35    return contacted == null ? false : contacted;
36  }
37
38  static Future setHasFever(bool hasFever) async {
39    await _preferences.setBool("feverState", hasFever);
40  }
41
42  static bool getHasFever() {
43    bool fever = _preferences.getBool("feverState");
44    return fever == null ? false : fever;
45  }
46
47  static Future setHasCough(bool hasCough) async {
48    await _preferences.setBool("coughState", hasCough);
49  }
50
51  static bool getHasCough() {
52    bool cough = _preferences.getBool("coughState");
53    return cough == null ? false : cough;
54  }

```

```

55
56     static Future setHasSenseLoss(bool hasSenseLoss) async {
57         await _preferences.setBool("senseLossState", hasSenseLoss);
58     }
59
60     static bool getHasSenseLoss() {
61         bool senseLoss = _preferences.getBool("senseLossState");
62         return senseLoss == null ? false : senseLoss;
63     }
64
65     static Future setIsolationDue(String isolationDue) async {
66         await _preferences.setString("isolationDue", isolationDue);
67     }
68
69     static String getIsolationDue() {
70         String isolation = _preferences.getString("isolationDue");
71         return isolation == null ? "" : isolation;
72     }
73
74     static Future setMatchingTimes(int matchingTimes) async {
75         await _preferences.setInt("matchingTimes", matchingTimes);
76     }
77
78     static int getMatchingTimes() {
79         int matchingTimes = _preferences.getInt("matchingTimes");
80         return matchingTimes == null ? 0 : matchingTimes;
81     }
82
83     static Future setWiFiBackgroundActivityState(bool isScanning) async {
84         await _preferences.setBool("isScanning", isScanning);
85     }
86
87     static bool getWiFiBackgroundActivityState() {
88         bool isScanning = _preferences.getBool("isScanning");
89         //default the scanning state is true
90         return isScanning == null ? true : isScanning;
91     }
92 }
```

app_database.dart

```

1 import 'dart:async';
2
3 import 'package:path_provider/path_provider.dart';
4 import 'package:path/path.dart';
```

```

5 import 'package:sembast/sembast.dart';
6 import 'package:sembast/sembast_io.dart';
7
8 class AppDatabase {
9   //Singleton instance
10  static final AppDatabase _singleton = AppDatabase._();
11
12  // A public accessor
13  static AppDatabase get instance => _singleton;
14
15  // Completer is used for transforming synchronous code into asynchronous code
16  Completer<Database> _dbOpenCompleter;
17
18  // A private constructor which allows us to create instances of AppDatabase
19  // only from within the AppDatabase itself.
20  AppDatabase._();
21
22  Future<Database> get database async {
23    if(_dbOpenCompleter == null) {
24      _dbOpenCompleter = Completer();
25      _openDatabase();
26    }
27
28    return _dbOpenCompleter.future;
29  }
30
31  Future _openDatabase() async {
32    final appDocumentDir = await getApplicationDocumentsDirectory();
33    final dbPath = join(appDocumentDir.path, "user.db");
34    final database = await databaseFactoryIo.openDatabase(dbPath);
35    _dbOpenCompleter.complete(database);
36  }
37}

```

auth.dart

```

1 import 'package:firebase_auth/firebase_auth.dart';
2 import 'package:firebase_core/firebase_core.dart';
3 import 'package:flutter/cupertino.dart';
4 import 'package:wifi_scanning_flutter/models/customised_user.dart';
5
6 class AuthService {
7   final FirebaseAuth _auth = FirebaseAuth.instance;
8
9   //Create UserInfo obj based on User

```

```

10     CustomisedUser _customisedUserFromUser(User user){
11         return user != null ? CustomisedUser(user.uid) : null;
12     }
13
14     //auth change user stream
15     //In the youtube tutorial it's Stream<User>
16     Stream<CustomisedUser> get user {
17         return _auth.authStateChanges()
18             .map(_customisedUserFromUser);
19             // .map((User user) => _customisedUserFromUser(user));
20     }
21
22     //sign in anon
23     Future signInAnon() async {
24         WidgetsFlutterBinding.ensureInitialized();
25         await Firebase.initializeApp();
26         try {
27             // original class: AuthResult
28             UserCredential result = await _auth.signInAnonymously();
29             // original class: FirebaseUser
30             User user = result.user;
31             return _customisedUserFromUser(user);
32         }
33         catch(e) {
34             print(e.toString());
35             return null;
36         }
37     }
38
39     //sign out
40     Future signOut() async {
41         try {
42             return await _auth.signOut();
43         }
44         catch(e) {
45             print(e.toString());
46             return null;
47         }
48     }
49 }
```

message_handler.dart

```

1  /*
2  Since flutter dev is currently migrating the platform, firebase messaging is
```

```

3 incompatible with plugins flutter_local_notifications: ^4.0.1+2 and
4 flutter_local_notifications_platform_interface: ^2.0.0+1. So background push
5 notification can't be implemented successfully.
6 Hopefully flutter dev can debug this soon.
7 */
8
9
10 import 'package:flutter/material.dart';
11
12 class MessageHandler extends StatefulWidget {
13     MessageHandler({Key key}) : super(key: key);
14
15     @override
16     _MessageHandlerState createState() => _MessageHandlerState();
17 }
18
19 class _MessageHandlerState extends State<MessageHandler> {
20     @override
21     Widget build(BuildContext context) {
22         return Container(
23             child: Scaffold(),
24         );
25     }
26 }
```

wifi_dao.dart

```

1 import 'package:sembast/sembast.dart';
2 import 'package:wifi_scanning_flutter/services/app_database.dart';
3 import 'package:wifi_scanning_flutter/models/customised_wifi.dart';
4
5 class WifiDao {
6     static const String WIFI_DATABASE_NAME = "wifi_list";
7
8     final _wifiStore = intMapStoreFactory.store(WIFI_DATABASE_NAME);
9
10    Future<Database> get _db async => await AppDatabase.instance.database;
11
12    Future insert(CustomisedWifi wifi) async {
13        await _wifiStore.add(await _db, wifi.toMap());
14    }
15
16    Future update(CustomisedWifi wifi) async {
17        final finder = Finder(filter: Filter.byKey(wifi.ssid));
18        await _wifiStore.update(
```

```

19         await _db,
20         wifi.toMap(),
21         finder: finder
22     );
23 }
24
25 Future deleteByDatetime(CustomisedWifi wifi) async {
26     final finder = Finder(filter: Filter.byKey(wifi.dateTime));
27     await _wifiStore.delete(
28         await _db,
29         finder: finder
30     );
31 }
32
33 //Delete everything in the database
34 Future deleteAll() async {
35     await _wifiStore.delete(await _db);
36 }
37
38 Future<List<CustomisedWifi>> getAllSortedBy(String field) async {
39     final finder = Finder(sortOrders: [
40         SortOrder(field)
41     ]);
42     final recordSnapShots = await _wifiStore.find(
43         await _db,
44         finder : finder,
45     );
46
47     return recordSnapShots.map((snapshot) {
48         final wifi = CustomisedWifi.fromMap(snapshot.value);
49         return wifi;
50     }).toList();
51 }
52
53 Future<List<CustomisedWifi>> getScansWithin14Days() async {
54     String lowerBound = DateTime.now().add(Duration(days: -14)).toString();
55     final finder = Finder(
56         filter: Filter.greaterThanOrEqualTo("dateTime", lowerBound)
57     );
58
59     final recordSnapShots = await _wifiStore.find(
60         await _db,
61         finder : finder,
62     );
63
64     return recordSnapShots.map((snapshot) {

```

```
65     final wifi = CustomisedWifi.fromMap(snapshot.value);
66     return wifi;
67   }).toList();
68 }
69 }
```

result_dao.dart

```
1 import 'package:sembast/sembast.dart';
2 import 'package:wifi_scanning_flutter/models/customised_result.dart';
3
4 import '../app_database.dart';
5
6 class ResultDao {
7   static const String RESULT_DATABASE_NAME = "result_list";
8
9   final _resultStore = intMapStoreFactory.store(RESULT_DATABASE_NAME);
10
11 Future<Database> get _db async => await AppDatabase.instance.database;
12
13 Future insert(CustomisedResult result) async {
14   await _resultStore.add(await _db, result.toMap());
15 }
16
17 Future deleteAll() async {
18   await _resultStore.delete(await _db);
19 }
20
21 Future<List<CustomisedResult>> getAllSortedBy(String field) async {
22   final finder = Finder(sortOrders: [
23     SortOrder(field)
24   ]);
25   final recordSnapShots = await _resultStore.find(
26     await _db,
27     finder : finder,
28   );
29
30   return recordSnapShots.map((snapshot) {
31     final result = CustomisedResult.fromMap(snapshot.value);
32     print(snapshot.key);
33     return result;
34   }).toList();
35 }
36 }
```

cloud_database.dart

```
1 import 'dart:async';
2
3 import 'package:cloud_firestore/cloud_firestore.dart';
4 import 'package:wifi_scanning_flutter/services/user_preference.dart';
5 import 'package:wifi_scanning_flutter/models/customised_wifi.dart';
6
7 class CloudDatabase {
8     final String uid;
9     //class constructor
10    CloudDatabase({this.uid});
11
12    final CollectionReference userCollection =
13        FirebaseFirestore.instance.collection('users');
14
15    Future updateUserData(Map<String, List<Map>> curLst) async {
16        return await userCollection
17            .doc("'$uid")
18            .set(curLst)
19            .whenComplete(() => print("Saving action complete"))
20            .onError((error, stackTrace) => print("Failed to save the scan"));
21    }
22
23    Future<List<CustomisedWifi>> getAllScansFromCloudMadeByOtherUsers() async {
24        List<CustomisedWifi> cloudList = [];
25        QuerySnapshot snapshot =
26            await FirebaseFirestore.instance.collection("users").get();
27        snapshot.docs.forEach((element) {
28            String curUid = element.id;
29            //we only need to get other users' data
30            if (curUid != uid) {
31                element.data().forEach((key, value) {
32                    String timestamp = key;
33                    value.toList().forEach((signal) {
34                        cloudList.add(CustomisedWifi(timestamp, signal["ssid"],
35                            signal["bssid"], signal["rssI"], signal["frequency"]));
36                    });
37                });
38            }
39        });
40
41        return cloudList;
42    }
43
44    Future<void> deleteAllScansOfCurrentUser() async {
```

```
45     await FirebaseFirestore.instance
46     .collection("users").doc(UserPreference.getUsername()).delete();
47   }
48 }
```

B.1.4 Models

customised_wifi.dart

```
1 class CustomisedWifi {
2   String dateTime;
3   String ssid;
4   String bssid;
5   int rssi;
6   int frequency;
7
8   CustomisedWifi(this.dateTime, this.ssid, this.bssid, this.rssi, this.frequency);
9
10  Map<String, dynamic> toMap() => {
11    "dateTime": dateTime,
12    "ssid": ssid,
13    "bssid": bssid,
14    "rssi": rssi,
15    "frequency": frequency
16  };
17
18  static CustomisedWifi fromMap(Map<String, dynamic> map){
19    return CustomisedWifi(
20      map['dateTime'],
21      map['ssid'],
22      map['bssid'],
23      map['rssi'],
24      map['frequency']
25    );
26  }
27}
```

customised_user.dart

```
1 class CustomisedUser {
2   String uid;
3   bool state = false;
4   bool hasBeenContacted = false;
```

```

5     bool hasTemperature = false;
6     bool hasCough = false;
7     bool hasSenseLoss = false;
8     String isolationDue = "";
9
10    CustomisedUser(this.uid);
11
12    String get userId {
13        return uid;
14    }
15
16    set userId(String id) {
17        uid = id;
18    }
19
20    bool get infectionState {
21        return state;
22    }
23
24    set infectionState(bool currentState) {
25        state = currentState;
26    }
27
28    bool get isContacted {
29        return hasBeenContacted;
30    }
31
32    set isContacted(bool currentState) {
33        hasBeenContacted = currentState;
34    }
35
36    bool get gotTemperature {
37        return hasTemperature;
38    }
39
40    set gotTemperature(bool currentState) {
41        hasTemperature = currentState;
42    }
43
44    bool get gotCough {
45        return hasCough;
46    }
47
48    set gotCough(bool currentState) {
49        hasCough = currentState;
50    }

```

```

51
52     bool get gotSenseLoss {
53         return hasSenseLoss;
54     }
55
56     set gotSenseLoss(bool currentState) {
57         hasSenseLoss = currentState;
58     }
59
60     String get isolationUntil {
61         return isolationDue;
62     }
63
64     set isolationUntil(String date) {
65         isolationDue = date;
66     }
67
68     Map<String, dynamic> toMap() => {
69         "id": uid,
70         "state": state,
71         "contact": hasBeenContacted,
72     };
73
74     static CustomisedUser fromMap(Map<String, dynamic> map) {
75         return CustomisedUser(
76             map['id'],
77         );
78     }
79 }
```

customised_result.dart

```

1  class CustomisedResult {
2      double filterPercentage;
3      double similarityThreshold;
4      double similarity;
5      bool prediction;
6      bool truth;
7
8      CustomisedResult(this.filterPercentage, this.similarityThreshold, this.similarity,
9          this.prediction, this.truth);
10
11     Map<String, dynamic> toMap() => {
12         "filterPercentage": filterPercentage,
13         "similarityThreshold": similarityThreshold,
```

```

14         "similarity": similarity,
15         "prediction": prediction,
16         "truth": truth,
17     };
18
19     static CustomisedResult fromMap(Map<String, dynamic> map) {
20         return CustomisedResult(
21             map['filterPercentage'],
22             map['similarityThreshold'],
23             map['similarity'],
24             map['prediction'],
25             map['truth'],
26         );
27     }
28 }
```

B.2 Python: Code for Test

B.2.1 Simplified Fingerprinting Model Test

```

1 \%config Completer.use_jedi = False
2
3 import numpy as np
4 import pandas as pd
5 import os
6 import torch
7 from torch import nn, optim
8 from torch.utils import data
9 from geneticalgorithm import geneticalgorithm as ga
10
11 d = {}
12 #@param fname data of each room from the .txt files in this folder
13 #@return a list of scans of the room grouped by timestamps
14 def read_data(fname):
15     samples = []
16
17     with open(fname) as f:
18
19         while True:
20             line = f.readline()
21
22             if line == "":
23                 break
24
```

```

25         line = line.split(" ")
26
27         rssi = int(line[-3])
28         mac = (line[-5])
29         ts = (line[1]+" "+line[2])
30
31         mac_h = hash(mac)
32         d[mac_h] = mac
33
34         samples.append((ts,mac_h,rssi))
35
36     frame = pd.DataFrame(samples,columns=["ts","id","dbm"])
37     frame["ts"] = pd.to_datetime(frame["ts"])
38     frame["id"] = frame["id"].astype(np.int64)
39
40     groupidx = (frame["ts"].diff().dt.seconds > 1).cumsum()
41
42     frames = []
43
44     for i in groupidx.unique():
45         temp = frame[groupidx == i]
46         temp = temp.groupby("id",as_index=False).mean().sort_values(by=["dbm"])
47
48         frames.append(temp["id"].to_numpy())
49
50     return frames
51
52 #Concatenate scans from all rooms together as a list
53 scans = [read_data(f) for f in os.listdir() if f[-4:]==" .txt"]
54
55 #@param localScan is a single scan made in room A
56 #@param cloudScan is a single scan made in room B. This room can be the same as room A
57 #@return a Boolean indicating whether localScan and cloudScan has a match
58 def matcher(fP,sT,localScan, cloudScan):
59     similarity = 0.0
60     filteredLst1 = set(localScan[:max(int(fP*len(localScan)),1)])
61     filteredLst2 = set(cloudScan[:max(int(fP*len(cloudScan)),1)])
62     if(len(filteredLst1) <= len(filteredLst2)):
63         increment = 1/len(filteredLst1)
64         similarity = increment*len(filteredLst1.intersection(filteredLst2))
65     else:
66         increment = 1/len(filteredLst2)
67         similarity = increment*len(filteredLst2.intersection(filteredLst1))
68
69     return similarity >= sT
70

```

```

71 X = []
72 y = []
73 #label each combination of scans
74 for i in range(len(scans)):
75     for j in range(len(scans[i])):
76         for k in range(len(scans)):
77             label = i==k
78             for m in range(len(scans[k])):
79                 X.append([scans[i][j],scans[k][m]])
80             y.append(label)
81
82 #param k input values for 2 parameters to be trained
83 #return the objective function to be minimised. Can be modified.
84 def f(k):
85     fP,sT = k
86
87     preds = []
88
89     for x in X:
90         preds.append(matcher(fP,sT,x[0],x[1]))
91
92     p = np.array(preds)
93
94     correct = p!=y
95     incorrect = ~correct
96     fp = (incorrect) & p
97     #fn = incorrect & ~p
98     tp = correct & p
99     #tn = correct & ~p
100
101    return fp.sum()
102
103
104 varbound=np.array([[0,1],[0,1]])
105
106 model=ga(function=f,dimension=2,variable_type='real',variable_boundaries=varbound)
107
108 model.run()
109
110 #@param objectiveFunction the objective function in string
111 #@return the set of parameter values for the objectiveFunction
112 def getParametersOf(objectiveFunction):
113     if(objectiveFunction == "fp-tp"):
114         return [0.92116652, 0.012094]
115     elif(objectiveFunction == "fp"):
116         return [0.84022877, 0.97232887]

```

```

117     elif(objectiveFunction == "-tp"):
118         return [0.94605785, 0.01525309]
119     else:
120         return [1,1]
121
122 fP,sT = getParametersOf("fp")
123
124 #Construct the confusion matrix for the simplified WiFi fingerprinting model with fP, sT
125 preds = []
126
127 for x in X:
128     preds.append(matcher(fP,sT,x[0],x[1]))
129
130 p = np.array(preds)
131
132 correct = p==y
133 incorrect = ~correct
134 fp = incorrect & p
135 fn = incorrect & ~p
136 tp = correct & p
137 tn = correct & ~p
138
139
140 print(tp.sum(),fp.sum())
141 print(fn.sum(),tn.sum())

```

B.2.2 Other Models Test

```

1 import pandas as pd
2 import os
3 import random
4 import numpy as np
5 from sklearn.tree import DecisionTreeClassifier
6
7 d = {}
8 #@param fname data of each room from the .txt files in this folder
9 #@return a list of scans of the room grouped by timestamps
10 def read_data(fname):
11     samples = []
12
13     with open(fname) as f:
14
15         while True:
16             line = f.readline()

```

```

17
18     if line == "":
19         break
20
21     line = line.split(" ")
22
23     rssi = int(line[-3])
24     mac = (line[-5])
25     ts = (line[1]+" "+line[2])
26     #Since decision tree classifier does not work with String,
27     #a quick conversion from String to numbers is used
28     mac_h = hash(mac)
29     d[mac_h] = mac
30
31     samples.append((ts,mac_h,rssi))
32
33 frame = pd.DataFrame(samples,columns=["ts","id","dbm"])
34 frame["ts"] = pd.to_datetime(frame["ts"])
35
36 groupidx = (frame["ts"].diff().dt.seconds > 1).cumsum()
37
38 frames = []
39
40 for i in groupidx.unique():
41     temp = frame[groupidx == i]
42     temp = temp.groupby("id",as_index=False).mean().sort_values(by=["dbm"])
43
44 frames.append(temp.to_numpy())
45
46 return frames
47
48 #Concadenate scans from all rooms together as a list
49 scans = [read_data(f) for f in os.listdir() if f[-4:]==".txt"]
50
51 #@return a random integer between 1 and 0
52 def randomBool():
53     return bool(random.randint(0, 1))
54
55 X1 = []
56 y1 = []
57 #label each combination of scans
58 for i in range(len(scans)):
59     for j in range(len(scans[i])):
60         for k in range(len(scans)):
61             label = i==k
62             for m in range(len(scans[k])):

```

```

63             X1.append([scans[i][j],scans[k][m]])
64             y1.append(label)
65
66 #number of runs to construct confusion matrices for the random model. Can be modified.
67 runs = 10000
68 tp_lst = []
69 fp_lst = []
70 tn_lst = []
71 fn_lst = []
72 for a in range(runs):
73     p = np.array([randomBool() for element in X1])
74     correct = p==y1
75     incorrect = ~correct
76     fp = incorrect & p
77     fn = incorrect & ~p
78     tp = correct & p
79     tn = correct & ~p
80     tp_lst.append(tp.sum())
81     fp_lst.append(fp.sum())
82     tn_lst.append(tn.sum())
83     fn_lst.append(fn.sum())
84
85 #Calculate statistical values from runs. Can be modified.
86 #mean: np.mean(fn_lst)
87 #max: np.max(fn_lst)
88 #min: np.min(fn_lst)
89 #standard deviation: np.std(fn_lst)
90 np.std(fn_lst)
91
92 X2 = []
93 y2 = []
94 #label each combination of "scan A, scan B, scan A.length, scan B.length"
95 for i in range(len(scans)):
96     for j in range(len(scans[i])):
97         for k in range(len(scans)):
98             label = i==k
99             for m in range(len(scans[k])):
100                 #The first n signals taken from each scan
101                 n=3
102                 X2.append(
103                     np.concatenate([
104                         scans[i][j][:n],
105                         scans[k][m][:n]
106                     ]).flatten().tolist() + [
107                         len(scans[i][j]),
108                         len(scans[k][m])

```

```
109         ])
110         y2.append(label)
111
112     #initialise a decision tree classifier
113     clf = DecisionTreeClassifier()
114
115     #train the tree
116     clf = clf.fit(X2,y2)
117
118     #Confusion Matrix for Decision Tree Classifier
119     p = clf.predict(X2)
120     correct = p==y2
121     incorrect = ~correct
122     fp = incorrect & p
123     fn = incorrect & ~p
124     tp = correct & p
125     tn = correct & ~p
126
127     print(tp.sum(),fp.sum())
128     print(fn.sum(),tn.sum())
```

Appendix C

Raw Test Data

C.1 WiFi Matching Algorithm Runtime on Samsung Device

Run	Runtime_match/s	Runtime_no_match/s
1	0.349309	0.799839
2	0.410966	0.351245
3	0.305067	0.300564
4	0.28998	0.250434
5	0.42307	0.266349
6	0.42542	0.267573
7	0.311347	0.306623
8	0.457374	0.431921
9	0.354518	0.319983
10	0.353083	0.179582
11	0.376056	0.33284
12	0.342594	0.345935
13	0.359103	0.358057
14	0.374003	0.356066
15	0.348149	0.364182
16	0.423957	0.373202
17	0.392434	0.505022

18	0.262663	0.243701
19	0.447563	0.366395
20	0.300132	0.436637
21	0.314445	0.435546
22	0.309553	0.449502
23	0.47575	0.457705
24	0.45522	0.447341
25	0.359345	0.548488
26	0.477075	0.486443
27	0.488338	0.452984
28	0.492001	0.454912
29	0.486284	0.484854
30	0.501764	0.514987
31	0.503519	0.392322
32	0.52749	0.534186
33	0.543465	0.551682
34	0.534714	0.53747
35	0.555441	0.569674
36	0.554958	0.565241
37	0.557244	0.56501
38	0.568475	0.57218
39	0.61111	0.583493
40	0.614705	0.588973
41	0.476563	0.594093
42	0.474041	0.651294
43	0.485368	0.657978
44	0.632772	0.671135
45	0.648869	0.516084
46	0.64914	0.681435
47	0.627803	0.672022
48	0.543422	0.656832
49	0.647645	0.687783

50	0.545194	0.721205
51	0.53054	0.724272
52	0.699844	0.722771
53	0.678309	0.736521
54	0.568345	0.620791
55	0.565188	0.747957
56	0.570845	0.636532
57	0.580307	0.638299
58	0.719792	0.760355
59	0.745382	0.634501
60	0.760047	0.795145
61	0.626194	0.77414
62	0.724433	0.792684
63	0.74662	0.811456
64	0.777886	0.809038
65	0.675587	0.836901
66	0.778921	0.798596
67	0.763776	0.734177
68	0.782741	0.747258
69	0.697397	0.816031
70	0.754965	0.886376
71	0.824828	0.722918
72	0.703343	0.868595
73	0.816968	0.861497
74	0.842946	0.906376
75	1.021915	0.90253
76	0.82724	0.941509
77	0.878377	0.91681
78	0.881677	0.94213
79	0.86847	0.947514
80	0.888188	0.906272
81	0.894339	1.117042

82	0.912055	0.998264
83	0.890494	1.05546
84	0.934606	0.99651
85	0.917522	0.962599
86	0.908533	1.018401
87	0.921988	1.031411
88	0.923209	1.035159
89	0.934723	1.095771
90	0.953715	0.997112
91	0.963287	1.060635
92	0.968984	1.103965
93	0.925461	1.110798
94	1.140685	1.106591
95	0.976881	1.044041
96	1.003794	1.108681
97	1.010039	1.156453
98	0.976252	1.125154
99	1.004786	1.132516
100	1.029261	1.284773

C.2 WiFi Scans in My Room

Time: 2021-02-28 22:06:07.452792 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:06:07.469937 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:06:07.470030 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:06:07.470066 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:07.470093 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:07.470114 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:07.470136 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:07.470158 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:06:07.470181 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:06:07.470201 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:06:07.470225 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:06:07.470248 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:06:07.470270 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:06:07.470291 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -72 Frequency: 5200

Time: 2021-02-28 22:06:07.470313 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:06:07.470334 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:06:07.470365 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:01 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:06:07.470388 SSID: Glide_2.4 BSSID: 00:42:5a:0b:ef:08 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:06:07.470410 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:06:07.470431 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:06:07.470453 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:06:07.470475 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:06:07.470497 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:06:07.470521 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -93 Frequency: 5280
Time: 2021-02-28 22:06:17.490362 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -54 Frequency: 5660
Time: 2021-02-28 22:06:17.490520 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -54 Frequency: 5660
Time: 2021-02-28 22:06:17.490565 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -54 Frequency: 5660
Time: 2021-02-28 22:06:17.490601 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -54 Frequency: 5660
Time: 2021-02-28 22:06:17.490634 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:06:17.490666 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:06:17.490702 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:06:17.490739 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:06:17.490775 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:06:17.490810 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:06:17.490842 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:06:17.490878 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -77 Frequency: 5240
Time: 2021-02-28 22:06:17.490915 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -77 Frequency: 5240
Time: 2021-02-28 22:06:17.490951 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:06:17.490987 SSID: Glide_2.4 BSSID: 00:42:5a:0b:ef:08 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:06:17.491019 SSID: BTHub6-HP28 BSSID: d8:7d:7f:f7:27:62 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:06:17.491050 SSID: BTWi-fi BSSID: da:7d:7f:f7:29:63 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:06:17.491082 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:17.491113 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:17.491146 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:06:17.491178 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:06:17.491209 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:06:17.491240 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:06:17.491271 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:06:17.491302 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:06:17.491333 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:06:17.491364 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:06:17.491395 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:06:17.491430 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:06:17.491466 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:06:17.491500 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:06:17.491564 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:06:17.491593 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:06:23.710927 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -60 Frequency: 5660
Time: 2021-02-28 22:06:23.711078 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -60 Frequency: 5660
Time: 2021-02-28 22:06:23.711125 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -60 Frequency: 5660

Time: 2021-02-28 22:06:23.711168 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -60 Frequency: 5660
Time: 2021-02-28 22:06:23.711205 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:06:23.711242 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:06:23.711279 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:06:23.711316 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:06:23.711356 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -66 Frequency: 2462
Time: 2021-02-28 22:06:23.711394 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -66 Frequency: 2462
Time: 2021-02-28 22:06:23.711432 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -66 Frequency: 2462
Time: 2021-02-28 22:06:23.711471 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -66 Frequency: 2462
Time: 2021-02-28 22:06:23.711512 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -69 Frequency: 5200
Time: 2021-02-28 22:06:23.711549 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -69 Frequency: 5200
Time: 2021-02-28 22:06:23.711585 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -69 Frequency: 5200
Time: 2021-02-28 22:06:23.711619 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -69 Frequency: 5200
Time: 2021-02-28 22:06:23.711752 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:06:23.711794 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:06:23.711830 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:06:23.711867 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:06:23.711903 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:06:23.711943 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:06:23.711982 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:06:23.712021 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:06:23.712059 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:06:23.712100 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:06:23.712138 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:06:23.712176 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:06:23.712217 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:23.712253 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:23.712320 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:23.712363 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:23.712401 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:06:23.712437 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:06:23.712474 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:06:23.712513 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:06:23.712550 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:06:23.712586 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:06:23.712623 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:06:30.856545 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -59 Frequency: 5200
Time: 2021-02-28 22:06:30.856626 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -59 Frequency: 5200
Time: 2021-02-28 22:06:30.856656 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -59 Frequency: 5200
Time: 2021-02-28 22:06:30.856716 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -59 Frequency: 5200
Time: 2021-02-28 22:06:30.856747 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:06:30.856793 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:06:30.856817 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:06:30.856837 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:06:30.856859 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:06:30.856881 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -70 Frequency: 2462

Time: 2021-02-28 22:06:30.856903 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -79 Frequency: 5240
Time: 2021-02-28 22:06:30.856924 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -79 Frequency: 5240
Time: 2021-02-28 22:06:30.856947 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -79 Frequency: 5240
Time: 2021-02-28 22:06:30.856989 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -79 Frequency: 5240
Time: 2021-02-28 22:06:30.857026 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:30.857048 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:06:30.857068 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:06:30.857088 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:30.857110 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:30.857131 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:30.857148 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:06:30.857200 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:06:30.857263 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:30.857285 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:30.857323 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:30.857343 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:30.857373 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:06:30.857393 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:06:30.857416 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:06:30.857454 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:06:30.857479 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:06:30.857544 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:06:30.857611 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:06:30.857646 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:06:30.857668 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:06:30.857689 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:06:30.857715 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:06:30.857753 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:06:30.858354 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:06:30.858405 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:06:30.858432 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:06:33.908566 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:06:33.908684 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:06:33.908727 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:06:33.908779 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:06:33.908817 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:06:33.908853 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:06:33.908891 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:06:33.908927 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:06:33.908964 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -70 Frequency: 2412
Time: 2021-02-28 22:06:33.909001 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -71 Frequency: 2412
Time: 2021-02-28 22:06:33.909039 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -71 Frequency: 2412
Time: 2021-02-28 22:06:33.909075 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -71 Frequency: 2412
Time: 2021-02-28 22:06:33.909110 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -73 Frequency: 2462
Time: 2021-02-28 22:06:33.909146 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -73 Frequency: 2462
Time: 2021-02-28 22:06:33.909182 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -73 Frequency: 2462

Time: 2021-02-28 22:06:33.909218 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -74 Frequency: 2462
Time: 2021-02-28 22:06:33.909254 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:33.909290 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:33.909324 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:33.909361 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:06:33.909396 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:06:33.909433 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:06:33.909467 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:06:33.909502 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:06:33.909537 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:06:33.909573 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:06:33.909608 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:06:33.909645 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:06:33.909680 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:06:33.909717 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:06:33.909753 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:06:33.909788 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:06:33.909824 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:06:33.909859 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:06:33.909897 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:06:33.909939 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:06:33.909984 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:06:33.910058 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:33.910099 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:33.910145 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:33.910183 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:33.910219 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:06:33.910255 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:06:33.910320 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:06:33.910359 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:06:33.910395 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:06:33.910434 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:06:33.910470 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:06:33.910507 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:06:33.910544 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:33.910582 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:33.910618 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:33.910656 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:06:33.910844 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:33.910880 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:33.910916 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:06:33.910952 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:06:33.910998 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:06:33.911033 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:e0 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:06:33.911069 SSID: Glide_2.4 BSSID: 40:01:7a:e5:b3:e8 RSSI: -90 Frequency: 2412
Time: 2021-02-28 22:06:33.911105 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -90 Frequency: 5240

Time: 2021-02-28 22:06:33.911142 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:06:33.911179 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:06:33.911215 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:06:33.911251 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:06:33.911287 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:06:33.911324 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:06:33.911359 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:06:33.911395 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:06:33.911431 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:06:39.895360 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:06:39.895465 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:06:39.895501 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:06:39.895531 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:06:39.895556 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -70 Frequency: 2412
Time: 2021-02-28 22:06:39.895580 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:06:39.895603 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:06:39.895676 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:06:39.895712 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:06:39.895739 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:06:39.895765 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:06:39.895791 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -74 Frequency: 5200
Time: 2021-02-28 22:06:39.895818 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:06:39.895845 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:06:39.895871 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:06:39.895894 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:06:39.895916 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:06:39.895943 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:06:39.895966 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:06:39.895989 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:06:39.896011 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:06:39.896035 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:06:39.896063 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:06:39.896090 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:06:39.896119 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:06:39.896142 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:06:39.896164 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:06:39.896187 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:06:39.896209 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:06:39.896232 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:06:39.896256 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:06:39.896280 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:39.896336 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:39.896364 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:39.896390 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:06:39.896419 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:06:39.896445 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -85 Frequency: 5560

Time: 2021-02-28 22:06:39.896472 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:06:39.896505 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:06:39.896537 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:06:39.896565 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:39.896594 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:39.896622 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:39.896651 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:06:39.896679 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:06:39.896707 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:06:39.896733 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:06:39.896763 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:06:39.896792 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:06:39.896821 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:06:39.896847 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:06:39.896874 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:06:39.896902 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:06:39.896931 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:06:39.896965 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:06:39.896994 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:06:39.897023 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:06:39.897052 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:06:39.897081 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:06:39.897108 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:06:39.897134 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:06:39.897161 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:06:39.897188 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:06:39.897214 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:06:39.897242 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:06:39.897269 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:06:39.897297 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:06:43.623515 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:43.623682 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:43.623729 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:43.623768 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:06:43.623806 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:06:43.623842 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:06:43.623879 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:06:43.623916 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:06:43.623952 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -71 Frequency: 2412
Time: 2021-02-28 22:06:43.623989 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -77 Frequency: 2437
Time: 2021-02-28 22:06:43.624026 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:06:43.624064 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:06:43.624100 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:06:43.624136 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:06:43.624172 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:43.624209 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -80 Frequency: 2437

Time: 2021-02-28 22:06:43.624250 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:43.624287 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:43.624327 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:06:43.624365 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:06:43.624404 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:06:43.624441 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:06:43.624493 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:06:43.624532 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:06:43.624607 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:06:43.624679 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:06:43.624745 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:06:43.624786 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:06:43.624826 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:06:43.624866 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:c1 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:06:43.624907 SSID: BSSID: a0:23:9f:8d:23:c5 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:06:43.624946 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:43.624988 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:43.625028 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:43.625067 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:43.625109 SSID: Glide_2.4 BSSID: 40:01:7a:e5:b3:e8 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:06:43.625150 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:06:43.625191 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:21 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:06:43.625232 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:06:43.625272 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:06:43.625310 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:06:43.625349 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:06:43.625389 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:06:43.625429 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:20 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:06:43.625469 SSID: BSSID: 18:80:90:f2:c0:26 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:06:43.625509 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:41 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:06:43.625548 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:43.625588 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:43.625628 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:06:43.625667 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:43.625707 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:43.625746 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:43.625787 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:06:43.625827 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:06:43.625867 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:06:43.625906 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:06:43.625946 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:06:43.625984 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:06:43.626024 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:06:43.626063 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:06:43.626103 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:06:43.626142 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280

Time: 2021-02-28 22:06:43.626182 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:06:43.626221 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:06:43.626260 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:06:43.626299 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:06:43.626339 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:06:43.626379 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:06:43.626418 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:06:43.626457 SSID: Glide_2.4 BSSID: 40:ce:24:e0:c5:08 RSSI: -91 Frequency: 2437
Time: 2021-02-28 22:06:43.626497 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:01 RSSI: -91 Frequency: 2437
Time: 2021-02-28 22:06:43.626537 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:06:53.629253 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:06:53.629388 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -64 Frequency: 5660
Time: 2021-02-28 22:06:53.629426 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -64 Frequency: 5660
Time: 2021-02-28 22:06:53.629457 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -64 Frequency: 5660
Time: 2021-02-28 22:06:53.629487 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:06:53.629518 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:06:53.629548 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:06:53.629579 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:06:53.629607 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:06:53.629637 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:06:53.629667 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -77 Frequency: 5240
Time: 2021-02-28 22:06:53.629696 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -77 Frequency: 5240
Time: 2021-02-28 22:06:53.629726 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:06:53.629756 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:06:53.629784 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:06:53.629815 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:06:53.629846 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:53.629875 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:06:53.629905 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:06:53.629934 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:06:53.629964 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:06:53.629995 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:53.630025 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:53.630054 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:53.630084 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:06:53.630137 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:06:53.630168 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:53.630197 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:06:53.630225 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:06:53.630254 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:06:53.630345 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:06:53.630382 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:06:53.630419 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:06:53.630460 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:06:53.630534 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:06:53.630576 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -89 Frequency: 5220

```
Time: 2021-02-28 22:06:53.630610 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:06:53.630644 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:06:53.630676 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:06:53.630711 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:06:53.630744 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:06:53.630778 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:06:53.630811 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:06:53.630844 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -90 Frequency: 2462
```

C.3 WiFi Scans in the Kitchen

```
Time: 2021-02-28 22:16:13.322140 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:16:13.337646 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:16:13.337742 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:16:13.337769 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:16:13.337794 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:16:13.337816 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:16:13.337838 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:16:13.337860 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -66 Frequency: 2412
Time: 2021-02-28 22:16:13.337882 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -66 Frequency: 2412
Time: 2021-02-28 22:16:13.337904 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:16:13.337925 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:16:13.337947 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:16:13.337969 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:16:13.337991 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:16:13.338013 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:16:13.338045 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:16:13.338067 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:16:13.338090 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:16:13.338112 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:16:13.338132 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:16:13.338153 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:16:13.338175 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:16:13.338196 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:16:13.338218 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:16:13.338239 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:16:13.338262 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:16:16.267225 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:16.267430 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:16.267480 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:16.267522 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:16.267558 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -44 Frequency: 2412
Time: 2021-02-28 22:16:16.267593 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -44 Frequency: 2412
Time: 2021-02-28 22:16:16.267685 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -44 Frequency: 2412
```

Time: 2021-02-28 22:16:16.267729 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -44 Frequency: 2412
Time: 2021-02-28 22:16:16.267769 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -72 Frequency: 2437
Time: 2021-02-28 22:16:16.267805 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:16:16.267873 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:16:16.267916 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:16:16.267958 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:16:16.267997 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:16:16.268036 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:16:16.268077 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:16:16.268116 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:16:16.268157 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:16:16.268198 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:16:16.268233 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:16:16.268268 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:16:16.268304 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:16:16.268346 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:16:16.268389 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:16:16.268427 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:16:16.268462 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:16:16.268499 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:16:16.268535 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:16:16.268572 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:16:16.268609 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:16:16.268647 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:16:16.268684 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:16:16.268720 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:16:16.268757 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:16:16.268827 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:16:16.268866 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:16.268909 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:16.268952 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:16.268996 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:16:16.269035 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:16:16.269071 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:16:16.269107 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:16:16.269143 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:16:16.269180 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:16:16.269217 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:16:16.269254 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:16:16.269291 SSID: BTWi-fi BSSID: 7a:fe:3b:3d:1d:68 RSSI: -94 Frequency: 2412
Time: 2021-02-28 22:16:19.018957 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -42 Frequency: 2412
Time: 2021-02-28 22:16:19.019086 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -42 Frequency: 5220
Time: 2021-02-28 22:16:19.019127 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -42 Frequency: 5220
Time: 2021-02-28 22:16:19.019165 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -42 Frequency: 5220
Time: 2021-02-28 22:16:19.019202 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -42 Frequency: 5220
Time: 2021-02-28 22:16:19.019243 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -43 Frequency: 2412

Time: 2021-02-28 22:16:19.019283 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -43 Frequency: 2412
Time: 2021-02-28 22:16:19.019321 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -44 Frequency: 2412
Time: 2021-02-28 22:16:19.019359 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:16:19.019397 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:16:19.019435 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:16:19.019471 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:16:19.019504 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:19.019536 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:19.019569 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:19.019601 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:16:19.019690 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:16:19.019748 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:16:19.019796 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:16:19.019838 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:16:19.019886 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:16:19.019932 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:16:19.019974 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:16:19.020020 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:16:19.020087 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:19.020128 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:19.020171 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:19.020216 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:19.020273 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:16:19.020327 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:16:19.020377 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:16:19.020425 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:16:19.020463 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:16:19.020497 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:16:19.020529 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:16:19.020562 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:16:19.020600 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:16:19.020639 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:16:19.020673 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:16:19.020707 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:16:22.145537 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -44 Frequency: 5220
Time: 2021-02-28 22:16:22.145646 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -44 Frequency: 5220
Time: 2021-02-28 22:16:22.145678 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -44 Frequency: 5220
Time: 2021-02-28 22:16:22.145703 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -46 Frequency: 5220
Time: 2021-02-28 22:16:22.145726 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -52 Frequency: 2412
Time: 2021-02-28 22:16:22.145751 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:16:22.145936 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:22.145974 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:22.146035 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:22.146098 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:16:22.146129 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:16:22.146155 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -81 Frequency: 5560

Time: 2021-02-28 22:16:22.146177 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:16:22.146235 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:16:22.146264 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:16:22.146291 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:16:22.146314 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:16:22.146343 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:16:22.146366 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:16:22.146423 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:16:22.146453 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:16:22.146513 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:16:22.146579 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:16:22.146609 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:16:22.146636 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:16:22.146692 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:16:22.146719 SSID: BSSID: 7a:fe:3b:3d:1d:6b RSSI: -92 Frequency: 2412
Time: 2021-02-28 22:16:24.815368 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -48 Frequency: 5220
Time: 2021-02-28 22:16:24.815528 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -48 Frequency: 5220
Time: 2021-02-28 22:16:24.815581 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -48 Frequency: 5220
Time: 2021-02-28 22:16:24.815705 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -50 Frequency: 2412
Time: 2021-02-28 22:16:24.815759 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -50 Frequency: 5220
Time: 2021-02-28 22:16:24.815799 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:16:24.815838 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:16:24.815876 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:16:24.815915 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:16:24.815955 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:16:24.815999 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:16:24.816043 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:16:24.816082 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:16:24.816119 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:16:24.816156 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:16:24.816194 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:16:24.816234 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:16:24.816273 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:16:24.816310 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:16:24.816347 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:16:24.816385 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:16:24.816423 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:16:24.816460 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:16:24.816497 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:16:24.816535 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:16:27.594627 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -48 Frequency: 5220
Time: 2021-02-28 22:16:27.594761 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -48 Frequency: 5220
Time: 2021-02-28 22:16:27.594810 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -48 Frequency: 5220
Time: 2021-02-28 22:16:27.594847 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -50 Frequency: 2412
Time: 2021-02-28 22:16:27.594881 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -50 Frequency: 5220
Time: 2021-02-28 22:16:27.594921 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -77 Frequency: 5200

Time: 2021-02-28 22:16:27.594959 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:16:27.594995 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:16:27.595030 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:16:27.595065 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:16:27.595100 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:16:27.595134 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:16:27.595169 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:16:27.595206 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:16:27.595241 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:16:27.595275 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:16:27.595309 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:16:27.595345 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:16:27.595381 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:16:27.595415 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:16:27.595451 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:16:27.595502 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:16:27.595543 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:16:27.595614 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:16:27.595713 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:16:30.487620 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -43 Frequency: 5220
Time: 2021-02-28 22:16:30.487789 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -45 Frequency: 5220
Time: 2021-02-28 22:16:30.487826 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -45 Frequency: 5220
Time: 2021-02-28 22:16:30.487862 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -45 Frequency: 5220
Time: 2021-02-28 22:16:30.487898 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -48 Frequency: 2412
Time: 2021-02-28 22:16:30.487932 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -49 Frequency: 2412
Time: 2021-02-28 22:16:30.487985 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -49 Frequency: 2412
Time: 2021-02-28 22:16:30.488018 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -49 Frequency: 2412
Time: 2021-02-28 22:16:30.488048 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:16:30.488084 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:16:30.488119 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:16:30.488149 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:16:30.488177 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:16:30.488206 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:16:30.488238 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:30.488267 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:30.488294 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:16:30.488323 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:16:30.488351 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:16:30.488380 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:16:30.488409 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:16:30.488438 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:16:30.488466 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:16:30.488495 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:16:30.488525 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:16:30.488554 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:16:30.488583 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -90 Frequency: 5660

Time: 2021-02-28 22:16:30.488614 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:16:30.488642 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:16:30.488670 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:16:30.488700 SSID: BTWi-fi BSSID: 7a:fe:3b:3d:1d:68 RSSI: -95 Frequency: 2412
Time: 2021-02-28 22:16:35.175012 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -40 Frequency: 5220
Time: 2021-02-28 22:16:35.175150 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -40 Frequency: 5220
Time: 2021-02-28 22:16:35.175202 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -40 Frequency: 5220
Time: 2021-02-28 22:16:35.175239 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -43 Frequency: 2412
Time: 2021-02-28 22:16:35.175285 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -43 Frequency: 5220
Time: 2021-02-28 22:16:35.175324 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -44 Frequency: 2412
Time: 2021-02-28 22:16:35.175373 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -44 Frequency: 2412
Time: 2021-02-28 22:16:35.175415 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -44 Frequency: 2412
Time: 2021-02-28 22:16:35.175449 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -74 Frequency: 5200
Time: 2021-02-28 22:16:35.175491 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -74 Frequency: 5200
Time: 2021-02-28 22:16:35.175533 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:16:35.175608 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:16:35.175727 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:16:35.175792 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -76 Frequency: 2437
Time: 2021-02-28 22:16:35.175833 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -76 Frequency: 2437
Time: 2021-02-28 22:16:35.175878 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:16:35.175914 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:16:35.175964 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:16:35.176006 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:16:35.176051 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:16:35.176086 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:16:35.176123 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:16:35.176157 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:16:35.176201 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:16:35.176236 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:16:35.176286 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:16:35.176327 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:16:35.176363 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:16:35.176407 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:16:35.176447 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:16:35.176487 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:16:35.176526 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:16:35.176569 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:16:35.176607 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:16:35.176645 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:16:38.561289 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:38.561407 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:38.561448 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:38.561484 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -41 Frequency: 5220
Time: 2021-02-28 22:16:38.561519 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -42 Frequency: 2412
Time: 2021-02-28 22:16:38.561549 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -76 Frequency: 2437
Time: 2021-02-28 22:16:38.561579 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -76 Frequency: 2462

Time: 2021-02-28 22:16:38.561616 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:16:38.561651 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:16:38.561682 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:16:38.561717 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:16:38.561753 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:16:38.561784 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:16:38.561819 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:16:38.561850 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:16:38.561880 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:16:38.561909 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:16:38.561940 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:38.561970 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:38.562001 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:16:38.562037 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:16:38.562073 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:16:38.562102 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:16:38.562132 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -82 Frequency: 5280
Time: 2021-02-28 22:16:38.562162 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -82 Frequency: 5280
Time: 2021-02-28 22:16:38.562192 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -82 Frequency: 5280
Time: 2021-02-28 22:16:38.562222 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -82 Frequency: 5280
Time: 2021-02-28 22:16:38.562253 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:16:38.562281 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:16:38.562311 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:16:38.562340 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:16:38.562371 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:16:38.562401 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:16:38.562431 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:16:38.562461 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:16:38.562491 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:16:38.562521 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:16:38.562550 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -91 Frequency: 5200

C.4 WiFi Scans in the Hallway

Time: 2021-02-28 22:10:31.053393 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -62 Frequency: 2412
Time: 2021-02-28 22:10:31.069906 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -62 Frequency: 2412
Time: 2021-02-28 22:10:31.069982 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -62 Frequency: 2412
Time: 2021-02-28 22:10:31.070007 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:10:31.070029 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:10:31.070051 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:10:31.070071 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:10:31.070091 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -71 Frequency: 2462
Time: 2021-02-28 22:10:31.070112 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:10:31.070133 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -75 Frequency: 5200

Time: 2021-02-28 22:10:31.070155 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:10:31.070176 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:10:31.070200 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:10:31.070221 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:10:31.070241 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:10:31.070261 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:10:31.070282 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:10:31.070302 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:10:31.070323 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:10:36.147840 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -62 Frequency: 5200
Time: 2021-02-28 22:10:36.148012 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -62 Frequency: 5200
Time: 2021-02-28 22:10:36.148060 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -63 Frequency: 5200
Time: 2021-02-28 22:10:36.148097 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -63 Frequency: 5200
Time: 2021-02-28 22:10:36.148133 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -66 Frequency: 2412
Time: 2021-02-28 22:10:36.148166 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:10:36.148199 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:10:36.148232 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:10:36.148265 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:10:36.148299 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:10:36.148334 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:10:36.148366 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:10:36.148400 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:10:36.148432 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:10:36.148464 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:10:36.148498 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:10:36.148532 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:10:36.148567 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:10:36.148601 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:10:36.148636 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:10:36.148669 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:10:36.148702 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:10:36.148734 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:10:36.148768 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:10:36.148801 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:10:36.148834 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:10:36.148866 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:10:36.148900 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:10:36.148934 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:10:36.148966 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -77 Frequency: 5280
Time: 2021-02-28 22:10:36.149 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -77 Frequency: 5280
Time: 2021-02-28 22:10:36.149031 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -77 Frequency: 5280
Time: 2021-02-28 22:10:36.149068 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:10:36.149130 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:10:36.149166 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:10:36.149201 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:10:36.149236 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -78 Frequency: 5280

Time: 2021-02-28 22:10:36.149273 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:10:36.149310 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:10:36.149347 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:10:36.149384 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:10:36.149419 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:21 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:10:36.149455 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:20 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:10:36.149494 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:10:36.149534 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:10:36.149571 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:10:36.149607 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:e0 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:10:36.149644 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:e1 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:10:36.149683 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:10:36.149720 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:10:36.149758 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:10:36.149796 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:10:36.149833 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:36.149870 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:36.149907 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:36.149947 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:36.149984 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:36.150022 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:36.150058 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:36.150095 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:c1 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:10:36.150133 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:10:36.150170 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:10:36.150208 SSID: BSSID: a0:23:9f:8d:23:c5 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:10:36.150246 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:36.150283 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:36.150320 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:e0 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:10:36.150359 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:e1 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:10:36.150397 SSID: BSSID: 40:01:7a:e5:b3:e6 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:10:36.150434 SSID: Glide_2.4 BSSID: 40:01:7a:e5:b3:e8 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:10:36.150472 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:40 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:10:36.150510 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:10:36.150549 SSID: BSSID: 18:80:90:f2:aa:46 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:10:36.150586 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:10:36.150624 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:36.150662 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:36.150699 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:10:36.150736 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:10:36.150774 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:10:36.150811 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:10:36.150848 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:10:36.150888 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:10:36.150924 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:10:36.150962 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -86 Frequency: 5280

Time: 2021-02-28 22:10:36.151 SSID: Glide-5 BSSID: 18:80:90:ce:51:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:10:36.151036 SSID: BSSID: 18:80:90:ce:51:09 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:10:36.151074 SSID: UNITE-Staff BSSID: 18:80:90:ce:51:0e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:10:36.151113 SSID: UNITE-Corporate BSSID: 18:80:90:ce:51:0f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:10:36.151151 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:10:36.151189 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:10:36.151228 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:36.151265 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:36.151302 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:10:36.151337 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:10:36.151373 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:10:36.151409 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:10:36.151446 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:36.151483 SSID: Glide_2.4 BSSID: 70:df:2f:5f:36:67 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:10:36.151522 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:61 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:10:36.151561 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:10:36.151597 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:10:36.151690 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -90 Frequency: 2437
Time: 2021-02-28 22:10:36.151741 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:10:36.151778 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:36.151819 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:36.151857 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:10:36.151896 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:10:36.151934 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:10:36.151971 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -92 Frequency: 5500
Time: 2021-02-28 22:10:36.152009 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -92 Frequency: 5500
Time: 2021-02-28 22:10:36.152047 SSID: BSSID: 70:df:2f:5f:33:2a RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:10:36.152084 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:10:36.152122 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:10:36.152158 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -93 Frequency: 5660
Time: 2021-02-28 22:10:40.561010 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:10:40.561152 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -64 Frequency: 5220
Time: 2021-02-28 22:10:40.561210 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -64 Frequency: 5220
Time: 2021-02-28 22:10:40.561258 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -64 Frequency: 5220
Time: 2021-02-28 22:10:40.561306 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -64 Frequency: 5220
Time: 2021-02-28 22:10:40.561354 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:10:40.561401 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:10:40.561462 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:10:40.561513 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:10:40.561561 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:10:40.561622 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:10:40.561668 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:10:40.561709 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -65 Frequency: 5320
Time: 2021-02-28 22:10:40.561759 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -65 Frequency: 5320
Time: 2021-02-28 22:10:40.561801 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -65 Frequency: 5320
Time: 2021-02-28 22:10:40.561843 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -66 Frequency: 5320

Time: 2021-02-28 22:10:40.561889 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:10:40.561934 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:10:40.561977 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:10:40.562018 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:10:40.562060 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:10:40.562102 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:10:40.562144 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:10:40.562185 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:10:40.562229 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:10:40.562271 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -72 Frequency: 2437
Time: 2021-02-28 22:10:40.562313 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:10:40.562355 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:10:40.562396 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:10:40.562439 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:10:40.562481 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -72 Frequency: 5660
Time: 2021-02-28 22:10:40.562522 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -73 Frequency: 2462
Time: 2021-02-28 22:10:40.562563 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -73 Frequency: 2462
Time: 2021-02-28 22:10:40.562604 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -73 Frequency: 2462
Time: 2021-02-28 22:10:40.562647 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:10:40.562689 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:10:40.562730 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:10:40.562772 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:10:40.562813 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:e0 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:10:40.562855 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:e1 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:10:40.562896 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:10:40.562937 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:10:40.562979 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:40.563027 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:40.563069 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:40.563111 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:40.563152 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:10:40.563195 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:10:40.563238 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:10:40.563282 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:10:40.563323 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:10:40.563367 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:10:40.563411 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:10:40.563453 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:10:40.563495 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:10:40.563537 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:40.563579 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:40.563622 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:10:40.563714 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:10:40.563754 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:10:40.563795 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:10:40.563837 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -83 Frequency: 5200

Time: 2021-02-28 22:10:40.563880 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:40.563921 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:40.563963 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:10:40.564006 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:10:40.564048 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:40.564090 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:40.564132 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:10:40.564174 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:10:40.564217 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:10:40.564259 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:10:40.564302 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:40.564344 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:40.564386 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:40.564427 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:40.564470 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:40.564513 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:40.564554 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:40.564596 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:40.564638 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:40.564680 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:40.564723 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:40.564766 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:10:40.564808 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:10:40.564850 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:10:40.564892 SSID: Glide-5 BSSID: 18:80:90:ce:51:08 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:10:40.564934 SSID: UNITE-Staff BSSID: 18:80:90:ce:51:0e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:10:40.564976 SSID: UNITE-Corporate BSSID: 18:80:90:ce:51:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:10:40.565019 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -88 Frequency: 5560
Time: 2021-02-28 22:10:40.565061 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:10:40.565103 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:10:40.565146 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:40.565188 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:40.565230 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:40.565273 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:40.565372 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:61 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:10:40.565415 SSID: BSSID: 18:80:90:ce:51:09 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:10:40.565460 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:10:40.565503 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:10:40.565544 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:10:40.565588 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:10:40.565632 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:60 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:10:40.565694 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:10:40.565740 SSID: Glide_2.4 BSSID: 70:df:2f:5f:36:67 RSSI: -90 Frequency: 2437
Time: 2021-02-28 22:10:40.565785 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:10:40.565827 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:10:40.565870 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 2437

Time: 2021-02-28 22:10:40.565913 SSID: Glide-5 BSSID: 70:df:2f:5f:36:69 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:10:40.565971 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:10:40.566439 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:10:40.566612 SSID: BSSID: 70:df:2f:5f:36:6a RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:10:40.566651 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:6e RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:10:40.5666585 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:6f RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:10:40.5666618 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:10:40.5666652 SSID: UNITE-Staff BSSID: 70:df:2f:5f:33:2e RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:10:40.5666686 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -93 Frequency: 5220
Time: 2021-02-28 22:10:44.586001 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -54 Frequency: 5200
Time: 2021-02-28 22:10:44.586117 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -54 Frequency: 5200
Time: 2021-02-28 22:10:44.586151 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -54 Frequency: 5200
Time: 2021-02-28 22:10:44.586179 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -57 Frequency: 5200
Time: 2021-02-28 22:10:44.586206 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -58 Frequency: 5220
Time: 2021-02-28 22:10:44.586231 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -58 Frequency: 5220
Time: 2021-02-28 22:10:44.586257 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -58 Frequency: 5220
Time: 2021-02-28 22:10:44.586283 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -58 Frequency: 5220
Time: 2021-02-28 22:10:44.586309 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:10:44.586335 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:10:44.586361 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:10:44.586388 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:10:44.586415 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:10:44.586442 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:10:44.586469 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -63 Frequency: 2462
Time: 2021-02-28 22:10:44.586495 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:10:44.586522 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -64 Frequency: 2437
Time: 2021-02-28 22:10:44.586549 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -67 Frequency: 5280
Time: 2021-02-28 22:10:44.586576 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -67 Frequency: 5280
Time: 2021-02-28 22:10:44.586602 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -67 Frequency: 5280
Time: 2021-02-28 22:10:44.586629 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -67 Frequency: 5280
Time: 2021-02-28 22:10:44.586655 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -68 Frequency: 5320
Time: 2021-02-28 22:10:44.586682 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -68 Frequency: 5320
Time: 2021-02-28 22:10:44.586708 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -68 Frequency: 5320
Time: 2021-02-28 22:10:44.586735 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -68 Frequency: 5320
Time: 2021-02-28 22:10:44.586764 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:10:44.586789 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:e0 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:10:44.586815 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:10:44.586841 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:10:44.586868 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:10:44.586895 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:10:44.586921 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:10:44.586947 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:10:44.586973 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:10:44.586999 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:10:44.587024 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:10:44.587050 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -77 Frequency: 2412

Time: 2021-02-28 22:10:44.587077 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:10:44.587103 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:10:44.587129 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:10:44.587155 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:10:44.587181 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:e1 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:10:44.587208 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -79 Frequency: 5500
Time: 2021-02-28 22:10:44.587235 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -79 Frequency: 5560
Time: 2021-02-28 22:10:44.587261 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:41 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:10:44.587287 SSID: BSSID: 00:42:5a:4d:9f:46 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:10:44.587313 SSID: Glide_2.4 BSSID: 00:42:5a:4d:9f:48 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:10:44.587339 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:e0 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:10:44.587365 SSID: BSSID: 40:01:7a:e5:b3:e6 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:10:44.587392 SSID: Glide_2.4 BSSID: 40:01:7a:e5:b3:e8 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:10:44.587417 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:10:44.587443 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:10:44.587471 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:10:44.587497 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:10:44.587525 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:00 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:10:44.587552 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:01 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:10:44.587579 SSID: BSSID: 40:ce:24:e0:c5:06 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:10:44.587605 SSID: Glide_2.4 BSSID: 40:ce:24:e0:c5:08 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:10:44.587708 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:10:44.587749 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:10:44.587791 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:10:44.587831 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:10:44.587883 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:44.587913 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:44.587941 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:10:44.587971 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:10:44.588 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:10:44.588030 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:10:44.588059 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:44.588090 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:44.588121 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:10:44.588151 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:10:44.588183 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:10:44.588215 SSID: UNITE-Staff BSSID: 70:df:2f:5f:33:2e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:10:44.588246 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:10:44.588276 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:10:44.588308 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:10:44.588338 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:10:44.588368 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:10:44.588399 SSID: BSSID: 70:df:2f:5f:33:2a RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:10:44.588428 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:10:44.588458 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:10:44.588489 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -90 Frequency: 5240

Time: 2021-02-28 22:10:44.588520 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:10:44.588552 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:10:48.613912 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -51 Frequency: 2412
Time: 2021-02-28 22:10:48.614001 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -57 Frequency: 5220
Time: 2021-02-28 22:10:48.614026 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -57 Frequency: 5220
Time: 2021-02-28 22:10:48.614049 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -57 Frequency: 5220
Time: 2021-02-28 22:10:48.614067 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -58 Frequency: 5220
Time: 2021-02-28 22:10:48.614089 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -60 Frequency: 2437
Time: 2021-02-28 22:10:48.614107 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -61 Frequency: 5200
Time: 2021-02-28 22:10:48.614128 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -62 Frequency: 5200
Time: 2021-02-28 22:10:48.614146 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -62 Frequency: 5200
Time: 2021-02-28 22:10:48.614167 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -62 Frequency: 5320
Time: 2021-02-28 22:10:48.614185 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -63 Frequency: 2462
Time: 2021-02-28 22:10:48.614208 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -63 Frequency: 5320
Time: 2021-02-28 22:10:48.614227 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -63 Frequency: 5320
Time: 2021-02-28 22:10:48.614249 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -63 Frequency: 5320
Time: 2021-02-28 22:10:48.614268 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:10:48.614289 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:10:48.614307 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:10:48.614328 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:21 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:10:48.614346 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:20 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:10:48.614367 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:10:48.614391 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:10:48.614410 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:10:48.614430 SSID: BSSID: 18:80:90:f2:c0:26 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:10:48.614450 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:10:48.614470 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:10:48.614487 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:10:48.614505 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:10:48.614523 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -71 Frequency: 5660
Time: 2021-02-28 22:10:48.614543 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:10:48.614562 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:10:48.614603 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:10:48.614637 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:10:48.614659 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:10:48.614679 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:10:48.614701 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:10:48.614722 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:10:48.614744 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:10:48.614765 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:48.614789 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:48.614809 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:48.614831 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:48.614853 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:48.614912 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:48.614949 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -83 Frequency: 5660

Time: 2021-02-28 22:10:48.614977 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:48.615006 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:48.615032 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:48.615062 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:48.615087 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:10:48.615121 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:10:48.615147 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:10:48.615177 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:10:48.615202 SSID: BSSID: 70:df:2f:5f:33:2a RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:10:48.615231 SSID: UNITE-Staff BSSID: 70:df:2f:5f:33:2e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:10:48.615257 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:10:48.615288 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:10:48.615314 SSID: MKSWIFI2CE2 BSSID: be:dd:c2:9a:2c:e2 RSSI: -90 Frequency: 2412
Time: 2021-02-28 22:10:48.615346 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:10:48.615371 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:10:48.615401 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:10:48.615428 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -93 Frequency: 5320
Time: 2021-02-28 22:10:52.156909 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -47 Frequency: 5220
Time: 2021-02-28 22:10:52.156973 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -47 Frequency: 5220
Time: 2021-02-28 22:10:52.156991 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -47 Frequency: 5220
Time: 2021-02-28 22:10:52.157008 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -47 Frequency: 5220
Time: 2021-02-28 22:10:52.157026 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -51 Frequency: 2412
Time: 2021-02-28 22:10:52.157044 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:10:52.157060 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:10:52.157079 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:10:52.157096 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -64 Frequency: 2437
Time: 2021-02-28 22:10:52.157112 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -65 Frequency: 5320
Time: 2021-02-28 22:10:52.157128 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -65 Frequency: 5320
Time: 2021-02-28 22:10:52.157144 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -65 Frequency: 5320
Time: 2021-02-28 22:10:52.157160 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:10:52.157176 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:10:52.157192 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:10:52.157208 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:10:52.157224 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:10:52.157240 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:10:52.157256 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:10:52.157273 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -69 Frequency: 5280
Time: 2021-02-28 22:10:52.157290 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:10:52.157306 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -70 Frequency: 5280
Time: 2021-02-28 22:10:52.157322 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -70 Frequency: 5280
Time: 2021-02-28 22:10:52.157339 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -70 Frequency: 5280
Time: 2021-02-28 22:10:52.157355 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -70 Frequency: 5660
Time: 2021-02-28 22:10:52.157371 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:10:52.157398 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:10:52.157415 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:10:52.157431 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -78 Frequency: 5660

Time: 2021-02-28 22:10:52.157448 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:10:52.157465 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:10:52.157481 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:10:52.157499 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:10:52.157516 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:10:52.157532 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:10:52.157548 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:10:52.157564 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:10:52.157581 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:52.157597 SSID: BSSID: 70:df:2f:5f:33:2a RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:52.157613 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:52.157629 SSID: UNITE-Staff BSSID: 70:df:2f:5f:33:2e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:52.157645 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:10:52.157661 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:52.157677 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:10:52.157693 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:10:52.157710 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:10:52.157726 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:10:52.157743 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:10:52.157759 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:52.157776 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:52.157792 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:52.157808 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:52.157824 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:52.157841 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:10:52.157857 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:10:52.157873 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:10:52.157889 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:10:52.157906 SSID: Glide-5 BSSID: 18:80:90:ce:51:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:10:52.157926 SSID: BSSID: 18:80:90:ce:51:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:10:52.157942 SSID: UNITE-Staff BSSID: 18:80:90:ce:51:0e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:10:52.157959 SSID: UNITE-Corporate BSSID: 18:80:90:ce:51:0f RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:10:52.157975 SSID: Glide-5 BSSID: 70:df:2f:5f:36:69 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:10:52.157991 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:6e RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:10:52.158007 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:6f RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:10:52.158023 SSID: MKSWIFI2CE2 BSSID: be:dd:c2:9a:2c:e2 RSSI: -92 Frequency: 2412
Time: 2021-02-28 22:10:52.158040 SSID: BSSID: 70:df:2f:5f:36:6a RSSI: -93 Frequency: 5260
Time: 2021-02-28 22:10:55.461447 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:10:55.461561 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -62 Frequency: 5200
Time: 2021-02-28 22:10:55.461591 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -62 Frequency: 5200
Time: 2021-02-28 22:10:55.461616 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -62 Frequency: 5200
Time: 2021-02-28 22:10:55.461639 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -62 Frequency: 5220
Time: 2021-02-28 22:10:55.461663 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -62 Frequency: 5220
Time: 2021-02-28 22:10:55.461687 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -62 Frequency: 5220
Time: 2021-02-28 22:10:55.461709 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -62 Frequency: 2437
Time: 2021-02-28 22:10:55.461732 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -63 Frequency: 5200

Time: 2021-02-28 22:10:55.461755 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:10:55.461777 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:10:55.461800 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:10:55.461822 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:10:55.461844 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:10:55.461868 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -69 Frequency: 5280
Time: 2021-02-28 22:10:55.461891 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -69 Frequency: 5280
Time: 2021-02-28 22:10:55.461914 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -69 Frequency: 5280
Time: 2021-02-28 22:10:55.461936 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -70 Frequency: 5280
Time: 2021-02-28 22:10:55.461957 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:10:55.461980 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:10:55.462002 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:10:55.462024 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:10:55.462046 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:10:55.462068 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:10:55.462090 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:10:55.462114 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:10:55.462136 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:10:55.462157 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:10:55.462178 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:10:55.462199 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:10:55.462221 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:10:55.462242 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:10:55.462263 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:10:55.462285 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:10:55.462307 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:10:55.462327 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:10:55.462353 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:10:55.462378 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:55.462403 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:55.462428 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:55.462450 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:55.462479 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:55.462504 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:55.462526 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:55.462546 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:10:55.462569 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:10:55.462590 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:10:55.462654 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:10:55.462681 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:55.462706 SSID: BSSID: 70:df:2f:5f:33:2a RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:55.462727 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:55.462748 SSID: UNITE-Staff BSSID: 70:df:2f:5f:33:2e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:55.462768 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:55.462791 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:55.462812 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -87 Frequency: 5560

Time: 2021-02-28 22:10:55.462835 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:55.462857 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:10:55.462882 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:10:55.462908 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:10:55.462931 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:10:55.462955 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:10:55.462981 SSID: Glide-5 BSSID: 70:df:2f:5f:36:69 RSSI: -89 Frequency: 5260
Time: 2021-02-28 22:10:55.463006 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:6e RSSI: -89 Frequency: 5260
Time: 2021-02-28 22:10:55.463032 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:6f RSSI: -89 Frequency: 5260
Time: 2021-02-28 22:10:55.463057 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:10:55.463086 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:10:55.463117 SSID: BSSID: 70:df:2f:5f:36:6a RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:10:55.463151 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:10:55.463248 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:10:55.463290 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:10:55.463315 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:10:55.463340 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:10:55.463364 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:55.463394 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:55.463420 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:55.463446 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:10:55.463473 SSID: Glide-5 BSSID: 40:ce:24:e0:a9:88 RSSI: -92 Frequency: 5200
Time: 2021-02-28 22:10:55.463501 SSID: BSSID: 40:ce:24:e0:a9:89 RSSI: -93 Frequency: 5200
Time: 2021-02-28 22:10:55.463529 SSID: UNITE-Staff BSSID: 40:ce:24:e0:a9:8e RSSI: -93 Frequency: 5200
Time: 2021-02-28 22:10:58.140409 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -60 Frequency: 5200
Time: 2021-02-28 22:10:58.140536 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -61 Frequency: 5200
Time: 2021-02-28 22:10:58.140574 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -61 Frequency: 5200
Time: 2021-02-28 22:10:58.140605 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -66 Frequency: 2462
Time: 2021-02-28 22:10:58.140637 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:10:58.140668 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -68 Frequency: 5220
Time: 2021-02-28 22:10:58.140698 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -68 Frequency: 5220
Time: 2021-02-28 22:10:58.140729 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -68 Frequency: 5220
Time: 2021-02-28 22:10:58.140759 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -68 Frequency: 2437
Time: 2021-02-28 22:10:58.140789 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -68 Frequency: 5320
Time: 2021-02-28 22:10:58.140819 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -68 Frequency: 5320
Time: 2021-02-28 22:10:58.140849 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -68 Frequency: 5320
Time: 2021-02-28 22:10:58.140879 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -69 Frequency: 5220
Time: 2021-02-28 22:10:58.140908 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:10:58.140938 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -69 Frequency: 2412
Time: 2021-02-28 22:10:58.140968 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -69 Frequency: 2412
Time: 2021-02-28 22:10:58.140998 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -69 Frequency: 2412
Time: 2021-02-28 22:10:58.141029 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -71 Frequency: 2412
Time: 2021-02-28 22:10:58.141059 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -72 Frequency: 5660
Time: 2021-02-28 22:10:58.141090 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:10:58.141120 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:10:58.141149 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -75 Frequency: 5280

Time: 2021-02-28 22:10:58.141178 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:10:58.141208 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:10:58.141237 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -75 Frequency: 5560
Time: 2021-02-28 22:10:58.141282 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -75 Frequency: 5560
Time: 2021-02-28 22:10:58.141312 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -75 Frequency: 5560
Time: 2021-02-28 22:10:58.141342 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:10:58.141371 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -76 Frequency: 5560
Time: 2021-02-28 22:10:58.141400 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -77 Frequency: 5280
Time: 2021-02-28 22:10:58.141430 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:10:58.141459 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:10:58.141489 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:10:58.141518 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:10:58.141547 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:10:58.141577 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:10:58.141606 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:10:58.141645 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:58.141675 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:58.141705 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:58.141734 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:10:58.141763 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:10:58.141793 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:10:58.141822 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:10:58.141850 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:10:58.141880 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:10:58.141910 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:10:58.141939 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:58.141968 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:58.141997 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:58.142026 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:10:58.142057 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:58.142087 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:58.142117 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:10:58.142147 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:10:58.142177 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:10:58.142207 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:10:58.142242 SSID: Glide-5 BSSID: 18:80:90:ce:51:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:10:58.142272 SSID: UNITE-Corporate BSSID: 18:80:90:ce:51:0f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:10:58.142303 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:10:58.142333 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:10:58.142362 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:58.142392 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:10:58.142424 SSID: BSSID: 18:80:90:ce:51:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:10:58.142453 SSID: UNITE-Staff BSSID: 18:80:90:ce:51:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:10:58.142484 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:58.142516 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:10:58.142546 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -87 Frequency: 5660

Time: 2021-02-28 22:10:58.142576 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:10:58.142606 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:58.142636 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:58.142666 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:10:58.142696 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:10:58.142725 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:10:58.142754 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:10:58.142785 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:10:58.142815 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:10:58.142845 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:10:58.142874 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:10:58.142904 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:10:58.142934 SSID: BSSID: 70:df:2f:5f:36:6a RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:10:58.142963 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:6e RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:10:58.142993 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:6f RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:10:58.143023 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:58.143053 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:58.143082 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:10:58.143112 SSID: Glide-5 BSSID: 70:df:2f:5f:0c:49 RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:58.143141 SSID: BSSID: 70:df:2f:5f:0c:4a RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:10:58.143171 SSID: Glide-5 BSSID: 70:df:2f:5f:36:69 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:10:58.143206 SSID: UNITE-Staff BSSID: 40:ce:24:e0:a9:8e RSSI: -92 Frequency: 5200
Time: 2021-02-28 22:10:58.143239 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:10:58.143269 SSID: Glide-5 BSSID: 40:ce:24:e0:a9:88 RSSI: -93 Frequency: 5200
Time: 2021-02-28 22:11:01.825546 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:11:01.825647 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:11:01.825673 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:11:01.825696 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:11:01.825716 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -67 Frequency: 5220
Time: 2021-02-28 22:11:01.825736 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -67 Frequency: 5220
Time: 2021-02-28 22:11:01.825755 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -67 Frequency: 5220
Time: 2021-02-28 22:11:01.825774 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -69 Frequency: 2412
Time: 2021-02-28 22:11:01.825794 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -69 Frequency: 5220
Time: 2021-02-28 22:11:01.825813 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:11:01.825861 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -74 Frequency: 5280
Time: 2021-02-28 22:11:01.825891 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -74 Frequency: 5280
Time: 2021-02-28 22:11:01.825917 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -74 Frequency: 5280
Time: 2021-02-28 22:11:01.825937 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:11:01.825956 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:11:01.825978 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:11:01.825997 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:11:01.826017 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:11:01.826037 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:11:01.826057 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -77 Frequency: 5280
Time: 2021-02-28 22:11:01.826077 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:11:01.826099 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -78 Frequency: 5660

Time: 2021-02-28 22:11:01.826119 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:11:01.826139 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:11:01.826177 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:11:01.826201 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:11:01.826221 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:11:01.826240 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:11:01.826260 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:11:01.826279 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:11:01.826307 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:11:01.826329 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:11:01.826349 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:11:01.826368 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:11:01.826388 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:11:01.826412 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:11:01.826433 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:11:01.826453 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:11:01.826472 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:11:01.826492 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:11:01.826512 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:11:01.826531 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:11:01.826549 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:11:01.826569 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:11:01.826589 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:11:01.826608 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:11:01.826626 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:11:01.826646 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:11:01.826674 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:11:01.826708 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:11:01.826738 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:11:01.826762 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:11:01.826784 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:11:01.826805 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:11:01.826824 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:11:01.826844 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:11:01.826873 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:11:01.826894 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:11:01.826913 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:11:01.826937 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:11:01.827023 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:11:01.827058 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:11:01.827080 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:11:01.827101 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:11:01.827122 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:11:01.827142 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:11:01.827161 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:11:01.827180 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -88 Frequency: 5660

```
Time: 2021-02-28 22:11:01.827200 SSID: UNITE-Staff BSSID: 70:df:2f:5f:33:2e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:11:01.827219 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:11:01.827238 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:11:01.827259 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:11:01.827278 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:11:01.827401 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:11:01.827433 SSID: BSSID: 70:df:2f:5f:33:2a RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:11:01.827459 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:11:01.827481 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:11:01.827500 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:11:01.827521 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:11:01.827540 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:11:01.827560 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:11:01.827579 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:11:01.827599 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:11:01.827618 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -91 Frequency: 5220
```

C.5 WiFi Scans outside the 6th Floor Elevator

```
Time: 2021-02-28 22:20:26.715187 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:20:26.733009 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:20:26.733160 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:20:26.733196 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733226 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733257 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733285 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733313 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733352 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733385 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733424 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733461 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:20:26.733493 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:20:26.733535 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:20:26.733569 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:20:26.733598 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:20:26.733626 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:26.733655 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:26.733693 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:26.733727 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:20:26.733767 SSID: BT-3ZA2CQ BSSID: 44:fe:3b:3d:1d:6f RSSI: -90 Frequency: 2412
Time: 2021-02-28 22:20:26.733801 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:26.733830 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:26.733866 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:26.733916 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -91 Frequency: 5320
```

Time: 2021-02-28 22:20:26.733940 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:26.733965 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:26.733988 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:31.543381 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543603 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543727 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543782 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543830 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:31.543876 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:20:31.543919 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:20:31.543961 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:31.544011 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:31.544055 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:31.544095 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:31.544134 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:20:31.544175 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:20:31.544219 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:31.544264 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:31.544306 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:31.544350 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:31.544393 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:20:31.544435 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:20:31.544476 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:31.544524 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:31.544568 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:20:31.544611 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:20:31.544652 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544694 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544738 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544781 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544821 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:20:31.544861 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:20:31.544902 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:20:31.544943 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -78 Frequency: 5280
Time: 2021-02-28 22:20:31.544983 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:20:31.545024 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:20:31.545065 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:31.545105 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:31.545146 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:31.545229 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:31.545277 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -79 Frequency: 5240
Time: 2021-02-28 22:20:31.545325 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545373 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545420 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545472 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545518 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -79 Frequency: 2462

Time: 2021-02-28 22:20:31.545687 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:20:31.545754 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:20:31.545803 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:31.545856 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:31.545909 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:20:31.545961 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:20:31.546118 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:20:31.546160 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:20:31.546200 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:20:31.546240 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:20:31.546280 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:31.546330 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:31.546383 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:31.546415 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:31.546447 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:31.546479 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:31.546509 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:31.546540 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:31.546573 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:31.546646 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:31.546687 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:20:31.546727 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:20:31.546764 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:20:31.546807 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:20:31.546842 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:31.546874 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:31.546906 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:31.546942 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.546973 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.547005 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.547038 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.547107 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:31.547154 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:31.547217 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:31.547262 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:31.547322 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:20:31.547364 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:20:31.547419 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:20:31.547460 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:20:31.547498 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:20:31.547536 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:20:31.547568 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:20:31.547662 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:20:31.547713 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:31.547752 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:31.547791 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -85 Frequency: 5240

Time: 2021-02-28 22:20:31.547830 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:31.547900 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:31.547949 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:40 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:31.547987 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:01 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:20:31.548021 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548055 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548090 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548127 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548163 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548202 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548234 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548265 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548297 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:00 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:31.548330 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:31.548361 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:31.548393 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548428 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548464 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548495 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548527 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:00 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548560 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548592 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548622 SSID: Glide_2.4 BSSID: 40:ce:24:e0:ac:08 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548655 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548686 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548718 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548748 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548779 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548810 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:31.548882 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:31.548929 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:31.548995 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:31.549037 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:31.549080 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:31.549124 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:20:31.549164 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:20:31.549198 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:20:31.549231 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549266 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549303 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549334 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549366 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:31.549399 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:31.549436 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:31.549473 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549505 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -90 Frequency: 5660

Time: 2021-02-28 22:20:31.549537 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549571 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549610 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549647 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549696 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549735 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549768 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549804 SSID: Glide-5 BSSID: 00:42:5a:4c:b8:08 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:31.549837 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:20:31.549872 SSID: BSSID: 00:42:5a:4c:b8:09 RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:31.549906 SSID: UNITE-Staff BSSID: 00:42:5a:4c:b8:0e RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:31.549939 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:b8:0f RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:35.762731 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:20:35.762915 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:20:35.762974 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:20:35.763028 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:20:35.763067 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:35.763120 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:35.763158 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:20:35.763202 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:20:35.763245 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:35.763284 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:20:35.763327 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:20:35.763366 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:20:35.7633414 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:20:35.763484 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:20:35.763524 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:20:35.763563 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:20:35.763603 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763707 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763754 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763784 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763823 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:35.763856 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:35.763897 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:35.763930 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:20:35.763972 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764008 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764047 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764081 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764115 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:35.764150 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:35.764180 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:35.764213 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:20:35.764245 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:20:35.764284 SSID: BSSID: 18:80:90:c0:38:06 RSSI: -76 Frequency: 2462

Time: 2021-02-28 22:20:35.764317 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:20:35.764350 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764381 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764421 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764452 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764487 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:20:35.764515 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:35.764546 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:35.764574 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:20:35.764607 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:20:35.764639 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:35.764672 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:35.764703 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:20:35.764739 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:20:35.764772 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:20:35.764802 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:20:35.764835 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:35.764865 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:35.764900 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:20:35.764929 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:20:35.764963 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:20:35.764992 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:20:35.765025 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:20:35.765053 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:20:35.765087 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:20:35.765117 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:20:35.765153 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:20:35.765182 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:35.765215 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:20:35.765243 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:35.765275 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:35.765305 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:35.765338 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765370 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765400 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765432 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765462 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765492 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:35.765523 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:35.765556 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:20:35.765583 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:20:35.765615 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:40 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:20:35.765645 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:20:35.765677 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:20:35.765703 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:20:35.765739 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -84 Frequency: 5320

Time: 2021-02-28 22:20:35.765768 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:35.765802 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:35.765830 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:01 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:35.765869 SSID: BSSID: 18:80:90:f2:ad:06 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:35.765897 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:20:35.765932 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:35.765961 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:35.765999 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:e0 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766033 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:e1 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766064 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766097 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766128 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:35.766162 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:35.766191 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:35.766223 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766250 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766282 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766310 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766344 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766377 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766415 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766444 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766478 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:20:35.766507 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:35.766542 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:00 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766571 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:01 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766606 SSID: BSSID: 40:ce:24:e0:b9:06 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766640 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766669 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:35.766702 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:20:35.766731 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.766769 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:00 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.766798 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:35.766835 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:35.766864 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:35.766898 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:35.766927 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.766960 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.766990 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.767026 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.767055 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:20:35.767090 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:20:35.767118 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:35.767153 SSID: BSSID: 00:42:5a:0b:ef:06 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767187 SSID: Glide_2.4 BSSID: 00:42:5a:0b:ef:08 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767224 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -88 Frequency: 2462

Time: 2021-02-28 22:20:35.767255 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767292 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767329 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.767361 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:01 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:35.767394 SSID: Glide_2.4 BSSID: 00:42:5a:4d:b6:e8 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:35.767424 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:20:35.767455 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:35.767484 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:35.767522 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:35.767554 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767590 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767622 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767722 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767752 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767784 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767812 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767868 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767925 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767964 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:35.767998 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:35.768034 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:20:35.768068 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:39.863808 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -60 Frequency: 5560
Time: 2021-02-28 22:20:39.863986 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:39.864032 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:39.864066 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:39.864096 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864128 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864165 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864196 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864226 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864258 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864291 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864329 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864364 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:20:39.864394 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864424 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864455 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864490 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864524 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:39.864557 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:39.864593 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:39.864628 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:20:39.864662 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:20:39.864692 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -74 Frequency: 5280
Time: 2021-02-28 22:20:39.864722 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -74 Frequency: 5280

Time: 2021-02-28 22:20:39.864752 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864785 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864816 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864854 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864887 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:39.864922 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -76 Frequency: 5220
Time: 2021-02-28 22:20:39.864954 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:20:39.864984 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865015 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865048 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865081 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865119 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:39.865153 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:39.865185 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:39.865218 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:20:39.865249 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:39.865280 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -79 Frequency: 5500
Time: 2021-02-28 22:20:39.865312 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -79 Frequency: 5500
Time: 2021-02-28 22:20:39.865342 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:39.865375 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:20:39.865408 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865436 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865465 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865498 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865527 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:39.865557 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865595 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865626 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865656 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865782 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:39.865821 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:39.865856 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.865890 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.865924 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.865957 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:39.865990 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:39.866019 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.866051 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:00 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.866088 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.866262 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.867707 SSID: Glide_2.4 BSSID: 40:ce:24:e0:ac:08 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.867862 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:39.867911 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:39.867960 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:39.868030 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:39.868072 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -83 Frequency: 5660

Time: 2021-02-28 22:20:39.868129 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:39.868169 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:39.868208 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:39.868253 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868292 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868331 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868370 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868410 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:20:39.868452 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:20:39.868492 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:39.868537 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:39.868590 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:39.868630 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:20:39.868684 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:20:39.868729 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868769 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868811 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868866 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868948 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:39.868983 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869033 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869069 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869103 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869138 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869179 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869214 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:20:39.869252 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:20:39.869287 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:20:39.869326 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869361 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869395 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869436 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869469 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869501 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:39.869533 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:20:39.869565 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:20:39.869630 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:c0 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:39.869664 SSID: BSSID: a0:23:9f:8d:33:c5 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:39.869695 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:41 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:39.869739 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:39.869772 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:39.869811 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:39.869849 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:39.869880 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:39.869923 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:39.869974 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -89 Frequency: 5320

Time: 2021-02-28 22:20:39.870007 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:39.870039 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:39.870072 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:20:39.870105 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:20:39.870151 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:39.870184 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:39.870220 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:39.870260 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:39.870291 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:c0 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:39.870321 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:c1 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:39.870352 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:39.870382 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:39.870413 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:39.870444 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:20:39.870475 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:20:39.870506 SSID: BSSID: 18:80:90:f2:c5:c6 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:39.870537 SSID: Glide_2.4 BSSID: 18:80:90:f2:c5:c8 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:39.870568 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:39.870599 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:39.870631 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:39.870662 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:39.870693 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:39.870724 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:39.870755 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:20:39.870786 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:20:39.870816 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:20:39.870847 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -93 Frequency: 5320
Time: 2021-02-28 22:20:43.556173 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -59 Frequency: 5560
Time: 2021-02-28 22:20:43.556319 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:43.556358 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:43.556408 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:43.556444 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:43.556530 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:43.556574 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:43.556607 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:43.556638 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -67 Frequency: 5240
Time: 2021-02-28 22:20:43.556668 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -67 Frequency: 5240
Time: 2021-02-28 22:20:43.556710 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -67 Frequency: 5240
Time: 2021-02-28 22:20:43.556740 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:20:43.556777 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:20:43.556804 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:20:43.556828 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -68 Frequency: 2437
Time: 2021-02-28 22:20:43.556856 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:43.556886 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:43.556916 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:43.556944 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -70 Frequency: 2412

Time: 2021-02-28 22:20:43.557083 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:20:43.557125 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:43.557152 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:43.557179 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:20:43.557204 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:20:43.557230 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:20:43.557254 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:20:43.557282 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:43.557306 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557345 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557382 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557408 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557441 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:43.557474 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557500 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557527 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557562 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557590 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:43.557661 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:43.557739 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:43.557778 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:20:43.557805 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:20:43.557842 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:c0 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:20:43.557881 SSID: BSSID: 18:80:90:f2:c5:c6 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:20:43.557916 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:43.557955 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:43.558025 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:43.558090 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:43.558130 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558158 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558202 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558243 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558274 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:20:43.558298 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:43.558324 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:43.558347 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:43.558408 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:20:43.558438 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:20:43.558465 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:43.558493 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:20:43.558518 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:00 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:43.558544 SSID: BSSID: 18:80:90:f2:90:06 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:43.558568 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:43.558589 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:43.558611 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:43.558631 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -84 Frequency: 5660

Time: 2021-02-28 22:20:43.558655 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:43.558679 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:43.558699 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:20:43.558721 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:01 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:20:43.558743 SSID: Glide_2.4 BSSID: 18:80:90:f2:90:08 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:20:43.558767 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:43.558792 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:43.558816 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:43.558843 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:43.558871 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:43.558894 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.558919 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.558943 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.558980 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.559005 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:c0 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:43.559037 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:43.559065 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:43.559091 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:43.559116 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:43.559142 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:43.559208 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:43.559238 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:43.559259 SSID: BSSID: a0:23:9f:8d:33:c5 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:43.559316 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:20:43.559345 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:20:43.559369 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:43.559396 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:20:43.559417 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:43.559442 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:40 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:43.559465 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:20:43.559512 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559541 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559565 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:43.559614 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:43.559716 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:43.559747 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559801 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559829 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559852 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559878 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559902 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559926 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559950 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559981 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:43.560007 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:43.560034 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -90 Frequency: 5320

Time: 2021-02-28 22:20:43.560079 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:43.560106 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:43.560169 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:43.560203 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:43.560248 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:43.560276 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:43.560300 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:43.560329 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:20:43.560355 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:43.560380 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:43.560415 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:43.560446 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:43.560472 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:43.560499 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:20:43.560526 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:43.560561 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:43.560590 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:43.560618 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:47.925856 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.925979 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.926011 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.926037 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.926065 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:20:47.926089 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:20:47.926119 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:20:47.926147 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926171 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926200 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926229 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926257 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:47.926281 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:47.926308 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:47.926332 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:47.926365 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:47.926393 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:20:47.926422 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:20:47.926451 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926478 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926506 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926533 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926561 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:20:47.926588 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -71 Frequency: 5500
Time: 2021-02-28 22:20:47.926616 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -71 Frequency: 2462
Time: 2021-02-28 22:20:47.926643 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:20:47.926670 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:47.926698 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -73 Frequency: 2437

Time: 2021-02-28 22:20:47.926725 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:47.926749 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:47.926771 SSID: BSSID: 18:80:90:f2:97:66 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:47.926798 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:20:47.926826 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:47.926855 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:20:47.926883 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:20:47.926911 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:20:47.926940 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:47.926964 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:47.926991 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:47.927019 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927047 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927116 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927148 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927172 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:47.927199 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:47.927223 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:47.927255 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:20:47.927283 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:47.927312 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:47.927338 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:47.927366 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927393 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927417 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927440 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927467 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927495 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927522 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927549 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927572 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927599 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927700 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927735 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:20:47.927770 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:47.927803 SSID: Glide_2.4 BSSID: 18:80:90:f2:90:08 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:20:47.927833 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:80 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:47.927858 SSID: BSSID: a0:23:9f:8d:26:85 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:47.927886 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:00 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:20:47.927914 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:01 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:20:47.927938 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:20:47.927964 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:47.927987 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:47.928014 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:41 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:20:47.928043 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:47.928066 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -86 Frequency: 5220

Time: 2021-02-28 22:20:47.928103 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:47.928152 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:47.928178 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:47.928205 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:47.928232 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:40 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:47.928260 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:47.928287 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:47.928315 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:47.928340 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:47.928361 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:47.928387 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:47.928414 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:47.928440 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -89 Frequency: 5260
Time: 2021-02-28 22:20:47.928467 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:47.928492 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:47.928518 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:47.928543 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:47.928568 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:47.928589 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:47.928610 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:47.928636 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:47.928660 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:47.928682 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:47.928708 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:47.928733 SSID: BSSID: a0:23:9f:8d:4a:2a RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:47.928754 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:47.928776 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:47.928797 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:47.928822 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:47.928841 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:47.928863 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:47.928888 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:47.928913 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4a:2e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:47.928939 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:20:47.928961 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -93 Frequency: 5280
Time: 2021-02-28 22:20:52.344951 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -64 Frequency: 5240
Time: 2021-02-28 22:20:52.345078 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -64 Frequency: 5240
Time: 2021-02-28 22:20:52.345112 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -64 Frequency: 5240
Time: 2021-02-28 22:20:52.345140 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -66 Frequency: 5240
Time: 2021-02-28 22:20:52.345167 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345193 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345220 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345246 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345271 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345297 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345322 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -69 Frequency: 5500

Time: 2021-02-28 22:20:52.345347 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345373 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345398 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -70 Frequency: 5500
Time: 2021-02-28 22:20:52.345422 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -70 Frequency: 5500
Time: 2021-02-28 22:20:52.345447 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:20:52.345472 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:20:52.345496 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:20:52.345521 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345546 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345571 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345595 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345620 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -71 Frequency: 5500
Time: 2021-02-28 22:20:52.345645 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:20:52.345671 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -72 Frequency: 2437
Time: 2021-02-28 22:20:52.345696 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:20:52.345721 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:20:52.345747 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:20:52.345772 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:20:52.345797 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:20:52.345822 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:52.345847 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:20:52.345872 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -76 Frequency: 5220
Time: 2021-02-28 22:20:52.345898 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:20:52.345922 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:52.345948 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:52.345974 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:52.346 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346026 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:20:52.346051 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346077 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:80 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346103 SSID: BSSID: 18:80:90:f2:97:66 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346129 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:20:52.346154 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:20:52.346179 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:52.346204 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:52.346230 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:52.346255 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:52.346280 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:52.346305 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:52.346330 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346355 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346379 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346404 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346429 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:52.346454 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:52.346479 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -82 Frequency: 2437

Time: 2021-02-28 22:20:52.346504 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:c0 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:52.346528 SSID: BSSID: a0:23:9f:8d:33:c5 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:52.346553 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:20:52.346577 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:52.346602 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:52.346626 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:52.346651 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:52.346676 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:52.346700 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:52.346725 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:52.346750 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:52.346774 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:52.346800 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:20:52.346825 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:52.346850 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346876 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346901 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346927 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346952 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:52.346978 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:52.347003 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:20:52.347029 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:20:52.347055 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:52.347080 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:52.347105 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:52.347130 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:52.347156 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:20:52.347180 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:20:52.347205 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:20:52.347230 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347255 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347280 SSID: BSSID: a0:23:9f:8d:4a:2a RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347305 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4a:2e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347330 SSID: Glide-5 BSSID: a0:23:9f:8d:4a:29 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347356 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4a:2f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347382 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:00 RSSI: -90 Frequency: 2437
Time: 2021-02-28 22:20:52.347408 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347433 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347460 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347485 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347510 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347536 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347562 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347588 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:52.347613 SSID: Glide_2.4 BSSID: 18:80:90:f2:a1:a8 RSSI: -91 Frequency: 2437
Time: 2021-02-28 22:20:56.564423 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -59 Frequency: 5560

Time: 2021-02-28 22:20:56.564533 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -59 Frequency: 5560
Time: 2021-02-28 22:20:56.564558 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -59 Frequency: 5560
Time: 2021-02-28 22:20:56.564581 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -60 Frequency: 5560
Time: 2021-02-28 22:20:56.564604 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:56.564626 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:56.564644 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:56.564663 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -66 Frequency: 5500
Time: 2021-02-28 22:20:56.564681 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:20:56.564703 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:20:56.564725 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:20:56.564749 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:20:56.564775 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:56.564799 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:56.564822 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:56.564845 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:20:56.564868 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:56.564890 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:56.564911 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:20:56.564931 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:20:56.564953 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:20:56.564977 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:20:56.564998 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:20:56.565015 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:20:56.565034 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:56.565057 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:20:56.565081 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:56.565104 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:56.565127 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:20:56.565145 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:20:56.565169 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:20:56.565191 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:56.565213 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:56.565236 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:56.565257 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:56.565279 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:56.565305 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -76 Frequency: 5220
Time: 2021-02-28 22:20:56.565329 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:56.565353 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:20:56.565376 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:20:56.565400 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565423 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565446 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565465 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565487 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:56.565509 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:56.565532 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -79 Frequency: 5220

Time: 2021-02-28 22:20:56.565558 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565581 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565604 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565627 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565651 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:20:56.565673 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:20:56.565695 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565718 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565741 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565764 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565785 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:20:56.565808 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565831 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565853 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565921 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565947 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:56.565971 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:56.565994 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:56.566016 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:56.566042 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:20:56.566065 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:20:56.566089 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:20:56.566112 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:56.566137 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:56.566162 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:56.566184 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:20:56.566206 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:56.566229 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:56.566252 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:56.566276 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:56.566313 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:56.566339 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:56.566367 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:56.566393 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:56.566415 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:56.566439 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566469 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566499 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566523 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566545 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:56.566582 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:56.566609 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:56.566632 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:20:56.566723 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:20:56.566760 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:20:56.566785 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -89 Frequency: 5220

Time: 2021-02-28 22:20:56.566808 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:56.566832 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:56.566867 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:56.566951 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:56.567017 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:20:56.567049 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:20:56.567077 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:20:56.567102 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:56.567149 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:20:56.567178 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:20:56.567203 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -92 Frequency: 5240
Time: 2021-02-28 22:20:56.567230 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:20:56.567254 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:20:56.567276 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:21:01.402308 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -54 Frequency: 5560
Time: 2021-02-28 22:21:01.402671 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -54 Frequency: 5560
Time: 2021-02-28 22:21:01.402745 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -54 Frequency: 5560
Time: 2021-02-28 22:21:01.402796 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -62 Frequency: 5500
Time: 2021-02-28 22:21:01.402835 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:21:01.402872 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:21:01.402908 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -63 Frequency: 5500
Time: 2021-02-28 22:21:01.402950 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:21:01.403022 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403063 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403102 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403141 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403180 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:21:01.403219 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -68 Frequency: 2437
Time: 2021-02-28 22:21:01.403258 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:21:01.403296 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -69 Frequency: 5240
Time: 2021-02-28 22:21:01.403334 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -69 Frequency: 5240
Time: 2021-02-28 22:21:01.403373 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:21:01.403411 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:21:01.403450 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:21:01.403489 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:21:01.403528 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:21:01.403566 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:21:01.403605 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:21:01.404731 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:21:01.404821 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -73 Frequency: 2462
Time: 2021-02-28 22:21:01.404850 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -74 Frequency: 5220
Time: 2021-02-28 22:21:01.404875 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:21:01.404901 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:21:01.404926 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:21:01.404950 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:21:01.404974 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -78 Frequency: 5220

Time: 2021-02-28 22:21:01.404998 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:21:01.405023 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:21:01.405047 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:21:01.405072 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:21:01.405096 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:01.405122 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:01.405146 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:21:01.405171 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:21:01.405195 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:21:01.405221 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:21:01.405245 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405270 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405296 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405320 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405346 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:21:01.405370 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405395 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405419 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405444 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405469 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405494 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405519 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405545 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405570 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405595 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405620 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405646 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405674 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405700 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405726 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405752 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405778 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405804 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405829 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:21:01.405855 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:01.405880 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:01.405905 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:21:01.405930 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:21:01.405955 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.405982 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406006 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406034 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406059 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406085 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406110 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406135 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -85 Frequency: 5560

Time: 2021-02-28 22:21:01.406160 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406185 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406210 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406235 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:01.406259 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:01.406285 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:21:01.406310 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:21:01.406334 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:21:01.406358 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:21:01.406382 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:21:01.406407 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:21:01.406431 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406456 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406480 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406505 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406532 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:21:01.406557 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:21:01.406581 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:21:01.406606 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:21:01.406631 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:21:01.406657 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:01.406681 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -88 Frequency: 5560
Time: 2021-02-28 22:21:01.406706 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:21:01.406730 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:21:01.406755 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:21:01.406781 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:21:01.406807 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:21:01.406832 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:01.406856 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:21:01.406882 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:21:01.406909 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:21:01.406935 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:21:01.406959 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:21:01.406984 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:01.407009 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:21:01.407034 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -93 Frequency: 5260
Time: 2021-02-28 22:21:01.407059 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -93 Frequency: 5180
Time: 2021-02-28 22:21:01.407085 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -94 Frequency: 5180
Time: 2021-02-28 22:21:05.128836 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.128940 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.128974 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.129002 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.129030 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:21:05.129056 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:21:05.129084 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:21:05.129109 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -70 Frequency: 2462

Time: 2021-02-28 22:21:05.129135 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:21:05.129161 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:21:05.129186 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:21:05.129211 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129237 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129262 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129287 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:66 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129312 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:21:05.129336 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:29 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:21:05.129362 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129386 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129412 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e9 RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129435 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129461 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:21:05.129486 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:21:05.129513 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:21:05.129538 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:69 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:21:05.129564 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:21:05.129589 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129614 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:21:05.129638 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:09 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:21:05.129664 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:21:05.129689 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129714 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a9 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129739 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129765 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129790 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129815 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129840 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129866 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4a RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:21:05.129892 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:21:05.129919 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:21:05.129945 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:21:05.129972 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:21:05.130010 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:49 RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:21:05.130061 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:21:05.130091 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ad RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:21:05.130128 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:21:05.130183 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:21:05.130219 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:21:05.130250 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:21:05.130279 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:21:05.130304 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:21:05.130331 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:89 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:21:05.130357 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:21:05.130383 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -84 Frequency: 5280

Time: 2021-02-28 22:21:05.130409 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:21:05.130434 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:21:05.130460 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:21:05.130485 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130510 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130536 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130560 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130585 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:21:05.130610 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:21:05.130636 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:21:05.130660 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:21:05.130686 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130711 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130736 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130760 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130786 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:21:05.130811 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130835 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130860 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130884 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130908 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:21:05.130933 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:21:05.130957 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.130982 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131007 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131032 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131058 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131083 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131109 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:21:05.131134 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:21:05.131158 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:05.131184 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:05.131210 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:05.131234 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:21:05.131259 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:21:05.131285 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:21:05.131309 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:21:05.131334 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:21:05.131358 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:21:05.131383 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:21:05.131407 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131431 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131456 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131480 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131505 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:21:05.131530 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -91 Frequency: 5180

```
Time: 2021-02-28 22:21:05.131555 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:05.131579 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:05.131603 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:05.131711 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:21:05.131740 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:21:05.131764 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:21:05.131789 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:21:05.131815 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -92 Frequency: 5180
```

C.6 WiFi Scans in the Room Nextdoor

```
Time: 2021-03-03 15:22:26.384286 SSID: SKYE91DA1 BSSID: 90:21:06:d5:22:9d RSSI: -64 Frequency: 5180
Time: 2021-03-03 15:22:26.384286 SSID: SKYE91DA BSSID: 90:21:06:d5:22:9a RSSI: -70 Frequency: 2412
Time: 2021-03-03 15:22:26.384286 SSID: YourAssOnSteroids BSSID: d6:35:1d:0a:07:6d RSSI: -87 Frequency: 5300
Time: 2021-03-03 15:22:26.384286 SSID: EE-BrightBox-djsrt3 BSSID: 94:6a:b0:78:54:4e RSSI: -89 Frequency: 2462
Time: 2021-03-03 15:22:41.302552 SSID: SKYE91DA BSSID: 90:21:06:d5:22:9a RSSI: -60 Frequency: 2412
Time: 2021-03-03 15:22:41.302552 SSID: SKYE91DA1 BSSID: 90:21:06:d5:22:9d RSSI: -71 Frequency: 5180
Time: 2021-03-03 15:22:41.302552 SSID: YourAss BSSID: d4:35:1d:0a:07:65 RSSI: -88 Frequency: 2437
Time: 2021-03-03 15:22:41.302552 SSID: Casa Albany BSSID: 90:72:82:a5:95:8f RSSI: -92 Frequency: 2412
Time: 2021-03-03 15:22:41.302552 SSID: EE-BrightBox-djsrt3 BSSID: 94:6a:b0:78:54:4e RSSI: -93 Frequency: 2462
Time: 2021-03-03 15:22:41.302552 SSID: Post_Office_F468 BSSID: 8c:59:73:85:f4:68 RSSI: -97 Frequency: 2452
Time: 2021-03-03 15:22:49.022574 SSID: SKYE91DA BSSID: 90:21:06:d5:22:9a RSSI: -72 Frequency: 2412
Time: 2021-03-03 15:22:49.022574 SSID: SKYE91DA1 BSSID: 90:21:06:d5:22:9d RSSI: -74 Frequency: 5180
Time: 2021-03-03 15:22:49.022574 SSID: YourAssOnSteroids BSSID: d6:35:1d:0a:07:6d RSSI: -89 Frequency: 5300
Time: 2021-03-03 15:22:49.022574 SSID: YourAss BSSID: d4:35:1d:0a:07:65 RSSI: -90 Frequency: 2437
Time: 2021-03-03 15:22:49.022574 SSID: PLUSNET-QHMQ9 BSSID: 98:aa:fc:34:e7:ad RSSI: -91 Frequency: 2472
Time: 2021-03-03 15:22:49.022574 SSID: JOSHANDKAVITA BSSID: 84:be:52:d2:be:14 RSSI: -92 Frequency: 2462
Time: 2021-03-03 15:22:49.022574 SSID: SKY357FD BSSID: 90:21:06:9d:b1:cd RSSI: -93 Frequency: 2412
Time: 2021-03-03 15:22:49.022574 SSID: SKYKASA88 BSSID: 80:72:15:64:ed:92 RSSI: -93 Frequency: 2437
Time: 2021-03-03 15:22:49.022574 SSID: BSSID: 72:75:dc:1d:8c:a6 RSSI: -94 Frequency: 2412
Time: 2021-03-03 15:22:49.022574 SSID: EE-BrightBox-g7wcm2 BSSID: e4:75:dc:37:41:f8 RSSI: -94 Frequency: 2412
Time: 2021-03-03 15:22:49.022574 SSID: BTWi-fi BSSID: 92:72:82:a5:95:8f RSSI: -94 Frequency: 2412
Time: 2021-03-03 15:22:49.022574 SSID: PLUSNET-QHMQ9 BSSID: 18:90:d8:ad:83:5a RSSI: -95 Frequency: 2472
Time: 2021-03-03 15:22:59.176440 SSID: SKYE91DA BSSID: 90:21:06:d5:22:9a RSSI: -71 Frequency: 2412
Time: 2021-03-03 15:22:59.176440 SSID: SKYE91DA1 BSSID: 90:21:06:d5:22:9d RSSI: -73 Frequency: 5180
Time: 2021-03-03 15:22:59.176440 SSID: YourAss BSSID: d4:35:1d:0a:07:65 RSSI: -85 Frequency: 2437
Time: 2021-03-03 15:22:59.176440 SSID: SKY357FD BSSID: 90:21:06:9d:b1:cd RSSI: -88 Frequency: 2412
Time: 2021-03-03 15:22:59.176440 SSID: KASA-2.4 BSSID: a0:40:a0:76:d3:c8 RSSI: -88 Frequency: 2452
Time: 2021-03-03 15:22:59.176440 SSID: SKYKASA88 BSSID: b0:3e:51:a7:b4:8c RSSI: -88 Frequency: 2462
Time: 2021-03-03 15:22:59.176440 SSID: EE-BrightBox-djsrt3 BSSID: 94:6a:b0:78:54:4e RSSI: -88 Frequency: 2462
Time: 2021-03-03 15:22:59.176440 SSID: BSSID: 72:75:dc:1d:8c:a6 RSSI: -90 Frequency: 2412
Time: 2021-03-03 15:22:59.176440 SSID: SKYKASA88 BSSID: 80:72:15:64:ed:92 RSSI: -90 Frequency: 2437
Time: 2021-03-03 15:22:59.176440 SSID: BT-ZRAK2K BSSID: e4:75:dc:1d:8c:a2 RSSI: -90 Frequency: 2412
Time: 2021-03-03 15:22:59.176440 SSID: BTWi-fi BSSID: 72:75:dc:1d:8c:a3 RSSI: -90 Frequency: 2412
```

Time: 2021-03-03 15:22:59.176440 SSID: Casa Albany BSSID: 90:72:82:a5:95:8f RSSI: -90 Frequency: 2412
Time: 2021-03-03 15:22:59.176440 SSID: SKYHY4YW BSSID: a0:bd:cd:dd:96:da RSSI: -90 Frequency: 2437
Time: 2021-03-03 15:22:59.176440 SSID: PLUSNET-C6RQJ8 BSSID: 10:d7:b0:a7:a7:f2 RSSI: -90 Frequency: 2437
Time: 2021-03-03 15:22:59.176440 SSID: Post_Office_F468 BSSID: 8c:59:73:85:f4:68 RSSI: -90 Frequency: 2452
Time: 2021-03-03 15:22:59.176440 SSID: BTWi-fi BSSID: 92:72:82:a5:95:8f RSSI: -91 Frequency: 2412
Time: 2021-03-03 15:22:59.176440 SSID: BTWi-fi BSSID: 7a:6c:9a:83:87:d4 RSSI: -91 Frequency: 2412
Time: 2021-03-03 15:22:59.176440 SSID: PLUSNET-QHMQ9 BSSID: 98:aa:fc:34:e7:ad RSSI: -93 Frequency: 2472
Time: 2021-03-03 15:22:59.176440 SSID: PLUSNET-QHMQ9 BSSID: 18:90:d8:ad:83:5a RSSI: -94 Frequency: 2472
Time: 2021-03-03 15:23:08.473936 SSID: SKYE91DA1 BSSID: 90:21:06:d5:22:9d RSSI: -64 Frequency: 5180
Time: 2021-03-03 15:23:08.473936 SSID: SKYE91DA BSSID: 90:21:06:d5:22:9a RSSI: -67 Frequency: 2412
Time: 2021-03-03 15:23:08.473936 SSID: YourAss BSSID: d4:35:1d:0a:07:65 RSSI: -81 Frequency: 2437
Time: 2021-03-03 15:23:08.473936 SSID: BTWi-fi BSSID: 92:72:82:a5:95:8f RSSI: -90 Frequency: 2412
Time: 2021-03-03 15:23:08.473936 SSID: BTWifi-X BSSID: b2:72:82:a5:95:8f RSSI: -91 Frequency: 2412
Time: 2021-03-03 15:23:08.473936 SSID: belkin.c85.guests BSSID: ec:1a:59:ab:cc:86 RSSI: -96 Frequency: 2412
Time: 2021-03-03 15:23:20.565401 SSID: SKYE91DA BSSID: 90:21:06:d5:22:9a RSSI: -66 Frequency: 2412
Time: 2021-03-03 15:23:20.565401 SSID: SKYE91DA1 BSSID: 90:21:06:d5:22:9d RSSI: -68 Frequency: 5180
Time: 2021-03-03 15:23:20.565401 SSID: Post_Office_F468 BSSID: 8c:59:73:85:f4:68 RSSI: -88 Frequency: 2452
Time: 2021-03-03 15:23:20.565401 SSID: YourAssOnSteroids BSSID: d6:35:1d:0a:07:6d RSSI: -93 Frequency: 5300
Time: 2021-03-03 15:23:20.565401 SSID: YourAss BSSID: d4:35:1d:0a:07:65 RSSI: -94 Frequency: 2437
Time: 2021-03-03 19:11:10.121127 SSID: SKYE91DA BSSID: 90:21:06:d5:22:9a RSSI: -57 Frequency: 2412
Time: 2021-03-03 19:11:10.121127 SSID: SKYE91DA1 BSSID: 90:21:06:d5:22:9d RSSI: -63 Frequency: 5180
Time: 2021-03-03 19:11:10.121127 SSID: YourAssOnSteroids BSSID: d6:35:1d:0a:07:6d RSSI: -85 Frequency: 5300
Time: 2021-03-03 19:11:10.121127 SSID: YourAss BSSID: d4:35:1d:0a:07:65 RSSI: -86 Frequency: 2437
Time: 2021-03-03 19:11:10.121127 SSID: Casa Albany BSSID: 90:72:82:a5:95:8f RSSI: -93 Frequency: 2412
Time: 2021-03-03 19:11:10.121127 SSID: KASA-2.4 BSSID: a0:40:a0:76:d3:c8 RSSI: -93 Frequency: 2452
Time: 2021-03-03 19:11:10.121127 SSID: EE-BrightBox-djsrt3 BSSID: 94:6a:b0:78:54:4e RSSI: -93 Frequency: 2462
Time: 2021-03-03 19:11:10.121127 SSID: PLUSNET-C6RQJ8 BSSID: 10:d7:b0:a7:a7:f2 RSSI: -95 Frequency: 2437

C.7 WiFi Scans in the Hallway Upstairs

Time: 2021-02-28 22:20:26.715187 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:20:26.733009 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -64 Frequency: 2412
Time: 2021-02-28 22:20:26.733160 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:20:26.733196 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733226 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733257 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733285 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:20:26.733313 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733352 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733385 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733424 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -71 Frequency: 5200
Time: 2021-02-28 22:20:26.733461 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:20:26.733493 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:20:26.733535 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -72 Frequency: 2462

Time: 2021-02-28 22:20:26.733569 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:20:26.733598 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:20:26.733626 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:26.733655 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:26.733693 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:26.733727 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:20:26.733767 SSID: BT-3ZA2CQ BSSID: 44:fe:3b:3d:1d:6f RSSI: -90 Frequency: 2412
Time: 2021-02-28 22:20:26.733801 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:26.733830 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:26.733866 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:26.733916 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:26.733940 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:26.733965 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:26.733988 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:31.543381 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543603 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543727 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543782 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:20:31.543830 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:31.543876 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:20:31.543919 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:20:31.543961 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:31.544011 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:31.544055 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:31.544095 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:31.544134 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:20:31.544175 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:20:31.544219 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:31.544264 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:31.544306 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:31.544350 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:31.544393 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:20:31.544435 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:20:31.544476 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:31.544524 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:31.544568 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:20:31.544611 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:20:31.544652 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544694 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544738 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544781 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:20:31.544821 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:20:31.544861 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:20:31.544902 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:20:31.544943 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -78 Frequency: 5280
Time: 2021-02-28 22:20:31.544983 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -78 Frequency: 5560

Time: 2021-02-28 22:20:31.545024 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:20:31.545065 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:31.545105 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:31.545146 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:31.545229 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:31.545277 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -79 Frequency: 5240
Time: 2021-02-28 22:20:31.545325 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545373 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545420 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545472 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545518 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:31.545687 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:20:31.545754 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:20:31.545803 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:31.545856 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:31.545909 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:20:31.545961 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:20:31.546118 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:20:31.546160 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:20:31.546200 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:20:31.546240 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:20:31.546280 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:31.546330 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:31.546383 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:31.546415 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:31.546447 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:31.546479 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:31.546509 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:31.546540 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:31.546573 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:31.546646 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:31.546687 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:20:31.546727 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:20:31.546764 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:20:31.546807 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:20:31.546842 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:31.546874 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:31.546906 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:31.546942 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.546973 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.547005 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.547038 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:20:31.547107 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:31.547154 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:31.547217 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:31.547262 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -84 Frequency: 2412

Time: 2021-02-28 22:20:31.547322 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:20:31.547364 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:20:31.547419 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:20:31.547460 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:20:31.547498 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:20:31.547536 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:20:31.547568 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:20:31.547662 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:20:31.547713 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:31.547752 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:31.547791 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:31.547830 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:31.547900 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:31.547949 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:40 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:31.547987 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:01 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:20:31.548021 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548055 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548090 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548127 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:20:31.548163 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548202 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548234 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548265 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:31.548297 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:00 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:31.548330 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:31.548361 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:31.548393 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548428 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548464 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548495 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:31.548527 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:00 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548560 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548592 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548622 SSID: Glide_2.4 BSSID: 40:ce:24:e0:ac:08 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:31.548655 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548686 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548718 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548748 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548779 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:31.548810 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:31.548882 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:31.548929 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:31.548995 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:31.549037 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:31.549080 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:31.549124 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -89 Frequency: 5660

Time: 2021-02-28 22:20:31.549164 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:20:31.549198 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:20:31.549231 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549266 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549303 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549334 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:31.549366 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:31.549399 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:31.549436 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:31.549473 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549505 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549537 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549571 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549610 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:31.549647 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549696 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549735 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549768 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:31.549804 SSID: Glide-5 BSSID: 00:42:5a:4c:b8:08 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:31.549837 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:20:31.549872 SSID: BSSID: 00:42:5a:4c:b8:09 RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:31.549906 SSID: UNITE-Staff BSSID: 00:42:5a:4c:b8:0e RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:31.549939 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:b8:0f RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:35.762731 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:20:35.762915 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:20:35.762974 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:20:35.763028 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:20:35.763067 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:35.763120 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:35.763158 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:20:35.763202 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:20:35.763245 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:35.763284 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:20:35.763327 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:20:35.763366 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:20:35.763414 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:20:35.763484 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:20:35.763524 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:20:35.763563 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:20:35.763603 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763707 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763754 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763784 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:35.763823 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:35.763856 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:35.763897 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -76 Frequency: 5200

Time: 2021-02-28 22:20:35.763930 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:20:35.763972 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764008 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764047 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764081 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:20:35.764115 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:35.764150 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:35.764180 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:20:35.764213 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:20:35.764245 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:20:35.764284 SSID: BSSID: 18:80:90:c0:38:06 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:20:35.764317 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:20:35.764350 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764381 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:60 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764421 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764452 SSID: BSSID: a0:23:9f:8d:3b:65 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:35.764487 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:20:35.764515 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:35.764546 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:35.764574 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:20:35.764607 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:20:35.764639 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:35.764672 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:35.764703 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:20:35.764739 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:20:35.764772 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:20:35.764802 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:20:35.764835 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:35.764865 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:35.764900 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:20:35.764929 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:20:35.764963 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:20:35.764992 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:20:35.765025 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:20:35.765053 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:20:35.765087 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:20:35.765117 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:20:35.765153 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:20:35.765182 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:35.765215 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:20:35.765243 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:35.765275 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:35.765305 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:35.765338 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765370 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765400 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -83 Frequency: 5660

Time: 2021-02-28 22:20:35.765432 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765462 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:35.765492 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:35.765523 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:35.765556 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:20:35.765583 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:20:35.765615 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:40 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:20:35.765645 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:20:35.765677 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:20:35.765703 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:20:35.765739 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:20:35.765768 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:35.765802 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:35.765830 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:01 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:35.765869 SSID: BSSID: 18:80:90:f2:ad:06 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:20:35.765897 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:20:35.765932 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:35.765961 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:35.765999 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:e0 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766033 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:e1 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766064 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766097 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:35.766128 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:35.766162 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:35.766191 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:35.766223 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766250 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766282 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766310 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766344 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766377 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766415 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766444 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:35.766478 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:20:35.766507 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:20:35.766542 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:00 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766571 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:01 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766606 SSID: BSSID: 40:ce:24:e0:b9:06 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766640 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:35.766669 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:35.766702 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:20:35.766731 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.766769 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:00 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.766798 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:35.766835 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:35.766864 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -88 Frequency: 5280

Time: 2021-02-28 22:20:35.766898 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:a6 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:35.766927 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.766960 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.766990 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.767026 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.767055 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:20:35.767090 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:20:35.767118 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:35.767153 SSID: BSSID: 00:42:5a:0b:ef:06 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767187 SSID: Glide_2.4 BSSID: 00:42:5a:0b:ef:08 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767224 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767255 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767292 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:35.767329 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:35.767361 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:01 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:35.767394 SSID: Glide_2.4 BSSID: 00:42:5a:4d:b6:e8 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:35.767424 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:20:35.767455 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:35.767484 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:35.767522 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:35.767554 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767590 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767622 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767722 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:35.767752 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767784 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767812 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767868 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767925 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:35.767964 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:35.767998 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:35.768034 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:20:35.768068 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:39.863808 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -60 Frequency: 5560
Time: 2021-02-28 22:20:39.863986 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:39.864032 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:39.864066 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:39.864096 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864128 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864165 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864196 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:20:39.864226 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864258 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864291 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864329 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:20:39.864364 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -72 Frequency: 2412

Time: 2021-02-28 22:20:39.864394 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864424 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864455 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864490 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -72 Frequency: 5500
Time: 2021-02-28 22:20:39.864524 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:39.864557 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:39.864593 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:39.864628 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:20:39.864662 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:20:39.864692 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -74 Frequency: 5280
Time: 2021-02-28 22:20:39.864722 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -74 Frequency: 5280
Time: 2021-02-28 22:20:39.864752 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864785 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864816 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864854 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:39.864887 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:20:39.864922 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -76 Frequency: 5220
Time: 2021-02-28 22:20:39.864954 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:20:39.864984 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865015 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865048 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865081 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:39.865119 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:39.865153 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:39.865185 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:39.865218 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:20:39.865249 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:39.865280 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -79 Frequency: 5500
Time: 2021-02-28 22:20:39.865312 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -79 Frequency: 5500
Time: 2021-02-28 22:20:39.865342 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:20:39.865375 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:20:39.865408 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865436 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865465 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865498 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:39.865527 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:61 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:39.865557 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865595 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865626 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865656 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:20:39.865782 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:39.865821 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:39.865856 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.865890 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.865924 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.865957 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -81 Frequency: 2412

Time: 2021-02-28 22:20:39.865990 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:39.866019 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:39.866051 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:00 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.866088 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.866262 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.867707 SSID: Glide_2.4 BSSID: 40:ce:24:e0:ac:08 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:39.867862 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:39.867911 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:39.867960 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:39.868030 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:39.868072 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:39.868129 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:39.868169 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:39.868208 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:39.868253 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868292 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868331 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868370 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:39.868410 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:20:39.868452 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:20:39.868492 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:39.868537 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:20:39.868590 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:39.868630 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:20:39.868684 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:20:39.868729 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868769 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868811 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868866 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:20:39.868948 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:39.868983 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869033 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869069 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869103 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869138 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869179 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:39.869214 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:20:39.869252 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:20:39.869287 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:20:39.869326 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869361 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869395 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869436 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869469 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:39.869501 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:39.869533 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -88 Frequency: 5220

Time: 2021-02-28 22:20:39.869565 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:20:39.869630 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:c0 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:39.869664 SSID: BSSID: a0:23:9f:8d:33:c5 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:20:39.869695 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:41 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:39.869739 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:39.869772 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:39.869811 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:39.869849 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:39.869880 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:39.869923 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:39.869974 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:39.870007 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:39.870039 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:39.870072 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:20:39.870105 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:20:39.870151 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:39.870184 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:39.870220 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:39.870260 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:39.870291 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:c0 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:39.870321 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:c1 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:39.870352 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:39.870382 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:39.870413 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:39.870444 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:20:39.870475 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:20:39.870506 SSID: BSSID: 18:80:90:f2:c5:c6 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:39.870537 SSID: Glide_2.4 BSSID: 18:80:90:f2:c5:c8 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:39.870568 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:39.870599 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:39.870631 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:39.870662 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:39.870693 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:39.870724 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:39.870755 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:20:39.870786 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:20:39.870816 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:20:39.870847 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -93 Frequency: 5320
Time: 2021-02-28 22:20:43.556173 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -59 Frequency: 5560
Time: 2021-02-28 22:20:43.556319 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:43.556358 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:43.556408 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:20:43.556444 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:43.556530 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:43.556574 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:43.556607 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -65 Frequency: 5500

Time: 2021-02-28 22:20:43.556638 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -67 Frequency: 5240
Time: 2021-02-28 22:20:43.556668 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -67 Frequency: 5240
Time: 2021-02-28 22:20:43.556710 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -67 Frequency: 5240
Time: 2021-02-28 22:20:43.556740 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:20:43.556777 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:20:43.556804 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:20:43.556828 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -68 Frequency: 2437
Time: 2021-02-28 22:20:43.556856 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:43.556886 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:43.556916 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:43.556944 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -70 Frequency: 2412
Time: 2021-02-28 22:20:43.557083 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:20:43.557125 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:43.557152 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:43.557179 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:20:43.557204 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:20:43.557230 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:20:43.557254 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:20:43.557282 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:20:43.557306 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557345 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557382 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557408 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:43.557441 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:20:43.557474 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557500 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557527 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557562 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:20:43.557590 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:43.557661 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:43.557739 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:43.557778 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:20:43.557805 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:20:43.557842 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:c0 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:20:43.557881 SSID: BSSID: 18:80:90:f2:c5:c6 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:20:43.557916 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:43.557955 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:43.558025 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:43.558090 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:43.558130 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558158 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558202 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558243 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:20:43.558274 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:20:43.558298 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:43.558324 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -83 Frequency: 5660

Time: 2021-02-28 22:20:43.558347 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:43.558408 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:20:43.558438 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:20:43.558465 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:43.558493 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:20:43.558518 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:00 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:43.558544 SSID: BSSID: 18:80:90:f2:90:06 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:20:43.558568 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:20:43.558589 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:43.558611 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:43.558631 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:43.558655 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:43.558679 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:20:43.558699 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:20:43.558721 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:01 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:20:43.558743 SSID: Glide_2.4 BSSID: 18:80:90:f2:90:08 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:20:43.558767 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:43.558792 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:43.558816 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:43.558843 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:43.558871 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:20:43.558894 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.558919 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.558943 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.558980 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:43.559005 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:c0 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:43.559037 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:43.559065 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:43.559091 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:43.559116 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:43.559142 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:43.559208 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:43.559238 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:43.559259 SSID: BSSID: a0:23:9f:8d:33:c5 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:20:43.559316 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:20:43.559345 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:20:43.559369 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:43.559396 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:20:43.559417 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:43.559442 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:40 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:20:43.559465 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:20:43.559512 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559541 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559565 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:43.559614 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:43.559716 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -89 Frequency: 5220

Time: 2021-02-28 22:20:43.559747 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559801 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559829 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559852 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559878 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559902 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:43.559926 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559950 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:20:43.559981 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:43.560007 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:43.560034 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:43.560079 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:43.560106 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:43.560169 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:43.560203 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:43.560248 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:43.560276 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:43.560300 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:43.560329 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:20:43.560355 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:43.560380 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:43.560415 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:43.560446 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:43.560472 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:20:43.560499 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:20:43.560526 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:43.560561 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:20:43.560590 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:43.560618 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:20:47.925856 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.925979 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.926011 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.926037 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:20:47.926065 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:20:47.926089 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:20:47.926119 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:20:47.926147 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926171 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926200 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926229 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:20:47.926257 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:47.926281 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:47.926308 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:47.926332 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:47.926365 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:47.926393 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -70 Frequency: 5320

Time: 2021-02-28 22:20:47.926422 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:20:47.926451 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926478 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926506 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926533 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:20:47.926561 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:20:47.926588 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -71 Frequency: 5500
Time: 2021-02-28 22:20:47.926616 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -71 Frequency: 2462
Time: 2021-02-28 22:20:47.926643 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:20:47.926670 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:47.926698 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:47.926725 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:47.926749 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:47.926771 SSID: BSSID: 18:80:90:f2:97:66 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:20:47.926798 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:20:47.926826 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:47.926855 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:20:47.926883 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:20:47.926911 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:20:47.926940 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:47.926964 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:47.926991 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:47.927019 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927047 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927116 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927148 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:20:47.927172 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:47.927199 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:47.927223 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:47.927255 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:20:47.927283 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:47.927312 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:47.927338 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:20:47.927366 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927393 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927417 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927440 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927467 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927495 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927522 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927549 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927572 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927599 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:20:47.927700 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:47.927735 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:20:47.927770 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -81 Frequency: 5660

Time: 2021-02-28 22:20:47.927803 SSID: Glide_2.4 BSSID: 18:80:90:f2:90:08 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:20:47.927833 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:80 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:47.927858 SSID: BSSID: a0:23:9f:8d:26:85 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:20:47.927886 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:00 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:20:47.927914 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:01 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:20:47.927938 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:20:47.927964 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:47.927987 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:20:47.928014 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:41 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:20:47.928043 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:47.928066 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:47.928103 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:47.928152 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:20:47.928178 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:47.928205 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:47.928232 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:40 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:20:47.928260 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:47.928287 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:20:47.928315 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:47.928340 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:47.928361 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:47.928387 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:47.928414 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:47.928440 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -89 Frequency: 5260
Time: 2021-02-28 22:20:47.928467 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:47.928492 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:20:47.928518 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:20:47.928543 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:47.928568 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:47.928589 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:47.928610 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:47.928636 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:47.928660 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:20:47.928682 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:20:47.928708 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:20:47.928733 SSID: BSSID: a0:23:9f:8d:4a:2a RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:20:47.928754 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:47.928776 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:47.928797 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:47.928822 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:47.928841 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:47.928863 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:20:47.928888 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:47.928913 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4a:2e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:20:47.928939 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:20:47.928961 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -93 Frequency: 5280

Time: 2021-02-28 22:20:52.344951 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -64 Frequency: 5240
Time: 2021-02-28 22:20:52.345078 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -64 Frequency: 5240
Time: 2021-02-28 22:20:52.345112 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -64 Frequency: 5240
Time: 2021-02-28 22:20:52.345140 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -66 Frequency: 5240
Time: 2021-02-28 22:20:52.345167 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345193 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345220 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345246 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:20:52.345271 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345297 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345322 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345347 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345373 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -69 Frequency: 5500
Time: 2021-02-28 22:20:52.345398 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -70 Frequency: 5500
Time: 2021-02-28 22:20:52.345422 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -70 Frequency: 5500
Time: 2021-02-28 22:20:52.345447 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:20:52.345472 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:20:52.345496 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:20:52.345521 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345546 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345571 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345595 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:20:52.345620 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -71 Frequency: 5500
Time: 2021-02-28 22:20:52.345645 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:20:52.345671 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -72 Frequency: 2437
Time: 2021-02-28 22:20:52.345696 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:20:52.345721 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:20:52.345747 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:20:52.345772 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:20:52.345797 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:20:52.345822 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:20:52.345847 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:20:52.345872 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -76 Frequency: 5220
Time: 2021-02-28 22:20:52.345898 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:20:52.345922 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:20:52.345948 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:52.345974 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:20:52.346 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346026 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:20:52.346051 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346077 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:80 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346103 SSID: BSSID: 18:80:90:f2:97:66 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:20:52.346129 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:20:52.346154 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:20:52.346179 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:20:52.346204 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -80 Frequency: 5660

Time: 2021-02-28 22:20:52.346230 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:52.346255 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:52.346280 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:52.346305 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:20:52.346330 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:40 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346355 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:41 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346379 SSID: BSSID: 18:80:90:ce:60:46 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346404 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:20:52.346429 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:52.346454 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:52.346479 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:52.346504 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:c0 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:52.346528 SSID: BSSID: a0:23:9f:8d:33:c5 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:20:52.346553 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:20:52.346577 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:20:52.346602 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:52.346626 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:20:52.346651 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:52.346676 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:52.346700 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:52.346725 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:52.346750 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:20:52.346774 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:20:52.346800 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:20:52.346825 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:52.346850 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346876 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346901 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346927 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:52.346952 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:52.346978 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:20:52.347003 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:20:52.347029 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:20:52.347055 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:52.347080 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:52.347105 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:52.347130 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:20:52.347156 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:20:52.347180 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:20:52.347205 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:20:52.347230 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347255 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347280 SSID: BSSID: a0:23:9f:8d:4a:2a RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347305 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4a:2e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347330 SSID: Glide-5 BSSID: a0:23:9f:8d:4a:29 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:20:52.347356 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4a:2f RSSI: -89 Frequency: 5320

Time: 2021-02-28 22:20:52.347382 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:00 RSSI: -90 Frequency: 2437
Time: 2021-02-28 22:20:52.347408 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347433 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347460 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347485 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347510 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347536 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347562 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:20:52.347588 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:20:52.347613 SSID: Glide_2.4 BSSID: 18:80:90:f2:a1:a8 RSSI: -91 Frequency: 2437
Time: 2021-02-28 22:20:56.564423 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -59 Frequency: 5560
Time: 2021-02-28 22:20:56.564533 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -59 Frequency: 5560
Time: 2021-02-28 22:20:56.564558 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -59 Frequency: 5560
Time: 2021-02-28 22:20:56.564581 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -60 Frequency: 5560
Time: 2021-02-28 22:20:56.564604 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:56.564626 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:56.564644 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -65 Frequency: 5500
Time: 2021-02-28 22:20:56.564663 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -66 Frequency: 5500
Time: 2021-02-28 22:20:56.564681 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:20:56.564703 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:20:56.564725 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:20:56.564749 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:20:56.564775 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:56.564799 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:56.564822 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:20:56.564845 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:20:56.564868 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:56.564890 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:20:56.564911 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:20:56.564931 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:20:56.564953 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:20:56.564977 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:20:56.564998 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:20:56.565015 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:20:56.565034 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:56.565057 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:20:56.565081 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:56.565104 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:20:56.565127 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:20:56.565145 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:20:56.565169 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:20:56.565191 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:56.565213 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:56.565236 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:20:56.565257 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:20:56.565279 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -76 Frequency: 5200

Time: 2021-02-28 22:20:56.565305 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -76 Frequency: 5220
Time: 2021-02-28 22:20:56.565329 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:20:56.565353 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:20:56.565376 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:20:56.565400 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565423 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565446 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565465 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:20:56.565487 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:56.565509 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:56.565532 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:20:56.565558 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565581 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565604 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565627 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:20:56.565651 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:20:56.565673 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:20:56.565695 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565718 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565741 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565764 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:20:56.565785 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:20:56.565808 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565831 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565853 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565921 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:20:56.565947 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:20:56.565971 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:56.565994 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:56.566016 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:20:56.566042 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:20:56.566065 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:20:56.566089 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:20:56.566112 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:56.566137 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:56.566162 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:20:56.566184 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:20:56.566206 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:20:56.566229 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:20:56.566252 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:56.566276 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:56.566313 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:20:56.566339 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:56.566367 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:56.566393 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:20:56.566415 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -87 Frequency: 5660

Time: 2021-02-28 22:20:56.566439 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566469 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566499 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566523 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:20:56.566545 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:56.566582 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:56.566609 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:20:56.566632 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:20:56.566723 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:20:56.566760 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:20:56.566785 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:56.566808 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:56.566832 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:20:56.566867 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:56.566951 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:20:56.567017 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:20:56.567049 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:20:56.567077 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:20:56.567102 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:20:56.567149 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:20:56.567178 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:20:56.567203 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -92 Frequency: 5240
Time: 2021-02-28 22:20:56.567230 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:20:56.567254 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:20:56.567276 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:21:01.402308 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -54 Frequency: 5560
Time: 2021-02-28 22:21:01.402671 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -54 Frequency: 5560
Time: 2021-02-28 22:21:01.402745 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -54 Frequency: 5560
Time: 2021-02-28 22:21:01.402796 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -62 Frequency: 5500
Time: 2021-02-28 22:21:01.402835 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -62 Frequency: 5500
Time: 2021-02-28 22:21:01.402872 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:21:01.402908 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -63 Frequency: 5500
Time: 2021-02-28 22:21:01.402950 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -64 Frequency: 5500
Time: 2021-02-28 22:21:01.403022 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403063 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403102 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403141 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:21:01.403180 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -68 Frequency: 5240
Time: 2021-02-28 22:21:01.403219 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -68 Frequency: 2437
Time: 2021-02-28 22:21:01.403258 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:21:01.403296 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -69 Frequency: 5240
Time: 2021-02-28 22:21:01.403334 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -69 Frequency: 5240
Time: 2021-02-28 22:21:01.403373 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:21:01.403411 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:21:01.403450 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:21:01.403489 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -72 Frequency: 5220

Time: 2021-02-28 22:21:01.403528 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:21:01.403566 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:21:01.403605 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:21:01.404731 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:21:01.404821 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -73 Frequency: 2462
Time: 2021-02-28 22:21:01.404850 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -74 Frequency: 5220
Time: 2021-02-28 22:21:01.404875 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:21:01.404901 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:21:01.404926 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:21:01.404950 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:21:01.404974 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:21:01.404998 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:21:01.405023 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:21:01.405047 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:21:01.405072 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:21:01.405096 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:01.405122 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:01.405146 SSID: Glide_2.4 BSSID: a0:23:9f:8d:3b:67 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:21:01.405171 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:21:01.405195 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:21:01.405221 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:21:01.405245 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405270 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405296 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405320 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:21:01.405346 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:21:01.405370 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405395 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405419 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405444 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405469 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405494 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405519 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405545 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:21:01.405570 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405595 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405620 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405646 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:21:01.405674 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405700 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405726 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405752 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405778 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405804 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:21:01.405829 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:21:01.405855 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -84 Frequency: 5660

Time: 2021-02-28 22:21:01.405880 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:01.405905 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:21:01.405930 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:21:01.405955 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.405982 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406006 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:21:01.406034 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406059 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406085 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406110 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406135 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406160 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406185 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406210 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:01.406235 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:01.406259 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:01.406285 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:21:01.406310 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:21:01.406334 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:21:01.406358 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:21:01.406382 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:21:01.406407 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:21:01.406431 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406456 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406480 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406505 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:01.406532 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:21:01.406557 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:21:01.406581 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:21:01.406606 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:21:01.406631 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:21:01.406657 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:01.406681 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -88 Frequency: 5560
Time: 2021-02-28 22:21:01.406706 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:21:01.406730 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:21:01.406755 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:21:01.406781 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:21:01.406807 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:21:01.406832 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:01.406856 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:21:01.406882 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:21:01.406909 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:21:01.406935 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:21:01.406959 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:21:01.406984 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:01.407009 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -92 Frequency: 5260

Time: 2021-02-28 22:21:01.407034 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -93 Frequency: 5260
Time: 2021-02-28 22:21:01.407059 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -93 Frequency: 5180
Time: 2021-02-28 22:21:01.407085 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -94 Frequency: 5180
Time: 2021-02-28 22:21:05.128836 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.128940 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.128974 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.129002 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:21:05.129030 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -67 Frequency: 2437
Time: 2021-02-28 22:21:05.129056 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:21:05.129084 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:21:05.129109 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:21:05.129135 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:21:05.129161 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:21:05.129186 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:21:05.129211 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129237 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129262 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129287 SSID: BSSID: 18:80:90:f2:97:66 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:21:05.129312 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:21:05.129336 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:21:05.129362 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129386 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129412 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129435 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:21:05.129461 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:21:05.129486 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:21:05.129513 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:21:05.129538 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:21:05.129564 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:21:05.129589 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129614 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:21:05.129638 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:21:05.129664 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:21:05.129689 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129714 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129739 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129765 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:21:05.129790 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129815 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129840 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:21:05.129866 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:21:05.129892 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:21:05.129919 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:21:05.129945 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:21:05.129972 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:21:05.130010 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -81 Frequency: 5560

Time: 2021-02-28 22:21:05.130061 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:21:05.130091 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:21:05.130128 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -82 Frequency: 5220
Time: 2021-02-28 22:21:05.130183 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:21:05.130219 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:21:05.130250 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:21:05.130279 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:21:05.130304 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:21:05.130331 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:21:05.130357 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:21:05.130383 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:21:05.130409 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:21:05.130434 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:21:05.130460 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:21:05.130485 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130510 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130536 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130560 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:21:05.130585 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:21:05.130610 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:21:05.130636 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:21:05.130660 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:21:05.130686 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130711 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130736 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130760 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:21:05.130786 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:21:05.130811 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130835 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130860 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130884 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:21:05.130908 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:21:05.130933 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:21:05.130957 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.130982 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131007 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131032 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131058 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131083 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:21:05.131109 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:21:05.131134 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:21:05.131158 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:05.131184 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:05.131210 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:21:05.131234 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:21:05.131259 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -88 Frequency: 5660

Time: 2021-02-28 22:21:05.131285 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:21:05.131309 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:21:05.131334 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:21:05.131358 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:21:05.131383 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:21:05.131407 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131431 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131456 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131480 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:21:05.131505 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:21:05.131530 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:21:05.131555 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:05.131579 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:05.131603 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:21:05.131711 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:21:05.131740 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:21:05.131764 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -92 Frequency: 5260
Time: 2021-02-28 22:21:05.131789 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:21:05.131815 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:29:59.759095 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -61 Frequency: 5660
Time: 2021-02-28 22:29:59.774618 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -61 Frequency: 5660
Time: 2021-02-28 22:29:59.774708 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -61 Frequency: 5660
Time: 2021-02-28 22:29:59.774732 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -61 Frequency: 5660
Time: 2021-02-28 22:29:59.774755 SSID: Glide_2.4 BSSID: 18:80:90:ce:60:48 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:29:59.774776 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:29:59.774797 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -73 Frequency: 5200
Time: 2021-02-28 22:29:59.774818 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -73 Frequency: 5200
Time: 2021-02-28 22:29:59.774838 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -73 Frequency: 5200
Time: 2021-02-28 22:29:59.774870 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:29:59.774893 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:29:59.774923 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:29:59.774955 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:29:59.774979 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:29:59.775001 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:29:59.775022 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:29:59.775042 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:29:59.775062 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:29:59.775082 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:29:59.775102 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:29:59.775123 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:30:04.336217 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:30:04.336409 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:30:04.336479 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:30:04.336526 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:30:04.336564 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -65 Frequency: 5560
Time: 2021-02-28 22:30:04.336604 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -66 Frequency: 5560

Time: 2021-02-28 22:30:04.336644 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:30:04.336702 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:30:04.336742 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:04.336845 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:04.336894 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:04.336944 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:04.336981 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:30:04.337029 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:30:04.337070 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:30:04.337108 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:30:04.337149 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:30:04.337185 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:30:04.337229 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:30:04.337270 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:30:04.337318 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:30:04.337355 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:04.337397 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:04.337433 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:04.337474 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:04.337516 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:30:04.337554 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:04.337593 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:04.337630 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:04.337668 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:04.337704 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:04.337748 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:04.337788 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:04.337829 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:04.337865 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:04.337914 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.337951 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.337993 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.338033 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.338072 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.338112 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.338149 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.338190 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:04.338227 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -81 Frequency: 5200
Time: 2021-02-28 22:30:04.338273 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:40 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:30:04.338311 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:41 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:30:04.338357 SSID: BSSID: 00:42:5a:4d:9f:46 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:30:04.338395 SSID: Glide_2.4 BSSID: 00:42:5a:4d:9f:48 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:30:04.338439 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:04.338479 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:30:04.338516 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:30:04.338559 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:e1 RSSI: -83 Frequency: 2412

Time: 2021-02-28 22:30:04.338600 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:30:04.338643 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:30:04.338685 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:30:04.338731 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:30:04.338771 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:30:04.338813 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:30:04.338849 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:30:04.338895 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:30:04.338937 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:30:04.338973 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:30:04.339019 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:30:04.339056 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:30:04.339098 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:30:04.339134 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:30:04.339176 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:30:04.339212 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:04.339256 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:30:04.339293 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:30:04.339334 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:30:04.339375 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:30:04.339411 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:04.339451 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:04.339489 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:04.339529 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:04.339566 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:30:04.339609 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:30:04.339644 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:30:04.339688 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:30:04.339723 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:04.339765 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:04.339806 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:04.339844 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:04.339884 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:30:04.339921 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:30:04.339961 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:30:04.339999 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:30:04.340042 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:30:04.340081 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:30:04.340130 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -92 Frequency: 5240
Time: 2021-02-28 22:30:04.340170 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -93 Frequency: 5240
Time: 2021-02-28 22:30:04.340217 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -93 Frequency: 5240
Time: 2021-02-28 22:30:08.240060 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:30:08.240184 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:30:08.240239 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:30:08.240288 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -66 Frequency: 2412
Time: 2021-02-28 22:30:08.240334 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -66 Frequency: 2437

Time: 2021-02-28 22:30:08.240381 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:30:08.240426 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:08.240471 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:08.240517 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:08.240563 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -70 Frequency: 5200
Time: 2021-02-28 22:30:08.240609 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -70 Frequency: 5200
Time: 2021-02-28 22:30:08.240652 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -70 Frequency: 5200
Time: 2021-02-28 22:30:08.240697 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -70 Frequency: 5200
Time: 2021-02-28 22:30:08.240742 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:08.240849 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:08.240896 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:30:08.240941 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:30:08.240985 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:30:08.241031 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:08.241076 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:08.241121 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:08.241166 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:08.241212 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:30:08.241257 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -74 Frequency: 2462
Time: 2021-02-28 22:30:08.241302 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:08.241346 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:08.241391 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:08.241435 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -75 Frequency: 2412
Time: 2021-02-28 22:30:08.241480 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:30:08.241529 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:30:08.241574 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -76 Frequency: 2412
Time: 2021-02-28 22:30:08.241627 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:30:08.241675 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:30:08.241722 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:30:08.241770 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:30:08.241817 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:30:08.241864 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:30:08.241909 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:30:08.241954 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:30:08.241999 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:30:08.242044 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:08.242089 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:08.242133 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:08.242179 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:08.242223 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:08.242268 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:30:08.242312 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:30:08.242357 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:30:08.242402 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:30:08.242446 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:30:08.242490 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -83 Frequency: 5320

Time: 2021-02-28 22:30:08.242536 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:30:08.242580 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:30:08.242625 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:30:08.242670 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:30:08.242714 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:30:08.242759 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:30:08.242804 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:30:08.242850 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:30:08.242895 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:30:08.242940 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:30:08.242986 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:30:08.243031 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:30:08.243079 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:30:08.243125 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:30:08.243169 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:08.243215 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:08.243260 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:08.243305 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:30:08.243349 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:08.243395 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:08.243440 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:08.243486 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:08.243531 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:30:08.243577 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:30:08.243623 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:30:08.243669 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:30:08.243717 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:30:08.243763 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:30:08.243809 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:30:08.243856 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:30:08.243919 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -92 Frequency: 5500
Time: 2021-02-28 22:30:08.244016 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:30:12.594197 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -62 Frequency: 2437
Time: 2021-02-28 22:30:12.594301 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:30:12.594341 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:30:12.594376 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:30:12.594411 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:30:12.594447 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:30:12.594481 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -63 Frequency: 5560
Time: 2021-02-28 22:30:12.594517 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:30:12.594551 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:12.594586 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:30:12.594620 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:30:12.594654 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:30:12.594689 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -68 Frequency: 5200
Time: 2021-02-28 22:30:12.594724 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -72 Frequency: 5320

Time: 2021-02-28 22:30:12.594758 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:12.594793 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:12.594827 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -73 Frequency: 2437
Time: 2021-02-28 22:30:12.594862 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:30:12.594896 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:12.594930 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:12.594965 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:12.594999 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:12.595033 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:30:12.595067 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -74 Frequency: 2412
Time: 2021-02-28 22:30:12.595102 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -74 Frequency: 2412
Time: 2021-02-28 22:30:12.595136 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -74 Frequency: 2412
Time: 2021-02-28 22:30:12.595170 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:30:12.595204 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -78 Frequency: 5280
Time: 2021-02-28 22:30:12.595238 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -78 Frequency: 5280
Time: 2021-02-28 22:30:12.595272 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -78 Frequency: 5280
Time: 2021-02-28 22:30:12.595306 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -78 Frequency: 5280
Time: 2021-02-28 22:30:12.595340 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:12.595373 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:30:12.595408 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:30:12.595441 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:30:12.595476 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:30:12.595510 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:30:12.595545 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:30:12.595580 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:30:12.595613 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:12.595646 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:12.595682 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:30:12.595716 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:30:12.595750 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:12.595784 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:12.595818 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:12.595852 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:30:12.595886 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:30:12.595922 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:30:12.595957 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:30:12.595992 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:30:12.596026 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:30:12.596065 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:30:12.596101 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:30:12.596137 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:30:12.596173 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:30:12.596210 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:12.596246 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:12.596282 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:12.596319 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -89 Frequency: 5200

Time: 2021-02-28 22:30:12.596355 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -89 Frequency: 5200
Time: 2021-02-28 22:30:12.596390 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:12.596425 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:30:12.596460 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:30:12.596494 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:30:12.596529 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:30:12.596563 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:30:12.596597 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -92 Frequency: 5560
Time: 2021-02-28 22:30:12.596631 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:30:16.273537 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:30:16.273682 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:30:16.273758 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:30:16.273816 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:30:16.273865 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:30:16.273909 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:30:16.273952 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:30:16.273994 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:30:16.274035 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:30:16.274076 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -70 Frequency: 5280
Time: 2021-02-28 22:30:16.274117 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:30:16.274158 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:30:16.274200 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -71 Frequency: 5280
Time: 2021-02-28 22:30:16.274242 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:30:16.274284 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:30:16.274325 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:16.274366 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:30:16.274406 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -74 Frequency: 5200
Time: 2021-02-28 22:30:16.274455 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -74 Frequency: 5200
Time: 2021-02-28 22:30:16.274495 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -74 Frequency: 5200
Time: 2021-02-28 22:30:16.274534 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:16.274576 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:16.274620 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:16.274671 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:30:16.274704 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:30:16.274738 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:30:16.274771 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -75 Frequency: 5320
Time: 2021-02-28 22:30:16.274806 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:16.274841 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -77 Frequency: 2437
Time: 2021-02-28 22:30:16.274875 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -77 Frequency: 2437
Time: 2021-02-28 22:30:16.274908 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:30:16.274943 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:30:16.274977 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:16.275011 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:16.275046 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:00 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:16.275081 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:01 RSSI: -80 Frequency: 2462
Time: 2021-02-28 22:30:16.275119 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -81 Frequency: 2412

Time: 2021-02-28 22:30:16.275163 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:30:16.275196 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:30:16.275229 SSID: BSSID: 40:ce:24:e0:b9:06 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:30:16.275261 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:16.275295 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:30:16.275327 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:30:16.275361 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:30:16.275394 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:30:16.275428 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:16.275469 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:16.275502 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:16.275536 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:16.275570 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:30:16.275604 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:30:16.275636 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:30:16.275670 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:30:16.275704 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:30:16.275738 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:30:16.275770 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:30:16.275804 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:30:16.275837 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:16.275870 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:16.275903 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:16.275936 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:16.275971 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:30:16.276005 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:30:16.276040 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:16.276074 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:16.276107 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:16.276142 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:16.276175 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:16.276209 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:16.276243 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:30:16.276276 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:30:16.276310 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:30:16.276344 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:30:16.276378 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:30:16.276412 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:30:16.276445 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:16.276478 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:16.276511 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:16.276544 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -88 Frequency: 5200
Time: 2021-02-28 22:30:16.276577 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:30:16.276610 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:16.276644 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:30:16.276677 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -88 Frequency: 5500

Time: 2021-02-28 22:30:16.276710 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:16.276744 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:30:16.276820 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:30:16.276856 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -89 Frequency: 5200
Time: 2021-02-28 22:30:16.276888 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:30:16.276921 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:16.276954 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:16.276988 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:16.277022 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:16.277055 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:30:16.277089 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:30:16.277126 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:30:16.277160 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:30:16.277195 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:16.277229 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:16.277264 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:16.277297 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:30:16.277330 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:30:16.277363 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:30:16.277396 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:30:16.277429 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:21.837366 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:30:21.837481 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:30:21.837520 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:30:21.837554 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -61 Frequency: 2412
Time: 2021-02-28 22:30:21.837583 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -64 Frequency: 5280
Time: 2021-02-28 22:30:21.837614 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -64 Frequency: 5280
Time: 2021-02-28 22:30:21.837683 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -65 Frequency: 5280
Time: 2021-02-28 22:30:21.837714 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -65 Frequency: 5280
Time: 2021-02-28 22:30:21.837742 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -66 Frequency: 2437
Time: 2021-02-28 22:30:21.837771 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -66 Frequency: 2437
Time: 2021-02-28 22:30:21.837797 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -66 Frequency: 2437
Time: 2021-02-28 22:30:21.837826 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -66 Frequency: 2437
Time: 2021-02-28 22:30:21.837853 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:30:21.837878 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:30:21.837906 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:30:21.837933 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -67 Frequency: 5560
Time: 2021-02-28 22:30:21.837959 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:30:21.837987 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:30:21.838013 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:30:21.838041 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:30:21.838070 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -73 Frequency: 5320
Time: 2021-02-28 22:30:21.838096 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:30:21.838124 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:30:21.838152 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:30:21.838181 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -74 Frequency: 5320

Time: 2021-02-28 22:30:21.838218 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:30:21.838265 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:30:21.838311 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:30:21.838349 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:30:21.838379 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:21.838410 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:21.838449 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:21.838480 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:21.838512 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:30:21.838539 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:30:21.838650 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:30:21.838707 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:30:21.838791 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:30:21.838843 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:e1 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:30:21.838881 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:30:21.838912 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:30:21.838943 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:21.838986 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:e0 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:30:21.839072 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:30:21.839247 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:30:21.839294 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:30:21.839330 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:30:21.839360 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:30:21.839391 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:30:21.839422 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:30:21.839468 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:30:21.839509 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:21.839543 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:21.839631 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:21.839688 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:21.839778 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:21.839831 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:30:21.839877 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:30:21.839914 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:30:21.839948 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:30:21.839977 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:30:21.840006 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:21.840296 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:30:21.840450 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:30:21.840508 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:21.840549 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:21.840586 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:ee RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:30:21.840620 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:00 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:30:21.840697 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:30:21.840742 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:30:21.840854 SSID: Glide_2.4 BSSID: 40:ce:24:e0:ac:08 RSSI: -88 Frequency: 2437

Time: 2021-02-28 22:30:21.840899 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:30:21.840938 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -89 Frequency: 5180
Time: 2021-02-28 22:30:21.840975 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -89 Frequency: 5180
Time: 2021-02-28 22:30:21.841006 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:30:21.841094 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:ef RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:30:21.841135 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:30:21.841168 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:30:21.841202 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:21.841233 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:21.841267 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:21.841303 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:30:21.841333 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:30:21.841365 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:21.841437 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:21.841480 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:21.841515 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:30:21.841543 SSID: BSSID: 18:80:90:f2:96:e9 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:30:21.841576 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:30:21.841609 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:30:21.841650 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:30:21.841686 SSID: Glide-5 BSSID: a0:23:9f:8d:22:69 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:30:21.841716 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:30:21.841746 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:30:21.841780 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:30:21.841818 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:30:21.841854 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:30:21.841884 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:30:21.841914 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:30:21.842028 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:30:21.842075 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:30:21.842107 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:30:21.842188 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -91 Frequency: 2462
Time: 2021-02-28 22:30:21.842233 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:30:21.842268 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:21.842300 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:21.842329 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:30:21.842356 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -92 Frequency: 5200
Time: 2021-02-28 22:30:25.776837 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:30:25.776958 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:30:25.776985 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:30:25.777010 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:30:25.777038 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:30:25.777060 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:30:25.777082 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:30:25.777105 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:30:25.777130 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -69 Frequency: 5560

Time: 2021-02-28 22:30:25.777158 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:30:25.777182 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:30:25.777209 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -71 Frequency: 5320
Time: 2021-02-28 22:30:25.777239 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:30:25.777273 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:30:25.777301 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:30:25.777326 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:30:25.777365 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:30:25.777394 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:25.777419 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:30:25.777449 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -74 Frequency: 5320
Time: 2021-02-28 22:30:25.777478 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:25.777502 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:25.777525 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:25.777549 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:30:25.777608 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:30:25.777630 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:30:25.777650 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:30:25.777677 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:00 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:30:25.777702 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:01 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:30:25.777723 SSID: BSSID: 40:ce:24:e0:b9:06 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:30:25.777746 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:30:25.777770 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:25.777790 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:25.777809 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:30:25.777837 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:25.777860 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:25.777880 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:25.777899 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -81 Frequency: 5320
Time: 2021-02-28 22:30:25.777927 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:25.777949 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:30:25.777970 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:30:25.777994 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:30:25.778017 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:30:25.778041 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:30:25.778063 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:30:25.778092 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:30:25.778115 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:30:25.778141 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:30:25.778164 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:30:25.778187 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:30:25.778210 SSID: SKY45FFF6_EXT BSSID: 68:ff:7b:b0:2f:03 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:30:25.778237 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:30:25.778261 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:30:25.778281 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:30:25.778298 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -86 Frequency: 5500

Time: 2021-02-28 22:30:25.778315 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:25.778337 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:25.778360 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:4f RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:25.778379 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:25.778405 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:25.778426 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:25.778450 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:25.778473 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:30:25.778493 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:30:25.778515 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:30:25.778536 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:30:25.778560 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:25.778582 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:30:25.778609 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:30:25.778633 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:30:25.778652 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:30:25.778675 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:30:25.778699 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:30:25.778724 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:41 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:30:25.778750 SSID: BSSID: 00:42:5a:4c:c8:46 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:30:25.778769 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:30:25.778795 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:30:25.778819 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:30:25.778840 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:30:25.778868 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:30:25.778891 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -91 Frequency: 2437
Time: 2021-02-28 22:30:25.778909 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:30:25.778935 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:30:25.778957 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:25.778979 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:25.779 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:25.779021 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -92 Frequency: 5240
Time: 2021-02-28 22:30:25.779044 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -92 Frequency: 5240
Time: 2021-02-28 22:30:25.779070 SSID: Glide-5 BSSID: 18:80:90:f2:96:e8 RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:30:25.779095 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:30:25.779114 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:30:25.779137 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:30:25.779158 SSID: SKY45FF6_EXT BSSID: 68:ff:7b:b0:2f:04 RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:30:25.779231 SSID: Glide_2.4 BSSID: 18:80:90:ce:1c:88 RSSI: -93 Frequency: 2462
Time: 2021-02-28 22:30:29.911836 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:30:29.911939 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:30:29.911962 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -61 Frequency: 5560
Time: 2021-02-28 22:30:29.911984 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -62 Frequency: 2412
Time: 2021-02-28 22:30:29.912005 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -66 Frequency: 5560
Time: 2021-02-28 22:30:29.912025 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:29.912044 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -72 Frequency: 5320

Time: 2021-02-28 22:30:29.912064 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -72 Frequency: 5320
Time: 2021-02-28 22:30:29.912083 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -72 Frequency: 5660
Time: 2021-02-28 22:30:29.912104 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -72 Frequency: 5660
Time: 2021-02-28 22:30:29.912123 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -72 Frequency: 5660
Time: 2021-02-28 22:30:29.912142 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -72 Frequency: 5660
Time: 2021-02-28 22:30:29.912161 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:29.912180 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:29.912199 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:29.912218 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:30:29.912237 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -77 Frequency: 2437
Time: 2021-02-28 22:30:29.912256 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:30:29.912275 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -77 Frequency: 2437
Time: 2021-02-28 22:30:29.912294 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -77 Frequency: 2437
Time: 2021-02-28 22:30:29.912315 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -77 Frequency: 2437
Time: 2021-02-28 22:30:29.912334 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:30:29.912353 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:30:29.912372 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:30:29.912392 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:30:29.912411 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:30:29.912431 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:30:29.912451 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:30:29.912479 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:30:29.912500 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:30:29.912519 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:30:29.912537 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:30:29.912556 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:30:29.912575 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:00 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:29.912594 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:01 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:29.912615 SSID: BSSID: 40:ce:24:e0:b9:06 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:29.912633 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:30:29.912652 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:30:29.912671 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:30:29.912690 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:30:29.912709 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:30:29.912728 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:29.912746 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:29.912766 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:29.912862 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:29.912886 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:29.912904 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:29.912923 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:29.912942 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:30:29.912961 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -85 Frequency: 5560
Time: 2021-02-28 22:30:29.912982 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:30:29.913001 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:30:29.913040 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -86 Frequency: 5560

Time: 2021-02-28 22:30:29.913088 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:30:29.913121 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:30:29.913142 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:30:29.913162 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:30:29.913182 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:30:29.913203 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:30:29.913222 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:29.913243 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:29.913263 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:29.913283 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -88 Frequency: 5560
Time: 2021-02-28 22:30:29.913303 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:30:29.913325 SSID: WAVLINK-N BSSID: 80:3f:5d:f7:fd:a1 RSSI: -88 Frequency: 2427
Time: 2021-02-28 22:30:29.913345 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:80 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:30:29.913365 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:29.913385 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:29.913405 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:29.913425 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:29.913445 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:29.913465 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:30:29.913485 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:30:29.913504 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:30:29.913524 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:60 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:30:29.913544 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:30:29.913564 SSID: BSSID: a0:23:9f:8d:22:65 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:30:29.913583 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:30:29.913603 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:30:29.913622 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:30:29.913642 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:30:29.913663 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:30:29.913683 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:30:29.913703 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:30:29.913723 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:30:29.913743 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:30:29.913764 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:81 RSSI: -91 Frequency: 2412
Time: 2021-02-28 22:30:29.913784 SSID: BSSID: a0:23:9f:8d:26:85 RSSI: -91 Frequency: 2412
Time: 2021-02-28 22:30:29.913804 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:29.913824 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -92 Frequency: 5220
Time: 2021-02-28 22:30:29.913843 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -92 Frequency: 5500
Time: 2021-02-28 22:30:29.913863 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -93 Frequency: 5220
Time: 2021-02-28 22:30:29.913882 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -93 Frequency: 5280
Time: 2021-02-28 22:30:35.225470 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -55 Frequency: 5560
Time: 2021-02-28 22:30:35.225563 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -55 Frequency: 5560
Time: 2021-02-28 22:30:35.225591 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -55 Frequency: 5560
Time: 2021-02-28 22:30:35.225613 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -55 Frequency: 5560
Time: 2021-02-28 22:30:35.225633 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -66 Frequency: 2437
Time: 2021-02-28 22:30:35.225653 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -67 Frequency: 2412

Time: 2021-02-28 22:30:35.225672 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:35.225692 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:35.225711 SSID: BSSID: 18:80:90:f2:ac:a6 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:30:35.225732 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:30:35.225751 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:30:35.225771 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:30:35.225790 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:30:35.225808 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:35.225828 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:35.225846 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:35.225865 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -73 Frequency: 5280
Time: 2021-02-28 22:30:35.225884 SSID: Glide-5 BSSID: 18:80:90:f2:ac:a8 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:35.225904 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:35.225923 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:30:35.225942 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -74 Frequency: 2437
Time: 2021-02-28 22:30:35.225961 SSID: BSSID: 18:80:90:f2:ac:a9 RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:30:35.225980 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:81 RSSI: -76 Frequency: 2437
Time: 2021-02-28 22:30:35.225999 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:80 RSSI: -76 Frequency: 2437
Time: 2021-02-28 22:30:35.226018 SSID: BSSID: a0:23:9f:8d:44:85 RSSI: -76 Frequency: 2437
Time: 2021-02-28 22:30:35.226038 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:30:35.226058 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:30:35.226078 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:30:35.226098 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:30:35.226118 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:30:35.226137 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:30:35.226156 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:30:35.226175 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:30:35.226194 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:30:35.226213 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:30:35.226232 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:30:35.226252 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:30:35.226272 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:30:35.226291 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:30:35.226310 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -78 Frequency: 2462
Time: 2021-02-28 22:30:35.226329 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:30:35.226348 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -79 Frequency: 2462
Time: 2021-02-28 22:30:35.226367 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:35.226386 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:30:35.226405 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:30:35.226425 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -82 Frequency: 2462
Time: 2021-02-28 22:30:35.226443 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:30:35.226462 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:30:35.226481 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:30:35.226500 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:30:35.226519 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:30:35.226538 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 5320

Time: 2021-02-28 22:30:35.226557 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:30:35.226576 SSID: BSSID: 18:80:90:f2:96:e6 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:30:35.226596 SSID: Glide_2.4 BSSID: 18:80:90:f2:96:e8 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:30:35.226621 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:30:35.226645 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:35.226665 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:30:35.226684 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:30:35.226703 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:40 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:30:35.226723 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:30:35.226747 SSID: BSSID: 18:80:90:f2:aa:46 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:30:35.226767 SSID: UNITE-Staff BSSID: 18:80:90:f2:96:e1 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:30:35.226786 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:30:35.226806 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:30:35.226824 SSID: UNITE-Corporate BSSID: 18:80:90:f2:96:e0 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:30:35.226843 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:30:35.226862 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:35.226882 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:35.226901 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:30:35.226945 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:30:35.226979 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:30:35.227005 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:30:35.227039 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:30:35.227068 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:30:35.227089 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:30:35.227109 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:30:35.227129 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:35.227147 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:35.227166 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:35.227186 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:30:35.227205 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:30:35.227223 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -89 Frequency: 5200
Time: 2021-02-28 22:30:35.227242 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:35.227262 SSID: BSSID: 00:42:5a:4d:9f:49 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:35.227282 SSID: UNITE-Staff BSSID: 00:42:5a:4d:9f:4e RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:35.227301 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:30:35.227320 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:30:35.227339 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:30:35.227358 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:30:35.227377 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:30:35.227396 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:30:35.227415 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:35.227433 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:35.227453 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:35.227471 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:30:35.227490 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:30:35.227508 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -92 Frequency: 5200

Time: 2021-02-28 22:30:35.227527 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -93 Frequency: 5200

C.8 WiFi Scans in the Hallway Downstairs

Time: 2021-02-28 22:34:32.797135 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -54 Frequency: 5320
Time: 2021-02-28 22:34:32.813821 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -59 Frequency: 5320
Time: 2021-02-28 22:34:32.813921 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -59 Frequency: 5320
Time: 2021-02-28 22:34:32.813949 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -59 Frequency: 5320
Time: 2021-02-28 22:34:32.813975 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -60 Frequency: 5560
Time: 2021-02-28 22:34:32.814 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -62 Frequency: 2437
Time: 2021-02-28 22:34:32.814023 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:34:32.814057 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:34:32.814081 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -62 Frequency: 5560
Time: 2021-02-28 22:34:32.814105 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:34:32.814129 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -63 Frequency: 2437
Time: 2021-02-28 22:34:32.814152 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:34:32.814178 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:34:32.814200 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:34:32.814226 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:34:32.814252 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:40 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:34:32.814277 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:34:32.814302 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -65 Frequency: 2462
Time: 2021-02-28 22:34:32.814331 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -66 Frequency: 5200
Time: 2021-02-28 22:34:32.814355 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:34:32.814378 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:34:32.814400 SSID: BSSID: 18:80:90:f2:97:66 RSSI: -67 Frequency: 2412
Time: 2021-02-28 22:34:32.814425 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:34:32.814449 SSID: BSSID: 18:80:90:c0:38:06 RSSI: -67 Frequency: 2462
Time: 2021-02-28 22:34:32.814470 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:34:32.814508 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:34:32.814549 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:34:32.814571 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -69 Frequency: 2412
Time: 2021-02-28 22:34:32.814593 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -73 Frequency: 5500
Time: 2021-02-28 22:34:32.814614 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -73 Frequency: 5500
Time: 2021-02-28 22:34:32.814635 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -73 Frequency: 5500
Time: 2021-02-28 22:34:32.814656 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:34:32.814677 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:34:32.814698 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -75 Frequency: 5660
Time: 2021-02-28 22:34:32.814721 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:34:32.814741 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:34:32.814762 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:32.814784 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:32.814804 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:32.814825 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -77 Frequency: 5320

Time: 2021-02-28 22:34:32.814846 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -78 Frequency: 2437
Time: 2021-02-28 22:34:32.814866 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:32.814887 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:32.814920 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:2f RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:34:32.814950 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:2e RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:34:32.814982 SSID: Glide-5 BSSID: 18:80:90:f2:c0:28 RSSI: -80 Frequency: 5280
Time: 2021-02-28 22:34:32.815010 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:32.815036 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:32.815059 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:32.815080 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:34:32.815100 SSID: SKY45FF6_EXT BSSID: 68:ff:7b:b0:2f:03 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:34:32.815121 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:34:32.815143 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:34:32.815165 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:32.815184 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:20 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:32.815204 SSID: UNITE-Staff BSSID: 18:80:90:f2:c0:21 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:32.815224 SSID: Glide_2.4 BSSID: 00:42:5a:4d:9f:48 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:32.815244 SSID: Glide_2.4 BSSID: 18:80:90:f2:c0:28 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:32.815266 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:34:32.815287 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -85 Frequency: 5220
Time: 2021-02-28 22:34:32.815307 SSID: BSSID: 18:80:90:f2:c0:29 RSSI: -85 Frequency: 5280
Time: 2021-02-28 22:34:32.815329 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:b6:ef RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:34:32.815349 SSID: UNITE-Staff BSSID: 00:42:5a:4d:b6:ee RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:34:32.815371 SSID: Glide-5 BSSID: 00:42:5a:4d:b6:e8 RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:34:32.815391 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -86 Frequency: 5220
Time: 2021-02-28 22:34:32.815411 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:34:32.815432 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:9f:40 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:34:32.815453 SSID: BSSID: 00:42:5a:4d:b6:e9 RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:34:32.815474 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:34:32.815494 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -87 Frequency: 5240
Time: 2021-02-28 22:34:32.815515 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:34:32.815536 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:34:32.815556 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:34:32.815578 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:34:32.815599 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:34:32.815620 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:32.815640 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:32.815661 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:32.815682 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:32.815703 SSID: TP-Link_CC34 BSSID: 60:32:b1:d2:cc:34 RSSI: -88 Frequency: 2417
Time: 2021-02-28 22:34:32.815725 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:34:32.815747 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:32.815768 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:32.815790 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:32.815811 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:34:32.815832 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -89 Frequency: 2412

Time: 2021-02-28 22:34:32.815853 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:34:32.815874 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:34:32.815894 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:32.815915 SSID: BSSID: 18:80:90:ce:50:69 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:32.815936 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:34:32.815964 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:34:32.815990 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:34:32.816024 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:34:32.816051 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:34:32.816075 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:32.816097 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:32.816119 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:34:32.816140 SSID: UNITE-Corporate BSSID: 18:80:90:ce:50:6f RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:34:32.816161 SSID: Bedroom speaker.ynm BSSID: fa:8f:ca:64:3b:5f RSSI: -91 Frequency: 2427
Time: 2021-02-28 22:34:32.816183 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:34:32.816205 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:34:32.816225 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:34:32.816246 SSID: UNITE-Staff BSSID: 18:80:90:ce:50:6e RSSI: -91 Frequency: 5500
Time: 2021-02-28 22:34:32.816266 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -92 Frequency: 5240
Time: 2021-02-28 22:34:32.816288 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:34:32.816309 SSID: SKY45FF6_EXT BSSID: 68:ff:7b:b0:2f:04 RSSI: -93 Frequency: 5180
Time: 2021-02-28 22:34:32.816329 SSID: Glide-5 BSSID: 00:42:5a:4d:9f:48 RSSI: -93 Frequency: 5500
Time: 2021-02-28 22:34:32.816350 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -93 Frequency: 5660
Time: 2021-02-28 22:34:35.399572 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:34:35.399751 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:34:35.399802 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:34:35.399840 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:34:35.399876 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:35.399911 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:35.399944 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:34:35.399980 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:34:35.400014 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:35.400053 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:35.400093 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:35.400127 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -71 Frequency: 2462
Time: 2021-02-28 22:34:35.400161 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:34:35.400197 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:35.400233 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:35.400269 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:35.400304 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:35.400341 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:c1 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:34:35.400377 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:34:35.400413 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:35.400447 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:35.400484 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:35.400537 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -75 Frequency: 5200

Time: 2021-02-28 22:34:35.400577 SSID: BSSID: 18:80:90:f2:aa:46 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:35.400613 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:40 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:34:35.400650 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:34:35.400689 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:35.400724 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:35.400760 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:35.400872 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:35.400916 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:35.400957 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:35.400997 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:34:35.401034 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:34:35.401073 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:34:35.401108 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:34:35.401144 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:35.401176 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:35.401212 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:35.401247 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:35.401284 SSID: BSSID: 40:ce:24:e0:c5:06 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:35.401320 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:35.401355 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:35.401390 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:35.401427 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:35.401465 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:34:35.401502 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:35.401535 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:35.401569 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:35.401604 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:35.401640 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:34:35.401674 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:34:35.401708 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:01 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:34:35.401742 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:34:35.401786 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:34:35.401822 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:35.401858 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:35.401905 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:35.401954 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:35.401981 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:35.402008 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:35.402037 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:35.402063 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:35.402092 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:34:35.402119 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:34:35.402147 SSID: BSSID: c0:25:5c:23:6c:85 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:34:35.402174 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:35.402202 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:35.402229 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -83 Frequency: 5220

Time: 2021-02-28 22:34:35.402256 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:35.402284 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:34:35.402310 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:34:35.402338 SSID: BSSID: 00:42:5a:4c:c8:46 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:35.402365 SSID: Glide_2.4 BSSID: 00:42:5a:4c:c8:48 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:35.402394 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:20 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:35.402423 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:35.402452 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:35.402480 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:35.402508 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:35.402538 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:34:35.402567 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:34:35.402595 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:35.402623 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:35.402650 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:35.402679 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:35.402707 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:35.402746 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:35.402776 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:35.402804 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:34:35.402874 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:35.402910 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:35.402942 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:35.402971 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:35.402998 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:34:35.403032 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:34:35.403066 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:34:35.403096 SSID: Glide-5 BSSID: 00:42:5a:4c:b8:08 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:35.403126 SSID: BSSID: 00:42:5a:4c:b8:09 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:35.403158 SSID: UNITE-Staff BSSID: 00:42:5a:4c:b8:0e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:35.403188 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:b8:0f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:35.403217 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:20 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:34:35.403247 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:35.403276 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:35.403386 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:35.403434 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:34:35.403464 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:34:35.403491 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:35.403520 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:35.403557 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:35.403587 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:35.403616 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:35.403646 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:35.403675 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:35.403702 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:35.403731 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -90 Frequency: 5660

Time: 2021-02-28 22:34:35.403760 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:35.403788 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:35.403816 SSID: Glide_2.4 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 2412
Time: 2021-02-28 22:34:35.403846 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:35.403875 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:35.403903 SSID: Glide-5 BSSID: 18:80:90:f2:a1:e8 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:35.403931 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ee RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:35.403998 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:ef RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:35.404035 SSID: UNITE-Corporate BSSID: 18:80:90:ce:51:0f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:35.404065 SSID: BSSID: 18:80:90:f2:a1:e9 RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:34:35.404094 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -93 Frequency: 5240
Time: 2021-02-28 22:34:37.985257 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:34:37.985381 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:34:37.985428 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -66 Frequency: 5320
Time: 2021-02-28 22:34:37.985463 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -67 Frequency: 5320
Time: 2021-02-28 22:34:37.985494 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:37.985524 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:37.985555 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:34:37.985590 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:34:37.985620 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:37.985671 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:37.985704 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:37.985734 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -71 Frequency: 2462
Time: 2021-02-28 22:34:37.985763 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -72 Frequency: 2412
Time: 2021-02-28 22:34:37.985793 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:37.985823 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:37.985854 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:37.985884 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:34:37.985915 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:c1 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:34:37.985944 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -73 Frequency: 2412
Time: 2021-02-28 22:34:37.985974 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:37.986002 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:37.986032 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:37.986062 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:37.986092 SSID: BSSID: 18:80:90:f2:aa:46 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:37.986122 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:40 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:34:37.986152 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:34:37.986182 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:37.986211 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:37.986241 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:37.986270 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -78 Frequency: 5240
Time: 2021-02-28 22:34:37.986299 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:37.986329 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:37.986359 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:34:37.986391 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:34:37.986422 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -78 Frequency: 5560

Time: 2021-02-28 22:34:37.986453 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:34:37.986482 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:37.986511 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:37.986543 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:37.986574 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:37.986604 SSID: BSSID: 40:ce:24:e0:c5:06 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:37.986654 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:37.986687 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:37.986717 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:37.986747 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:37.986776 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:34:37.986807 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:37.986838 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:37.986869 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:37.986899 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:34:37.986930 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:34:37.986963 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:34:37.986994 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:01 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:34:37.987024 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -81 Frequency: 2462
Time: 2021-02-28 22:34:37.987053 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:34:37.987086 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:37.987118 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:37.987152 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:37.987186 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:37.987216 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:37.987246 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:37.987276 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:37.987318 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -83 Frequency: 5320
Time: 2021-02-28 22:34:37.987349 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:34:37.987379 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:34:37.987408 SSID: BSSID: c0:25:5c:23:6c:85 RSSI: -83 Frequency: 2412
Time: 2021-02-28 22:34:37.987436 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:37.987464 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:37.987494 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:37.987569 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:37.987616 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:34:37.987652 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -84 Frequency: 5220
Time: 2021-02-28 22:34:37.987684 SSID: BSSID: 00:42:5a:4c:c8:46 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:37.987778 SSID: Glide_2.4 BSSID: 00:42:5a:4c:c8:48 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:37.987824 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:20 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:37.987857 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:37.987892 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:37.987922 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:37.987972 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:8f RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:37.988015 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:34:37.988049 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -84 Frequency: 5660

Time: 2021-02-28 22:34:37.988084 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:37.988117 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:37.988150 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:37.988280 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:37.988315 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:37.988348 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:37.988380 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:37.988412 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:34:37.988445 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:37.988477 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:37.988509 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:37.988541 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:37.988574 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:34:37.988605 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:34:37.988635 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:34:37.988667 SSID: Glide-5 BSSID: 00:42:5a:4c:b8:08 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:37.988698 SSID: BSSID: 00:42:5a:4c:b8:09 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:37.988730 SSID: UNITE-Staff BSSID: 00:42:5a:4c:b8:0e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:37.988834 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:b8:0f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:37.988873 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c0:20 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:34:37.988904 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:37.988937 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:37.988970 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:37.989 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:34:37.989032 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:34:37.989063 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:37.989096 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:37.989128 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:37.989161 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:37.989194 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:37.989226 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:37.989259 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:37.989291 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:37.989325 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:37.989356 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:37.989387 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:37.989418 SSID: Glide_2.4 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 2412
Time: 2021-02-28 22:34:37.989449 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:37.989479 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:37.989509 SSID: Glide-5 BSSID: 18:80:90:f2:a1:e8 RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:37.989541 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ee RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:37.989571 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:ef RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:37.989603 SSID: UNITE-Corporate BSSID: 18:80:90:ce:51:0f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:37.989634 SSID: BSSID: 18:80:90:f2:a1:e9 RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:34:37.989667 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -93 Frequency: 5240
Time: 2021-02-28 22:34:40.413666 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -61 Frequency: 2462

Time: 2021-02-28 22:34:40.413788 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:40.413828 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:40.413862 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:40.413891 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:34:40.413918 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:34:40.413946 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:34:40.413974 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:40.414003 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:40.414039 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:34:40.414074 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:34:40.414104 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:34:40.414134 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:34:40.414163 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:40.414192 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:40.414267 SSID: BSSID: 18:80:90:c0:38:06 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:40.414301 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:34:40.414334 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:34:40.414370 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:34:40.414404 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:34:40.414432 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:34:40.414466 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:34:40.414495 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:40.414523 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:40.415221 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:40.415288 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:40.415324 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:34:40.415355 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:34:40.415381 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:34:40.415408 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:34:40.415476 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:34:40.415515 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:40.415552 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:34:40.415587 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:34:40.415620 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:40.415649 SSID: Glide_2.4 BSSID: 00:42:5a:4c:c8:48 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:40.415714 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:40.415751 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:40.415785 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:40.415818 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:40.415850 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:40.415879 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:40.415907 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:40.415939 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:40.415970 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:40.415998 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:40.416060 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -79 Frequency: 2412

Time: 2021-02-28 22:34:40.416098 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:01 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:34:40.416134 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:34:40.416167 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:34:40.416200 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:34:40.416233 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:34:40.416265 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:40.416297 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:40.416328 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:40.416355 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:40.416389 SSID: UNITE-Staff BSSID: 18:80:90:ce:50:6e RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:40.416420 SSID: BSSID: 18:80:90:ce:50:69 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:40.416452 SSID: UNITE-Corporate BSSID: 18:80:90:ce:50:6f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:40.416485 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:40.416517 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:40.416545 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:40.416578 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:40.416610 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:34:40.416639 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:34:40.416671 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:40.416702 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:40.416731 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:40.416766 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:40.416854 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:00 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:40.416910 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:01 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:40.416945 SSID: BSSID: 00:42:5a:0b:ef:06 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:40.416992 SSID: Glide_2.4 BSSID: 00:42:5a:0b:ef:08 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:40.417027 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:40.417058 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:40.417085 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:40.417116 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:40.417146 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:40.417199 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:40.417235 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:40.417265 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:40.417291 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:40.417327 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:40.417359 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:40.417387 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:40.417419 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:40.417450 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:40.417476 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:40.417516 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:40.417549 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:34:40.417576 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:34:40.417637 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:34:40.417672 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -87 Frequency: 5200

Time: 2021-02-28 22:34:40.417698 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:40.417725 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:40.417755 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:40.417813 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:40.417846 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ee RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:40.417873 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:40.417905 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:40.417951 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:40.417982 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:40.418046 SSID: UNITE-Staff BSSID: 00:42:5a:4d:b6:ee RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:34:40.418078 SSID: Glide-5 BSSID: 00:42:5a:4d:b6:e8 RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:34:40.418105 SSID: Glide-5 BSSID: 18:80:90:f2:a1:e8 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:40.418132 SSID: BSSID: 18:80:90:f2:a1:e9 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:40.418164 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:ef RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:40.418195 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:40.418226 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:40.418261 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:40.418321 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:b6:ef RSSI: -89 Frequency: 5180
Time: 2021-02-28 22:34:40.418355 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:34:40.418390 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:34:40.418421 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:34:40.418452 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:34:40.418482 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:40.418513 SSID: Glide-5 BSSID: 18:80:90:f2:a1:a8 RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:34:40.418540 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ae RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:34:40.418617 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:40.418656 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:40.418684 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:40.418714 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:34:40.418740 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:34:40.418765 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:34:40.418792 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:34:40.418818 SSID: BSSID: 18:80:90:f2:a1:a9 RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:34:40.418849 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:af RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:34:40.418879 SSID: BSSID: 00:42:5a:4d:b6:e9 RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:34:40.418906 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:34:40.418931 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:34:40.418962 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:34:40.418992 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -92 Frequency: 5200
Time: 2021-02-28 22:34:40.419020 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:40.419051 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:40.419080 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:40.419109 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -93 Frequency: 5200
Time: 2021-02-28 22:34:40.419137 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -93 Frequency: 5220
Time: 2021-02-28 22:34:40.419165 SSID: MKSWIFI2CE2 BSSID: be:dd:c2:9a:2c:e2 RSSI: -93 Frequency: 2412
Time: 2021-02-28 22:34:42.849468 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -61 Frequency: 2462

Time: 2021-02-28 22:34:42.849561 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:42.849593 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:42.849621 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:42.849650 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:34:42.849679 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:34:42.849707 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -64 Frequency: 5200
Time: 2021-02-28 22:34:42.849734 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:42.849761 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:34:42.849788 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:34:42.849816 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -69 Frequency: 2462
Time: 2021-02-28 22:34:42.849842 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:34:42.849869 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:34:42.849895 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:42.849920 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:42.849947 SSID: BSSID: 18:80:90:c0:38:06 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:42.849974 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:34:42.849999 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:34:42.850030 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:34:42.850058 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:34:42.850084 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -73 Frequency: 5560
Time: 2021-02-28 22:34:42.850111 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -73 Frequency: 5220
Time: 2021-02-28 22:34:42.850138 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:42.850164 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:42.850191 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:42.850217 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:42.850243 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:34:42.850269 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:34:42.850296 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:34:42.850323 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:34:42.850350 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:34:42.850378 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:42.850405 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -77 Frequency: 5660
Time: 2021-02-28 22:34:42.850434 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:34:42.850462 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:42.850488 SSID: Glide_2.4 BSSID: 00:42:5a:4c:c8:48 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:42.850515 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:42.850541 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:42.850571 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:42.850599 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:42.850638 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:42.850678 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:42.850706 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:42.850772 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:42.850801 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:42.850836 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:34:42.850872 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -79 Frequency: 2412

Time: 2021-02-28 22:34:42.850922 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:01 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:34:42.850947 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:34:42.850972 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:34:42.851084 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:34:42.851116 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -81 Frequency: 5500
Time: 2021-02-28 22:34:42.851141 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:42.851166 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:42.851230 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:42.851256 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:34:42.851284 SSID: UNITE-Staff BSSID: 18:80:90:ce:50:6e RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:42.851332 SSID: BSSID: 18:80:90:ce:50:69 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:42.851358 SSID: UNITE-Corporate BSSID: 18:80:90:ce:50:6f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:42.851386 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:42.851411 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:42.851441 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:42.851465 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:42.851493 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:34:42.851652 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:34:42.851681 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:42.851706 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:42.851733 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -83 Frequency: 5220
Time: 2021-02-28 22:34:42.851759 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:42.851788 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:00 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:42.851813 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:01 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:42.851838 SSID: BSSID: 00:42:5a:0b:ef:06 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:42.851862 SSID: Glide_2.4 BSSID: 00:42:5a:0b:ef:08 RSSI: -83 Frequency: 2462
Time: 2021-02-28 22:34:42.852146 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:60 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:42.852173 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:42.852197 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:42.852221 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:34:42.852246 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:42.852270 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:42.852294 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:42.852318 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:42.852341 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:42.852364 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:34:42.852388 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:42.852411 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:42.852434 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:42.852457 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:42.852480 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:42.852504 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:42.852527 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:34:42.852550 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:34:42.852574 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:34:42.852597 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -87 Frequency: 5200

Time: 2021-02-28 22:34:42.852620 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:42.852643 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:42.852666 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:42.852689 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:42.852713 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ee RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:42.852735 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:42.852759 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:42.852836 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:42.852860 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:42.852885 SSID: UNITE-Staff BSSID: 00:42:5a:4d:b6:ee RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:34:42.852909 SSID: Glide-5 BSSID: 00:42:5a:4d:b6:e8 RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:34:42.852932 SSID: Glide-5 BSSID: 18:80:90:f2:a1:e8 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:42.852955 SSID: BSSID: 18:80:90:f2:a1:e9 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:42.852978 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:ef RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:42.853002 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:42.853026 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:42.853049 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:42.853072 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:b6:ef RSSI: -89 Frequency: 5180
Time: 2021-02-28 22:34:42.853095 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:34:42.853119 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:34:42.853142 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:34:42.853166 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -89 Frequency: 2462
Time: 2021-02-28 22:34:42.853189 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:42.853214 SSID: Glide-5 BSSID: 18:80:90:f2:a1:a8 RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:34:42.853237 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ae RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:34:42.853260 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:42.853283 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:42.853306 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:42.853329 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:34:42.853352 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -91 Frequency: 5240
Time: 2021-02-28 22:34:42.853375 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:34:42.853398 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -91 Frequency: 5320
Time: 2021-02-28 22:34:42.853420 SSID: BSSID: 18:80:90:f2:a1:a9 RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:34:42.853443 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:af RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:34:42.853466 SSID: BSSID: 00:42:5a:4d:b6:e9 RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:34:42.853490 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:34:42.853513 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:34:42.853535 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:34:42.853558 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -92 Frequency: 5200
Time: 2021-02-28 22:34:42.853581 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:42.853604 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:42.853627 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:42.853650 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -93 Frequency: 5200
Time: 2021-02-28 22:34:42.853673 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -93 Frequency: 5220
Time: 2021-02-28 22:34:42.853696 SSID: MKSWIFI2CE2 BSSID: be:dd:c2:9a:2c:e2 RSSI: -93 Frequency: 2412
Time: 2021-02-28 22:34:47.028556 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -62 Frequency: 5220

Time: 2021-02-28 22:34:47.028652 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -62 Frequency: 5220
Time: 2021-02-28 22:34:47.028683 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:47.028713 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -63 Frequency: 5220
Time: 2021-02-28 22:34:47.028745 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -63 Frequency: 5220
Time: 2021-02-28 22:34:47.028859 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:34:47.028899 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:34:47.028931 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -65 Frequency: 5200
Time: 2021-02-28 22:34:47.028962 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -66 Frequency: 5200
Time: 2021-02-28 22:34:47.028991 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:34:47.029020 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:34:47.029048 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:34:47.029076 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:34:47.029104 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:34:47.029132 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:34:47.029160 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:34:47.029188 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -69 Frequency: 5660
Time: 2021-02-28 22:34:47.029215 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:47.029242 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:47.029269 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:47.029295 SSID: BSSID: 18:80:90:c0:38:06 RSSI: -70 Frequency: 2462
Time: 2021-02-28 22:34:47.029326 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -71 Frequency: 2412
Time: 2021-02-28 22:34:47.029358 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:34:47.029385 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:34:47.029413 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -76 Frequency: 5280
Time: 2021-02-28 22:34:47.029440 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:34:47.029468 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:34:47.029495 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:34:47.029523 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:34:47.029551 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -77 Frequency: 5500
Time: 2021-02-28 22:34:47.029579 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:34:47.029608 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:34:47.029637 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:34:47.029664 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:34:47.029690 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:34:47.029716 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:34:47.029743 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -78 Frequency: 5280
Time: 2021-02-28 22:34:47.029770 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:34:47.029791 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -79 Frequency: 5280
Time: 2021-02-28 22:34:47.029817 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:47.029843 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:47.029864 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:47.029886 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -79 Frequency: 5320
Time: 2021-02-28 22:34:47.029912 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:34:47.029938 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:34:47.029959 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:34:47.029981 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -81 Frequency: 5240

Time: 2021-02-28 22:34:47.030007 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:34:47.030033 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:34:47.030054 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:34:47.030077 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:34:47.030103 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:47.030129 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:34:47.030150 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:34:47.030172 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:34:47.030198 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:34:47.030226 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:34:47.030246 SSID: Glide_2.4 BSSID: 40:01:7a:44:76:68 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:47.030268 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:34:47.030289 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:34:47.030316 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:34:47.030343 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:61 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:47.030369 SSID: BSSID: 40:01:7a:44:76:66 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:47.030400 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:a1 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:47.030429 SSID: Glide_2.4 BSSID: 18:80:90:f2:a1:a8 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:47.030459 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:47.030488 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:47.030515 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:47.030543 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:34:47.030570 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:47.030598 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:47.030625 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:47.030651 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:47.030682 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:47.030710 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:47.030737 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:80 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:47.030765 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:81 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:47.030792 SSID: BSSID: a0:23:9f:8d:26:85 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:47.030823 SSID: Glide_2.4 BSSID: a0:23:9f:8d:26:87 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:47.030851 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:34:47.030877 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:a0 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:47.030905 SSID: BSSID: 18:80:90:f2:a1:a6 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:47.030933 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:34:47.030961 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:34:47.030988 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -86 Frequency: 5260
Time: 2021-02-28 22:34:47.031019 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:34:47.031047 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:34:47.031077 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:34:47.031105 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -86 Frequency: 5200
Time: 2021-02-28 22:34:47.031135 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:47.031166 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:47.031195 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:47.031222 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -87 Frequency: 5560

Time: 2021-02-28 22:34:47.031249 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:47.031279 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -87 Frequency: 5560
Time: 2021-02-28 22:34:47.031308 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:47.031335 SSID: BSSID: 18:80:90:f2:a1:a9 RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:34:47.031362 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:af RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:34:47.031389 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:47.031418 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:47.031445 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -87 Frequency: 5260
Time: 2021-02-28 22:34:47.031473 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:34:47.031502 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:34:47.031531 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:34:47.031558 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:47.031585 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:34:47.031612 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:47.031639 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:47.031670 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:47.031698 SSID: Glide-5 BSSID: 18:80:90:f2:a1:a8 RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:34:47.031725 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ae RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:34:47.031752 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:47.031779 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:47.031805 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:47.031831 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:47.031858 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:47.031884 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:47.031915 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:47.031946 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:47.031974 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:47.032001 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:47.032029 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:34:47.032056 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:34:47.032084 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:34:47.032113 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:47.032144 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:47.032174 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:47.032204 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:34:47.032232 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:34:47.032260 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:34:47.032291 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -91 Frequency: 5180
Time: 2021-02-28 22:34:47.032320 SSID: BSSID: a0:23:9f:8d:37:45 RSSI: -91 Frequency: 2437
Time: 2021-02-28 22:34:47.032346 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:34:47.032375 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:34:47.032404 SSID: Glide_2.4 BSSID: a0:23:9f:8d:37:47 RSSI: -93 Frequency: 2437
Time: 2021-02-28 22:34:51.500037 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -63 Frequency: 2462
Time: 2021-02-28 22:34:51.500169 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -63 Frequency: 2462
Time: 2021-02-28 22:34:51.500199 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -64 Frequency: 5660
Time: 2021-02-28 22:34:51.500219 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -64 Frequency: 2462

Time: 2021-02-28 22:34:51.500241 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:34:51.500264 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -65 Frequency: 5660
Time: 2021-02-28 22:34:51.500292 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:34:51.500315 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:01 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:34:51.500338 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:34:51.500360 SSID: BSSID: 18:80:90:f2:ad:06 RSSI: -65 Frequency: 2412
Time: 2021-02-28 22:34:51.500410 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -67 Frequency: 5220
Time: 2021-02-28 22:34:51.500435 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -67 Frequency: 5220
Time: 2021-02-28 22:34:51.500463 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -67 Frequency: 5220
Time: 2021-02-28 22:34:51.500485 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -67 Frequency: 5220
Time: 2021-02-28 22:34:51.500506 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -68 Frequency: 5660
Time: 2021-02-28 22:34:51.500528 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:34:51.500548 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:34:51.500570 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -72 Frequency: 5280
Time: 2021-02-28 22:34:51.500591 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -72 Frequency: 5660
Time: 2021-02-28 22:34:51.500610 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -73 Frequency: 5660
Time: 2021-02-28 22:34:51.500631 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -75 Frequency: 5280
Time: 2021-02-28 22:34:51.500651 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -75 Frequency: 5560
Time: 2021-02-28 22:34:51.500672 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -75 Frequency: 5560
Time: 2021-02-28 22:34:51.500693 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -75 Frequency: 5560
Time: 2021-02-28 22:34:51.500714 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -75 Frequency: 5560
Time: 2021-02-28 22:34:51.500734 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -76 Frequency: 5200
Time: 2021-02-28 22:34:51.500759 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:34:51.500830 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -76 Frequency: 5320
Time: 2021-02-28 22:34:51.500856 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:34:51.500883 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:34:51.500905 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:34:51.500928 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:34:51.500949 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:51.500970 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:34:51.500993 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:34:51.501019 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:34:51.501041 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:34:51.501063 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:34:51.501086 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -79 Frequency: 5500
Time: 2021-02-28 22:34:51.501109 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:c1 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:51.501131 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:c0 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:51.501153 SSID: BSSID: a0:23:9f:8d:33:c5 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:51.501174 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:51.501194 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:34:51.501216 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:34:51.501237 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:34:51.501259 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:34:51.501282 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -81 Frequency: 5560
Time: 2021-02-28 22:34:51.501307 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:51.501329 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -82 Frequency: 5260

Time: 2021-02-28 22:34:51.501351 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -82 Frequency: 5260
Time: 2021-02-28 22:34:51.501399 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -82 Frequency: 5260
Time: 2021-02-28 22:34:51.501423 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -82 Frequency: 5260
Time: 2021-02-28 22:34:51.501445 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:51.501465 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:51.501486 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -82 Frequency: 5500
Time: 2021-02-28 22:34:51.501512 SSID: BSSID: 40:ce:24:e0:ac:06 RSSI: -82 Frequency: 2437
Time: 2021-02-28 22:34:51.501535 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:34:51.501558 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:34:51.501580 SSID: BSSID: a0:23:9f:8d:37:45 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:51.501602 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -83 Frequency: 5500
Time: 2021-02-28 22:34:51.501625 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:01 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:51.501647 SSID: Glide_2.4 BSSID: 40:ce:24:e0:ac:08 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:34:51.501668 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:34:51.501689 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:34:51.501712 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:51.501734 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:51.501759 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -84 Frequency: 2437
Time: 2021-02-28 22:34:51.501783 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4a:21 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:34:51.501808 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4a:2f RSSI: -84 Frequency: 5320
Time: 2021-02-28 22:34:51.501831 SSID: Glide-5 BSSID: 18:80:90:f2:90:08 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:34:51.501854 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:51.501876 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:51.501902 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:51.501925 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:51.501949 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4a:20 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:51.501972 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4a:27 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:51.501996 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:51.502019 SSID: Glide-5 BSSID: a0:23:9f:8d:4a:29 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:51.502041 SSID: BSSID: a0:23:9f:8d:4a:2a RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:51.502062 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4a:2e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:51.502085 SSID: BSSID: 18:80:90:f2:90:09 RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:34:51.502105 SSID: UNITE-Staff BSSID: 18:80:90:f2:90:0e RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:34:51.502127 SSID: UNITE-Corporate BSSID: 18:80:90:f2:90:0f RSSI: -86 Frequency: 5660
Time: 2021-02-28 22:34:51.502150 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -86 Frequency: 2437
Time: 2021-02-28 22:34:51.502174 SSID: Glide-5 BSSID: 18:80:90:f2:a1:a8 RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:34:51.502199 SSID: BSSID: 18:80:90:f2:a1:a9 RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:34:51.502230 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ae RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:34:51.502251 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:af RSSI: -87 Frequency: 5180
Time: 2021-02-28 22:34:51.502273 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:34:51.502294 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:34:51.502313 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -88 Frequency: 5240
Time: 2021-02-28 22:34:51.502333 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:51.502357 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:51.502382 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:51.502457 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -88 Frequency: 5320

Time: 2021-02-28 22:34:51.502480 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:51.502498 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:51.502519 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:51.502540 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:51.502565 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:51.502590 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:51.502660 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:34:51.502691 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -89 Frequency: 5200
Time: 2021-02-28 22:34:51.502712 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -89 Frequency: 5200
Time: 2021-02-28 22:34:51.502732 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:34:51.502753 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:86:cf RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:34:51.502774 SSID: Glide-5 BSSID: 00:42:5a:4d:f7:68 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:51.502815 SSID: BSSID: 00:42:5a:4d:f7:69 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:51.502862 SSID: UNITE-Staff BSSID: 00:42:5a:4d:f7:6e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:51.502886 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -91 Frequency: 2412
Time: 2021-02-28 22:34:51.502908 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:34:51.502929 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:34:51.502951 SSID: Glide-5 BSSID: 40:ce:24:e0:86:c8 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:34:51.502973 SSID: BSSID: 40:ce:24:e0:86:c9 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:34:51.502994 SSID: UNITE-Staff BSSID: 40:ce:24:e0:86:ce RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:34:51.503015 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:f7:6f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:34:51.503035 SSID: Glide-5 BSSID: 70:df:2f:5f:36:49 RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:34:51.503061 SSID: BSSID: 70:df:2f:5f:36:4a RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:34:51.503107 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:4f RSSI: -92 Frequency: 5180
Time: 2021-02-28 22:34:51.503131 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -93 Frequency: 5660
Time: 2021-02-28 22:34:55.411798 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:55.411909 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:34:55.411933 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:34:55.411955 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -63 Frequency: 2462
Time: 2021-02-28 22:34:55.411980 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:34:55.412008 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -63 Frequency: 5660
Time: 2021-02-28 22:34:55.412031 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:34:55.412050 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -66 Frequency: 5220
Time: 2021-02-28 22:34:55.412072 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -66 Frequency: 5220
Time: 2021-02-28 22:34:55.412098 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -66 Frequency: 5220
Time: 2021-02-28 22:34:55.412120 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -66 Frequency: 5220
Time: 2021-02-28 22:34:55.412140 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:00 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:34:55.412162 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:01 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:34:55.412183 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:34:55.412204 SSID: BSSID: 18:80:90:f2:ad:06 RSSI: -68 Frequency: 2412
Time: 2021-02-28 22:34:55.412225 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:34:55.412249 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -72 Frequency: 5560
Time: 2021-02-28 22:34:55.412271 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -72 Frequency: 5560
Time: 2021-02-28 22:34:55.412293 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -72 Frequency: 5560
Time: 2021-02-28 22:34:55.412313 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -74 Frequency: 5200
Time: 2021-02-28 22:34:55.412339 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -74 Frequency: 5200

Time: 2021-02-28 22:34:55.412360 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -74 Frequency: 2462
Time: 2021-02-28 22:34:55.412381 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -74 Frequency: 2462
Time: 2021-02-28 22:34:55.412404 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -74 Frequency: 2462
Time: 2021-02-28 22:34:55.412427 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:55.412448 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:55.412475 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:55.412498 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -74 Frequency: 5560
Time: 2021-02-28 22:34:55.412518 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:55.412541 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -75 Frequency: 5200
Time: 2021-02-28 22:34:55.412561 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412581 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412604 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:34:55.412626 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:80 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412646 SSID: Glide_2.4 BSSID: 40:ce:24:e0:b9:08 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412666 SSID: BSSID: a0:23:9f:8d:4b:85 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412689 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:00 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412713 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:01 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412736 SSID: BSSID: 40:ce:24:e0:b9:06 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:34:55.412757 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:34:55.412836 SSID: Glide-5 BSSID: 18:80:90:f2:97:68 RSSI: -76 Frequency: 5500
Time: 2021-02-28 22:34:55.412860 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:55.412881 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:55.412903 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:55.412924 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:55.412944 SSID: BSSID: 18:80:90:f2:97:69 RSSI: -78 Frequency: 5500
Time: 2021-02-28 22:34:55.412969 SSID: Glide_2.4 BSSID: 40:01:7a:44:76:68 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:55.412989 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:55.413009 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:34:55.413033 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:60 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:55.413058 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:55.413084 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:55.413111 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:34:55.413135 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:61 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:34:55.413156 SSID: BSSID: 40:01:7a:44:76:66 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:34:55.413176 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:34:55.413196 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:34:55.413216 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:34:55.413235 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:34:55.413256 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:34:55.413276 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:34:55.413299 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -81 Frequency: 5280
Time: 2021-02-28 22:34:55.413320 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:34:55.413343 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:34:55.413368 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:34:55.413390 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -81 Frequency: 5220
Time: 2021-02-28 22:34:55.413410 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -81 Frequency: 5220

Time: 2021-02-28 22:34:55.413430 SSID: BSSID: a0:23:9f:8d:23:c5 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:34:55.413449 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -82 Frequency: 5280
Time: 2021-02-28 22:34:55.413474 SSID: Glide-5 BSSID: 40:ce:24:e0:b9:08 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:55.413494 SSID: BSSID: 40:ce:24:e0:b9:09 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:55.413514 SSID: UNITE-Staff BSSID: 40:ce:24:e0:b9:0e RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:55.413537 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:b9:0f RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:34:55.413562 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:34:55.413583 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:34:55.413605 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -82 Frequency: 5200
Time: 2021-02-28 22:34:55.413629 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -82 Frequency: 5280
Time: 2021-02-28 22:34:55.413650 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -83 Frequency: 5200
Time: 2021-02-28 22:34:55.413670 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:34:55.413693 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:34:55.413715 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:34:55.413736 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -84 Frequency: 5260
Time: 2021-02-28 22:34:55.413757 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -84 Frequency: 5260
Time: 2021-02-28 22:34:55.413782 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -84 Frequency: 5260
Time: 2021-02-28 22:34:55.413803 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -84 Frequency: 5200
Time: 2021-02-28 22:34:55.413824 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:34:55.413847 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:34:55.413872 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:34:55.413892 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:34:55.413912 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:34:55.413931 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:34:55.413952 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -85 Frequency: 5200
Time: 2021-02-28 22:34:55.413973 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4a:27 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:55.413994 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4a:21 RSSI: -85 Frequency: 2412
Time: 2021-02-28 22:34:55.414015 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:34:55.414037 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:34:55.414058 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -86 Frequency: 5240
Time: 2021-02-28 22:34:55.414080 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:55.414103 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:34:55.414124 SSID: MKSWIFI2CE2 BSSID: be:dd:c2:9a:2c:e2 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:34:55.414144 SSID: Glide-5 BSSID: 18:80:90:f2:a1:a8 RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:34:55.414165 SSID: BSSID: 18:80:90:f2:a1:a9 RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:34:55.414189 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:ae RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:34:55.414210 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:af RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:34:55.414232 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:34:55.414253 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:34:55.414273 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:34:55.414297 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4a:20 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:34:55.414318 SSID: BSSID: a0:23:9f:8d:4a:25 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:34:55.414341 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -87 Frequency: 5320
Time: 2021-02-28 22:34:55.414362 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:34:55.414384 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:34:55.414405 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:80 RSSI: -88 Frequency: 2412

Time: 2021-02-28 22:34:55.414427 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -89 Frequency: 5560
Time: 2021-02-28 22:34:55.414447 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:34:55.414468 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -89 Frequency: 2412
Time: 2021-02-28 22:34:55.414489 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:55.414510 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:55.414534 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:34:55.414556 SSID: UNITE-Staff BSSID: 18:80:90:f2:a1:a1 RSSI: -89 Frequency: 2437
Time: 2021-02-28 22:34:55.414578 SSID: Glide-5 BSSID: 18:80:90:f2:c5:c8 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:55.414600 SSID: BSSID: 18:80:90:f2:c5:c9 RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:55.414622 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c5:cf RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:55.414645 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:34:55.414662 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:34:55.414682 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:55.414704 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:55.414725 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:34:55.414746 SSID: UNITE-Corporate BSSID: 18:80:90:f2:a1:a0 RSSI: -90 Frequency: 2437
Time: 2021-02-28 22:34:55.414766 SSID: UNITE-Staff BSSID: 18:80:90:f2:c5:ce RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:34:55.414788 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2d:41 RSSI: -90 Frequency: 2412
Time: 2021-02-28 22:34:55.414809 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:34:55.414829 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:55.414849 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:34:59.154223 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -57 Frequency: 5200
Time: 2021-02-28 22:34:59.154328 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -58 Frequency: 5200
Time: 2021-02-28 22:34:59.154355 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -58 Frequency: 5200
Time: 2021-02-28 22:34:59.154374 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -58 Frequency: 5200
Time: 2021-02-28 22:34:59.154395 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -61 Frequency: 2462
Time: 2021-02-28 22:34:59.154416 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -61 Frequency: 2462
Time: 2021-02-28 22:34:59.154438 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -62 Frequency: 5220
Time: 2021-02-28 22:34:59.154459 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -62 Frequency: 5220
Time: 2021-02-28 22:34:59.154480 SSID: BSSID: f4:7f:35:84:3a:a2 RSSI: -62 Frequency: 2462
Time: 2021-02-28 22:34:59.154501 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -62 Frequency: 5220
Time: 2021-02-28 22:34:59.154522 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -63 Frequency: 5220
Time: 2021-02-28 22:34:59.154542 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:34:59.154562 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:34:59.154579 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -66 Frequency: 5660
Time: 2021-02-28 22:34:59.154600 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -67 Frequency: 5660
Time: 2021-02-28 22:34:59.154620 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:34:59.154644 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:00 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:34:59.154665 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:01 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:34:59.154687 SSID: BSSID: 18:80:90:c0:38:06 RSSI: -68 Frequency: 2462
Time: 2021-02-28 22:34:59.154709 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:34:59.154730 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:34:59.154750 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:34:59.154770 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:01 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:34:59.154796 SSID: Glide_2.4 BSSID: a0:23:9f:8d:2f:07 RSSI: -70 Frequency: 2437
Time: 2021-02-28 22:34:59.154842 SSID: BSSID: a0:23:9f:8d:2f:05 RSSI: -70 Frequency: 2437

Time: 2021-02-28 22:34:59.154866 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:00 RSSI: -71 Frequency: 2437
Time: 2021-02-28 22:34:59.154893 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -71 Frequency: 5560
Time: 2021-02-28 22:34:59.154931 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -71 Frequency: 2412
Time: 2021-02-28 22:34:59.154957 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -74 Frequency: 5660
Time: 2021-02-28 22:34:59.154978 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -75 Frequency: 2437
Time: 2021-02-28 22:34:59.154995 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:34:59.155016 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:34:59.155042 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -76 Frequency: 5660
Time: 2021-02-28 22:34:59.155064 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:81 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:34:59.155088 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -77 Frequency: 2462
Time: 2021-02-28 22:34:59.155110 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:59.155132 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:59.155152 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:34:59.155176 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:34:59.155199 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:60 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:59.155220 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:61 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:59.155242 SSID: BSSID: 18:80:90:f2:97:66 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:59.155262 SSID: Glide_2.4 BSSID: 18:80:90:f2:97:68 RSSI: -78 Frequency: 2412
Time: 2021-02-28 22:34:59.155283 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:34:59.155303 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -79 Frequency: 5220
Time: 2021-02-28 22:34:59.155329 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -80 Frequency: 5240
Time: 2021-02-28 22:34:59.155356 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:34:59.155389 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:34:59.155409 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:34:59.155429 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:34:59.155448 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:34:59.155468 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:59.155492 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:59.155515 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:34:59.155538 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:34:59.155559 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:34:59.155579 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -80 Frequency: 5220
Time: 2021-02-28 22:34:59.155601 SSID: BSSID: 34:db:fd:e0:07:75 RSSI: -80 Frequency: 2437
Time: 2021-02-28 22:34:59.155621 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:34:59.155647 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -81 Frequency: 5240
Time: 2021-02-28 22:34:59.155670 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:34:59.155691 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -81 Frequency: 2437
Time: 2021-02-28 22:34:59.155713 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:34:59.155738 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:34:59.155764 SSID: Glide_2.4 BSSID: 40:01:7a:44:76:68 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:34:59.155791 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:61 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:34:59.155812 SSID: BSSID: 40:01:7a:44:76:66 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:34:59.155833 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:60 RSSI: -82 Frequency: 2412
Time: 2021-02-28 22:34:59.155858 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -83 Frequency: 5240
Time: 2021-02-28 22:34:59.155879 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -83 Frequency: 5280
Time: 2021-02-28 22:34:59.155902 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -83 Frequency: 5560

Time: 2021-02-28 22:34:59.155923 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:34:59.155944 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:34:59.155964 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -83 Frequency: 5560
Time: 2021-02-28 22:34:59.155985 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:34:59.156006 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -84 Frequency: 5240
Time: 2021-02-28 22:34:59.156027 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:34:59.156047 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:34:59.156068 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -84 Frequency: 5280
Time: 2021-02-28 22:34:59.156093 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:34:59.156118 SSID: BSSID: 18:80:90:f2:aa:49 RSSI: -84 Frequency: 5560
Time: 2021-02-28 22:34:59.156140 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -84 Frequency: 5500
Time: 2021-02-28 22:34:59.156164 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:34:59.156190 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -85 Frequency: 5240
Time: 2021-02-28 22:34:59.156212 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:20 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:59.156233 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:21 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:59.156257 SSID: Glide_2.4 BSSID: 40:01:7a:fe:04:28 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:59.156279 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:34:59.156302 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:59.156324 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:59.156345 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:59.156366 SSID: BSSID: 40:01:7a:fe:04:26 RSSI: -85 Frequency: 2437
Time: 2021-02-28 22:34:59.156386 SSID: Glide-5 BSSID: a0:23:9f:8d:37:49 RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:59.156406 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:37:4f RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:59.156429 SSID: BSSID: a0:23:9f:8d:37:4a RSSI: -85 Frequency: 5500
Time: 2021-02-28 22:34:59.156451 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:00 RSSI: -86 Frequency: 2412
Time: 2021-02-28 22:34:59.156473 SSID: Glide-5 BSSID: 00:42:5a:4d:c2:68 RSSI: -86 Frequency: 5260
Time: 2021-02-28 22:34:59.156493 SSID: BSSID: 00:42:5a:4d:c2:69 RSSI: -86 Frequency: 5260
Time: 2021-02-28 22:34:59.156512 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c2:6e RSSI: -86 Frequency: 5260
Time: 2021-02-28 22:34:59.156533 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c2:6f RSSI: -86 Frequency: 5260
Time: 2021-02-28 22:34:59.156555 SSID: UNITE-Staff BSSID: a0:23:9f:8d:37:4e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:34:59.156579 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:01 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:59.156601 SSID: Glide_2.4 BSSID: 00:42:5a:4d:c5:08 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:59.156623 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:59.156645 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:59.156665 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:59.156687 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -87 Frequency: 5660
Time: 2021-02-28 22:34:59.156711 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:34:59.156733 SSID: BSSID: 00:42:5a:4d:c5:06 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:59.156755 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:81 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:59.156829 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:34:59.156857 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:34:59.156877 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:34:59.156899 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -87 Frequency: 5200
Time: 2021-02-28 22:34:59.156920 SSID: Glide_2.4 BSSID: 18:80:90:f2:ac:a8 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:34:59.156941 SSID: Glide_2.4 BSSID: 00:42:5a:4d:b6:e8 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:34:59.156964 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -88 Frequency: 5320

Time: 2021-02-28 22:34:59.156985 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:34:59.157005 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:59.157027 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:59.157048 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:59.157069 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:34:59.157089 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:34:59.157108 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:59.157129 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:59.157148 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -88 Frequency: 5280
Time: 2021-02-28 22:34:59.157168 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:a0 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:34:59.157189 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:a1 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:34:59.157213 SSID: Glide_2.4 BSSID: 40:01:7a:e5:b3:e8 RSSI: -88 Frequency: 2412
Time: 2021-02-28 22:34:59.157234 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -89 Frequency: 5320
Time: 2021-02-28 22:34:59.157254 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -89 Frequency: 5180
Time: 2021-02-28 22:34:59.157274 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -89 Frequency: 5180
Time: 2021-02-28 22:34:59.157295 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:34:59.157318 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:34:59.157338 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:34:59.157358 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:34:59.157378 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:34:59.157398 SSID: UNITE-Staff BSSID: 18:80:90:ce:50:6e RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:34:59.157418 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:34:59.157440 SSID: BSSID: 18:80:90:ce:50:69 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:34:59.157460 SSID: UNITE-Corporate BSSID: 18:80:90:ce:50:6f RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:34:59.157479 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:34:59.157499 SSID: BSSID: 00:42:5a:4c:b8:09 RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:34:59.157521 SSID: UNITE-Staff BSSID: 00:42:5a:4c:b8:0e RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:34:59.157542 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:b8:0f RSSI: -90 Frequency: 5560
Time: 2021-02-28 22:34:59.157564 SSID: Glide-5 BSSID: 00:42:5a:4c:b8:08 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:34:59.157585 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -93 Frequency: 5660
Time: 2021-02-28 22:35:02.055837 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:a0 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:35:02.055923 SSID: uS-Glide-2.4 BSSID: f4:7f:35:84:3a:a6 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:35:02.055947 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:a1 RSSI: -64 Frequency: 2462
Time: 2021-02-28 22:35:02.055969 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -69 Frequency: 5200
Time: 2021-02-28 22:35:02.055989 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -69 Frequency: 5200
Time: 2021-02-28 22:35:02.056010 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -69 Frequency: 5200
Time: 2021-02-28 22:35:02.056030 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -70 Frequency: 5220
Time: 2021-02-28 22:35:02.056051 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:35:02.056071 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:40 RSSI: -71 Frequency: 2462
Time: 2021-02-28 22:35:02.056092 SSID: BSSID: 18:80:90:f2:aa:46 RSSI: -71 Frequency: 2462
Time: 2021-02-28 22:35:02.056112 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -71 Frequency: 5220
Time: 2021-02-28 22:35:02.056132 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -72 Frequency: 5200
Time: 2021-02-28 22:35:02.056152 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -72 Frequency: 5220
Time: 2021-02-28 22:35:02.056172 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -72 Frequency: 2437
Time: 2021-02-28 22:35:02.056192 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -72 Frequency: 2437
Time: 2021-02-28 22:35:02.056212 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -72 Frequency: 2462

Time: 2021-02-28 22:35:02.056232 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:35:02.056251 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -74 Frequency: 2462
Time: 2021-02-28 22:35:02.056271 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -75 Frequency: 5240
Time: 2021-02-28 22:35:02.056291 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:35:02.056310 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:35:02.056330 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -76 Frequency: 5240
Time: 2021-02-28 22:35:02.056350 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:35:02.056370 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -77 Frequency: 5320
Time: 2021-02-28 22:35:02.056389 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056409 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056428 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056448 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056468 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056488 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056507 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056526 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -77 Frequency: 5560
Time: 2021-02-28 22:35:02.056546 SSID: Glide_2.4 BSSID: 18:80:90:f2:ad:08 RSSI: -77 Frequency: 2412
Time: 2021-02-28 22:35:02.056566 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:35:02.056586 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:35:02.056605 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:35:02.056625 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:35:02.056645 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -78 Frequency: 5320
Time: 2021-02-28 22:35:02.056665 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -78 Frequency: 5560
Time: 2021-02-28 22:35:02.056684 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:35:02.056704 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:35:02.056723 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:35:02.056743 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:35:02.056762 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:35:02.056832 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -78 Frequency: 5660
Time: 2021-02-28 22:35:02.056854 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:35:02.056873 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:35:02.056893 SSID: Glide_2.4 BSSID: a0:23:9f:8d:33:c7 RSSI: -79 Frequency: 2437
Time: 2021-02-28 22:35:02.056913 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -80 Frequency: 5320
Time: 2021-02-28 22:35:02.056948 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:35:02.056968 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:35:02.056988 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:35:02.057008 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -80 Frequency: 5500
Time: 2021-02-28 22:35:02.057028 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:01 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:35:02.057048 SSID: BSSID: 18:80:90:f2:ad:06 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:35:02.057068 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:35:02.057093 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:35:02.057124 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:35:02.057147 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:35:02.057162 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:c1 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:35:02.057176 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:33:cf RSSI: -81 Frequency: 5660
Time: 2021-02-28 22:35:02.057198 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -82 Frequency: 2412

Time: 2021-02-28 22:35:02.057213 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:35:02.057228 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:35:02.057242 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:35:02.057256 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:35:02.057271 SSID: Glide_2.4 BSSID: 18:80:90:ce:50:68 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:35:02.057286 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:35:02.057301 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:35:02.057316 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:35:02.057330 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:35:02.057346 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -85 Frequency: 2462
Time: 2021-02-28 22:35:02.057372 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:35:02.057392 SSID: UNITE-Staff BSSID: 18:80:90:f2:97:6e RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:35:02.057414 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -86 Frequency: 5500
Time: 2021-02-28 22:35:02.057432 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:35:02.057447 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:35:02.057462 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -86 Frequency: 5280
Time: 2021-02-28 22:35:02.057477 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:35:02.057515 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -86 Frequency: 5320
Time: 2021-02-28 22:35:02.057565 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:35:02.057583 SSID: UNITE-Staff BSSID: 18:80:90:ce:50:6e RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:35:02.057634 SSID: BSSID: 18:80:90:ce:50:69 RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:35:02.057649 SSID: UNITE-Corporate BSSID: 18:80:90:ce:50:6f RSSI: -87 Frequency: 5500
Time: 2021-02-28 22:35:02.057664 SSID: Glide_2.4 BSSID: 40:01:7a:44:76:68 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:35:02.057679 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -87 Frequency: 5220
Time: 2021-02-28 22:35:02.057694 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:35:02.057709 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -87 Frequency: 5280
Time: 2021-02-28 22:35:02.057724 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:61 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:35:02.057739 SSID: BSSID: 40:01:7a:44:76:66 RSSI: -87 Frequency: 2412
Time: 2021-02-28 22:35:02.057754 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:e0 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:35:02.057769 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:e1 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:35:02.057784 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:b6:ef RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:35:02.057800 SSID: BSSID: 00:42:5a:4d:b6:e9 RSSI: -88 Frequency: 5180
Time: 2021-02-28 22:35:02.057816 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:35:02.057831 SSID: Glide_2.4 BSSID: ac:4a:56:41:dc:e8 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:35:02.057845 SSID: BSSID: ac:4a:56:41:dc:e6 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:35:02.057860 SSID: BSSID: ac:4a:56:41:dc:e9 RSSI: -89 Frequency: 5240
Time: 2021-02-28 22:35:02.057875 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:02.057890 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:02.057905 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:02.057920 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:35:02.057934 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:35:02.057955 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:35:02.057971 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:35:02.057986 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ac:af RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:02.058001 SSID: UNITE-Staff BSSID: 00:42:5a:4d:b6:ee RSSI: -90 Frequency: 5180
Time: 2021-02-28 22:35:02.058017 SSID: Glide-5 BSSID: 00:42:5a:4d:b6:e8 RSSI: -90 Frequency: 5180

Time: 2021-02-28 22:35:02.058032 SSID: Glide-5 BSSID: ac:4a:56:41:dc:e8 RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:35:02.058047 SSID: UNITE-Staff BSSID: ac:4a:56:41:dc:ee RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:35:02.058062 SSID: UNITE-Corporate BSSID: ac:4a:56:41:dc:ef RSSI: -90 Frequency: 5240
Time: 2021-02-28 22:35:02.058077 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:35:02.058093 SSID: BSSID: a0:23:9f:8d:26:8a RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:35:02.058107 SSID: UNITE-Staff BSSID: 18:80:90:f2:c6:2e RSSI: -90 Frequency: 5320
Time: 2021-02-28 22:35:02.058122 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -90 Frequency: 5660
Time: 2021-02-28 22:35:02.058137 SSID: BSSID: 00:42:5a:4c:b8:09 RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:35:02.058151 SSID: UNITE-Staff BSSID: 00:42:5a:4c:b8:0e RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:35:02.058166 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:b8:0f RSSI: -91 Frequency: 5560
Time: 2021-02-28 22:35:02.058321 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:26:8f RSSI: -91 Frequency: 5280
Time: 2021-02-28 22:35:02.058433 SSID: BSSID: 00:42:5a:4d:c5:09 RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:35:02.058460 SSID: UNITE-Staff BSSID: 00:42:5a:4d:c5:0e RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:35:02.058483 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:c5:0f RSSI: -91 Frequency: 5200
Time: 2021-02-28 22:35:02.058507 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:35:02.058540 SSID: BSSID: a0:23:9f:8d:22:6a RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:35:02.058564 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:6e RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:35:02.058591 SSID: BSSID: 40:01:7a:44:76:69 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:35:02.058615 SSID: UNITE-Staff BSSID: 40:01:7a:44:76:6e RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:35:02.058636 SSID: Glide-5 BSSID: a0:23:9f:8d:26:89 RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:35:02.058659 SSID: UNITE-Staff BSSID: a0:23:9f:8d:26:8e RSSI: -92 Frequency: 5280
Time: 2021-02-28 22:35:02.058683 SSID: Glide-5 BSSID: 00:42:5a:4d:c5:08 RSSI: -92 Frequency: 5200
Time: 2021-02-28 22:35:02.058705 SSID: Glide_2.4 BSSID: 18:80:90:f2:a1:a8 RSSI: -92 Frequency: 2437
Time: 2021-02-28 22:35:02.058728 SSID: BSSID: 18:80:90:f2:a1:a6 RSSI: -92 Frequency: 2437
Time: 2021-02-28 22:35:02.058749 SSID: UNITE-Corporate BSSID: 18:80:90:f2:c6:2f RSSI: -92 Frequency: 5320
Time: 2021-02-28 22:35:02.058773 SSID: Glide-5 BSSID: 40:01:7a:44:76:68 RSSI: -93 Frequency: 5280
Time: 2021-02-28 22:35:02.058796 SSID: UNITE-Corporate BSSID: 40:01:7a:44:76:6f RSSI: -93 Frequency: 5280
Time: 2021-02-28 22:35:09.002100 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:70 RSSI: -68 Frequency: 2437
Time: 2021-02-28 22:35:09.002203 SSID: Glide-5 BSSID: a0:23:9f:8d:4b:89 RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:35:09.002236 SSID: BSSID: a0:23:9f:8d:4b:8a RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:35:09.002263 SSID: UNITE-Staff BSSID: a0:23:9f:8d:4b:8e RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:35:09.002292 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:4b:8f RSSI: -68 Frequency: 5560
Time: 2021-02-28 22:35:09.002318 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:71 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:35:09.002343 SSID: Glide_2.4 BSSID: 34:db:fd:e0:07:77 RSSI: -69 Frequency: 2437
Time: 2021-02-28 22:35:09.002369 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:4e RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:35:09.002397 SSID: Glide-5 BSSID: 18:80:90:f2:aa:48 RSSI: -69 Frequency: 5560
Time: 2021-02-28 22:35:09.002423 SSID: UNITE-Corporate BSSID: 00:42:5a:0b:ef:0f RSSI: -69 Frequency: 5320
Time: 2021-02-28 22:35:09.002449 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:4f RSSI: -70 Frequency: 5560
Time: 2021-02-28 22:35:09.002475 SSID: Glide-5 BSSID: 00:42:5a:0b:ef:08 RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:35:09.002501 SSID: BSSID: 00:42:5a:0b:ef:09 RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:35:09.002526 SSID: UNITE-Staff BSSID: 00:42:5a:0b:ef:0e RSSI: -70 Frequency: 5320
Time: 2021-02-28 22:35:09.002553 SSID: UNITE-Corporate BSSID: 34:db:fd:e0:07:7f RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:35:09.002580 SSID: Glide-5 BSSID: 34:db:fd:e0:07:79 RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:35:09.002606 SSID: UNITE-Staff BSSID: 34:db:fd:e0:07:7e RSSI: -71 Frequency: 5240
Time: 2021-02-28 22:35:09.002632 SSID: Glide_2.4 BSSID: a0:23:9f:8d:4b:87 RSSI: -72 Frequency: 2462
Time: 2021-02-28 22:35:09.002658 SSID: BSSID: 34:db:fd:e0:07:7a RSSI: -73 Frequency: 5240

Time: 2021-02-28 22:35:09.002684 SSID: UNITE-Staff BSSID: 40:01:7a:e5:b3:ee RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:35:09.002710 SSID: UNITE-Corporate BSSID: 40:01:7a:e5:b3:ef RSSI: -74 Frequency: 5500
Time: 2021-02-28 22:35:09.002741 SSID: uS-Glide BSSID: f4:7f:35:84:3a:aa RSSI: -75 Frequency: 5220
Time: 2021-02-28 22:35:09.002767 SSID: UNITE-Corporate BSSID: 18:80:90:f2:aa:40 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:35:09.002793 SSID: UNITE-Staff BSSID: 18:80:90:f2:aa:41 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:35:09.002820 SSID: Glide_2.4 BSSID: 18:80:90:f2:aa:48 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:35:09.002846 SSID: BSSID: 18:80:90:f2:aa:46 RSSI: -75 Frequency: 2462
Time: 2021-02-28 22:35:09.002872 SSID: Glide-5 BSSID: 40:01:7a:e5:b3:e8 RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:35:09.002898 SSID: BSSID: 40:01:7a:e5:b3:e9 RSSI: -75 Frequency: 5500
Time: 2021-02-28 22:35:09.002924 SSID: Glide_2.4 BSSID: 18:80:90:c0:38:08 RSSI: -76 Frequency: 2462
Time: 2021-02-28 22:35:09.002951 SSID: UNITE-Corporate BSSID: 18:80:90:c0:38:0f RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:35:09.002978 SSID: UNITE-Staff BSSID: 18:80:90:c0:38:0e RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:35:09.003004 SSID: BSSID: 18:80:90:c0:38:09 RSSI: -77 Frequency: 5200
Time: 2021-02-28 22:35:09.003030 SSID: UNITE-Corporate BSSID: f4:7f:35:84:3a:af RSSI: -77 Frequency: 5220
Time: 2021-02-28 22:35:09.003057 SSID: Glide-5 BSSID: 18:80:90:c0:38:08 RSSI: -78 Frequency: 5200
Time: 2021-02-28 22:35:09.003083 SSID: BSSID: f4:7f:35:84:3a:ad RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:35:09.003110 SSID: UNITE-Staff BSSID: f4:7f:35:84:3a:ae RSSI: -78 Frequency: 5220
Time: 2021-02-28 22:35:09.003136 SSID: UNITE-Staff BSSID: 40:ce:24:e0:c5:0e RSSI: -79 Frequency: 5660
Time: 2021-02-28 22:35:09.003162 SSID: Glide_2.4 BSSID: c0:25:5c:23:6c:87 RSSI: -79 Frequency: 2412
Time: 2021-02-28 22:35:09.003189 SSID: BSSID: a0:23:9f:8d:23:ca RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:35:09.003214 SSID: UNITE-Staff BSSID: a0:23:9f:8d:23:ce RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:35:09.003243 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:cf RSSI: -79 Frequency: 5200
Time: 2021-02-28 22:35:09.003269 SSID: Glide-5 BSSID: a0:23:9f:8d:2f:09 RSSI: -80 Frequency: 5560
Time: 2021-02-28 22:35:09.003297 SSID: Glide-5 BSSID: 40:ce:24:e0:c5:08 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:35:09.003323 SSID: BSSID: 40:ce:24:e0:c5:09 RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:35:09.003352 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:c5:0f RSSI: -80 Frequency: 5660
Time: 2021-02-28 22:35:09.003380 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:81 RSSI: -80 Frequency: 2412
Time: 2021-02-28 22:35:09.003407 SSID: Glide-5 BSSID: a0:23:9f:8d:23:c9 RSSI: -80 Frequency: 5200
Time: 2021-02-28 22:35:09.003434 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:23:c0 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:35:09.003461 SSID: Glide_2.4 BSSID: a0:23:9f:8d:23:c7 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:35:09.003490 SSID: BSSID: a0:23:9f:8d:23:c5 RSSI: -81 Frequency: 2412
Time: 2021-02-28 22:35:09.003517 SSID: UNITE-Corporate BSSID: 40:01:7a:fe:04:2f RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:35:09.003544 SSID: UNITE-Staff BSSID: 40:01:7a:fe:04:2e RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:35:09.003570 SSID: Glide-5 BSSID: 40:01:7a:fe:04:28 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:35:09.003596 SSID: Glide-5 BSSID: 40:ce:24:e0:ac:08 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:35:09.003622 SSID: BSSID: 40:01:7a:fe:04:29 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:35:09.003647 SSID: BSSID: a0:23:9f:8d:2f:0a RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:35:09.003674 SSID: UNITE-Staff BSSID: a0:23:9f:8d:2f:0e RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:35:09.003700 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:2f:0f RSSI: -82 Frequency: 5560
Time: 2021-02-28 22:35:09.003726 SSID: UNITE-Staff BSSID: c0:25:5c:23:6c:8e RSSI: -82 Frequency: 5180
Time: 2021-02-28 22:35:09.003752 SSID: Glide-5 BSSID: a0:23:9f:8d:44:89 RSSI: -82 Frequency: 5320
Time: 2021-02-28 22:35:09.003778 SSID: Glide-5 BSSID: 70:df:2f:5f:33:29 RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:35:09.003804 SSID: UNITE-Staff BSSID: 70:df:2f:5f:33:2e RSSI: -82 Frequency: 5660
Time: 2021-02-28 22:35:09.003830 SSID: UNITE-Staff BSSID: 18:80:90:f2:ad:0e RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:35:09.003856 SSID: UNITE-Corporate BSSID: c0:25:5c:23:6c:8f RSSI: -83 Frequency: 5180
Time: 2021-02-28 22:35:09.003883 SSID: UNITE-Staff BSSID: a0:23:9f:8d:44:8e RSSI: -83 Frequency: 5320

Time: 2021-02-28 22:35:09.003910 SSID: BSSID: 18:80:90:f2:ad:09 RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:35:09.003935 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:33:2f RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:35:09.003961 SSID: Glide_2.4 BSSID: a0:23:9f:8d:44:87 RSSI: -83 Frequency: 2437
Time: 2021-02-28 22:35:09.003988 SSID: BSSID: 70:df:2f:5f:33:2a RSSI: -83 Frequency: 5660
Time: 2021-02-28 22:35:09.004014 SSID: UNITE-Corporate BSSID: 18:80:90:f2:ad:0f RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:35:09.004041 SSID: Glide-5 BSSID: c0:25:5c:23:6c:89 RSSI: -84 Frequency: 5180
Time: 2021-02-28 22:35:09.004067 SSID: Glide-5 BSSID: 18:80:90:f2:ad:08 RSSI: -84 Frequency: 5660
Time: 2021-02-28 22:35:09.004094 SSID: MKSWIFI2CE2 BSSID: be:dd:c2:9a:2c:e2 RSSI: -84 Frequency: 2412
Time: 2021-02-28 22:35:09.004120 SSID: Glide_2.4 BSSID: a0:23:9f:8d:22:67 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:35:09.004147 SSID: UNITE-Staff BSSID: a0:23:9f:8d:22:61 RSSI: -84 Frequency: 2462
Time: 2021-02-28 22:35:09.004173 SSID: UNITE-Staff BSSID: 00:42:5a:4d:b6:ee RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:35:09.004198 SSID: UNITE-Corporate BSSID: 40:ce:24:e0:ac:0f RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:35:09.004224 SSID: BSSID: 40:ce:24:e0:ac:09 RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:35:09.004250 SSID: UNITE-Staff BSSID: 40:ce:24:e0:ac:0e RSSI: -85 Frequency: 5320
Time: 2021-02-28 22:35:09.004276 SSID: BSSID: c0:25:5c:23:6c:8a RSSI: -85 Frequency: 5180
Time: 2021-02-28 22:35:09.004302 SSID: Glide-5 BSSID: 18:80:90:ce:60:48 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:35:09.004327 SSID: BSSID: 18:80:90:ce:60:49 RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:35:09.004353 SSID: UNITE-Staff BSSID: 18:80:90:ce:60:4e RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:35:09.004379 SSID: UNITE-Corporate BSSID: 18:80:90:ce:60:4f RSSI: -85 Frequency: 5660
Time: 2021-02-28 22:35:09.004404 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:b6:ef RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:35:09.004429 SSID: Glide-5 BSSID: 00:42:5a:4d:b6:e8 RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:35:09.004455 SSID: BSSID: 00:42:5a:4d:b6:e9 RSSI: -86 Frequency: 5180
Time: 2021-02-28 22:35:09.004480 SSID: Glide-5 BSSID: 00:42:5a:4c:b8:08 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:35:09.004505 SSID: BSSID: 00:42:5a:4c:b8:09 RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:35:09.004530 SSID: UNITE-Staff BSSID: 00:42:5a:4c:b8:0e RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:35:09.004556 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:b8:0f RSSI: -86 Frequency: 5560
Time: 2021-02-28 22:35:09.004582 SSID: UNITE-Corporate BSSID: 18:80:90:ce:1c:80 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:35:09.004607 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:81 RSSI: -86 Frequency: 2462
Time: 2021-02-28 22:35:09.004633 SSID: Glide_2.4 BSSID: a0:23:9f:8d:53:47 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:35:09.004659 SSID: BSSID: 70:df:2f:5f:36:65 RSSI: -87 Frequency: 2437
Time: 2021-02-28 22:35:09.004684 SSID: BSSID: 18:80:90:ce:1c:86 RSSI: -87 Frequency: 2462
Time: 2021-02-28 22:35:09.004710 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:61 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:35:09.004735 SSID: BSSID: 18:80:90:f2:8e:66 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:35:09.004760 SSID: Glide_2.4 BSSID: 18:80:90:f2:8e:68 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:35:09.004854 SSID: UNITE-Staff BSSID: 18:80:90:ce:50:6e RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:35:09.004883 SSID: Glide-5 BSSID: 18:80:90:ce:50:68 RSSI: -88 Frequency: 5500
Time: 2021-02-28 22:35:09.004908 SSID: Glide-5 BSSID: 00:42:5a:4c:c8:48 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:35:09.004935 SSID: BSSID: 00:42:5a:4c:c8:49 RSSI: -88 Frequency: 5660
Time: 2021-02-28 22:35:09.004960 SSID: Glide-5 BSSID: a0:23:9f:8d:3b:69 RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:35:09.004985 SSID: BSSID: a0:23:9f:8d:3b:6a RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:35:09.005011 SSID: UNITE-Staff BSSID: a0:23:9f:8d:3b:6e RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:35:09.005037 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:3b:6f RSSI: -88 Frequency: 5220
Time: 2021-02-28 22:35:09.005063 SSID: BSSID: a0:23:9f:8d:44:8a RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:35:09.005089 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:44:8f RSSI: -88 Frequency: 5320
Time: 2021-02-28 22:35:09.005114 SSID: BSSID: a0:23:9f:8d:53:45 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:35:09.005140 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:61 RSSI: -88 Frequency: 2437

Time: 2021-02-28 22:35:09.005171 SSID: Glide_2.4 BSSID: 70:df:2f:5f:36:67 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:35:09.005205 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:60 RSSI: -88 Frequency: 2437
Time: 2021-02-28 22:35:09.005231 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:40 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:35:09.005256 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:41 RSSI: -88 Frequency: 2462
Time: 2021-02-28 22:35:09.005281 SSID: UNITE-Corporate BSSID: 18:80:90:f2:97:6f RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:35:09.005306 SSID: UNITE-Corporate BSSID: 18:80:90:ce:50:6f RSSI: -89 Frequency: 5500
Time: 2021-02-28 22:35:09.005331 SSID: UNITE-Staff BSSID: 00:42:5a:4c:c8:4e RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:09.005356 SSID: UNITE-Corporate BSSID: 00:42:5a:4c:c8:4f RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:09.005385 SSID: UNITE-Staff BSSID: a0:23:9f:8d:53:4e RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:35:09.005415 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:53:4f RSSI: -89 Frequency: 5220
Time: 2021-02-28 22:35:09.005439 SSID: UNITE-Corporate BSSID: 18:80:90:f2:8e:6f RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:35:09.005460 SSID: UNITE-Staff BSSID: 18:80:90:f2:8e:6e RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:35:09.005481 SSID: Glide-5 BSSID: 18:80:90:f2:8e:68 RSSI: -89 Frequency: 5280
Time: 2021-02-28 22:35:09.005501 SSID: Glide-5 BSSID: a0:23:9f:8d:33:c9 RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:09.005522 SSID: BSSID: a0:23:9f:8d:33:ca RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:09.005547 SSID: UNITE-Staff BSSID: a0:23:9f:8d:33:ce RSSI: -89 Frequency: 5660
Time: 2021-02-28 22:35:09.005568 SSID: BSSID: 18:80:90:ce:50:69 RSSI: -90 Frequency: 5500
Time: 2021-02-28 22:35:09.005589 SSID: Glide-5 BSSID: 18:80:90:ce:1c:88 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:35:09.005610 SSID: BSSID: 18:80:90:ce:1c:89 RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:35:09.005640 SSID: UNITE-Staff BSSID: 18:80:90:ce:1c:8e RSSI: -90 Frequency: 5200
Time: 2021-02-28 22:35:09.005663 SSID: BSSID: a0:23:9f:8d:53:4a RSSI: -90 Frequency: 5220
Time: 2021-02-28 22:35:09.005684 SSID: BSSID: 18:80:90:f2:8e:69 RSSI: -90 Frequency: 5280
Time: 2021-02-28 22:35:09.005704 SSID: Glide_2.4 BSSID: 00:42:5a:4d:b6:e8 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:35:09.005725 SSID: Glide-5 BSSID: 70:df:2f:5f:36:69 RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:35:09.005747 SSID: UNITE-Staff BSSID: 70:df:2f:5f:36:6e RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:35:09.005768 SSID: UNITE-Corporate BSSID: 70:df:2f:5f:36:6f RSSI: -90 Frequency: 5260
Time: 2021-02-28 22:35:09.005790 SSID: UNITE-Corporate BSSID: 00:42:5a:4d:b6:e0 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:35:09.005811 SSID: UNITE-Staff BSSID: 00:42:5a:4d:b6:e1 RSSI: -90 Frequency: 2462
Time: 2021-02-28 22:35:09.005832 SSID: Glide-5 BSSID: a0:23:9f:8d:53:49 RSSI: -91 Frequency: 5220
Time: 2021-02-28 22:35:09.005853 SSID: BSSID: 70:df:2f:5f:36:6a RSSI: -91 Frequency: 5260
Time: 2021-02-28 22:35:09.005873 SSID: UNITE-Corporate BSSID: a0:23:9f:8d:22:6f RSSI: -91 Frequency: 5660
Time: 2021-02-28 22:35:09.005894 SSID: UNITE-Staff BSSID: 18:80:90:f2:ac:ae RSSI: -92 Frequency: 5660
Time: 2021-02-28 22:35:09.005915 SSID: BSSID: 40:ce:24:e0:a9:89 RSSI: -92 Frequency: 5200
Time: 2021-02-28 22:35:09.005936 SSID: Glide-5 BSSID: 40:ce:24:e0:a9:88 RSSI: -93 Frequency: 5200
Time: 2021-02-28 22:35:09.005957 SSID: UNITE-Staff BSSID: 40:ce:24:e0:a9:8e RSSI: -93 Frequency: 5200
Time: 2021-02-28 22:35:09.005978 SSID: Glide-5 BSSID: 40:ce:24:e0:a8:a8 RSSI: -93 Frequency: 5260
Time: 2021-02-28 22:35:09.006 SSID: BSSID: 40:ce:24:e0:a8:a9 RSSI: -93 Frequency: 5260
