

POWER CONVERSION AND DISTRIBUTION

CONVERSION PACKAGE

CLEAN POWER – CLEAN DESIGN

The SRV Series offers a wide range of power in a compact design weighing just 6 pounds. Atwood technology maintains safe, cool, reliable converter/charging operation, ensuring the performance of electrical systems with sophisticated controls. The thermostatically-controlled cooling fan also reduces noise and increases warm-weather performance. The SRV's circuitry includes over-temperature and over-current protection, safeguarding against power supply damage. Two external fuses provide "reversed battery" protection, preventing damage caused by cross-wiring. SRV filtered power provides smooth, optimum DC appliance operation, and the full output rating is available for battery charging. **Common features:** • Regulated output voltage ensures against erratic charging and damage to amenities. • Over-current protection prevents battery damage caused by over-charging. • Short circuit protection prevents damage to power supply. • Reverse battery hook-up protection prevents power supply damage due to cross-wiring. • Fan cooled, prevents unit from over-heating. • 100% burn-in tested ensures stringent quality assurance. • 2-year limited warranty. • UL/cUL certified.



Atwood® by **FORTRON**



CONVERTER/CHARGER & DISTRIBUTION PACKAGE

COOL, QUIET CONVERTER/CHARGING

With the wide selection of converter/charger output ratings, you can have "Total Package" convenience for easy replacement of other converter/chargers in the aftermarket. The Total Package carries a standard Atwood 2-yr. limited warranty, and is UL/cUL certified. Atwood® by Fortron has developed electronic switch mode technology that maintains safe, reliable, and cool operations. The cooling fan is thermostatically controlled, which also reduces noise and improves performance in warmer climates. The converter/charger circuitry includes over-temperature and over-current protection, safeguarding against power supply damage. Two external fuses provide "reversed battery" protection, preventing damage caused by cross-wiring from battery terminals.



CONVERTER SPECIFICATIONS

Order #	Model	Amps	Cut Out Size	External Dimensions	Input Voltage AC	Output Voltage DC	Input Current Amps	Output Current Amps	Breaker Config. AC	DC Branch Circuits
CONVERTER ONLY										
13574	SRV32	32	–	10.35" W x 7.75" D x 3.5" H	105/130	13.6	7	32	–	–
13577	SRV75	75	–	10.35" W x 7.75" D x 3.5" H	105/130	13.6	15	75	–	–
CONVERTER WITH PANEL (STANDARD BREAKER)										
13580	TP3-5530SS	55	12.5" W x 11.25" H	14" W x 12" H x 7" D	105/130	13.6	13	55	Main + 5 Branch	15



PARKPOWER by MARINCO 15 & 20AMP PRODUCTS

125-Volt Power Inlets: Straight blade inlet.

• Use 15Amp with any standard 15A extension cord; use 20Amp with any standard 20A extension cord. • UV resistant housing and cap.

Power Inlet:

14149 15A, White #150BBIW.RV 1

79862 15A, Black #150BBI.RV 1

14150 20A, White #200BBIW.RV 1

NEMA L5-30R  30A 125V LOCKING

30 AMP/125V, LOCKING PRODUCTS



PARKPOWER by MARINCO 30 AMP ACCESSORIES

Marine grade construction, 5 year mfr. warranty. Stainless steel fasteners. Contoured weatherproof cover design allows better grip. Yellow.

30 Amp, 125 Volt Accessories:

16641 Male Plug #305CRPN 1

16684 Weatherproof Cover with Sealing Ring for 20 & 30 Amp Female Connectors #103RN 1



RODALE LOCKING FEMALE CONNECTORS



30A 125V female locking connector, cETL approved, use with RV30ARCV (Coast #50069) for weatherproof seal. 2.5" H x 2.5" W x 4.5" L.

50067 30A Locking Female Connector #RV30AFDC 25

50A 125/250V female locking connector, cETL approved, use with RV50ARCV (Coast #50070) for weatherproof seal. 2.5" H x 2.5" W x 5.5" L.

50068 50A Locking Female Connector #RV50AFDC 25

POWER CORDS & ACCESSORIES

ELECTRICAL

E

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

ParkPower
by Marincó



PARKPOWER by MARINCO 30 AMP PRODUCTS

FEMALE CONNECTOR

- 30A 125-V locking connector. • Corrosion resistant materials. • Use with 103RV, 103ELRV for weatherproof seal.

14292 30A 125-V Connector
#305CRV 4

WEATHERPROOF COVER

- Weatherproof cover with threaded ring. • Use with 305CRV connector for a weather proof seal.

14293 Weatherproof Cover f/305CRV
#103RV 4



POWER INLETS

Standard Power Inlet. • 30A 125-V locking type. • Glass-filled polyester. • Easy Lock™ system. • Watertight. • 4-way right angle rear safety enclosure. • Stainless steel trim. • Accepts all Marincó detachable power cordsets.

14294 30A 125-V Power Inlet
#301ELRV 4

Stainless Steel Power Inlet. 30A 125V Locking. 316 stainless steel. Easy Lock™ System. Soft Touch™ cap design. Watertight cap. Accepts all Marincó detachable power cordsets. Locking cap.

16639 Stainless Steel w/8-Way Right Angle Rear Safety Enclosure
#303SSEL-B 1

COOPER WIRING 3-WIRE U-GROUND RUBBER CAP

Parallel blade with cord clamp. Rubber cap with reinforced zinc-plated, steel plate (.031" thick). Fiber cover included. Cord grips accept all cords from 19/64" to 9/16" dia. solid brass with #6-32 brass terminal screws backed out and staked. Grounding screw. Rated:15A-125V. 1875 Watts.



10481 3-Wire Male Cord Connector
#2867-BOX 1

11743



PARKPOWER by MARINCO 30A PRODUCTS

30A ADAPTER, 125-V

- 30A straight blade (2-pole, 3-wire) RV plug with 30A female locking connector. • Includes Easy Lock™ ring and threaded ring for connector.

11743 Adapter, 30A Male RV to 30A Locking Female (Not for sale in Canada)
#1PCMRV 1



30A LOCKING POWERCORD™ PLUS CORDSET WITH RV PLUG

LED power indicator light. Thumbprint locator. Super flexible 10/3 cable. Comfort grip ends. Easy Lock™ system. Includes threaded ring and Easy Lock™ ring. Watertight molded plug & connector ends. 5 year warranty.

13898 Cordset, 30A 25ft 25SPP.RV
#25SPP.RV 4



PARKPOWER by MARINCO RV 30 AMP RIGHT ANGLE LOCKING CORDSET

- GripLock™ handle design for easy hook-up and correct blade alignment with inlet, even in darkness. • Super flexible 10/3 cable. • Watertight molded plug and connector ends. • High quality construction. • Includes threaded ring and Easy Lock™ ring.

16835 30A RH Angle Locking Cord, 30'
(Not for sale in Canada)
#30RPCRV 4

50A 125/250V 3-POLE, 4-WIRE LOCKING

NEMA SS-1
W G 50A 125V LOCKING

NEMA SS-2
X W G 50A 125/250V LOCKING

50 AMP 125V, LOCKING & 50 AMP 125/250V, LOCKING PRODUCTS



PARKPOWER 50AMP PRODUCTS

Female Connector: 50A 125/250-V. Easy to install. Use with 50A 125/250-V 4-wire cable.

14295 50A 125/250-V Female Connector
#6364CRV 4

Weatherproof cover with threaded ring for 50A.

14296 Weatherproof Cover f/6364CRV
#7715CRV 4

MARINCO WEATHERPROOF COVER

For 50 Amp Connectors

16656 Cover w/Threaded Ring for #6360CRN or #6394CRN #7715CRN 1

ParkPower
by Marincó



RV POWER INLETS

50A 125/250V Stainless Steel Inlet. Does not include rear safety enclosure with strain relief. 4 wire system. UL & CSA approved.

16654 50A125/250V, Stainless Steel, 4-Wire w/Easy Lock™ System #6373EL 1

Standard 50A Power Inlet. 50A 125/250-V. Glass-filled polyester. Easy Lock™ system. Watertight. Rear safety enclosure with strain relief. Stainless steel trim.

14011 50A 125/250-V Power Inlet
#6353ELRV 1

POWER CORDS & ACCESSORIES


In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

ParkPower
by Marincó

50A LOCKING POWER CORD PLUS™ CORDSET WITH RV PLUG

- LED power indicator light.
- Thumbprint locator.
- Molded straight blade plug.
- Super flexible 6/3-8/1 cable.
- Comfort grip connector.
- Easy Lock™ System.
- Includes threaded ring and Easy Lock™ ring.
- Watertight molded plug & connector ends.
- High quality marine-grade construction.

16666 50A Cordset, 3-Pole, 4-Wire, 25ft.
#6152SPPRV-25 **1**

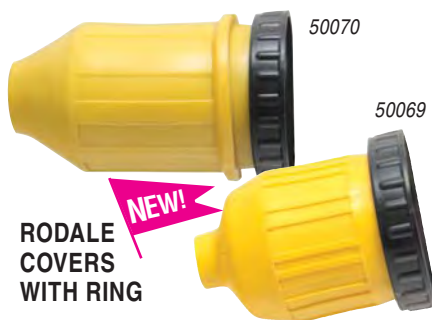

RODALE COVERS WITH RING

30A weatherproof cover with threaded ring, use with RV30AFDC (Coast #50067). 3" H x 3" W x 5" L.

50069 30A Cover with ring
#RV30ARCV **50**

50A weatherproof cover with threaded ring, use with RV50AFDC (Coast #50068). 3" H x 3" W x 6" L.

50070 50A Cover with ring
#RV50ARCV **50**



RODALE 30A AND 50A INLETS



cETL approved

30A power inlet, durable polyester casing, includes rear safety enclosure with strain relief. 3.5" H x 3.5" W x 3.5" L.

50307 30A Inlet, White
#30AINWH **25**

50A power inlet, durable polyester casing, includes rear safety enclosure with strain relief. 3.5" H x 3.5" W x 6" L.

50074 50A Inlet, White #50AINWH **25**

ParkPower
by Marincó

PARKPOWER by MARINCO ADAPTERS



No matter what your RV's power needs are, ParkPower adapters allow you to use a variety of RV park, storage or home electrical service options. ParkPower "Y" adapters will also solve different electrical power hook-up needs.

25 FOOT RV ADAPTER

- 50Amp 125/250-V locking connector with 30Amp 125-V RV straight blade plug (2-pole, 3-wire).
- Allows coaches with 50A locking service to access 30A RV park service.

14012 RV Adapter 50A/30A, 25' (Not for sale in Canada) #124ARV-25 **1**

1 FOOT RV ADAPTER

- Same as above, 1' long.

14013 RV Adapter 50A/30A (Not for sale in Canada) #124ARV **8**

ADAPTER

- 50A locking connector with 15A straight blade plug.
- Comfort grip connector.
- Easy Lock™ system.
- Includes threaded ring. Allows coaches with 50A locking service to connect to household power. Female 50A, 125/250-V 3-pole, 4-wire locking to male 15A 125-V.

14298 50A Twist Lock to 15A Straight (Not for sale in Canada) #150SPPRV **4**

Y ADAPTER

- 50A 125/250-V RV plug with two 30A female connectors.
- Not weatherproof.

14148 50A 125/250-V Male 3-Pole, 4-Wire to Two Female 30A 125-V 2-Pole, 3-Wire RV (Not for sale in Canada) #169AYRV **1**



COOPER WIRING HEAVY DUTY CORD CONNECTOR

2-pole, 3-wire with cord clamp. Molded rubber construction will not chip or wear away, impact and water resistant. Steel cord clamp takes cords from 5/16" (.312) to 5/8" (.625) in diameter. Rated: 15A-125V. Capacity: 1875 Watts.

10480 Heavy Duty Female Cord Connector #2887-BOX **5**

PARK POWER by MARINCO CONVERSION KITS

Marincó ParkPower makes hooking up your RV's electrical service much easier. The ParkPower detachable power system uses the same rugged corrosion-resistant components developed for marine use. At the core is the Marincó inlet and connector with weatherproof cover. After installing the inlet on the side of the RV, the original power cord that came with the RV can be modified by installing the connector and cover on the severed end. Detachable power allows you to use a variety of power cords and adapters to make hook-up easier. All components are of the highest quality construction and built to give years of service. 5 year warranty. Easy-to-follow installation instructions make conversion to detachable power a snap.

50A CONVERSION KIT

- Converts 50A hard wired RV power hook-up to detachable power hook-up.
- Easy Lock™ system.
- Has everything needed for conversion:
 - 6344EL-BRV 50A contoured power inlet.
 - 6364CRV 50A female connector (installs to RV power cord).
 - 7715CRV weatherproof cover with threaded ring.
 - Mounting gaskets.
- Electrical box.
- Strain relief.

13671 50A Conversion Kit (Not for sale in Canada) #50ARVKIT **1**



30A CONVERSION KIT

- Converts 30A hard wired RV power hook-up to detachable power hook-up.
- Easy Lock™ system.
- Includes everything needed for conversion:
 - 304EL-BRV 30A contoured power inlet.
 - 305CRV 30A female connector (installs to RV power cord).
 - 103RV comfort grip weatherproof cover with threaded ring.
 - Mounting adapters and gaskets.
- Electrical box.
- Strain relief.

13670 30A Conversion Kit #30ARVKIT **4**

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------



TECHNOLOGY RESEARCH CORPORATION PRODUCTS



SURGE GUARD SERIES WITH SHOCK SHIELD

Perfect for Pop-ups and Travel Trailers. Automatically shuts off the power when ground faults are present. Requires manual reset after a ground fault.

- Provides shock protection. • Weather resistant. • Convenient plug handles.
- 10/3 AWG cord • 510 Joules of surge protection. • 2" W x 20" L x 2" D. 120V/30A.

10297 30A Shock Shield
(Not for sale in Canada) #44740 20

SURGE GUARD PORTABLE MODELS WITH NEW LCD DISPLAY

Automatically shuts off the power when excessive voltage, Low (<102V) and High (>132V), or open neutral is present. Automatic reset on power restoration. LCD display will continuously monitor and display (in English) voltage and amp draw on all legs (30A one leg and 50A legs one & two). LCD display will also show faults (when occurred) for reverse polarity (miswired pedestal, elevated ground voltage).

11615 128 second reset delay protects AC compressor. Convenient plug handles. Weather resistant.

Portable Surge Guards:

11615 120V, 30 Amp, 5" W x 23" L x 4" D; 10/3 AWG Cord, 2450 Joules (Not for sale in Canada) #34730-001-LCD 4

11617 120/240V, 50 Amp, 5" W x 26" L x 4" D; 6/4 AWG Cord, 3850 Joules (Not for sale in Canada) #34750-001-LCD 1

CIRCUIT ANALYZER

Installs in seconds without tools or hardware. Adapter plugs directly between the power pedestal and your line cord and provides a graphic verification of electrical power before you hook up your RV. Identifies faulty PARKPOWER plus offers surge protection.

- Analyzes circuits to verify pedestal power.
- Illuminated power status indicators. • Weather resistant. • Checks for Open Ground, Open Neutral and Correct Polarity. • 1,020 Joules surge protection.

15296 30A Circuit Analyzer
#AECM10086 2



VOLTAGE REGULATORS

Don't Worry About Low Park Power Again State-of-the-Art Solution for Low Park Power!

Today's RVs contain advanced electronics including computers, TVs, satellite receivers, microwave ovens, air conditioners and other sophisticated appliances. Poor power quality entering an RV can not only affect the longevity of electronic equipment and motors, but can lead to thousands of dollars in repairs and create frustrating, unnecessary travel delays.

Surge Guard 30A and 50A Voltage Regulators offer the following features to protect your RV from low park power: • Provides stable regulated and reliable source of power. • Helps prevent low voltage damage to appliances. • Easy to read LED Status and Fault Indication Panel. • Fully automatic - Continuously monitors line voltage conditions. • True bypass mode - input voltage is equal to output voltage. • Increases voltage to an acceptable level. • 10% voltage increase. • Boosts as low as 95 Volts. • Optional mounting bracket for inside the RV.

Using the Surge Guard Voltage Regulator in conjunction with a Surge Guard RV power protection product provides the ultimate combination of low voltage and Surge Guard protection. The Surge Guard must be plugged in after or down stream of the Surge Guard Voltage Regulator.

S/O Voltage Regulator; Rated 120V/240V, 50A; For use on split phase, 3-wire service. Can be used on a 120/208V, 3-wire network; Weight: 42 lbs; Dim.: 10.25" L x 10.25" W x 5" H; 4-5 Feet or Cord Length and 2.5" of Mounting Feet Height # 10175

S/O Voltage Regulator; Rated 120V, 30A; For use on single phase, 2-wire service. Weight: 21 lbs; Dim.: 10.25" L x 10.25" W x 5" H; 4-5 Feet or Cord Length and 2.5" of Mounting Feet Height: 2.5" # 10176

S/O Optional Mounting Plate, 0.75" H



SURGE GUARD PLUS RV POWER PROTECTION

Protects RV bumper to bumper from faulty Park Power. Easy to read, two-line plain English backlit LCD remote display provides visual indication of voltage and current indication and fault identification. Multi-mode Surge Suppression (fuse protected). Provides the following protection:

- Excessive voltage • Mis-wired pedestal.
- Low (<102V) and High (>132V). • Open neutral.
- Open ground. • High/low frequency. • Reverse polarity. 3350 Joules, UL Listed. 120-240V, 50A, 60Hz. 6" W x 13" L x 6" D.

S/O Surge Guard Plus

UNIVERSAL LOCK HASP

- Prevents unauthorized removal of your Surge Guard electrical protector from your RV.
- For use with both 30 and 50 Amp Portable Surge Guard units. Lock not included.

17401 Universal Lock Hasp
#34590 10



HARDWIRE SURGE GUARD™

Complete electrical protection for your RV. Automatically shuts off the power when excessive voltage, Low (<102V) and High (>132V), or open neutral is present. Automatic reset on power restoration. Caution indicator light indicates: • Mis-wired Pedestal • Reverse Polarity • Elevated ground voltage 2 minute 15 second reset delay protects AC compressor. Fits inside RV's electrical compartment. Weather resistant. 30A - 1050 joules, 50A - 1750 joules. UL Listed.

Hardwire Surge Guard:

10292 120-240V/50A, 6" W x 12" L x 5" D #34560 1

10293 120V/30A, 6" W x 12" L x 4" D #34520 1

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

ARCON 110-VOLT PIGTAIL ADAPTERS

Arcon 110V Pigtail Adapters adapt all brands of plugs. Made of durable PVC with solid brass contacts. The premium Pigtail Adapters feature a yellow cord that is more visible and a unique handle. The new handle makes plug extraction effortless and stores flat against the plug. The economy models come with a black cord, do not have a handle and are only available in bulk. The 110V flat wire pigtail economy adapters have easy grip on both ends and are manufactured of flexible flat bonded 10/3 gauge wire.



110V ECONOMY SERIES FLAT WIRE PIGTAIL ADAPTERS (Not for sale in Canada)

- Easy grip on both ends. • Flexible flat bonded 10/3 gauge wire. • Bulk.

Economy Flat Wire Pigtail Adapter, Black:


- 14243** 30A Female-50A Male, 18"
#655386A018 1
- 14244** 50A Female-30A Male, 18"
#055406A018 1
- 14246** 30A Female-15A Male, 12"
#075976A012 1



110V ECONOMY SERIES TEMPORARY PIGTAIL ADAPTERS (Not for sale in Canada)

- Adapts all brands of RV plugs. • Made of durable PVC. • Solid brass contacts. • Not UL listed. • Bulk.

- 14239** 15A Female-30A Male, 18"
#055876A018 1
- 14370** 30A Female-15A Male, 9"
#5657A009 1
- 14240** 30A Female-15A Male, 18"
#565976A018 1
- 14241** 30A Female-50A Male, 18"
#655986A018 1
- 14242** 50A Female-30A Male, 18"
#055476A018 1

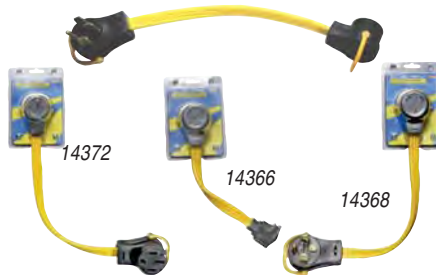

110V PREMIUM SERIES FLAT WIRE PIGTAIL ADAPTERS (Not for sale in Canada)

- Handle makes plug extraction effortless, stores flat against the plug. • Flexible flat bonded 10/3 ga. wire. • Packaged.

Premium Flat Wire Pigtail Adapter, Yellow:

- 14368** 30A Female-50A Male, 18"
#464476A018-C 1
- 14372** 50A Female-30A Male, 18"
#434706A018-C 1
- 14366** 30A Female-15A Male, 12"
#074476A012-C 1



110V PREMIUM SERIES TEMPORARY PIGTAIL ADAPTERS (Not for sale in Canada)

- Adapts all brands of RV plugs. • Made of durable PVC. • Solid brass contacts. • Handle makes plug extraction effortless and stores flat against the plug. • Not UL listed. • Yellow. • Packaged.

- 14362** 15A Female-30A Male, 18"
#435876A018-C 1
- 14245** 30A Female-15A Male, 9"
#5657A009-C 1
- 14365** 30A Female-15A Male, 18"
#564476A-018-C 1
- 14367** 30A Female-50A Male, 18"
#464486A018-C 1
- 14371** 50A Female-30A Male, 18"
#434776A018-C 1



ARCON 110V STRIPPED TEMPORARY PIGTAIL ADAPTERS

- Adapts all brands of RV plugs. • Made of durable PVC. • Solid brass contacts. • Not UL listed.

30A Male Only, 18", Stripped:

- 14369** Packaged #430076A-018-C 1

30A Female Only, 18", Stripped:

- 14363** Packaged #004476A018-C 1

- 14237** Bulk #005976A018 1




ARCON GENERATOR ADAPTERS

Lets you use the 30 amp, 115 volt output on your generator. Adapter will supply power to a 30 amp RV female pigtail from a 30 amp twist lock generator receptacle. Connect your 30 amp RV extension power cord to this adapter, which connects to your generator.

- 14977** L5-30 x 30A RV 12" Pigtail, Yellow, CD/1
#L53030R76012-C CUL 25

- 14397** ^{LS} L5-30 x 30A RV 12" Pigtail, Black, CD/1 (Not for sale in Canada)
#L53030R76012-C 25

* As part of a running change, color may vary due to availability thru the year (from black to yellow).

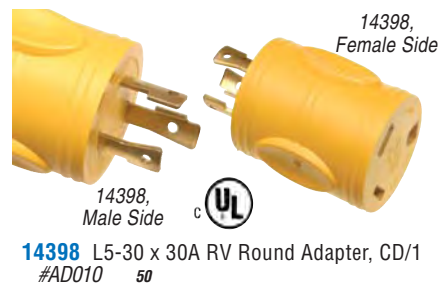

For more information on Arcon Products
visit our website at
www.arconelectrical.com.

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------



ARCON POWER CORDS

110V PREMIUM EXTENSION CORDS WITH HANDLE



Arcon 110V Premium Extension Cords are yellow making them more visible, and feature a uniquely designed handle that makes it easy to extract the plug from the outlet. The handle folds flat against the plug for storage and allows the door of a power outlet box to be closed when the cord is plugged into the outlet. The molded plugs are made of durable PVC with solid brass contacts.

RV Premium Extension Cord, with handle:

11533 30A, 25' #11533 g

11534 30A, 50' #11534 4

11535 50A, 30' #11535 2

110V EXTENSION CORDS



Arcon 110V Extension Cords feature a molded male plug on one end and a molded female plug on the other. The stripped cords have a molded male plug and are stripped at the other end to make it easy to hard wire to any connection.

14248 30A, 25' #055976A250 144

14249 30A, 50' #055976A500 80



Stripped end makes it easy to hard wire

14247 30A, 25' #050076A250 g

14250 50A, 25' #6500631825 3

RODALE RV DETACHABLE POWER CORDS AND ADAPTERS

- Threaded ring for easy connect and disconnect
- CSA approval on power cords and extension cord.

DETACHABLE RV ADAPTER CORDS (Not for sale in Canada)

Detachable RV Adapter cords with locking ring. Adapts power for 50amp, 30amp and 15amp service. Constructed with heavy-duty cable and watertight connection for safe, outdoor use.

15391 15amp to Detachable 30amp 1FT
Rating:12/3 STW #RV15M30FDT 12

15351 15amp to Detachable 50amp 1FT
Rating:12/3 STW #RV15M50FDT 12

15369 30amp to Detachable 30amp 1FT
Rating:10/3 STW #RV30M30FDT 12

15381 30amp to Detachable 50amp 1FT
Rating:10/3 STW #RV30M50FDT 12

15387 30amp to Detachable 50amp 25FT
Rating:10/3 STW #RV30M50D25 2



DETACHABLE RV POWER CORDS

Detachable RV power cords with locking ring for 30amp and 50amp service. Constructed with heavy-duty cable and watertight connection for safe, outdoor use. CSA Approved.

Detachable Power Cord, 25':

15342 Detachable 30amp Power Cord 25FT
Rating:10/3 STW
#30A25FDTB 2

15348 Detachable 50amp Power Cord 25FT
Rating: 6/3+8/1 STW
#50A25FDTB 2



4-PRONG GENERATOR ADAPTER

- For use when running power from a generator through the detachable power connection.
- Male end plugs into generator's 30A 4-prong connection.
- 30A detachable 4-prong male plug with 30A RV female connector.
- 5-yr warranty.

15329 30A 4-prong generator adapter
(Not for sale in Canada) #172ARV 1



PARK POWER
by MARINCO

PRV 50 AMP LOCKING GENERATOR ADAPTER (4-PRONG)

- Use to connect standard 50A straight blade RV cordset to generator equipped with 30A, 4-prong locking receptacle (L14-30R).
- Molded ends with 12" of flexible cable for maximum weatherproofing.

16839 50A 4-prong generator adapter
(Not for sale in Canada) #174ARV 5



In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

PARKPOWER by MARINCO RVEEL CORDSETS AND ADAPTERS

ParkPower
by Marinco

RVEEL by MARINCO
DETACHABLE POWER
Easily engaged locking system

The RVEEL (Easily Engaged Lock) Detachable Cordset has a patented, industry first, jaw-clamp design providing one-handed operation and a secure waterproof seal which completely eliminates the need for a locking ring. The RVEEL connection is built for the harshest environments and is UL approved. Best of all, it works with your current inlet. On the plug end of the cord, Park Power has added a large grip handle, that provides a safe connection and is movable so the electrical box can be closed. In addition to cordsets with the RVEEL System by Park Power also has a full set of pigtail adapters all using the new RVEEL technology.



RVEEL PIGTAIL ADAPTERS

25' RVEEL PIGTAIL ADAPTER

REVEEL Technology End:

Jaw clamp technology - eliminates locking ring. LED power indicator. Secondary lock for added security. Cord light.

RVEEL Pigtail Adapter:

50093 15A Plug to 30A Locking Connector
#P15-30RV 6

50094 15A Plug to 50A Locking Connector
#P15-504RV 6

REVEEL Technology End:

Jaw clamp technology - eliminates locking ring. LED power indicator. Secondary lock for added security. Cord light. Large Grip Handle: swivel handle. Keeps hand away from high voltage contacts. Easier to insert and remove.

50095 30A RV Plug to 50A 125/250V Locking Connector, 25' #P30-504RV-25 1

25' RVEEL CORDSETS

REVEEL Technology End:

Jaw clamp technology - eliminates locking ring. LED power indicator. Secondary lock for added security. Cord light. Large Grip Handle: swivel handle. Keeps hand away from high voltage contacts. Easier to insert and remove

RVEEL Cordset:

50096 30A 125V, 25' #CS30-25RV 4

50097 50A 125/250V, 25' #CS504-25RV 1



PARKPOWER by MARINCO

ParkPower
by Marinco



50A RIGHT ANGLE RV CORDSET

ParkPower is pleased to offer the **NEW** 50A 125/250V right angle RV cordset. • Right angle detachable connection provides minimal cordset protrusion from inlets for more clearance in tight RV spaces. • GripLock™ handle design for easy hook-up and correct blade alignment, even in the dark. • Includes a threaded ring and Easy Lock™ ring. • Heavy-duty construction. • Water-tight molded ends. • 30 feet of super flexible 6/3-8/1 cable.



19945 50A 30' Right Angle Cord Set
#30RPC50RV 1



PARKPOWER by MARINCO REPLACEMENT CONNECTORS

ParkPower
by Marinco

To compliment the replacement plugs, ParkPower is pleased to offer 30 Amp and 50 Amp replacement connectors. The replacement connectors share the same heavy-duty construction as the replacement plugs but has the standard NEMA connector configurations.

Connector features: • Matches standard RV inlets • Constructed of tough, glass-filled Nylon™ for best weather resistance • Cord strain relief firmly secures cable • Wide grip handle allows user to safely and easily remove plug from outlet • Heavy-duty screws secure cable.

Replacement Connector:

19917 Designed for use with 10 gauge, 30 Amp RV cable #30FCRV 24

19944 Designed for use with 6 gauge, 50 Amp RV cable #50FCRV 24



RODALE PIGTAIL ADAPTER

• Adapts power from 30amp to 15amp cordset and 30amp to 50amp. • Includes threaded ring for easy connect and disconnect. • Constructed with heavy-duty cable and watertight connections for safe, outdoor use.


10633 Pigtail Adapter with Locking Screw, 30A female to 15A male (Not for sale in Canada)
#P125-30FL-125-15ML 200

POWER CORDS & ACCESSORIES


ELECTRICAL

E

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

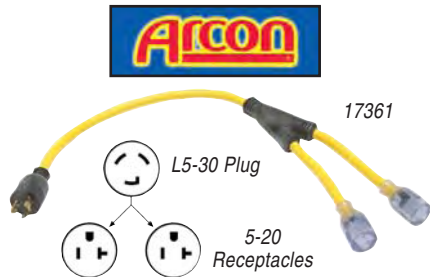

17361

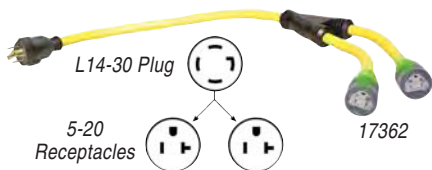

17362

ARCON GENERATOR ADAPTERS


GENERATOR Y-ADAPTERS (Not for sale in Canada)

Adapter L5-30P/5-20R adapts one locking 5-15 plug to two lighted 5-20 receptacles.

17361 Generator Adapter L5-30P/2 x 5-20R
#L530520TSTOW 5

Adapter L14-30P/5-20R adapts one locking L14-30 plug to two lighted 5-20 receptacles.

17362 Generator Adapter L14-30P/2 x 5-20R
#L430520TSTOW 5

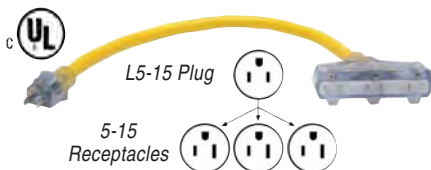

GENERATOR POWER BLOCK

Arcon Generator Power Block adapts one 5-15 plug to three lighted 5-15 receptacles. Lighted ends confirm power.

17360 Generator Cord Tri-Source Adapter
#515004STOW 5



MULTI-MAX ADAPTER (Not for sale in Canada)

Two 17" 30A cords are attached to one 6" 50A cord. Use two 120V/30A circuits and one 30A-20A adapter to provide 240V/50 amps of service. Use a 15A-30A adapter and one 30A cord of the Multi-Max to hook a 50A RV service cord to a 120V outlet at home.

17341 Multi-Max Adapter #272005 10



CAMCO ELECTRICAL CORD STORAGE HANDLE

Carry and store power cords easily. Keeps your power cord neatly coiled and makes it easy to carry.

14844 Electrical Cord Storage Handle
#55001 4



Adapter L5-30 to 5-20R—
30A Twist Lock Male to 20A Female. Bulk.

11827 30A Twist Lock Male to 20A Female,
(Not for sale in Canada) #AD-012 100

Adapter L5-30 to 2 x 5-20R—
30A Twist Lock Male to two 20A Female. Bulk.

11828 30A Twist-Lock Male to Two 20A Female
(Not for sale in Canada) #AD-212 30



ARCON EASY GRIP ROUND ADAPTERS


Made of durable UV protected PVC with solid brass contacts and molded Easy-Grip. Bulk.

Adapter 14-50R/5-30P—
Adapts 50A Female RV to 30A Male RV.

14014 50A Female to 30A Male
(Not for sale in Canada) #AD 028 45

Adapter 5-30R/14-50P—
Adapts 30A Female RV to 50A Male RV.


14018 30A Female to 50A Male
(Not for sale in Canada) #AD 029 45

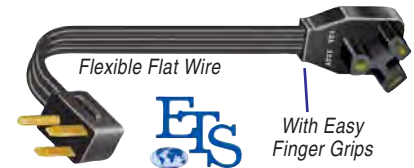

ETS HEAVY DUTY 30F/15M DOGBONE ADAPTER

Heavy duty special 30F Amp RV plug to standard 15M Amp outlet. Adapter is rated at 15 amp and adapts to all brands of RV plugs. Easy finger grips and flexible flat bonded 12" long 10/3 gauge wire.

15382 Heavy Duty Dogbone Adapter
#10810 BULK 100

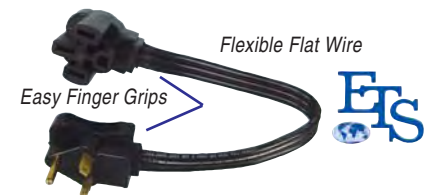

ETS HEAVY DUTY PARK ADAPTERS

50F/30M AMP: Heavy duty park adapter plugs into 30M amp park electrical box and 50F amp power cord from motor coach. Easy pull finger grip on both ends of adapter, along with flexible flat bonded 10/3 gauge wire, 18" long.

12193 50/30 Park Adapter
#10850 25



30F/50M AMP: Heavy duty park adapter plugs into 50M amp park electrical box and 30F amp power cord from motor coach. Easy pull finger grip on both ends of adapter, along with flexible flat bonded 10/3 gauge wire, 18" long.

12409 30/50 Park Adapter
(Not for sale in Canada) #10830 25

ParkPower by Marinc

PARKPOWER by MARINCO GENERATOR ADAPTER

• 30A locking male plug with 30A RV female connector. • Use to connect RV cordset to generator with 30A locking power outlet.

14147 Generator Adapter 30A
(Not for sale in Canada) #125A 1

POWER CORDS & ACCESSORIES

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------



13333
ARCON
110V
TEMPORARY
ADAPTERS

NEW!



ARCON
HARD-MOLDED
110V CIRCULAR ADAPTERS



13995



50A Female-15A Male



30A Female-15A Male



15A Female-30A Male



14058

14054

15A FEMALE- 30A MALE ADAPTERS
(Not for sale in Canada)

"Easy Grip" 15A Female-30A Male, Round:

14057 Packaged #AD-005C 1

14058 Bulk #AD-005 1

Triangle Adapter, 15A Female-30A Male:

14053 Packaged #AD-007C 1

14054 Bulk #AD-007 1



14082

ANGLED
TEMPORARY
ADAPTER
(Not for sale
in Canada)

Adapts 15 amp to 30 amp.

Angled Adapter, 30A Female to 15A Male, 90°:

14081 Packaged #AD-008C 1

14082 Bulk #AD-008 1

For more information on
Arcon Products visit our website at
www.arconelectrical.com.



50F-15M AMP TEMPORARY ADAPTER

Temporary adapter; 50 amp (F), 125V/250V to 15 amp (M), 125V.

Temporary Adapter 50-15A (F to M):

14063 50-15A Packaged (Not for sale in Canada) #14063 1

30F-15M AMP TEMPORARY ADAPTER

Temporary adapter; 30 amp (F), 125V to 15 amp (M), 125V.

Temporary Adapter 30 -15A (F to M):

14059 30-15A Packaged (Not for sale in Canada) #14059 1

15F-30M AMP TEMPORARY ADAPTER

Temporary adapter; 15 amp (F), 125V to 30 amp (M), 125V.

Temporary Adapter 15-30A (F to M):

14061 15-30A Packaged (Not for sale in Canada) #14061 1

ARCON
REPLACEMENT PLUG &
RECEPTACLE



WITH FOLDING HANDLE

- Great for making custom extension cord and adapters.
- Easy grasp handle allows for easier plug removal.
- Yellow handles makes the ends easier to see at night.
- Made of high impact plastic and solid brass contacts.
- cUL Approved.

Replacement Plug:

18203 30A #RS300 - CLAMSHELL 36

19186 NEW! 50A #RP-501 25

Replacement Receptacle:

18206 30A #RS301 - CLAMSHELL 45

19194 NEW! 50A #RS-501 25



18203

18206

19194

19186



JR PRODUCTS
FLIP-FLOP
ELECTRICAL
ADAPTER

- 15 Amp Male - 30 Amp Female
- Unique design holds cord more securely
- Housing made of PVC. • CSA approved.

14084 Flip-Flop Electrical Adapter, Pk/1
(Not for sale in Canada) #M-3022-A 28

VALTERRA
ELECTRICAL
ADAPTERS



Made of durable PVC and solid brass contacts. Not for permanent use.

Electrical Adapters, Carded
(Not for sale in Canada):

13224 30/15 Amp #A10-0014VP 30

13225 15/30 Amp #A10-0012VP 30



ADAPTERS, RECEPTACLES & POWER OUTLETS

ELECTRICAL

E

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

JR PRODUCTS ADAPTERS



OFFSET ELECTRICAL ADAPTER

Unique, offset design creates a twisting action on the 15 Amp male plug to help hold it more securely and assist in making a better contact. The adapter housing is made of durable PVC for lasting use and its larger round body makes it easier to hold when plugging or unplugging your cords. CSA approved.

45578 15M-30F Offset Adapter, Packaged
#M-3024-A 24

REVERSE ELECTRICAL ADAPTER

Designed to convert any 15 Amp male cord to plug in to the 30 Amp connections at most RV parks. The large round body makes connection a breeze. CSA approved.

45596 30M-15F Reverse Adapter, Packaged
#M-3026-A 24



COOPER Wiring Devices

COOPER WIRING POWER RECEPTACLE 50A, 125/250V NEMA 14-50 3-POLE/4-WIRE

- For replacement use in newer homes with 4-wire range and dryer connection points.
- Heavy gauge galvanized steel mounting strap for corrosion resistance.
- For use with copper or aluminum wire.
- Flush receptacles fit one-gang or two-gang enclosures.
- Surface receptacles have patented lay-in terminals that accept up to #4 AWG wire.
- Surface receptacle backs feature concentric knockouts and an adjustable cord clamp to allow wiring from back or bottom.
- 50A NEMA 14-50R Flush Mount Range Power Receptacle, Black (Matching Plug: S21).
- UL, CSA, NOM 426. Listed to UL498, file no. E15058; CSA certified to C22.2, no.42; NOM certified.

13332 Receptacle 50A 125/250 volt
#1258 12



PARALLAX POWER SUPPLY POWER OUTLETS

PARALLAX POWER SUPPLY
A Division of Connecticut Electric, Inc.

Provide electrical receptacles in a single enclosure for RV, home and farm.
Features: • NEMA 3R rainproof enclosure.
• Unique cover design allows cord to be used when door is closed. • All components factory wired and assembled. • c-ETL-us listed.

NEW!



50131

Order #	Models	Amps	Volts	Circuit Protect.	Dimensions H x W x D	
14505	#PS13-HR	30	120	N/A	6-1/8" x 5-3/8" x 4-3/4"	
14508	#PS54-HR	50	120/240	N/A	6-1/8" x 5-3/8" x 4-3/4"	
14506	#PSC13-HR	30	120	30A-1 Pole	9-1/2" x 5-3/8" x 4-3/4"	
14507	#PSC41-GR-HR	30	120/240	20A-1 Pole 30A-1 Pole	12-3/8" x 7-1/8" x 4-3/4"	
50131	NEW! #CESMPC575GRHR	80	120/240	20A-1 Pole 30A-1 Pole 50A-2 Pole	13-7/8" x 10-3/8" x 4-3/4"	

COOPER WIRING MOTOR BASE

COOPER Wiring Devices

Weatherproof parallel grounding male motor base 2-pole, 3-wire. For use on mobile homes, trailers, campers, etc. Horizontal snap open lid. Stainless steel hinge spring. Aluminum finish brass plate with weatherproof gasket. Mounting screws furnished. Individually boxed. Will take up to 1-17/32" dia. female connector. 15 Amp, 125 Volt.



11156 Motor Base
#S3999 15

COOPER WIRING WEATHER BOX PROTECTIVE COVER

COOPER Wiring Devices

Manufactured to the industry's toughest standards, this solid body cover combines the best of advanced materials, technology and industrial design. Polycarbonate cover and back, plus a pre-mounted gasket, for years of solid protection. Easy-to-mount inserts provide the flexibility of up to 98 different configurations. Moveable hinges allow maximum adaptability for mounting either horizontally or vertically in any type of application - vinyl, brick, concrete and a variety of other surfaces. Its deep, see-through architecture makes monitoring performance simple. Backed by 5-year Limited Warranty.

13791 Weather Box Cover, Single #WU-1 6



50 AMP ANGLE CAP

NEMA 14-50P,
125/250 volt, 4-wire.

10503 50 Amp Angle Cap
#S21-SP 10

COOPER WIRING RECEPTACLE

UL listed

Travel trailer flush receptacle, 2-pole, 3-wire, 30 amp, 125 volt. 2-1/4" W x 3-3/4" H.



10486 Receptacle 30A #1263-BOX 25



JR PRODUCTS HATCHES

ELECTRICAL HATCH WITHOUT BACK

- Vermin door accepts both 30 & 50 Amp cord;
- Open back for a variety of uses; • Direct OEM replacement; • UV & impact resistant;
- Resistant to road salts & acids; • Paintable.
- Outside: 8-1/2" H x 8" W; Cutout: 6-7/8" H x 6-3/8" W; Collar Depth: 1-1/8".

25416 Non-Locking Hatch with Thumb Lock, Polar White #22D32-A 12

25417 Locking RV Hatch, Polar White #22132-A 24

LOCKING ALL-PURPOSE RV UTILITY HATCH WITHOUT BACK

- Direct OEM replacement; • UV & impact resistant; • Resistant to road salts & acids;
- Paintable. • Outside: 8-1/2" H x 8" W; Cutout: 6-7/8" H x 6-3/8" W; Collar Depth: 1-1/8".

25415 Locking Hatch, Polar White #21102-A 12

MEDIUM ELECTRIC CABLE HATCH

- Vermin door accepts both 30 & 50 Amp cord;
- Open back for a variety of uses; • Direct OEM replacement; • UV & impact resistant;
- Resistant to road salts & acids; • Paintable.
- Outside: 6-1/2" H x 7-5/8" W; Cutout: 4-3/4" H x 5-7/8" W; Collar Depth: 1-1/8".

25412 Locking Hatch, Polar White #E7132-A 12



MULTI-PURPOSE HATCH WITHOUT BACK

- Direct OEM replacement; • UV & impact resistant; • Resistant to road salts & acids;
- Paintable. • Outside: 11-3/8" H x 10-3/8" W; Cutout: 9-1/8" H x 8" W; Collar Depth: No collar.

27809 Locking Hatch, Polar White #NBF02 1

LOCKING HATCH KEYS

Package of 2 replacement keys for locking hatch.

44846 Square Head #DECO-A 12

48779 **NEW!** Round Head #J236-A 1

49399 Round Head #751-A 12

RV DESIGNER WEATHER-PROOF OUTLET COVER

Weatherproof replacement cover for duplex outlet. Works for electrical, TV, phone etc. 4-3/4" x 2-3/4". Metal base with white plastic cover. Gasket & mounting screw included. Pk/1

46241 Weatherproof Cover #E365 12

RV DESIGNER WEATHERPROOF COVER

For GFI outlet. Clamshell packed.

85724 Weatherproof Cover, White #E465 12



JR PRODUCTS HATCH INSTALLATION KIT

Installation kit with everything you need to replace or install a hatch. Includes premium butyl tape and screws for a proper seal.

Hatch Installation Kit:

65439 Small (25" butyl tape and 12 screws)

#04205 36

65440 Large (36" butyl tape and 10 screws)

#04195 36



JR PRODUCTS KEY LOCKS

Cam lock for replacement in B&B Molder hatches as well as any other place a barrel lock is needed. Comes keyed for a 751 style key to match other compartments and hatches.

751 Key Code Lock Cam with key, 5/8" barrel:

43018 Long, 1-1/8" Blade #00100 1

43026 Short, 5/8" Blade #00E00 1

5/8" barrel



RV DESIGNER HATCH LOCK


Used on water, electric, gas hatches etc. "Cam" size is length of blade.

Clamshell packaging: 3" W x 5" H x 1" D, C:

44842 1-1/8" Hatch Lock with 1-1/8" cam, 5/8" barrel #L100 1

44843 Hatch Lock with 5/8" cam, 5/8" barrel #L110 1

44844 Replacement Key, Code 751, Pk/2 #L200 1

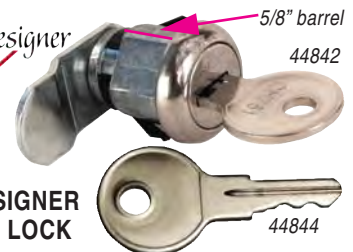

WINEGARD DUPLEX RECEPTACLE COVER

Weatherproof duplex electrical outlet cover to be used with any standard 117V duplex outlet.

14614 Cover, Ivory #WB-1110 12



In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------



JR PRODUCTS MULTI-PURPOSE HATCHES

WITH FLAT BACK

Great hatch for customizing your application. Constructed for long life and will not fade or discolor due to UV rays or weather. Hatch is paintable to match the exterior of any RV with no preparation of its surface. Designed with a flat back to fit almost any use.

With Flat Back, Polar White:

28696 Cutout dim.: 4-3/8" x 3-1/8"; outside dim.: 6-1/4" x 5" #D6102-A 1

28698 Cutout dim.: 4-3/4" x 5-7/8"; outside dim.: 6-1/2" x 7-5/8" #G8102-A 1



WITHOUT BACK

Constructed of high-quality plastic for durability. Will not discolor and resists fading and road salt. Paintable to match any exterior with no preparation. It is constructed with an open back and a 1-1/8" collar for a variety of uses. Cutout dimensions. 4-3/4" x 5-7/8"; outside dimensions. 6-1/2" x 7-5/8". Polar White.

28697 Multi-Purpose Hatch, Without Back #E8102-A 1



Large electrical hatch comes with two vermin doors that accept up to a 50 Amp cord. Built with a high quality plastic that won't fade or discolor. Resists road salts and acids. Paintable to match any exterior. Cutout dim.: 6" x 11-1/16"; outside dim.: 7-3/4" x 12-5/8". Polar White.

28699 Utility Center #ZH152-A 1

RV DESIGNER UNIVERSAL ROUND ELECTRIC CABLE HATCHES



Includes two interchangeable rear buckets. One fits 3" hole, one fits 3-1/2". 3" bucket accepts 30 amp cord & plug; 3-1/2" accepts 30 or 50 amp. Unique design diverts water. Gasket & screws included; everything you need for easy installation. 5-1/8" diameter faceplate covers holes & marks from most other hatches. UV protected plastic. 1-yr. warranty.

This is the hatch you want!



Universal Round Electric Cable Hatch, Full-color Box of 5" x 5" x 5":

10639 White #B101 6

10642 Colonial White #B103 6



ZEBRA RV ACCESSORIES CABLE HATCH

- Safely allows cord access while protecting your RV from pests.
- Made of durable polypropylene with locking latch.

Cable Hatch With Locking Latch, Packaged:

20176 Colonial White #RM207C 12

20178 Polar White #RM208P 12



ZEBRA RV ACCESSORIES ELECTRICAL CABLE HATCH

- Made of durable ABS plastic with snap-like catch. • 1" Back Opening. • Safely allows cord access while protecting your RV from pests.

Cable Hatch, Packaged:

20170 Colonial White #RE147C 12

20173 Polar White #RE147P 12



VALTERRA ELECTRICAL HATCH

Lockable hatch for use with RV electrical cords. • Paintable UV stabilized plastic. • Includes installation screws and putty tape. • Cut out: 5-7/8" W x 4-3/4" H; OD: 7-5/8" W x 6-1/2" H.

20641 Electrical Hatch, White, Carded #A10-2150VP 10



SEASENSE TOGGLE SWITCH BOOT

Flexible molded splash-proof boot for toggle switch.

14161 Toggle Boot, CD/1 #50031200 6

COOPER WIRING GROUND FAULT INTERRUPTER

Ground fault current interrupter receptacles. Designed to protect people from line-to-ground electrical shock hazards. Specification grade

with a GFCI rating of 15 amps, 120 volts at receptacle, 20 amps, 125 volt feed-through. UL listed 1-1/8" receptacle depth for extra wallbox room. Fits standard 2-1/2" box. With indicator light.



Ground Fault Interrupter:

13038 Brown #VGF15B 10

13219 Ivory #VGF15V 10

13039 White #VGF15W 10

Wall Plate Only for Ground Fault Interrupter:

10490 LS Brown Plate #2151B-BOX 10

10491 Ivory Plate #2151V-BOX 10

16241 White Plate #2151W-BOX 10

JR PRODUCTS HATCHES

ECONOMY SQUARE ELECTRIC CABLE HATCH

All white flush mounting with slide catch cover. 4 $\frac{3}{8}$ " overall dia. 3" cut-out dia. 1 $\frac{3}{4}$ " deep.



Economy Square Electric Cable Hatch:

12062 Colonial White #S-27-14-A 36

17236 Polar White #S-27-10-A 36



ECONOMY ROUND ELECTRIC CABLE HATCH

Mount flush with outside of wall of trailer. Easy to install. 3" cut-out, 4-1/2" flange.

Economy Round Electric Cable Hatch:

12954 Colonial White #S-23-14-A 36

15901 Polar White #S-23-10-A 36

ROUND CABLE HATCH WITH BACK


Low profile design. U.V. stabilized, fade and impact resistant. Easy installation with snap lock. Vermin door will accept up to 50 Amp cord. 4.5" dia. overall; 3.5" cut-out size.



Round Electric Cable Hatch with Back:

78834 Colonial White #370-1-A 1

78835 Polar White #370-2-A 1

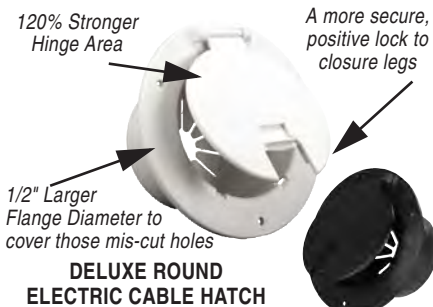

DELUXE ROUND ELECTRIC CABLE HATCH

Re-designed to be sturdier than other round electric cable hatches. The outside collar is wider to cover up any pre-existing screw holes. The hinge is extra heavy duty. Use this when an extra sturdy hatch is required. The hatch is constructed not to fade or discolor due to weather or chemical action. Vermin door will accept a 30 or 50 Amp cord. Replaces any round hatch up to 4-1/2". Polar White.

Round Electric Cable Hatch:

45262 Black #541-3-A 48

65841 Polar White #541-2-A 48



10484



12198



12338

COOPER WIRING PLATES & RECEPTACLES

WALL PLATE FOR RECEPTACLE

Non-flammable Bakelite; easy to clean. 2 $\frac{3}{4}$ " x 4 $\frac{1}{2}$ ". Short screws included.

Wall Plate for Duplex Receptacle:

12198 Ivory #2132V-BOX 5

12337 White #2132W-BOX 5

BLANK WALL PLATE

This blank wall plate is made of easy-to-clean, fireproof melamine plastic. Plate provides a neat cover-up for junction box areas and outlets no longer in use.

Blank Wall Plate

12199 Brown #2129B-BOX 10

12200 Ivory #2129V-BOX 10

12338 White #2129W-BOX 10

DUPLEX RECEPTACLE

Universal grounding duplex receptacle. 2-pole, 3-wire. Automatic self-grounding mounting screws ground to any grounded metallic wall box, eliminating the use of a bonding jumper. Has wire pressure terminals, 15A-125V rating.

Duplex Receptacle, CD/1:

10482 Brown #270B 1

10484 Ivory (Shown) #270V 1

12339 White #270W 1

CHROME ROCKER SWITCH

On/Off rocker switch mounted on chrome mini plate. Individually bagged with header card. 10 amp rated, 12 volt.

10158 Wall Switch #11-0190 24



JT&T WARNING LIGHTS

Low-profile illuminated warning lights. 12 Volt, 16/20 Amp. Use Panel #11693.

11688 Warning Light, Red #2632H 6



For walls up to 1/2" thick.



DIAMOND SPEED BOX PRODUCTS

RECEPTACLE WITH COVER

White self contained wiring receptacle eliminates the need for an outlet box, wire stripping, wire nuts and wall plates. Secures to the wall with built-in adjustable pawls.

13021 White Receptacle, Speed Box, Pk/1 #WDR15WT 6



For walls up to 1/2" thick.

TOGGLE SWITCH WITH COVER

White self contained wiring standard toggle switch eliminating the need for an outlet box, wire stripping, wire nuts and wall plates. Secures to the wall with built-in adjustable pawls.

13123 White Switch, Speed Box, Pk/1 #WDS151WT 6



POLLAK TOGGLE SWITCHES FOR UNIVERSAL APPLICATIONS

Heavy duty (U.L. Listed). 20 amp rating for heavy duty applications. 20 amps 6-24 volts DC, U.L. listed, 20 amps 125 volts, 10 amps 250 volts. All with $\frac{15}{32}$ " diameter, $\frac{3}{8}$ " long mounting stem. Furnished with Knurled face nut, hex back nut, and terminal screws. Chrome plated bat handle.

Single pole single throw. Two positions: Off/Momentary on. 2 screw terminals. CD/1.

12365 On-Mom #34-570V 1

Single pole single throw. Two positions: On/Off. 2 screw terminals.

12370 On-Off #34-571V 10

Single pole double throw. 3 positions: Momentary On/Off/Momentary On. 3 screw terminals.

12366 On-Off-Mom #34-575 5

Single pole double throw. Three positions: On/Off/On. 3 screw terminals.

12371 On-Off-On #34-573V 10

SWITCHES

ELECTRICAL

E

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

Pollak

POLLAK TOGGLE SWITCHES



LIGHT DUTY SWITCH

2 position on/off. 6-12V DC, 6 Amps. U/L listed 6 Amp. 125V, 3 Amp, 250 V AC. Knurled face nut, indicator plate, back nut and terminal screws assembled. Carded.

12966 Light Duty Toggle #34-500V 1

LONG HANDLE SWITCH

2 positions On-Off SPST, 2 screw. All metal chrome plated long bat handle, posi-touch 1 1/2" L.. Mounting stem 1 5/32" dia. 6-24 V DC, 50Amp.

11837 Long Toggle #34-213V 10

COOPER WIRING PUSH CANOPY SWITCH

Standard metal canopy switch with push-button operation. Superior switching action. Small flat Bakelite housing measures 1" L, 5/8" W, 7/16" H over lock nut. Standard shank threaded 3/8 - 27 3/8" L allows mounting clearance on 1/8" maximum thickness of mounting shell. Matching hexagonal lock nut and decorative knurled outer nut prevent rattling when #18 (221°F) black plastic wire 6" long, stripped 3/4". Non-removable metal knob.

11157 Push Canopy Switch, Carded #449NP-BOX 10



JT&T MINIATURE INDICATOR LIGHT

Built-in filament bulb. PVC covered wire leads 6" length. Chrome plated brass bushing. Standard stock 12/14 volt, .04A, 10,000 hr. life. Mounting diameter hole required .250".

12107 Miniature Light, Red #2633F 6

JT&T ROCKER SWITCHES

Standard duty 16 Amp @ 12 Volts. On/Off SPST. 1 1/8" L x 1/2" W x 1" D.



Illuminated Switch (use #11694 Panel Mount):

11682 Red #2602J 6

12101 Green #2605J 6

753788 LS Blue #2606J 6

12100 Amber #2607J 6

Non-Illuminated Switch (use #11694 Mount):

12093 Black #2600J 6

POLLAK HEAVY-DUTY MOMENTARY PUSH-BUTTON SWITCH



Single pole single throw. Two positions off/momentary on. Spring return to off. 12 and 6 VDC: 20A lamp load, 25A inductive load. 2 screw terminals with lock washers. Mounting stem 5/8" diameter, 3/4" long.

12374 HD Momentary #52-611V 10



(#65683, pictured, left; see section K for more info).

VENTLINE MOMENTARY SWITCH



61111 Plastic MOM Switch; for V2215 Sidewall Fans #BV0140-03 1



JT&T STANDARD DUTY 12V TOGGLE SWITCHES

Standard duty 16 Amp @ 12 Volt, except as noted. These switches use #11693 round panel mount.

11692 Non-Illuminated, On/Off, Black #2640H 6

11684 Illuminated Switch, On/Off, Blue #2616J 6

11685 Illuminated Switch, On/Off, Amber #2617J 6

KING CONTROLS 12V DIMMER SWITCH

12-volt dimmer switch is noiseless and low profile to fit many locations (1.7" x 1.4" x 0.7"). It works with incandescent and fluorescent fixtures. Handles up to 7.5-amps. Features OFF position.



10432 12V Dimmer Switch #9101 5



11411
11432

Jack/Stabilizer Hatches

Used for electrical stabilizer jacks, 5th wheel landing gear and high Amp motors. Made of high durable polypropylene with added UV protection. Polar White.

11411-11432 - Comes complete with our 15098 Mom-On/Off/Mom-On reversing motor switch which has the ratings of: 20 Amp @ 125 VAC, 15 Amp @ 250 VAC, 40 Amp @ 12 VDC. UL/CSA/VDE approved. O.D. 5" x 6-1/4".

11413 - 11420 - Comes complete with two of our #13635JR (S/O), which has the ratings of: 16 Amp @ 125 VAC(CSA), 15 Amp @ 125 VAC (UL), 10 Amp @ 250 VAC, 3/4 HP @ 250 VAC, 16 Amp @ 12 VDC. UL/CSA/CUL, IP55 and RoHS approved. O.D. 6-1/4" x 5".

Item #	JRP	Description
11411	13765	Single Switch w/Hatch
11432	V6D02-A	Repl. Hatch Only, f/11411
11413	13775	Double Switch w/Hatch
11420	H6D02-A	Repl. Hatch Only, f/13775



Exterior Access Hatch

Comes complete with two of our 15085 Mom-On/Off/Mom-On switch which has the ratings of: 13 Amp @ 125 VAC, 10 Amp @ 250 VAC, 5 Amp @ 14 V(T). UL/CSA/VDE approved. O.D. 6-1/4" x 5".

Item #	JRP	Description
11414	13785	Double Switch w/Hatch
11417	F6D02-A	Repl. Hatch Only

Water/Dust Protection Boot ONLY



Used for covering your switch to protect it from water or dust. Plastic boot easily slips over the switch then place the switch into the face plate or monitor panel.

* Shown at right installed on a switch.

Item #	JRP	Description
11373	13741-5	Mini Boot, Bag/5
11409	13751-5	Standard Boot, Bag/5
11410	13755	Standard Boot, Pk/1

Switches!



Face Plates

Popular accessories used in conjunction with our Standard Switches for installation or replacement.

Outside Dimensions (Switch Cutout)
 Single = 2.75" x 1.625" (1.125" x .550")
 Double = 2.75" x 2.25" (1.125" x .550")
 Triple = 2.75" x 3.25" (1.125" x .550")



Switch Base & Face Plate

Allows more space for thin wall applications.

Single Cutout = 1.125" x .550" (3.375" x 3.812")
Double Cutout = 1.125" x .550" (3.375" x 3.812")
Triple Cutout = 1.125" x .550" (3.75" x 4.875")

Item #	JRP	Description
12637	13605	NEW! Single White, Pk/1
12645	13615	NEW! Double White, Pk/1
12653	13625	NEW! Triple White, Pk/1



Base & Face Plate

Replacement for existing assemblies or you can create your own switch assembly to fit your specific need.

Single Cut Out Dim. = 1.25" x 1.625"

Item #	JRP	Description
14603	12105	Single, White, Pk/1
15137	12195	NEW! Single, Brown, Pk/1



Low Profile Slide-Out Switch w/Bezel

The large switch button makes this switch easy to use while the low-profile plate makes it fit neatly into any location. It is rated at 40 Amp @ 14 VDC peak, and 20 Amp continuous use, which means it can be used with reversing or switching motors used on most slide-outs.

Cut Out = 1.67" x .95" (Outside: 2.87" x 1.87")


Item #	JRP	Description
15144	12345	Single, White, Pk/1
15145	12355	Single, Black, Pk/1




Replacement Slide-Out High Current Motor Switch

High output reversing motor switch. 40 Amp @ 14VDC peak.

Switch Dim. = 1.85" x 1.2"



Item #	JRP	Description
11894	12091-5	NEW! White, Bag/5
14602	12095	White, Pk/1
11975	12291-5	NEW! Black, Bag/5
15146	12295	Black, Pk/1




Slide-Out Switch Assembly w/Bezel

12V 40 Amp high output slide-out switches are both durable and attractive. The pre-printed low profile bezel fits into any decor while the large rocker switches are easy to operate. The switches and housings are constructed of durable nylon for a long life and the terminals are made of copper alloy and/or silver plated copper alloy. Comes with an easy-to-read wiring diagram.

Single Cut Out Dim. = 1.85" x 1.20"

Item #	JRP	Description
14595	12075	Single, White, Pk/1
15143	12285	Single, Black, Pk/1

Red LED Indicator Light



Used to indicate operations on accessories such as water heaters and electric steps. Normally used with Red Snap-In Switch Cover, Part #13125. 16 Amp @ 125 VAC, 3/4 H.P., 10 Amp @ 250 VAC 1/2 H.P., 10 Amp @ 12VDC. UL/CSA/VDE approved.

Cut Out = .687" x .50" (Outside = .812" x .625")

Item #	JRP	Description
12009	13111-5	NEW! Red LED Light, Bag/5
17324	13115	Red LED Light, Pk/1



Snap-In Blank Switch Cover

Used when a switch is not needed in a multiple switch bezel for a professional appearance. The red one is used with the Red LED Indicator Light, Part #13115.

Cut Out = 1.125" x .550" (Outside = 1.120" x .547")

Item #	JRP	Description
12068	13121-5	NEW! Red, Bag/5
17325	LS 13125	Red, Pk/1
17326	13135	White, Pk/1
17327	13145	Brown, Pk/1
17328	13155	Black, Pk/1



Indicator Lights for Switches



For use with a standard switch. Illuminated when switch is in the "on" position. 10 AMP @ 14 VDC. UL/CSA/VDE approved.

Cut Out Dim. = 1.125" x .550"
Switch Dim. = 1.120" x .547"

Item #	JRP	Description
15059	12721-5	Red/Black, Bag/5
15101	12725	Red/Black, Pk/1
15060	12731-5	Red/Brown, Bag/5
15102	12735	Red/Brown, Pk/1
15062	12751-5	Red/White, Bag/5
15104	12755	Red/White, Pk/1
12076	13301-5	NEW! Brown/Amber, Bag/5
12135	13311-5	NEW! Green/Black, Bag/5
15170	13315	Green/Black, Pk/1

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

Switches!



Mom-On/Off/Mom-On 5th Wheel/Tongue Jack Switch

16 Amp @ 125 VAC(CSA), 15 Amp @ 125 VAC(UL), 10 Amp @ 250 VAC, 3/4 H.P. @ 250 VAC, 16 Amp @ 12 VDC. UL/CSA/CUL/IP55 RoHS approved.

Cutout = 1.736" x .95" - Switch = 1.30" x .75"

Item #	JRP	Description
12661	13631-5	NEW! 5th Wheel, Blk, Bag/5
12726	13635	NEW! 5th Wheel, Blk, Pk/1



SPST Momentary-On/Off Switch

Switches are used for 12 Volt lighting, steps and various accessory applications where the current is not constant. The indicator light is illuminated when the power circuit is in the open position. They are UL/CSA certified and can be used in multiple voltage situations. Often used on Fleetwood and Winnebago RV's. 16 Amp, 3/4 HP @ 125 VAC, 12 Amp, 3/4 HP @ 250 VAC, 16 Amp @ 28 VDC, 8 Amp @ 14VT.

Cut Out Dim. = 1.06" x .866"
Outside Dim. = 1.185" x 1.025"

Item #	JRP	Description
15236	13365	White/Amber Light, Pk/1




SPST Labeled On/Off Switch

Used for interior lighting and appliance uses. Switches are preprinted with on/off label. 16 Amp @ 125 VAC, 12 Amp @ 250 VAC, 3/4 H.P. @ 125-250 VAC, 10 Amp @ 14VDC. UL/CSA/VDE/RoHS approved.

Cut Out = 1.125" x .550" (Switch = 1.120" x .547")

Item #	JRP	Description
15031	12581-5	White w/Gold, Bag/5
15073	12585	White w/Gold, Pk/1
15032	12591-5	Black w/Silver, Bag/5
15074	12595	Black w/Silver, Pk/1
15033	12601-5	Brown w/Gold, Bag/5
15075	12605	Brown w/Gold, Pk/1
15034	12611-5	Ivory w/Gold, Bag/5
15076	12615	Ivory w/Gold, Pk/1

SPST On/Off Switch Assembly w/Bezel




12V interior switches can be used for various applications. Designed with a large switch button for easier use and the bezel assembly will look great in any application. 16 Amp @ 125-250 VAC, 3/4 H.P. @ 125-250 VAC, 10 Amp @ 14 VDC. UL/CSA/VDE approved.

Single Cutout = 1.625" x 1.25" (2.86" x 1.625")
Double Cutout = 1.625" x 2.437" (2.86" x 2.437")
Triple Cutout = 1.625" x 3.625" (2.86" x 4.22")

Item #	JRP	Description
14270	12005	Single Switch, White, Pk/1
14265	12015	Double Switch, White, Pk/1
14266	12025	Triple Switch, White, Pk/1
15127	12135	Single Switch, Brown, Pk/1
15128	12225	Single Switch, Black, Pk/1
15130	12235	NEW! Double Switch, Black, Pk/1
15132	12245	NEW! Triple Switch, Black, Pk/1


SPST On/Off Switch - RED



Used in applications such as: water heater activation, electric steps, lighting fixtures, or just about anything else that needs a power switch. 8 Amp @ 125 VAC, 1/2 H.P. @ 125-250 VAC. UL/CSA approved.

Item #	JRP	Description
10575	12041-5	NEW! Lighted On/Off, Red, Bag/5
14268	12045	Lighted On/Off, Red, Pk/1

SPST On/Off Switch




These great replacement switches will work for either replacements for existing assemblies or you can create your own assembly to fit your specific need. Used in applications such as: water heater activation, electric steps, lighting fixtures, or just about anything else that needs a power switch. 16 Amp @ 125-250 VAC, 3/4 H.P. @ 125-250 VAC, 10 Amp @ 14V(T), 3 Amp @ 125V (L). UL/CSA/VDE approved.

Cut Out = .67" x .50" (Switch = 1.285" x .830")

Item #	JRP	Description
10006	12031-5	NEW! On/Off, White, Bag/5
14267	12035	On/Off, White, Pk/1
11959	12161-5	NEW! On/Off, Brown, Bag/5
15133	12165	NEW! On/Off, Brown, Pk/1
11967	12251-5	NEW! On/Off, Black, Bag/5
15134	12255	On/Off, Black, Pk/1



SPST Illuminated On/Off Switch



This standard switch is commonly used for interior lighting and appliances. It becomes illuminated when in the "on" position. 16 Amp @ 125 VAC, 12 Amp @ 250 VAC, 3/4 H.P. @ 125-250 VAC, 10 Amp @ 14 VDC. UL/CSA/VDE/RoHS approved.

*Lamp is 14V/120V except for Mfr# 12511-5, 12515

Cut Out = 1.125" x .550" (Switch = 1.120" x .547")

Item #	JRP	Description
15020	12501-5	12V Red/White, Bag/5
15063	12505	12V Red/White, Pk/1
15022	12511-5	120V Red/Black, Bag/5
15064	12515	120V Red/Black, Pk/1
15023	12521-5	12V Red/Black, Bag/5
15065	12525	12V Red/Black, Pk/1
15066	12535	NEW! 12V Red/Brown, Pk/1
15068	12555	12V Amber/Black, Pk/1
15070	12575	12V Amber/Ivory, Pk/1
11474	13681-5	Blue/Black, Bag/5
11495	13685	Blue/Black, Pk/1
11526	13691-5	Green/Black, Bag/5
11528	13695	Green/Black, Pk/1



SPST On/Off Switch

Used for interior lighting and appliances. 16 Amp @ 125 VAC, 12 Amp @ 250 VAC, 3/4 H.P. @ 125-250 VAC, 10 Amp @ 14VDC. UL/CSA/VDE/RoHS approved.

Cut Out = 1.125" x .550" (Switch = 1.120" x .547")

Item #	JRP	Description
12176	13391-5	NEW! On/Off White, Bag/5
12177	13395	NEW! On/Off White, Pk/1
12178	13401-5	NEW! On/Off Black, Bag/5
12327	13405	NEW! On/Off Black, Pk/1
12345	13415	NEW! On/Off Ivory, Pk/1
12351	13425	NEW! On/Off Brown, Pk/1

Switches!



SPST Mini-On/ Off Switch

Used in appliance and monitor panels.
16 Amp @ 125 VAC, 16 Amp @ 250 VAC,
3/4 H.P. @ 125-250 VAC, 10 Amp @ 14 VDC.
UL/CSA/VDE approved
(Cut Out = .756" x .508" (Switch = .745" x .500"))



SPST Labeled On/Off Switch

Used for interior lighting and appliance uses.
Switches are pre-printed with on/off label.
16 Amp @ 125 VAC, 12 Amp @ 250 VAC,
3/4 H.P. @ 125-250 VAC, 10 Amp @ 14VDC.
UL/CSA/VDE/RoHS approved.

Cut Out = 1.125" x .550" (Switch = 1.120" x .547")




SPST Mini-Illuminated On/Off Switch

Used in appliance and monitor panels.
They become illuminated when in the
"on" position. 16 Amp @ 125 VAC, 1/3 H.P.,
10 Amp @ 250 VAC, 1/2 H.P., 20 Amp @
14 VDC. UL/CUL approved.

Cut Out = .756" x .508" (Switch = .745" x .500")

Item #	JRP	Description
15030	12761-5	Red/Black, Bag/5
15072	12765	Red/Black, Pk/1
15029	12771-5	NEW! Green/Black, Bag/5
15071	12775	Green/Black, Pk/1
11537	13705	Red Dot/Blk, Pk/1
11545	13711-5	Blue/Black, Bag/5

SPST Mini Momentary-On/ Off Switch



H.D. Rocker Switch. 13 Amp @
125 VAC, 10 Amp @ 250 VAC,
1/2 H.P. @ 125-250 VAC, 5 Amp @
14 VDC. UL/CSA/RoHS approved.

Cut Out = .756" x .508" (Switch = .745" x .500")

Item #	JRP	Description
15048	12811-5	Black, Bag/5
15090	12815	Black, Pk/1

SPST Mini On/Off/On Switch

13 Amp @ 125 VAC,
10 Amp @ 250 VAC,
1/2 H.P. @ 125-250 VAC,
5 Amp @ 14V(T)
UL/CSA/RoHS approved.

Cut Out = .756" x .508" (Switch = .745" x .500")

Item #	JRP	Description
12136	13331-5	NEW! Black, Bag/5
12138	13335	NEW! Black, Pk/1



SPST Momentary-On/Off Switch

Used for interior lighting and appliances. 13 Amp
@ 125 VAC, 10 Amp @ 250 VAC, 1/2 H.P.,
5 Amp @ 14 VDC. UL/CSA/RoHS approved.

Cut Out = 1.125" x .550" (Switch = 1.120" x .547")

Item #	JRP	Description
15046	12701-5	Black, Bag/5
15088	12705	Black, Pk/1
15047	12711-5	Brown, Bag/5
15089	12715	Brown, Pk/1
11439	13661-5	White, Bag/5
11441	13665	White, Pk/1

SPST Modular On/Off Switch with Bezel

12V interior switches can be used for
various applications. 12V switch under
the large paddles (Mfr# 13405; Coast#12327).
13 Amp @ 125 VAC, 10 Amp @ 250 VAC,
1/2 H.P., 125-250 VAC, 5 Amp @ 14V.T.
UL/CSA/VDE approved.

Single Cutout = 1.625" x 1.25" (2.86" x 1.625")
Double Cutout = 1.625" x 2.437" (2.86" x 2.437")
Triple Cutout = 1.625" x 3.625" (2.86" x 4.22")

Item #	JRP	Description
12568	13575	NEW! Single White, Pk/1
12599	13585	NEW! Double White, Pk/1
12602	13595	NEW! Triple White, Pk/1



SPST Standard On/On Switch

Used for interior lighting and appliances.
16 Amp @ 125 VAC, 12 Amp @ 250 VAC,
3/4 H.P. @ 125-250 VAC, 10 Amp @ 14 VDC.
UL/CSA/VDE/RoHS approved.

Cut Out = 1.125" x .550" (Switch = 1.120" x .547")

Item #	JRP	Description
15037	12621-5	On/On Black, Bag/5
15079	12625	On/On Black, Pk/1
15038	12631-5	On/On White, Bag/5
15080	12635	On/On White, Pk/1
15081	12645	On/On Brown, Pk/1
15040	12651-5	NEW! On/On Ivory, Bag/5
15082	12655	On/On Ivory, Pk/1

SPST Standard On/Off/On Switch

Same as above.

Item #	JRP	Description
15041	12661-5	NEW! On/Off/On Blk, Bag/5
15083	12665	On/Off/On Black, Pk/1



SPDT On/On Switch

Two-way operation switch
used to activate an operation
from two locations. 16 Amp @ 125-250 VAC,
3/4 H.P. @ 125/250 VAC, 10 Amp @ 14 VDC (T),
3 Amp @ 125V (L). UL/CSA/VDE approved.
Cut Out = .67" x .50" (Outside = 1.285" x .830")

Item #	JRP	Description
17321	13075	White, Pk/1
17322	13085	Brown, Pk/1
17323	13095	Black, Pk/1

In Section E:	Meters/Testers	Wiring	Fuses	12V Accessories	Battery Accessories	Chargers & Inverters	Cords & Adapters	Box/Hatch	Switches	Generators
---------------	----------------	--------	-------	-----------------	---------------------	----------------------	------------------	-----------	----------	------------

Switches!


SPDT Momentary-On/Off/ Momentary-On Switch

13 Amp @ 125 VAC,
10 Amp @ 250 VAC,
5 Amp @ 14 VDC.
UL/CSA/RoHS approved.

Cut Out = 1.125" x .550" (Switch = 1.120" x .547")



Item #	JRP	Description
15043	12671-5	NEW! Black, Bag/5
15085	12675	Black, Pk/1
15045	12691-5	NEW! White, Bag/5
15087	12695	White, Pk/1



SPDT Mini Momentary-On/Off/Momentary-On Switch

13 Amp @ 125 VAC, 10 Amp @ 250 VAC,
1/2 H.P. @ 125-250 VAC, 5 Amp @ 14 V(T).
UL/CSA/RoHS approved.

Cut Out = .756" x .508" (Switch = .745" x .500")

Item #	JRP	Description
11567	13721-5	Black, Bag/5
11586	13725	Black, Pk/1



JR PRODUCTS 2-ROW SLIDE-OUT SWITCH WIRING HARNESS

Used for the following slide-out switches: Mfr# Part Nos. 12095 (Coast# 14602), 12295 (Coast# 15146), 12075 (Coast# 14595), 12285 (Coast# 15143), 12085, 12345 (Coast# 15144) & 12355 (Coast# 15145). 40 Amp @ 12 VDC. Used to rewire 5-pin straight row switches.

17145 2-Row Slide-Out Switch Wiring Harness #13061 10



DPDT On/On Switch

DPDT switch is primarily used for choosing speaker locations. 16 Amp @ 125-250 VAC, 3/4 H.P. @ 125- 250 VAC, 10 Amp @ 14 VDC (T), 3 Amp @ 125V (L). UL/CSA/VDE approved.

Cut Out = .67" x .50" (Outside = 1.285" x .830")

Item #	JRP	Description
17318	13035	White, Pk/1
17320	13055	Black, Pk/1



DPDT Momentary-On/Off/Momentary-On Switch

DPDT switch is primarily used for hydraulic slide-out rooms. 8 Amp @ 125 VAC, 1/2 H.P. @ 125-250 VAC, 9 Amp @ 14 VDC. UL/CSA approved.

Cut Out = .67" x .50" (Outside = 1.285" x .830")

Item #	JRP	Description
17315	13005	White, Pk/1
17316	13015	Brown, Pk/1
17317	13025	Black, Pk/1



DPDT Mini On/Off Labeled I-O Switch

Used in appliance and monitor panels. 20 Amp @ 125 VAC, 15 Amp @ 250 VAC, 40 Amp Peak/20 Amp continuous @ 12 VDC, UL, CUL, RoHS approved.

Cut Out = .756" x .508" (Switch = .745" x .500")

Item #	JRP	Description
11614	13731-5	Black, Bag/5
11344	13735	Black, Pk/1


DPDT Mini On/Off/On Switch

13 Amp @ 125 VAC,
10 Amp @ 250 VAC,
1/2 H.P. @ 125-250 VAC,
5 Amp @ 14 VDC

•UL/CSA/RoHS approved

Cut Out = .756" x .508" (Switch = .745" x .500")

Item #	JRP	Description
12521	13341-5	NEW! Black, Bag/5
12174	13345	NEW! Black, Pk/1




DPDT Mini On/On Switch

H.D. 12V On/On Switch. 16 Amp @ 125 VAC, 16 Amp @ 250 VAC, 3/4 H.P. @ 125-250 VAC, 10 Amp @ 14 VDC. UL/CSA/VDE approved.

Cut Out = .756" x .508" (Switch = .745" x .500")

Item #	JRP	Description
15042	12801-5	Black, Bag/5
15084	12805	Black, Pk/1




Mini Mom-On/Off/Mom-On Switch

DPDT switch is used on various applications where momentary activation is needed for two separate operations. Often used in slide-out operations, monitor panels, refrigerators, and battery disconnects. UL/CSA/RoHS approved. 13 Amp @ 125 VAC, 10 Amp @ 250 VAC, 1/2 HP @ 125-250 VAC, 5 Amp @ 14 VT.

Cut Out Dim. = .756" x .508"
Switch Dim. = .745" x .500"

Item #	JRP	Description
15167	13445	Black, Pk/1



H.D. Momentary-On/Off/Momentary-On Switch

Used in many slide-out and multiple operations panels. Rated to withstand higher temperatures and heavy use.

20 Amp @ 125 VAC, 15 Amp @ 250 VAC, 40 Amp @ 12 VDC. UL/CSA/VDE approved.

Cut Out = 1.25" x .84" (Switch = 2.75" x 1.80")

Item #	JRP	Description
15056	12821-5	NEW! H.D. Switch, Black, Bag/5
15098	12825	H.D. Switch, Black, Pk/1
15099	12835	H.D. Switch, White, Pk/1