CryptoLogin Documentation

Adrian Bedard

Jonathan Bedard

May 25, 2016

Contents

I	CryptoLogin Library	2
1	Introduction 1.1 Unit Testing	3 3
2	File Index 2.1 File List	4 4
3	File Documentation 3.1 createUserForm.cpp File Reference 3.1.1 Detailed Description 3.2 createUserForm.h File Reference 3.3 cryptoLogin.h File Reference 3.3.1 Detailed Description 3.4 cryptoLoginLog.h File Reference 3.4.1 Detailed Description 3.5 keyGenerationPopUp.cpp File Reference 3.5.1 Detailed Description 3.6 keyGenerationPopUp.h File Reference 3.6.1 Detailed Description 3.7 listUsersForm.cpp File Reference 3.8 listUsersForm.h File Reference 3.9 loginMain.cpp File Reference 3.9.1 Detailed Description 3.10 loginMain.h File Reference 3.10.1 Detailed Description 3.11 loginMetaData.cpp File Reference 3.12 loginMetaData.h File Reference 3.12.1 Detailed Description	55 55 66 67 77 77 88 88 88 99 99
	3.13 manageKeysForm.cpp File Reference	10
4	Class Index	11

5	Nam			12
	5.1	login N	lamespace Reference	12
		5.1.1		13
		5.1.2	Variable Documentation	13
6	Clas	se Doci	umentation	14
•	6.1			14
	0.1	6.1.1		15
		6.1.2		15
		6.1.3		15
	6.2			16
	0.2	6.2.1	· ·	16
		6.2.2		16
		6.2.3		16
	6.3			17
	0.0	6.3.1		18
		6.3.2	·	18
		6.3.3		18
		6.3.4		19
		6.3.5		19
	6.4			19
	0	6.4.1	•	21
		6.4.2	·	21
		6.4.3		21
		6.4.4		23
	6.5	•		 24
	0.0	6.5.1		 25
		6.5.2		_ 25
		6.5.3		-c 26
		6.5.4		 26
	6.6			- º 28
	0.0	6.6.1	• • •	- 29
		6.6.2		- 29
		6.6.3		- 29
	6.7	login::r		- 29
	• • • • • • • • • • • • • • • • • • • •	6.7.1	· · ·	30
		6.7.2	·	30
		• · · · · —		31
		6.7.4		31
	6.8	login::ı		31
		6.8.1		32
		6.8.2	·	32
		6.8.3		33
		6.8.4		33
	6.9			34
		6.9.1		35
		6.9.2	·	35
		6.9.3		35
		6.9.4		36
				-

	6.10	login::userNode Struct Reference	36
		6.10.1 Detailed Description	37
		6.10.2 Constructor & Destructor Documentation	37
		6.10.3 Member Function Documentation	37
			38
	6.11	login::userSettingsForm Class Reference	39
			40
			40
			40
			40
	Da	to obvioative of the way.	41
II	Da	tastructures Library	+ 1
7			42
	7.1	Unit Testing	42
	7.2		42
		·	
8			43
	8.1	File List	43
9	File	Documentation	45
9	9.1		45
	J. 1		45
	9.2	·	45
	J. <u>L</u>	5	46
	9.3	·	46
	0.0		47
	9.4	·	-, 47
	J.∓	,	-, 47
	9.5	·	-, 48
	0.0		48
	9.6	·	48
	0.0		49
	9.7	·	49
	0.7	11	49
	9.8	·	.0 49
	0.0		50
	9.9		50
	0.0		53
			54
	9.10		63
	0	00	64
	9.11	·	64
	• • • • • • • • • • • • • • • • • • • •		64
	9.12		64
			66
	9,13		66
			66
	0 1/	·	67

	9.14.1 Detailed Description 9.14.2 Function Documentation .15 staticConstantPrinter.h File Reference 9.15.1 Detailed Description .16 staticConstantPrinter.cpp File Reference 9.16.1 Detailed Description	70 70 74 74 75 75
10	Class Index 0.1 Class List	76 76
11	lamespace Documentation 1.1 os Namespace Reference 11.1.1 Typedef Documentation 11.1.2 Enumeration Type Documentation 11.1.3 Function Documentation 11.1.4 Variable Documentation	78 78 81 83 84 89
12	class Documentation	90
	2.1 os::adnode< dataType > Class Template Reference 12.1.1 Detailed Description 12.1.2 Constructor & Destructor Documentation 12.1.3 Member Function Documentation 12.1.4 Member Data Documentation	90 91 91 91 93
	2.2 os::ads< dataType > Class Template Reference	93 94 94 94 97
		97 99 99 99 102 102
	2.4 os::asyncAVLTree< dataType > Class Template Reference	103 105 105 105 110 111
	12.5.1 Detailed Description	111 112 113 113 116 116
	12.6.1 Detailed Description	117 118 118 119

12.6.4 Member Data Documentation	 	 	 	124
12.7 os::constantPrinter Class Reference	 	 	 	124
12.7.1 Detailed Description	 	 	 	125
12.7.2 Constructor & Destructor Documentation	 	 	 	125
12.7.3 Member Function Documentation	 	 	 	125
12.7.4 Member Data Documentation	 	 	 	128
12.8 os::eventReceiver< senderType > Class Template Reference				
12.8.1 Detailed Description	 	 	 	129
12.8.2 Constructor & Destructor Documentation				
12.8.3 Member Function Documentation	 	 	 	129
12.8.4 Friends And Related Function Documentation	 	 	 	130
12.8.5 Member Data Documentation	 	 	 	130
12.9 os::eventSender< receiverType > Class Template Reference .	 	 	 	131
12.9.1 Detailed Description				
12.9.2 Constructor & Destructor Documentation				
12.9.3 Member Function Documentation				
12.9.4 Friends And Related Function Documentation				
12.9.5 Member Data Documentation				
12.10s::indirectMatrix< dataType > Class Template Reference				
12.10.1Detailed Description				
12.10.2Constructor & Destructor Documentation				
12.10.3Member Function Documentation				
12.10.4Friends And Related Function Documentation				
12.10.5Member Data Documentation				
12.11os::matrix< dataType > Class Template Reference				
12.11.1Detailed Description				
12.11.2Constructor & Destructor Documentation				
12.11.3 Member Function Documentation				
12.11.4Friends And Related Function Documentation				
12.11.5Member Data Documentation				
12.12bs::ptrComp Class Reference				
12.12.1Detailed Description				
12.12.2Constructor & Destructor Documentation				
12.12.3Member Function Documentation				
12.13bs::smart ptr< dataType > Class Template Reference				
12.13.1Detailed Description				
12.13.2Constructor & Destructor Documentation				
12.13.3Member Function Documentation				
12.13.4Member Data Documentation				
12.14os::smartSet< dataType > Class Template Reference				
12.14.1Detailed Description				
12.14.2Constructor & Destructor Documentation				
12.14.3Member Function Documentation				
12.14.4Member Data Documentation				
12.15os::unsortedList< dataType > Class Template Reference				
12.15.1Detailed Description				
12.15.2Constructor & Destructor Documentation				
12.15.3Member Function Documentation				
12.15.4Member Data Documentation				
Bala Boodinontation	 	 	 	. 00

	12.16:s::unsortedListNode< dataType > Class Template Reference	165
	12.16.1Detailed Description	166
	12.16.2Constructor & Destructor Documentation	
	12.16.3Member Function Documentation	166
	12.16.4Friends And Related Function Documentation	167
	12.16.5Member Data Documentation	
	12.17os::vector2d< dataType > Class Template Reference	168
	12.17.1Detailed Description	170
	12.17.2Constructor & Destructor Documentation	
	12.17.3Member Function Documentation	170
	12.17.4Member Data Documentation	
	12.18bs::vector3d< dataType > Class Template Reference	178
	12.18.1Detailed Description	181
	12.18.2Constructor & Destructor Documentation	181
	12.18.3 Member Function Documentation	182
	12.18.4Member Data Documentation	191
	Heit Teet Libran	100
Ш	Unit Test Library	192
13	Introduction	193
. •	13.1 Namespace test	
	13.2 Datastructures Testing	
14	File Index	194
	14.1 File List	194
4 6	: File Decumentation	195
ı	i File Documentation 15.1 DatastructuresTest.h File Reference	
	15.1.1 Detailed Description	
	15.2 DatastructuresTest.cpp File Reference	
	15.2.1 Detailed Description	
	15.3 masterTestHolder.h File Reference	
	15.3.1 Detailed Description	
	15.4 masterTestHolder.cpp File Reference	
	15.4.1 Detailed Description	
	15.5 singleTest.h File Reference	
	15.5.1 Detailed Description	
	15.6 singleTest.cpp File Reference	
	15.6.1 Detailed Description	198 198
	15.7 TestSuite.h File Reference	198
	15.7.1 Detailed Description	198
	15.8 TestSuite.cpp File Reference	198
	15.8.1 Detailed Description	199
	15.9 UnitTest.h File Reference	199
	15.9.1 Detailed Description	199
	15.10UnitTest.cpp File Reference	199
	15.10 IDetailed Description	200
	15.12JnitTestExceptions.h File Reference	
	10.1401111103LEAUGDUU113.111110110101100	∠∪\

	15.12.1Detailed Description	201
16	Class Index	202
	16.1 Class List	202
17	Namespace Documentation	203
	17.1 test Namespace Reference	203
	17.1.1 Typedef Documentation	
	17.1.2 Function Documentation	
	17.1.3 Variable Documentation	
10	Class Documentation	206
10	18.1 test::generalTestException Class Reference	
	18.1.1 Detailed Description	
	18.1.3 Member Function Documentation	
	18.1.4 Member Data Documentation	
	18.2 test::libraryTests Class Reference	
	18.2.1 Detailed Description	
	18.2.2 Constructor & Destructor Documentation	
	18.2.3 Member Function Documentation	
	18.2.4 Member Data Documentation	
	18.3 test::masterTestHolder Class Reference	
	18.3.1 Detailed Description	
	18.3.2 Constructor & Destructor Documentation	
	18.3.3 Member Function Documentation	
	18.3.4 Member Data Documentation	
	18.4 test::nullFunctionException Class Reference	
	18.4.1 Detailed Description	
	18.4.2 Constructor & Destructor Documentation	219
	18.5 test::singleFunctionTest Class Reference	219
	18.5.1 Detailed Description	220
	18.5.2 Constructor & Destructor Documentation	220
	18.5.3 Member Function Documentation	220
	18.5.4 Member Data Documentation	220
	18.6 test::singleTest Class Reference	220
	18.6.1 Detailed Description	221
	18.6.2 Constructor & Destructor Documentation	
	18.6.3 Member Function Documentation	222
	18.6.4 Member Data Documentation	
	18.7 test::testSuite Class Reference	
	18.7.1 Constructor & Destructor Documentation	224
	18.7.2 Member Function Documentation	225
	18.7.3 Member Data Documentation	229
	18.8 test::unknownException Class Reference	_
	18.8.1 Detailed Description	
	18.8.2 Constructor & Destructor Documentation	
	. S.S. — Solidiadio a Bodiadio Bodaliolitation	_00

V	osMechanics Library	2	231
19	Introduction 19.1 Namespace		232 232
20	File Index		233
	20.1 File List		233
21	File Documentation		235
	21.1 logger.cpp File Reference		235
	21.1.1 Detailed Description		235
	21.1.2 Function Documentation		235
	21.1.3 Variable Documentation		235
	21.2 logger.h File Reference		236
	21.2.1 Detailed Description		236
	21.3 multiLock.cpp File Reference		236
	21.3.1 Detailed Description		237
	21.4 multiLock.h File Reference		237
	21.4.1 Detailed Description		237 237
	21.5 osFunctions.cpp File Reference		237
	21.5.1 Detailed Description		238
			239
	21.6.1 Detailed Description		239
	21.7.1 Detailed Description		239
	21.8 osMechanicsTest.cpp File Reference		239
	21.8.1 Detailed Description		239
	21.9 osMechanicsTest.h File Reference	•	240
	21.9.1 Detailed Description		240
	21.10sThreads.cpp File Reference		240
	21.10.1Detailed Description		240
	21.10.2Function Documentation		241
	21.10.3Variable Documentation		241
	21.11osThreads.h File Reference		241
	21.11.1Detailed Description		241
	21.12safeQueue.h File Reference		241
	21.12.1Detailed Description		242
	21.13savableClass.cpp File Reference		242
	21.13.1Detailed Description		242
	21.14savableClass.h File Reference		242
	21.14.1Detailed Description		243
	21.15Serial.h File Reference		243
	21.15.1Detailed Description		243
	21.16serialThread.cpp File Reference		243
	21.16.1Detailed Description		244
	21.16.2Function Documentation		244
	21.17serialThread.h File Reference		244
	21.17.1Detailed Description		244
	21.1&socketFrame.cpp File Reference		244
	21.18.1Detailed Description		245

21.18.2Function Documentation		 	 	 		 		 	245
21.18.3Variable Documentation		 	 	 		 		 	245
21.19socketFrame.h File Reference		 	 	 		 		 	245
21.19.1Detailed Description									
21.20spinLock.cpp File Reference									
21.20.1Detailed Description									
21.21spinLock.h File Reference									
21.21.1Detailed Description									
21.22hreadDistribution.cpp File Reference	е	 	 	 		 		 	246
21.22.1Detailed Description									
21.22.2Function Documentation									
21.23threadDistribution.h File Reference			 	 					247
21.23.1Detailed Description									
21.24unix_osFunctions.cpp File Reference									
21.24.1Detailed Description									
21.24. Detailed Description									
21.24.3 Uniction Documentation									
21.25unix_osFunctions.h File Reference									
21.25.1Detailed Description									
21.25.2Variable Documentation									
21.20unix_Serial.h File Reference									
21.26.1Detailed Description									
21.27unix_spinLock.cpp File Reference									
21.27.1Detailed Description									
21.28unix_spinLock.h File Reference									
21.28.1Detailed Description									
21.29USBAccess.cpp File Reference									
21.29.1Detailed Description									
21.30USBAccess.h File Reference									
21.30.1Detailed Description									
21.31win_osFunctions.cpp File Reference									
21.31.1Detailed Description		 	 	 		 		 	253
21.32vin_osFunctions.h File Reference		 	 	 		 		 	253
21.32.1Detailed Description		 	 	 		 		 	253
21.33win_Serial.h File Reference		 	 	 		 		 	253
21.33.1Detailed Description		 	 	 		 		 	253
21.34win_spinLock.cpp File Reference		 	 	 		 		 	254
21.34.1Detailed Description		 	 	 		 		 	254
21.35win_spinLock.h File Reference		 	 	 		 		 	254
21.35.1Detailed Description		 	 	 		 		 	254
21.36XMLParser.cpp File Reference									
21.36.1Detailed Description									
21.37XMLParser.h File Reference									
21.37.1Detailed Description									
21.38XMLTest.cpp File Reference									
21.38.1Detailed Description									
21.39XMLTest.h File Reference									
21.39.1Detailed Description									
= =		 	 	 -	•	 	-	 	

22	Class Index	257
	22.1 Class List	257
23	Namespace Documentation	259
	23.1 os Namespace Reference	259
	23.1.1 Typedef Documentation	262
	23.1.2 Function Documentation	262
	23.1.3 Variable Documentation	266
24	Class Documentation	267
	24.1 os::executorThread Class Reference	267
	24.1.1 Detailed Description	
	24.1.2 Constructor & Destructor Documentation	
	24.1.3 Member Function Documentation	
	24.1.4 Member Data Documentation	
	24.2 os::IPAddress Class Reference	
	24.2.1 Detailed Description	
	24.2.2 Constructor & Destructor Documentation	
	24.2.3 Member Function Documentation	
	24.2.4 Member Data Documentation	
	24.3 os::LineLogger Class Reference	
	24.3.1 Constructor & Destructor Documentation	
	24.3.2 Member Function Documentation	
	24.3.3 Member Data Documentation	
	24.4 os::LineSaver Class Reference	
	24.4.1 Constructor & Destructor Documentation	
	24.4.2 Member Function Documentation	
	24.4.3 Friends And Related Function Documentation	
	24.4.4 Member Data Documentation	
	24.5 os::LineSaverListener Class Reference	
	24.5.1 Constructor & Destructor Documentation	
	24.5.2 Member Function Documentation	
	24.5.3 Friends And Related Function Documentation	
	24.5.4 Member Data Documentation	
	24.6 os::Log Class Reference	
	24.6.2 Member Function Documentation	
	24.6.3 Member Data Documentation	278 279
	24.7.1 Constructor & Destructor Documentation	
	24.7.1 Constructor & Destructor Documentation	
	24.7.3 Member Paration Documentation	
	24.8 os::logLine Struct Reference	
	24.8.1 Constructor & Destructor Documentation	
	24.8.2 Member Data Documentation	
	24.9 os::LogSaver Class Reference	
	24.9.1 Constructor & Destructor Documentation	
	24.9.2 Member Function Documentation	
	24.9.3 Member Data Documentation	
	2 note monitor bata booding tation	_0_

24.10s::logStatusHolder Class Reference	282
	283
24.10.2 Member Function Documentation	283
24.10.3Friends And Related Function Documentation	283
24.10.4Member Data Documentation	283
24.11os::logStatusListener Class Reference	284
24.11.1Constructor & Destructor Documentation	284
24.11.2 Member Function Documentation	284
24.11.3Friends And Related Function Documentation	285
24.11.4Member Data Documentation	285
24.12bs::LogStreamListener Class Reference	285
24.12.1Constructor & Destructor Documentation	285
24.12.2 Member Function Documentation	285
24.13os::multiLock Class Reference	286
24.13.1Detailed Description	287
	287
24.13.3 Member Function Documentation	287
24.13.4Member Data Documentation	288
24.14os::myIPAddress Class Reference	289
24.14.1Detailed Description	
24.14.2Constructor & Destructor Documentation	
24.14.3 Member Function Documentation	290
24.14.4Member Data Documentation	291
24.15os::safeQueue< dataType > Class Template Reference	
24.15.1Detailed Description	
24.15.2Constructor & Destructor Documentation	
24.15.3 Member Function Documentation	292
24.15.4Member Data Documentation	293
24.16os::savable Class Reference	293
24.16.1Detailed Description	295
24.16.2Constructor & Destructor Documentation	295
24.16.3 Member Function Documentation	295
24.16.4Member Data Documentation	298
24.17os::savingGroup Class Reference	298
24.17.1Detailed Description	299
24.17.2Constructor & Destructor Documentation	299
24.17.3 Member Function Documentation	299
24.17.4Friends And Related Function Documentation	300
24.17.5 Member Data Documentation	300
24.1&s::Serial Class Reference	300
24.18.1Detailed Description	301
24.18.2Constructor & Destructor Documentation	301
24.18.3 Member Function Documentation	301
24.18.4Member Data Documentation	302
24.19bs::serialThread Class Reference	302
24.19.1Detailed Description	303
24.19.2Constructor & Destructor Documentation	304
	304
24.19.4Member Data Documentation	304

24.20s::singleAction Class Reference	305
24.20.1Detailed Description	306
24.20.2Constructor & Destructor Documentation	306
24.20.3 Member Function Documentation	306
24.20.4Member Data Documentation	307
24.21os::socketTracker Class Reference	307
	308
24.21.2Constructor & Destructor Documentation	308
24.21.3 Member Function Documentation	308
24.21.4Friends And Related Function Documentation	308
24.21.5Member Data Documentation	308
24.22os::socketUser Class Reference	309
24.22.1Detailed Description	309
	309
	309
	309
24.23.1Detailed Description	310
24.23.2Constructor & Destructor Documentation	310
24.23.3Member Function Documentation	310
24.23.4Member Data Documentation	310
24.24os::threadActor Class Reference	311
24.24.1Detailed Description	311
24.24.2Constructor & Destructor Documentation	312
24.24.3Member Function Documentation	312
24.24.4Friends And Related Function Documentation	312
24.24.5Member Data Documentation	312
24.25os::threadDistributor Class Reference	313
24.25.1Detailed Description	313
24.25.2Constructor & Destructor Documentation	314
24.25.3Member Function Documentation	314
24.25.4Friends And Related Function Documentation	314
24.25.5Member Data Documentation	314
24.26s::threadHolder Class Reference	315
24.26.1Constructor & Destructor Documentation	316
24.26.2Member Function Documentation	316
24.26.3Member Data Documentation	317
24.27os::threadTracker Class Reference	317
24.27.1Detailed Description	319
24.27. Detailed Description	319
24.27.3Member Function Documentation	319
24.27.4Member Pata Documentation	320
24.28s::UDPAVLNode Struct Reference	321
	321
24.28.1Detailed Description	321
24.28.3Member Function Documentation	
	321
24.28.4Member Data Documentation	321
	321
24.29.1Detailed Description	323
24.29.2Constructor & Destructor Documentation	323

	24.29.3Member Function Documentation	
	24.29.4Member Data Documentation	. 324
	24.30s::UDPPacket Class Reference	. 325
	24.30.1Detailed Description	
	24.30.2Constructor & Destructor Documentation	
	24.30.3Member Function Documentation	
	24.30.4Member Data Documentation	
	24.31os::UDPServer Class Reference	
	24.31.1Detailed Description	
	24.31.2Constructor & Destructor Documentation	
	24.31.3Member Function Documentation	
	24.31.4Member Data Documentation	
	24.32bs::UDPSocket Class Reference	
	24.32.1Detailed Description	. 332
	24.32.2Constructor & Destructor Documentation	. 333
	24.32.3Member Function Documentation	. 333
	24.32.4Member Data Documentation	. 334
	24.33s::USBFile Class Reference	. 334
	24.33.1Constructor & Destructor Documentation	
	24.33.2Member Function Documentation	
	24.34os::USBNode Class Reference	
	24.34.1Detailed Description	
	24.34.2Constructor & Destructor Documentation	
	24.34.3Member Function Documentation	
	24.34.4Member Data Documentation	
	24.35os::XML_Node Class Reference	
	24.35.1Detailed Description	
	24.35.2Constructor & Destructor Documentation	
	24.35.3Member Function Documentation	
	24.35.4Member Data Documentation	. 338
.,		000
٧	CryptoGateway Library	339
25	Introduction	340
25	25.1 Namespace	
	20.1 Namespace	. 340
26	File Index	341
	004 571 111	0.44
	26.1 File List	. 541
27	File Documentation	344
	27.1 binaryEncryption.cpp File Reference	
	27.1.1 Detailed Description	
	27.2 binaryEncryption.h File Reference	
	27.2.1 Detailed Description	
	27.3 c_BaseTen.c File Reference	
	27.3.1 Detailed Description	
	27.4 c_BaseTen.h File Reference	
	27.4.1 Detailed Description	
	27.4.2 Function Documentation	. 346

27.5 c_cryptoTesting.cpp File Reference	 	 	 	349
27.5.1 Detailed Description	 	 	 	349
27.6 c_cryptoTesting.h File Reference	 	 	 	349
27.6.1 Detailed Description	 	 	 	349
27.7 c_numberDefinitions.c File Reference	 	 	 	350
27.7.1 Detailed Description	 	 	 	350
27.8 c_numberDefinitions.h File Reference				
27.8.1 Detailed Description	 	 	 	351
27.8.2 Typedef Documentation	 	 	 	351
27.8.3 Function Documentation				
27.9 cryptoCConstants.h File Reference				
27.9.1 Detailed Description				
27.9.2 Variable Documentation	 	 	 	355
27.10cryptoCHeaders.h File Reference	 	 	 	355
27.10.1Detailed Description	 	 	 	355
27.11cryptoConstants.cpp File Reference	 	 	 	356
27.11.1Detailed Description	 	 	 	356
27.12cryptoConstants.h File Reference	 	 	 	356
27.12.1Detailed Description	 	 	 	356
27.13cryptoCSource.cpp File Reference	 	 	 	356
27.13.1Detailed Description				
27.14cryptoError.cpp File Reference				
27.14.1Detailed Description				
27.15cryptoError.h File Reference				
27.15.1Detailed Description				
27.16cryptoFileTest.cpp File Reference				
27.16.1Detailed Description	 	 	 	359
27.17cryptoFileTest.h File Reference				
27.17.1Detailed Description				
27.1&ryptoGateway.h File Reference				
27.18.1Detailed Description				
27.19cryptoHash.cpp File Reference				
27.19.1Detailed Description				
27.20cryptoHash.h File Reference				
27.20.1Detailed Description				
27.21cryptoLogging.cpp File Reference				
27.21.1Detailed Description				
27.22cryptoLogging.h File Reference				363
27.22.1Detailed Description				363
27.23cryptoNumber.cpp File Reference				363
27.23.1Detailed Description				363
27.24cryptoNumber.h File Reference				364
27.24.1Detailed Description				364
27.25cryptoNumberTest.cpp File Reference				365
27.25.1Detailed Description				365
27.26cryptoPublicKey.cpp File Reference				365
27.26.1Detailed Description				365
27.27cryptoPublicKey.h File Reference				365
27.27.1Detailed Description				366
•				

27.2&ryptoTest.cpp File Reference	. 366
27.28.1Detailed Description	
27.29cryptoTest.h File Reference	
27.29.1Detailed Description	
27.30gateway.cpp File Reference	
27.30.1Detailed Description	
27.31gateway.h File Reference	. 367
27.31.1Detailed Description	368
27.32gatewayTest.cpp File Reference	
27.32.1Detailed Description	
27.33gatewayTest.h File Reference	
27.33.1Detailed Description	
27.34hashTest.cpp File Reference	369
27.34.1Detailed Description	
27.35hashTest.h File Reference	
27.35.1Detailed Description	
27.36hexConversion.cpp File Reference	
27.36.1Detailed Description	
27.37hexConversion.h File Reference	. 370
27.37.1Detailed Description	
27.3&eyBank.cpp File Reference	
27.38.1Detailed Description	
27.39keyBank.h File Reference	
27.39.1Detailed Description	
27.40message.cpp File Reference	
27.40.1Detailed Description	
27.41message.h File Reference	
27.41.1Detailed Description	
27.42publicKeyPackage.cpp File Reference	
27.42.1Detailed Description	
27.43publicKeyPackage.h File Reference	
27.43.1Detailed Description	
27.44publicKeyTest.h File Reference	
27.44.1Detailed Description	
27.45RC4_Hash.cpp File Reference	
27.46RC4_Hash.h File Reference	
27.47staticTestKeys.cpp File Reference	
27.47.1Detailed Description	
27.4&staticTestKeys.h File Reference	
27.48.1Detailed Description	
27.49streamCipher.cpp File Reference	
27.50streamCipher.h File Reference	
27.50.1Variable Documentation	
27.51streamPackage.cpp File Reference	
27.51.1Detailed Description	
27.52streamPackage.h File Reference	
27.52.1Detailed Description	
27.53streamTest.cpp File Reference	
27.53.1Detailed Description	
	J. /

	27.54streamTest.h File Reference	377
	27.54.1Detailed Description	377
	27.55estKeyGeneration.cpp File Reference	378
	27.5&estKeyGeneration.h File Reference	378
	27.56.1Detailed Description	378
	27.57user.cpp File Reference	378
	27.57.1Detailed Description	378
	27.58user.h File Reference	379
	27.58.1Detailed Description	379
	27.59XMLEncryption.cpp File Reference	379
	27.59.1Detailed Description	379
	27.60XMLEncryption.h File Reference	380
	27.60.1Detailed Description	380
၁၀	Class Index	382
20	28.1 Class List	382
	20.1 Glass List	302
29	Namespace Documentation	385
_	29.1 crypto Namespace Reference	385
	29.1.1 Typedef Documentation	
	29.1.2 Function Documentation	
	29.1.3 Variable Documentation	392
30	Class Documentation	394
	30.1 crypto::actionOnFileClosed Class Reference	394
	30.1.1 Detailed Description	394
	30.1.2 Constructor & Destructor Documentation	394
	30.1.3 Member Function Documentation	395
	30.2 crypto::actionOnFileError Class Reference	395
	30.2.1 Detailed Description	396
	30.2.2 Constructor & Destructor Documentation	396
	30.2.3 Member Function Documentation	396
	30.3 crypto::avlKeyBank Class Reference	396
	30.3.1 Detailed Description	398
	30.3.2 Constructor & Destructor Documentation	398 398
	30.3.4 Member Data Documentation	401
	30.4 crypto::binaryDecryptor Class Reference	402
	30.4.1 Detailed Description	403
	30.4.2 Constructor & Destructor Documentation	404
	30.4.3 Member Function Documentation	405
	30.4.4 Member Data Documentation	407
	30.5 crypto::binaryEncryptor Class Reference	408
	30.5.1 Detailed Description	409
	30.5.2 Constructor & Destructor Documentation	409
	30.5.3 Member Function Documentation	411
	30.5.4 Member Data Documentation	413
	30.6 crypto::bufferLargeError Class Reference	414
	30.6.1 Detailed Description	414
	30.6.2 Constructor & Destructor Documentation	414

30.6.3 Member Function Documentation	415
71	415
	415
	416
30.7.3 Member Function Documentation	416
30.8 crypto::customError Class Reference	416
30.8.1 Detailed Description	417
	417
	417
30.8.4 Member Data Documentation	418
30.9 crypto::error Class Reference	418
30.9.1 Detailed Description	420
30.9.2 Constructor & Destructor Documentation	420
30.9.3 Member Function Documentation	420
30.9.4 Member Data Documentation	421
30.10crypto::errorListener Class Reference	422
30.10.1Detailed Description	
30.10.2Constructor & Destructor Documentation	423
30.10.3Member Function Documentation	423
30.10.4Friends And Related Function Documentation	
30.10.5Member Data Documentation	
30.11crypto::errorSender Class Reference	
30.11.1Detailed Description	
30.11.2Constructor & Destructor Documentation	
30.11.3Member Function Documentation	
30.11.4Friends And Related Function Documentation	
30.11.5Member Data Documentation	
	427
30.12.1Detailed Description	428
30.12.2Constructor & Destructor Documentation	
30.12.3Member Function Documentation	
30.13crypto::fileOpenError Class Reference	
30.13.1Detailed Description	
30.13.2Constructor & Destructor Documentation	
30.13.3Member Function Documentation	
30.14crypto::gateway Class Reference	
30.14.1Detailed Description	
· ·	434
	434
	439
	.00 444
	446
·	446
	447
	451
	453
**	454
·	454
	455

30.16.4Member Data Documentation	458
30.17crypto::hashCompareError Class Reference	459
30.17.1Detailed Description	459
30.17.2Constructor & Destructor Documentation	459
30.17.3 Member Function Documentation	459
	460
30.18.1Detailed Description	460
30.18.2Constructor & Destructor Documentation	460
30.18.3 Member Function Documentation	461
30.19crypto::illegalAlgorithmBind Class Reference	461
30.19.1Detailed Description	462
30.19.2Constructor & Destructor Documentation	462
30.19.3Member Function Documentation	462
30.19.4Member Data Documentation	463
30.2@crypto::insertionFailed Class Reference	463
30.20.1Detailed Description	463
30.20.2Constructor & Destructor Documentation	463
30.20.3Member Function Documentation	463
30.21crypto::integer Class Reference	464
30.21.1Detailed Description	466
	466
	467
30.21.3Member Function Documentation	
30.22crypto::keyBank Class Reference	473
· ·	475
30.22.2Constructor & Destructor Documentation	475
30.22.3Member Function Documentation	476
30.22.4Friends And Related Function Documentation	480
30.22.5Member Data Documentation	480
30.23crypto::keyChangeReceiver Class Reference	481
· ·	482
	482
	482
	483
	483
· ·	484
	484
	484
30.25crypto::keyMissing Class Reference	485
30.25.1Detailed Description	485
30.25.2Constructor & Destructor Documentation	486
30.25.3 Member Function Documentation	486
30.26crypto::masterMismatch Class Reference	486
30.26.1Detailed Description	487
30.26.2Constructor & Destructor Documentation	487
30.26.3 Member Function Documentation	487
30.27crypto::message Class Reference	487
30.27.1Detailed Description	489
30.27.2Constructor & Destructor Documentation	489
30.27.3 Member Function Documentation	490

30.27.4Friends And Related Function Documentation .	 	 		491
30.27.5Member Data Documentation				492
30.28crypto::nodeGroup Class Reference				493
30.28.1Detailed Description				495
30.28.2Constructor & Destructor Documentation				495
30.28.3Member Function Documentation				496
30.28.4Friends And Related Function Documentation .				499
30.28.5Member Data Documentation				499
30.29crypto::nodeKeyReference Class Reference				500
30.29.1Detailed Description			 i	501
30.29.2Constructor & Destructor Documentation	 	 • •		501
30.29.3Member Function Documentation				502
30.29.4Friends And Related Function Documentation .				504
30.29.5Member Data Documentation				505
30.3@rypto::nodeNameReference Class Reference				505
30.30.1Detailed Description				507
30.30.2Constructor & Destructor Documentation				507
30.30.3Member Function Documentation				507
30.30.4Friends And Related Function Documentation				510
30.30.5Member Data Documentation				510
30.31crypto::NULLDataError Class Reference				511
30.31.1Detailed Description				511
30.31.2Constructor & Destructor Documentation				511
				511
30.31.3Member Function Documentation				512
30.32 rypto::NULLMaster Class Reference				512
30.32.1Detailed Description				512
30.32.2Constructor & Destructor Documentation				513
30.32.3Member Function Documentation				
30.33crypto::NULLPublicKey Class Reference				513
30.33.1Detailed Description				513
30.33.2Constructor & Destructor Documentation				514
30.33.3Member Function Documentation				514
30.34crypto::number Class Reference				514
30.34.1Detailed Description				517
30.34.2Constructor & Destructor Documentation				518
30.34.3Member Function Documentation				519
30.34.4Member Data Documentation				531
30.35numberType Struct Reference				531
30.35.1Detailed Description				532
30.35.2Member Data Documentation				532
30.3&rypto::passwordLargeError Class Reference				533
30.36.1Detailed Description				534
30.36.2Constructor & Destructor Documentation				534
30.36.3Member Function Documentation				534
30.37crypto::passwordSmallError Class Reference				535
30.37.1Detailed Description				535
30.37.2Constructor & Destructor Documentation				535
30.37.3 Member Function Documentation				535
30.3&rypto::publicKey Class Reference	 	 		536

30.38.1Detailed Description					 		540
30.38.2Constructor & Destructor Documentation							540
30.38.3 Member Function Documentation							542
30.38.4Member Data Documentation							554
30.39crypto::publicKeyPackage< pkType > Class Template Reference							556
30.39.1Constructor & Destructor Documentation							557
30.39.2 Member Function Documentation							557
30.40crypto::publicKeyPackageFrame Class Reference							558
30.40.1Constructor & Destructor Documentation							559
30.40.2Member Function Documentation							559
30.40.3Member Data Documentation							561
30.41crypto::publicKeySizeWrong Class Reference							561
30.41.1Detailed Description							561
30.41.2Constructor & Destructor Documentation							562
30.41.3Member Function Documentation							562
30.42crypto::publicKeyTypeBank Class Reference							562
30.42.1Constructor & Destructor Documentation	•	•	•	•	•	•	563
30.42.2Member Function Documentation							563
30.42.3Member Data Documentation							563
30.43crypto::publicRSA Class Reference							563
30.43.1Detailed Description							566
30.43.2Constructor & Destructor Documentation							566
30.43.3Member Function Documentation							568
30.43.4Friends And Related Function Documentation							573
30.43.5Member Data Documentation							574
30.44crypto::rc4Hash Class Reference							574
30.44.1Detailed Description							575
30.44.2Constructor & Destructor Documentation							575
30.44.3Member Function Documentation							576
30.45crypto::RCFour Class Reference							579
30.45.1Constructor & Destructor Documentation							
30.45.2Member Function Documentation							580
30.45.3Member Data Documentation							
30.4crypto::RSAKeyGenerator Class Reference							580
30.46.1Detailed Description							581
30.46.2Constructor & Destructor Documentation							581
30.46.3Member Function Documentation							581
30.46.4Member Data Documentation							582
30.47crypto::streamCipher Class Reference							582
30.47.1Constructor & Destructor Documentation							582
30.47.20 Member Function Documentation							582
30.48crypto::streamDecrypter Class Reference							583
30.48.1Constructor & Destructor Documentation							583
30.48.2Member Function Documentation							583
30.48.3Member Data Documentation							583
30.49crypto::streamEncrypter Class Reference							583
30.49.1Constructor & Destructor Documentation							584
30.49.2Member Function Documentation							584
30.49.3Member Para Documentation							584
OU. TU. UVIETIDEI DAIA DUCUITIETIIAIIUTT					 	•	504

	30.50crypto::streamPackage< streamType, hashType > Class Template Reference	
	30.50.1Constructor & Destructor Documentation	585
	30.50.2 Member Function Documentation	585
	30.51crypto::streamPackageFrame Class Reference	586
	30.51.1Constructor & Destructor Documentation	587
	30.51.2 Member Function Documentation	587
	30.51.3Member Data Documentation	588
	30.52crypto::streamPackageTypeBank Class Reference	588
	30.52.1Constructor & Destructor Documentation	588
	30.52.2 Member Function Documentation	
	30.52.3Member Data Documentation	589
	30.53crypto::streamPacket Class Reference	589
	30.53.1Constructor & Destructor Documentation	589
	30.53.2Member Function Documentation	589
	30.53.3Member Data Documentation	589
	30.54crypto::stringTooLarge Class Reference	
		590
	30.54.1Detailed Description	590
	30.54.2Constructor & Destructor Documentation	
	30.54.3Member Function Documentation	590
	30.55crypto::unknownErrorType Class Reference	591
	30.55.1Detailed Description	591
	30.55.2Constructor & Destructor Documentation	592
	30.55.3Member Function Documentation	592
	30.5&rypto::user Class Reference	592
	30.56.1Detailed Description	595
	30.56.2Constructor & Destructor Documentation	595
	30.56.3 Member Function Documentation	595
	30.56.4Member Data Documentation	604
	30.57crypto::xorHash Class Reference	605
	30.57.1Detailed Description	606
	30.57.2Constructor & Destructor Documentation	606
	30.57.3Member Function Documentation	607
VI	glGraphics Library	610
31	Introduction	611
J.	31.1 Namespace	•
	51.1 Namespace	011
32	File Index	612
-	32.1 File List	612
	02.77110 2.00	0.2
33	File Documentation	615
	33.1 freeglut.h File Reference	615
	33.1.1 Detailed Description	615
	33.2 freeglut_ext.h File Reference	615
	33.2.1 Detailed Description	615
	33.3 freeglut_std.h File Reference	616
	33.3.1 Detailed Description	616
	33.4 glCheckbox.cpp File Reference	
	2011 9.01.001.00/1.0pp 1 110 1101010100 1 1 1 1 1 1 1 1 1 1	5.0

The same of the sa	616
	616
· · · · · · · · · · · · · · · · · · ·	617
5 11	617
33.6.1 Detailed Description	617
O Company of the comp	617
33.7.1 Detailed Description	618
33.8 glContainers.cpp File Reference	618
l l	619
	619
	619
	620
	620
	620
	621
	621
	621
	621
	622
	622
	623
	623
	624
	624
	624
	625
	626
	626
	626
	626
	626
	627
	627
	627
	627
	628
	628
	628
	628
	629
	629
	629
0 11	629
	630
· · · · · · · · · · · · · · · · · · ·	630
9 9 11	630
· · · · · · · · · · · · · · · · · · ·	630
	630
33.28.1Detailed Description	631

	632
· · · · · · · · · · · · · · · · · · ·	632
33.30glTextbox.h File Reference	632
· ·	632
	633
	633
33.32glut_w.h File Reference	633
	633
33.33.1Detailed Description	633
33.34mage_DXT.h File Reference	634
33.34.1Detailed Description	634
33.35mage_helper.cpp File Reference	634
	634
33.36mage_helper.h File Reference	634
	635
33.37osGraphics.h File Reference	635
	635
	635
33.38.1Detailed Description	635
	636
	636
	636
	636
	637
	637
	637
	637
	638
	638
	638
	638
	639
	639
	639
	639
	640
	640
	641
·	641
	641
	641
	641
	642
	642
_ - -	642
	642
	642
	643
— 	643

	33.54win_osGraphics.h File Reference	643 643
34	Class Index	644
	34.1 Class List	644
35	Namespace Documentation	646
	35.1 gl Namespace Reference	646
	35.1.1 Typedef Documentation	649
	35.1.2 Enumeration Type Documentation	649
	35.1.3 Function Documentation	651
	35.1.4 Variable Documentation	651
	35.2 gl::col Namespace Reference	652
	35.2.1 Variable Documentation	653
	35.3 test Namespace Reference	653
	35.3.1 Function Documentation	654
	35.4 test::macro Namespace Reference	654
	35.4.1 Function Documentation	655
36	Class Documentation	656
	36.1 gl::activeDisplayArrowButton Class Reference	656
	36.1.1 Constructor & Destructor Documentation	657
	36.1.2 Member Function Documentation	657
	36.1.3 Member Data Documentation	657
	36.2 gl::activeDisplayButton Class Reference	657
	36.2.1 Constructor & Destructor Documentation	658
	36.2.2 Member Function Documentation	658
	36.2.3 Member Data Documentation	659
	36.3 gl::arrowButton Class Reference	659
	36.3.1 Constructor & Destructor Documentation	661
	36.3.2 Member Function Documentation	661
	36.3.3 Member Data Documentation	662
	36.4 gl::barGroup Class Reference	662
	36.4.1 Constructor & Destructor Documentation	664
	36.4.2 Member Function Documentation	664
	36.4.3 Friends And Related Function Documentation	665
	36.4.4 Member Data Documentation	665
	36.5 gl::baseUIDriver Class Reference	665
	36.5.1 Constructor & Destructor Documentation	666
	36.5.2 Member Function Documentation	666
	36.5.3 Friends And Related Function Documentation	667
	36.5.4 Member Data Documentation	667
	36.6 gl::box Class Reference	667
	36.6.1 Constructor & Destructor Documentation	668
	36.6.2 Member Function Documentation	668
	36.6.3 Member Data Documentation	669
	36.7 gl::button Class Reference	669
	36.7.1 Constructor & Destructor Documentation	670
	36.7.2 Member Function Documentation	670
	36.7.3 Member Data Documentation	671

	689
	689
	689
5	689
	692
36.21.2 Member Function Documentation	692
	697
36.21.4Member Data Documentation	697
5	698
	698
36.22.2 Member Function Documentation	699
36.22.3 Member Data Documentation	699
36.23gl::enterFunctionVoid Class Reference	699
36.23.1Constructor & Destructor Documentation	699
36.23.2 Member Function Documentation	699
36.23.3Member Data Documentation	700
	700
36.24.1Constructor & Destructor Documentation	700
36.24.2 Member Function Documentation	700
	700
36.24.4Member Data Documentation	700
	701
	701
	701
	701
	702
· ·	702
	702
	702
	704
	704
	705
	705
· ·	706
	706
	707
	707
	709
36.29.2Member Function Documentation	709
36.29.3Friends And Related Function Documentation	711
36.29.4Member Data Documentation	711
36.30gl::form3d Class Reference	712
36.30.1Constructor & Destructor Documentation	713
36.30.2Member Function Documentation	713
36.30.3Member Data Documentation	713
36.31gl::frame Class Reference	713
•	715
	715
	717
CO.OT. GENERAL TRANSPORT AND AND ADDRESS OF THE CONTRACT OF TH	

36.31.4Member Data Documentation	717
36.32gl::globalKeyboardListener Class Reference	718
36.32.1Constructor & Destructor Documentation	718
36.32.2Member Function Documentation	718
36.32.3Friends And Related Function Documentation	718
36.32.4Member Data Documentation	719
	719
36.33.1Constructor & Destructor Documentation	719
36.33.2Member Function Documentation	
36.33.3Friends And Related Function Documentation	
36.33.4Member Data Documentation	
36.34gl::Helvetica Class Reference	
36.34.1Constructor & Destructor Documentation	
36.34.2Member Function Documentation	
36.35gl::imageElement Class Reference	
36.35.1Constructor & Destructor Documentation	
36.35.2Member Function Documentation	
36.35.3Member Data Documentation	
36.36gl::key Class Reference	
36.36.1Constructor & Destructor Documentation	
36.36.2Member Function Documentation	
36.36.3Member Data Documentation	
36.37gl::keyboard Class Reference	
36.37.1Constructor & Destructor Documentation	
36.37.1901structor & Destructor Documentation	
36.37.3Friends And Related Function Documentation	
36.37.3 Hends And Related Function Documentation	
36.38gl::keyboardListener Class Reference	
36.38.1Constructor & Destructor Documentation	
36.38.2Member Function Documentation	
36.38.3Friends And Related Function Documentation	
36.38.4Member Data Documentation	
36.39gl::label Class Reference	
36.39.1Constructor & Destructor Documentation	
36.39.2Member Function Documentation	
36.39.3Member Data Documentation	
36.40gl::mouse Class Reference	
	728
	728
	729
	729
3	729
	730
	730
36.41.3Friends And Related Function Documentation	731
36.41.4Member Data Documentation	731
36.42gl::navForm Class Reference	731
	732
36.42.2 Member Function Documentation	732

00.40.0M D D L	-
	732
	732
	734
	734
	735
5 1	735
	735
	735
	736
	736
	736
	736
36.45.3 Member Data Documentation	736
36.46gl::pressedListener Class Reference	737
36.46.1Constructor & Destructor Documentation	737
36.46.2 Member Function Documentation	737
36.46.3 Friends And Related Function Documentation	737
36.46.4Member Data Documentation	737
36.47test::pressedTestListener Class Reference	738
36.47.1Constructor & Destructor Documentation	738
36.47.2 Member Function Documentation	738
	738
	738
	739
	739
	739
	739
	739
	740
	, .0 740
	, .0 740
	, .0 740
9	741
	741
	741
	741
	742
	742 742
	742 742
	742 742
	742 743
	743 743
	743 743
	744
	745
	745
	746
	746
36.54gl::singleButtonPopUp Class Reference	747

	36.54.1Constructor & Destructor Documentation						
	36.54.2Member Function Documentation						
	36.54.3Member Data Documentation						
	est::singleUIFunctionTest Class Reference						
	36.55.1Constructor & Destructor Documentation						
	36.55.2 Member Function Documentation						
3	36.55.3Member Data Documentation	 	 		 		749
36.5 @	est::singleUITest Class Reference	 	 		 		749
	36.56.1Constructor & Destructor Documentation						
3	36.56.2 Member Function Documentation	 	 		 		749
36.57t	est::testForm Class Reference	 	 		 		749
3	36.57.1Constructor & Destructor Documentation	 	 		 		751
3	36.57.2 Member Function Documentation	 	 		 		751
3	36.57.3Member Data Documentation	 	 		 		751
36.5&	gl::testingDriver Class Reference	 	 		 		751
	36.58.1Constructor & Destructor Documentation						
3	36.58.2 Member Function Documentation	 	 		 		752
	36.58.3Member Data Documentation						
	gl::textbox Class Reference						
	36.59.1Constructor & Destructor Documentation						
	36.59.2 Member Function Documentation						
	36.59.3Member Data Documentation						
	est::textboxForm Class Reference						
	36.60.1Constructor & Destructor Documentation						
	36.60.2Member Data Documentation						
	gl::texture_data Struct Reference						
	36.61.1Constructor & Destructor Documentation						
	36.61.2Member Data Documentation						
	gl::textureManager Class Reference						
	36.62.1Constructor & Destructor Documentation						
	36.62.2 Member Function Documentation						
	36.62.3Member Data Documentation						
	gl::TimesMonoRomanStroke Class Reference						
•	36.63.1Constructor & Destructor Documentation						
	36.63.2Member Function Documentation						
	gl::TimesRoman Class Reference						
•	36.64.1Constructor & Destructor Documentation						
	36.64.2Member Function Documentation						761
	gl::TimesRomanStroke Class Reference						
	36.65.1Constructor & Destructor Documentation						
	36.65.2Member Function Documentation						
	gl::UIDriver Class Reference						
	36.66.1Constructor & Destructor Documentation						
	36.66.2Member Function Documentation						
	36.66.3Friends And Related Function Documentation						
	36.66.4Member Data Documentation						
	est::UITestSuite Class Reference						
	36.67.1Constructor & Destructor Documentation						
	36.67.2 Member Function Documentation	 	 		 		764

36.6≷::wrappableBox Class Reference						 			764
36.68.1Constructor & Destructor Documentation	1.					 			765
36.68.2 Member Function Documentation						 			765

Part I CryptoLogin Library

Chapter 1

Introduction

The CryptoLogin library contains a series of forms and support class used to open, manage and edit users. These forms utilize the Datastructures, osMechanics, CryptoGateway and glGraphics libraries.

1.1 Unit Testing

Currently, the CryptoLogin library is not tested. In the future, the CryptoLogin will leverage the testing functionality of the glGraphics library to preform basic testing on the forms through the headless testing interface in glGraphics.

1.2 Namespace login

This namespace contains forms used for both logging in and visualizing the basics of a user. Note that the initial entry form is a template class so that the login namespace can open any form when logging in. It is expected that the subsequent form will provide opportunities for the user to open some of the user editing forms provided by the login namespace.

Chapter 2

File Index

2.1 File List

re is a list of all files with brief descriptions.
createUserForm.cpp
Implements the user creation form
createUserForm.h
cryptoLogin.h
All login header files
cryptoLoginLog.h
Logging for login namespace
keyGenerationPopUp.cpp
Key generation pop-up
keyGenerationPopUp.h
Various crypto-graphic pop-ups
listUsersForm.cpp
listUsersForm.h
loginMain.cpp
Miscellaneous implementation for login namespace 8
loginMain.h
Entry login form
loginMetaData.cpp
loginMetaData.h
Impliments login-form meta-data
manageKeysForm.cpp
manageKeysForm.h

Chapter 3

File Documentation

3.1 createUserForm.cpp File Reference

Implements the user creation form.

3.1.1 Detailed Description

Implements the user creation form.
Implements key management form.

Author

Jonathan Bedard

Date

4/21/2016

Bug None

Implements the user creation form. Consult createUserForm.h (p. 5) for details.

Author

Jonathan Bedard

Date

5/5/2016

Bug None

Implements the key management form, which can be accessed from the secure side side of the gateway

3.2 createUserForm.h File Reference

Classes

• class login::createUser

Namespaces

• login

3.3 cryptoLogin.h File Reference

All login header files.

3.3.1 Detailed Description

All login header files.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

Includes all login header files to be used outside the library.

3.4 cryptoLoginLog.h File Reference

Logging for login namespace.

Namespaces

• login

Functions

- std::ostream & login::loginout_func ()

 Standard out object for login namespace.
- std::ostream & login::loginerr_func ()

 Standard error object for login namespace.

Variables

- os::smart_ptr< std::ostream > login::loginout_ptr Standard out pointer for login namespace.
- os::smart_ptr< std::ostream > login::loginerr_ptr Standard error pointer for login namespace.

3.4.1 Detailed Description

Logging for login namespace.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

This file contains declarations which are used for logging within the login namespace.

3.5 keyGenerationPopUp.cpp File Reference

Key generation pop-up.

3.5.1 Detailed Description

Key generation pop-up.

Author

Jonathan Bedard

Date

5/8/2016

Bug None

Implements the key-generation pop-up which provides a UI while public keys are being generated.

3.6 keyGenerationPopUp.h File Reference

Various crypto-graphic pop-ups.

Classes

• class login::pulblicKeyPopUp

Used when generating keys.

• class login::userLoadingPopUp

Used when loading the user.

Namespaces

• login

3.6.1 Detailed Description

Various crypto-graphic pop-ups.

Author

Jonathan Bedard

Date

4/21/2016

Bug None

Provides two pop-up forms used by the CryptoLogin library. One is used when generating public keys and another is used when loading user data.

3.7 listUsersForm.cpp File Reference

3.8 listUsersForm.h File Reference

Classes

• class login::userFrame

Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.

• class login::listUsers

List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.

Namespaces

• login

3.9 loginMain.cpp File Reference

Miscellaneous implementation for login namespace.

3.9.1 Detailed Description

Miscellaneous implementation for login namespace.

Author

Jonathan Bedard

Date

3/7/2016

Bug None

Implements a number of functions and objects used in the login namespaces. In particular, this file implements the logging structures for the login namespace.

3.10 loginMain.h File Reference

Entry login form.

Classes

 class login::mainLogin< nextForm > Login form.

Namespaces

• login

3.10.1 Detailed Description

Entry login form.

Author

Jonathan Bedard

Date

4/20/2016

Bug None

Provides a template class for applications which would like to include a password to log in. Will allow the user to create new users and define public keys for those users as well.

3.11 loginMetaData.cpp File Reference

3.12 loginMetaData.h File Reference

Impliments login-form meta-data.

Classes

• struct login::userNode

User node.

• class login::loginMetaData

Login meta-data class.

Namespaces

• login

Variables

• const char * login::META_FILE

Meta-data file name.

• const char * login::USERS_FOLDER

Folder holding user data.

3.12.1 Detailed Description

Impliments login-form meta-data.

Contains meta-data for login form.

Author

Jonathan Bedard

Date

4/18/2016

Bug None

Impliments the login meta-data class. Consult loginMetaData.h (p. 9) for details.

Author

Jonathan Bedard

Date

4/13/2016

Bug None

Provides meta-data to the login form. This class has default states, so if a custom meta-data class is not passed to the login form, a default one will be created.

3.13 manageKeysForm.cpp File Reference

3.14 manageKeysForm.h File Reference

Classes

class login::publicKeyTypeFrameclass login::userSettingsForm

• class login::keyBankForm

Namespaces

login

Chapter 4

Class Index

4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:	
login::createUser	14
login::keyBankForm	16
login::listUsers	
List-user form A navigation form listing all users associated with a particular login ←	
MetaData (p. 19) class	17
login::loginMetaData	
Login meta-data class	19
login::mainLogin< nextForm >	
Login form	24
login::publicKeyTypeFrame	28
login::pulblicKeyPopUp	
Used when generating keys	29
login::userFrame	
Defines a user display frame This frame displays basic user data before a user is	
logged in. This data is defined from the login meta-data	31
login::userLoadingPopUp	-
Used when loading the user	34
login::userNode	-
User node	36
login::userSettingsForm	39

Chapter 5

Namespace Documentation

5.1 login Namespace Reference

Classes

- class createUser
- class keyBankForm
- class listUsers

List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.

• class loginMetaData

Login meta-data class.

• class mainLogin

Login form.

- class publicKeyTypeFrame
- class pulblicKeyPopUp

Used when generating keys.

• class userFrame

Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.

• class userLoadingPopUp

Used when loading the user.

• struct userNode

User node.

• class userSettingsForm

Functions

• std::ostream & loginout_func ()

Standard out object for login namespace.

• std::ostream & loginerr_func ()

Standard error object for login namespace.

Variables

- os::smart_ptr< std::ostream > loginout_ptr
 Standard out pointer for login namespace.
- os::smart_ptr< std::ostream > loginerr_ptr
 Standard error pointer for login namespace.
- const char * META FILE

Meta-data file name.

• const char * USERS FOLDER

Folder holding user data.

5.1.1 Function Documentation

```
std::ostream& login::loginerr_func ( )
```

Standard error object for login namespace.

#define statements allow the user to call this function with "login::loginerr." Logging is achieved by using "login::loginerr" as one would use "std::cerr."

```
std::ostream& login::loginout_func ( )
```

Standard out object for login namespace.

#define statements allow the user to call this function with "login::loginout." Logging is achieved by using "login::loginout" as one would use "std::cout."

5.1.2 Variable Documentation

```
os::smart_ptr<std::ostream> login::loginerr_ptr
```

Standard error pointer for login namespace.

This std::ostream is used as standard error for the login namespace. This pointer can be swapped out to programmatically redirect standard error for the login namespace.

```
os::smart ptr<std::ostream> login::loginout ptr
```

Standard out pointer for login namespace.

This std::ostream is used as standard out for the login namespace. This pointer can be swapped out to programmatically redirect standard out for the login namespace.

const char* login::META_FILE

Meta-data file name.

const char* login::USERS FOLDER


Folder holding user data.

Chapter 6

Class Documentation

6.1 login::createUser Class Reference

Inheritance diagram for login::createUser:



Public Member Functions

- createUser (gl::form *master, std::string baseTitle, loginMetaData &md)
- virtual ~createUser ()
- void updateIndicators ()
- void **receivedClicked** (os::smart_ptr< element > elm)
- void receivedEnter (os::smart_ptr< element > elm)
- bool **keyUnpress** (const gl::key &_key)

Protected Member Functions

• void update ()

Private Attributes

- gl::label lblUser
- gl::textbox tbxUser
- gl::label indUser
- gl::label IblPassword1
- gl::textbox tbxPassword1
- gl::label indPassword

- gl::label IblPassword2
- gl::textbox tbxPassword2
- gl::activeDisplayButton btnRSA128
- gl::activeDisplayButton btnRSA256
- gl::activeDisplayButton btnRSA512
- gl::activeDisplayButton btnCreate
- gl::button btnQuit
- loginMetaData & metaData
- unsigned int keyCreation


6.1.1 Constructor & Destructor Documentation

```
login::createUser::createUser ( gl::form * master, std::string baseTitle, loginMetaData & md )
virtual login::createUser::~createUser( ) [inline], [virtual]
6.1.2 Member Function Documentation
bool login::createUser::keyUnpress ( const gl::key & _key )
void login::createUser::receivedClicked ( os::smart_ptr< element > elm )
void login::createUser::receivedEnter ( os::smart_ptr< element > elm )
void login::createUser::update( ) [protected]
void login::createUser::updateIndicators ( )
6.1.3 Member Data Documentation
gl::activeDisplayButton login::createUser::btnCreate [private]
gl::button login::createUser::btnQuit [private]
gl::activeDisplayButton login::createUser::btnRSA128 [private]
gl::activeDisplayButton login::createUser::btnRSA256 [private]
gl::activeDisplayButton login::createUser::btnRSA512 [private]
gl::label login::createUser::indPassword [private]
gl::label login::createUser::indUser [private]
unsigned int login::createUser::keyCreation [private]
gl::label login::createUser::lblPassword1 [private]
gl::label login::createUser::lblPassword2 [private]
gl::label login::createUser::lblUser [private]
loginMetaData& login::createUser::metaData [private]
gl::textbox login::createUser::tbxPassword1 [private]
```

```
gl::textbox login::createUser::tbxPassword2 [private]
gl::textbox login::createUser::tbxUser [private]
```

6.2 login::keyBankForm Class Reference

Inheritance diagram for login::keyBankForm:



Public Member Functions

- **keyBankForm** (gl::form *master, os::smart_ptr< crypto::keyBank > kb)
- virtual ~keyBankForm ()
- void receivedClicked (os::smart_ptr< element > elm)
- void receivedEnter (os::smart_ptr< element > elm)
- void resize ()

Protected Member Functions

• void update ()

Private Attributes

- os::smart_ptr< crypto::keyBank > _keyBank
- gl::scrollArea scrArea

6.2.1 Constructor & Destructor Documentation

```
login::keyBankForm::keyBankForm ( gl::form * master, os::smart_ptr< crypto::keyBank > kb )
virtual login::keyBankForm::~keyBankForm ( ) [inline], [virtual]
6.2.2 Member Function Documentation
void login::keyBankForm::receivedClicked ( os::smart_ptr< element > elm )
void login::keyBankForm::receivedEnter ( os::smart_ptr< element > elm )
void login::keyBankForm::resize ( )
```


6.2.3 Member Data Documentation

void login::keyBankForm::update() [protected]

6.3 login::listUsers Class Reference

List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.

Inheritance diagram for login::listUsers:



Public Member Functions

- **listUsers** (gl::form *master, std::string baseTitle, **loginMetaData** &metaDataPointer) Form constructor.
- virtual ~listUsers ()

Virtual destructor.

Protected Member Functions

• void update ()

Triggered each update cycle.

Private Member Functions

• void refreshFromMeta ()

Rebuild form from meta-data.

Private Attributes

• bool needRefresh

Indicates if meta-data needs to be refreshed.

• gl::scrollArea scrArea

Area holding user frames.

• loginMetaData & metaData

Meta-data defining users.

• os::smartSet< userFrame > frameDisplay

User frames to be displayed.

Friends

• class userFrame

Friendship with user-frame Since the user-frame defines button-press events, the user-frame must be able to modify the intrinsics of this form+.

6.3.1 Detailed Description

List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.

6.3.2 Constructor & Destructor Documentation

 $login:: listUsers:: listUsers \ (\ gl:: form * master, \ std:: string \ baseTitle, \ \textbf{loginMetaData} \ \& \ metaDataPointer \)$

Form constructor.

Parameters

in	master	Previos form
in	baseTitle	Title of base application
in	metaDataPointer	Meta-data for user definition

virtual login::listUsers::~listUsers() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.3.3 Member Function Documentation

void login::listUsers::refreshFromMeta() [private]

Rebuild form from meta-data.

Returns

void

void login::listUsers::update() [protected]

Triggered each update cycle.

Returns

void

6.3.4 Friends And Related Function Documentation

friend class userFrame [friend]

Friendship with user-frame Since the user-frame defines button-press events, the user-frame must be able to modify the intrinsics of this form+.

6.3.5 Member Data Documentation

os::smartSet<userFrame> login::listUsers::frameDisplay [private]

User frames to be displayed.

loginMetaData& login::listUsers::metaData [private]

Meta-data defining users.

bool login::listUsers::needRefresh [private]

Indicates if meta-data needs to be refreshed.


gl::scrollArea login::listUsers::scrArea [private]

Area holding user frames.

6.4 login::loginMetaData Class Reference

Login meta-data class.

Inheritance diagram for login::loginMetaData:



Public Member Functions

• loginMetaData (std::string svPath)

Meta-data constructor.

• loginMetaData (loginMetaData &cpy)

Meta-data copy constructor.

• virtual ~loginMetaData ()

Virtual destructor.

• void load ()

Loads meta-data from XML file.

• void save ()

Saves meta-data file.

• void checkUserData ()

Check user directories.

• os::smart_ptr< userNode > findUser (std::string usr)

Find user by name.

- os::smart_ptr< crypto::user > createUser (std::string usr, std::string pass) throw (std::string)

 Create new user.
- os::smart_ptr< crypto::user > **openUser** (std::string usr, std::string pass) throw (std::string) Logs a new user in.
- void unbindUser ()

Sets the current user to NULL.

• const std::string & savePath () const

Returns the save path.

• os::smart_ptr< crypto::user > currentUser ()

Returns the current user.

Public Attributes

os::asyncAVLTree< userNode > users

List of current users Stores all users in a list to be logged into.

• std::string defaultUsername

Defaut username.

std::string defaultPassword

Default password.

• bool needsBinding

Data changed flag This flag is used by the UI to refresh when the loginMetaData (p. 19) changes.

• os::multiLock lock

Read/write lock.

Private Member Functions

• os::smartXMLNode generateSaveTree ()

Generate a new save tree.

Private Attributes

• std::string _savePath

Path to save directory.

• os::smart_ptr< crypto::user > _currentUser

Pointer to the current user.

6.4.1 Detailed Description

Login meta-data class.

Contains supporting data for login interfaces.

6.4.2 Constructor & Destructor Documentation

login::loginMetaData::loginMetaData (std::string svPath)

Meta-data constructor.

Parameters

in	svPath	Save directory path
----	--------	---------------------

login::loginMetaData::loginMetaData (loginMetaData & cpy)

Meta-data copy constructor.

Parameters

:	in	сру	Meta-data to copy	
---	----	-----	-------------------	--

virtual login::loginMetaData::~loginMetaData() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.4.3 Member Function Documentation

void login::loginMetaData::checkUserData ()

Check user directories.

Iterates through all folders in the user directory to see which users are actually available.

Returns

void

os::smart_ptr<crypto::user> login::loginMetaData::createUser (std::string usr, std::string pass) throw std::string)

Create new user.

Parameters

in	usr	Target username
in	pass	Target password

Returns

Newly created user

os::smart_ptr<crypto::user> login::loginMetaData::currentUser() [inline]

Returns the current user.

Returns

login::loginMetaData::_currentUser (p. 23)

os::smart_ptr<userNode> login::loginMetaData::findUser (std::string usr)

Find user by name.

Parameters

Name of	ser to be	searched
---------	-----------	----------

Returns

User with the given name

os::smartXMLNode login::loginMetaData::generateSaveTree() [private]

Generate a new save tree.

Returns

XML tree to be saved

void login::loginMetaData::load ()

Loads meta-data from XML file.

Parses the XML tree and scans folders to populate the list of available users.

Returns

void

os::smart_ptr<crypto::user> login::loginMetaData::openUser (std::string usr, std::string pass) throw std::string)

Logs a new user in.

Parameters

in	usr	Target username
in	pass	Target password

```
Returns
     Opened user
void login::loginMetaData::save ( )
Saves meta-data file.
Returns
     void
const std::string& login::loginMetaData::savePath ( ) const [inline]
Returns the save path.
Returns
     login::loginMetaData::_savePath (p. 23)
void login::loginMetaData::unbindUser( ) [inline]
Sets the current user to NULL.
Returns
     void
6.4.4 Member Data Documentation
os::smart_ptr<crypto::user> login::loginMetaData::_currentUser [private]
Pointer to the current user.
std::string login::loginMetaData::_savePath [private]
Path to save directory.
std::string login::loginMetaData::defaultPassword
Default password.
std::string login::loginMetaData::defaultUsername
Defaut username.
os::multiLock login::loginMetaData::lock
Read/write lock.
   Allows for both reading and writing to occur asynchronously
bool login::loginMetaData::needsBinding
```

Data changed flag This flag is used by the UI to refresh when the loginMetaData (p. 19) changes.


os::asyncAVLTree<userNode> login::loginMetaData::users

List of current users Stores all users in a list to be logged into.

6.5 login::mainLogin < nextForm > Class Template Reference

Login form.

Inheritance diagram for login::mainLogin< nextForm >:



Public Member Functions

• mainLogin (int *argc, char **argv, std::string title, loginMetaData metaData)

New form constructor.

• virtual ~mainLogin ()

Virtual destructor.

void openNextForm ()

Attempts to open the next form.

void receivedClicked (os::smart_ptr< element > elm)

Trigger on button click.

• void receivedEnter (os::smart_ptr< element > elm)

Trigger on enter event.

Protected Member Functions

• void update ()

Triggered every cycle.

Private Attributes

• loginMetaData _metaData

Login meta-data.

• bool loggedIn

Logged-in state.

• gl::label IblTitle

Title label.

• gl::label lblUser

User textbox label.

• gl::textbox tbxUser

User textbox.

• gl::label IblPassword

Password textbox label.

• gl::textbox tbxPassword

Password textbox.

• gl::button btnLogin

Login button.

• gl::button btnNewUser

New user button.

• gl::button btnListUsers

List users button.

• gl::button btnExit

Exit button.

6.5.1 Detailed Description

template < class nextForm > class login::mainLogin < nextForm >

Login form.

A form which places the next form behind a login security wall. Defined as a template class so it can open any form after a successful login.

6.5.2 Constructor & Destructor Documentation

template<class nextForm > login::mainLogin< nextForm >::mainLogin (int * argc, char ** argv, std::string title, loginMetaData metaData) [inline]

New form constructor.

The login form must be the launch point of any application which uses it.

Parameters

in	argc	Number of arguments to main
in	argv	String array of arguments to main
in	title	Title of form
in	metaData	Meta data defining login path

 $\label{login:mainLogin} template < {\tt class\ nextForm} > {\tt virtual\ login::mainLogin} < {\tt nextForm} > {\tt ::} \sim {\tt mainLogin} \ (\ \) \ \ [{\tt inline}], \\ [{\tt virtual}]$

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.5.3 Member Function Documentation

template<class nextForm > void login::mainLogin< nextForm >::openNextForm () [inline]

Attempts to open the next form.

Returns

void

 $template < class \ nextForm > void \ \textbf{login::mainLogin} < \ nextForm > :: received Clicked \ (\ os::smart_ptr < \ element > elm \) \ \ [inline]$

Trigger on button click.

Parameters

in elm Element clicked

Returns

void

 $template < class\ nextForm > void\ \textbf{login::mainLogin} < nextForm > :: receivedEnter\ (\ os::smart_ptr < element > elm\)\ [inline]$

Trigger on enter event.

Parameters

in	elm	Element receiving enter

Returns

void

template<class nextForm > void login::mainLogin< nextForm >::update () [inline],
[protected]

Triggered every cycle.

Saves the meta-data if needed, binds the meta-data to the form if the flag has been tripped and opens the next form is valid.

Returns

void

6.5.4 Member Data Documentation

 $template < class \ nextForm > \textbf{loginMetaData login::mainLogin} < \ nextForm > ::_metaData \\ [private]$

Login meta-data.

template < class nextForm > gl::button login::mainLogin < nextForm > ::btnExit [private] Exit button.

template<class nextForm > gl::button login::mainLogin< nextForm >::btnListUsers [private] List users button.

template<class nextForm > gl::button login::mainLogin< nextForm >::btnLogin [private] Login button.

template < class nextForm > gl::button login::mainLogin < nextForm > ::btnNewUser [private] New user button.

template < class nextForm > gl::label login::mainLogin < nextForm > ::lblPassword [private] Password textbox label.

template < class nextForm > gl::label login::mainLogin < nextForm > ::lblTitle [private]
Title label.

template < class nextForm > gl::label login::mainLogin < nextForm > ::lblUser [private] User textbox label.


template < class nextForm > bool login::mainLogin < nextForm > ::loggedIn [private] Logged-in state.

template < class nextForm > gl::textbox login::mainLogin < nextForm >::tbxPassword [private] Password textbox.

template < class nextForm > gl::textbox login::mainLogin < nextForm > ::tbxUser [private]
User textbox.

6.6 login::publicKeyTypeFrame Class Reference

Inheritance diagram for login::publicKeyTypeFrame:



Public Member Functions

- virtual ~publicKeyTypeFrame ()
- void receivedClicked (os::smart_ptr< element > elm)
- void receivedEnter (os::smart_ptr< element > elm)
- void resize ()

Public Attributes

- gl::element elmDivider
- gl::label IblTitle
- gl::button btnExpand
- gl::activeDisplayButton btnGenerate
- gl::button btnSetDefault

Protected Member Functions

- void **publicKeyChanged** (os::smart_ptr< crypto::publicKey > pbk)
- void update ()

Private Member Functions

• void updateKeyList ()

Private Attributes

- os::smart ptr< userSettingsForm > masterForm
- os::smart_ptr< crypto::user > _user
- os::smart_ptr< crypto::publicKeyPackageFrame > _pbkFrame
- os::smart ptr< crypto::publicKey > pbk
- os::unsortedList< gl::label > timestampList
- os::unsortedList< gl::label > keyList
- bool saveTrigger
- bool expanded


6.6.1 Constructor & Destructor Documentation

```
login::publicKeyTypeFrame::publicKeyTypeFrame ( os::smart_ptr< userSettingsForm > master,
os::smart_ptr< crypto::user > usr, os::smart_ptr< crypto::publicKeyPackageFrame > pbkfrm )
virtual login::publicKeyTypeFrame::~publicKeyTypeFrame( ) [inline], [virtual]
6.6.2 Member Function Documentation
void login::publicKeyTypeFrame::publicKeyChanged (os::smart ptr< crypto::publicKey > pbk)
[protected]
void login::publicKeyTypeFrame::receivedClicked ( os::smart ptr< element > elm )
void login::publicKeyTypeFrame::receivedEnter ( os::smart ptr< element > elm )
void login::publicKeyTypeFrame::resize ( )
void login::publicKeyTypeFrame::update( ) [protected]
void login::publicKeyTypeFrame::updateKeyList( ) [private]
6.6.3 Member Data Documentation
os::smart ptr<crypto::publicKey> login::publicKeyTypeFrame:: pbk [private]
os::smart ptr<crypto::publicKeyPackageFrame> login::publicKeyTypeFrame:: pbkFrame
[private]
os::smart ptr<crypto::user> login::publicKeyTypeFrame:: user [private]
gl::button login::publicKeyTypeFrame::btnExpand
gl::activeDisplayButton login::publicKeyTypeFrame::btnGenerate
gl::button login::publicKeyTypeFrame::btnSetDefault
gl::element login::publicKeyTypeFrame::elmDivider
bool login::publicKeyTypeFrame::expanded [private]
os::unsortedList<gl::label> login::publicKeyTypeFrame::keyList [private]
gl::label login::publicKeyTypeFrame::lblTitle
os::smart ptr<userSettingsForm> login::publicKeyTypeFrame::masterForm [private]
bool login::publicKeyTypeFrame::saveTrigger [private]
os::unsortedList<gl::label> login::publicKeyTypeFrame::timestampList [private]
```

6.7 login::pulblicKeyPopUp Class Reference

Used when generating keys.

Inheritance diagram for login::pulblicKeyPopUp:



Public Member Functions

- **pulblicKeyPopUp** (os::smart_ptr< gl::form > prev, os::smart_ptr< crypto::user > usr) *Basic constructor.*
- virtual ~pulblicKeyPopUp ()

Virtual destructor.

• void update ()

Triggered each update cycle.

Private Attributes

• gl::label lblKeyGeneration

Key generation label.

• os::smart_ptr< crypto::user > _user

User generating key.

• unsigned int dotCount

Dot counter.

6.7.1 Detailed Description

Used when generating keys.

When generating keys, the UI displays this form until the user can be accessed with a valid public key.

6.7.2 Constructor & Destructor Documentation

 $login::pulblicKeyPopUp::pulblicKeyPopUp \ (\ os::smart_ptr< \ gl::form>prev, \ os::smart_ptr< \ crypto::user>usr \)$

Basic constructor.

Parameters

ſ	in	prev	Previous form
	in	usr	User generating key

virtual login::pulblicKeyPopUp::~pulblicKeyPopUp() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.7.3 Member Function Documentation

void login::pulblicKeyPopUp::update ()

Triggered each update cycle.

Returns

void

6.7.4 Member Data Documentation

os::smart_ptr<crypto::user> login::pulblicKeyPopUp::_user [private]

User generating key.

unsigned int login::pulblicKeyPopUp::dotCount [private]

Dot counter.


gl::label login::pulblicKeyPopUp::lblKeyGeneration [private]

Key generation label.

6.8 login::userFrame Class Reference

Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.

Inheritance diagram for login::userFrame:



Public Member Functions

- userFrame (listUsers &master, os::smart_ptr< userNode > usr)
 - Constructor.
- virtual ~userFrame ()

Virtual destructor.

• void receivedClicked (os::smart_ptr< element > elm)

Trigger on button click.

void receivedEnter (os::smart_ptr< element > elm)

Trigger on enter event.

- bool **operator==** (const **userFrame** &usr)
- bool **operator!=** (const **userFrame** &usr)
- bool **operator**< (const **userFrame** &usr)
- bool operator> (const userFrame &usr)
- bool operator<= (const userFrame &usr)
- bool operator>= (const userFrame &usr)

Private Attributes

• os::smart_ptr< userNode > _user

User-node to be displayed.

• listUsers * mst

Master-form.

• gl::label IblUsername

Label displaying user-name.

• gl::label IblTimestamp

Label displaying time-stamp.

• gl::label IblPassword

Label displaying password.

• gl::button **btnRemove**

Remove user button.

• gl::button btnLoad

Load user button.

6.8.1 Detailed Description

Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.

6.8.2 Constructor & Destructor Documentation

login::userFrame::userFrame (listUsers & master, os::smart_ptr< userNode > usr)

Constructor.

Parameters

in	master	Master form
in	usr	User node to be displayed

```
virtual login::userFrame::~userFrame( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.8.3 Member Function Documentation

```
bool login::userFrame::operator!= ( const userFrame & usr ) [inline]
bool login::userFrame::operator< ( const userFrame & usr ) [inline]
bool login::userFrame::operator<= ( const userFrame & usr ) [inline]
bool login::userFrame::operator== ( const userFrame & usr ) [inline]
bool login::userFrame::operator> ( const userFrame & usr ) [inline]
bool login::userFrame::operator>= ( const userFrame & usr ) [inline]
void login::userFrame::receivedClicked ( os::smart_ptr< element > elm )
```

Trigger on button click.

Parameters

Returns

void

void login::userFrame::receivedEnter (os::smart_ptr< element > elm) [inline]

Trigger on enter event.

Note that in this element, there is no difference between an enter event and a clicked event.

Parameters

	-1	
in	elm	Element receiving enter

Returns

void

6.8.4 Member Data Documentation

```
os::smart\_ptr < \textbf{userNode} > login::userFrame::\_user \quad [private]
```

User-node to be displayed.

gl::button login::userFrame::btnLoad [private]

Load user button.

gl::button login::userFrame::btnRemove [private]

Remove user button.

gl::label login::userFrame::lblPassword [private]

Label displaying password.

gl::label login::userFrame::lblTimestamp [private]

Label displaying time-stamp.

gl::label login::userFrame::lblUsername [private]

Label displaying user-name.


listUsers* login::userFrame::mst [private]

Master-form.

6.9 login::userLoadingPopUp Class Reference

Used when loading the user.

Inheritance diagram for login::userLoadingPopUp:



Public Member Functions

• userLoadingPopUp (os::smart_ptr< gl::form > prev, loginMetaData &met, std::string _username, std::string _password)

Basic constructor.

• virtual ~userLoadingPopUp ()

Virtual destructor.

• void update ()

Triggered each update cycle.

Public Attributes

• os::smart_ptr< loginMetaData > meta

Meta-data opening a user.

• std::string username

Username string.

• std::string password

Password string.

Private Attributes

• gl::label IblLoadingUser

User loading label.

• unsigned int dotCount

Dot counter.

6.9.1 Detailed Description

Used when loading the user.

While the user is opening it's files, this is the UI which will display.

6.9.2 Constructor & Destructor Documentation

login::userLoadingPopUp::userLoadingPopUp (os::smart_ptr< gl::form > prev, loginMetaData & met, std::string _username, std::string _password)

Basic constructor.

Parameters

in	prev	Previous form
in	met	Meta-data loading user

virtual login::userLoadingPopUp::~userLoadingPopUp() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.9.3 Member Function Documentation

void login::userLoadingPopUp::update ()

Triggered each update cycle.

Returns

void

6.9.4 Member Data Documentation

unsigned int login::userLoadingPopUp::dotCount [private] Dot counter.

gl::label login::userLoadingPopUp::lblLoadingUser [private] User loading label.

os::smart_ptr<**loginMetaData**> login::userLoadingPopUp::meta

Meta-data opening a user.

std::string login::userLoadingPopUp::password

Password string.

std::string login::userLoadingPopUp::username Username string.

6.10 login::userNode Struct Reference

User node.

Public Member Functions

- userNode (std::string usr)
 - Construct user node.
- bool **operator==** (const **userNode** &usr)
 - == by username
- bool operator!= (const userNode &usr)
 - == by username
- bool operator< (const userNode &usr)
 - != by username
- bool operator> (const userNode &usr)
 - by username
- bool operator<= (const userNode &usr)
 - <= by username
- bool **operator**>= (const **userNode** &usr)
 - >= by username

Public Attributes

• std::string username

Username string.

• std::string password

Password string.

• bool userExists

User exists flag.

• uint64_t timestamp

Last time user accessed.

6.10.1 Detailed Description

User node.

Used in the meta-data file. Stores all user-names and, if applicable, passwords associated with the user-names.

6.10.2 Constructor & Destructor Documentation

login::userNode::userNode (std::string usr) [inline]

Construct user node.

Note that the existance of a user-node does not gurantee the existance of a user. By default, it is assumed that such a user does not exists.

Parameters

-:	uor	Heer name
TU	usi	User-name

6.10.3 Member Function Documentation

bool login::userNode::operator!= (const userNode & usr) [inline]

== by username

Returns

username==usr.username

bool login::userNode::operator< (const userNode & usr) [inline]</pre>

!= by username

Returns

username!=usr.username

bool login::userNode::operator<= (const **userNode** & usr) [inline]

<= by username

Returns

username<=usr.username

bool login::userNode::operator== (const userNode & usr) [inline]

== by username

Returns

username==usr.username

bool login::userNode::operator> (const userNode & usr) [inline]

by username

Returns

username<usr.username

bool login::userNode::operator>= (const userNode & usr) [inline]

>= by username

Returns

username>=usr.username

6.10.4 Member Data Documentation

std::string login::userNode::password

Password string.

If this is defined, then the password for the user in question is being stored in plain-text. This is insecure, but many use cases don't demand the security.

uint64_t login::userNode::timestamp

Last time user accessed.

bool login::userNode::userExists

User exists flag.


Set based on weather the user was found on disk.

std::string login::userNode::username

Username string.

6.11 login::userSettingsForm Class Reference

Inheritance diagram for login::userSettingsForm:



Public Member Functions

- userSettingsForm (gl::form *master, os::smart_ptr< crypto::user > ud)
- virtual ~userSettingsForm ()
- void **receivedClicked** (os::smart_ptr< element > elm)
- void receivedEnter (os::smart_ptr< element > elm)
- void resize ()

Public Attributes

- gl::label IblUsername
- gl::checkboxGroup chgStreamType
- gl::checkboxGroup chgHash
- gl::label lblPublicKeyTitle
- gl::label IblPublicKeyHashDescriptor
- gl::label IblPublicKeyHash
- gl::label lblPublicKeyDescriptor
- gl::label lblPublicKey

Protected Member Functions

• void update ()

Private Member Functions

void refreshDefaultPublicKeys ()

Private Attributes

- os::smart_ptr< crypto::user > _userData
- gl::scrollArea scrArea
- os::unsortedList< publicKeyTypeFrame > frameList

Friends

• class publicKeyTypeFrame

6.11.1 Constructor & Destructor Documentation

```
login::userSettingsForm::userSettingsForm ( gl::form * master, os::smart_ptr< crypto::user > ud )
virtual login::userSettingsForm::~userSettingsForm( ) [inline], [virtual]
6.11.2 Member Function Documentation
void login::userSettingsForm::receivedClicked ( os::smart_ptr< element > elm )
void login::userSettingsForm::receivedEnter ( os::smart_ptr< element > elm )
void login::userSettingsForm::refreshDefaultPublicKeys( ) [private]
void login::userSettingsForm::resize ( )
void login::userSettingsForm::update( ) [protected]
6.11.3 Friends And Related Function Documentation
friend class publicKeyTypeFrame [friend]
6.11.4 Member Data Documentation
os::smart ptr<crypto::user> login::userSettingsForm:: userData [private]
gl::checkboxGroup login::userSettingsForm::chgHash
gl::checkboxGroup login::userSettingsForm::chgStreamType
os::unsortedList<publicKeyTypeFrame> login::userSettingsForm::frameList [private]
gl::label login::userSettingsForm::lblPublicKey
gl::label login::userSettingsForm::lblPublicKeyDescriptor
gl::label login::userSettingsForm::lblPublicKeyHash
gl::label login::userSettingsForm::lblPublicKeyHashDescriptor
gl::label login::userSettingsForm::lblPublicKeyTitle
gl::label login::userSettingsForm::lblUsername
gl::scrollArea login::userSettingsForm::scrArea [private]
```

Part II Datastructures Library

Chapter 7

Introduction

The Datastructures library contains a series of utility classes and template classes used for the organization and management of data. Most notably, this library allow dynamic memory management through the smart_ptr class and provides a flexible runtime data container in the ads (Abstract Data Structure) template and its children.

7.1 Unit Testing

The testing of the Datastructures library is preformed within the UnitTest library. Since the UnitTest library uses the functionality of the Datastructures library, the Datastructures library cannot be dependent on the UnitTest library as the UnitTest library is already dependent on the Datastructures library

7.2 Namespace os

Datastructures extends the os namespace. The os namespace is designed for tools, algorithms and data-structures used in programs of all types. Structures in this library do not implement operating system specific interfaces such as sockets and file I/O. The osMechanics library also extends the os namespace.

Chapter 8

File Index

8.1 File List

	st of all files with brief descriptions:	
		45
ads.h		
	Abstract datastructure interface	46
async <i>A</i>	AVL.h	
	Asynchronous AVL tree	47
AVL.h		
	AVL tree	48
Datastı	ructures.h	
	Master Datastructures header file	45
eventD	river.cpp	
	Event driver implementation	49
eventD	river.h	
	Event sender and receiver	48
list.h		
	Doubly Linked List	49
matrix.	h	
	Matrix templates	50
osLogg	·	
		64
osLogo	ger.h	
		63
osVect		
	Vector templates	64
set.h		
	Smart Set	66
smartP	Pointer.h	
	Template declaration of os::smart_ptr (p. 146)	67
staticC	constantPrinter.cpp	
	Constant printing support, implementation	75

staticConstantPrinter.h																
Constant printing support																74

Chapter 9

File Documentation

9.1 Datastructures.h File Reference

Master Datastructures header file.

9.1.1 Detailed Description

Master Datastructures header file.

Author

Jonathan Bedard

Date

2/14/2016

Bug No known bugs.

All of the headers in the Datastructures library are held in this file. When using the Datastructures library, it is expected that this header is included instead of the individual required headers.

9.2 abstractSorting.h File Reference

Template for sorting arrays.

Namespaces

• os

Functions

template < class dataType >
 int os::defaultCompareSort (const dataType &v1, const dataType &v2)
 Basic compare.

• template<class dataType >

int os::pointerCompareSort (smart_ptr< dataType > ptr1, smart_ptr< dataType > ptr2)

Raw pointer compare.

template<class dataType >

void os::quicksort (dataType *arr, unsigned int length, int(*sort_comparison)(const dataType &, const dataType &)=&defaultCompareSort)

Template quick-sort.

• template<class dataType >

void **os::pointerQuicksort** (smart_ptr< smart_ptr< dataType >> arr, unsigned int length, int(*sort_comparison)(smart_ptr< dataType >, smart_ptr< dataType >)=&pointerCompare \leftarrow Sort)

Template for quick-sort, pointer version.

9.2.1 Detailed Description

Template for sorting arrays.

Author

Jonathan Bedard

Date

2/15/2016

Bug No known bugs.

This file contains a template class definition of an AVL tree and its nodes. This tree has insertion, search and deletion of O(log(n)) where n is the number of nodes in the tree. This tree is thread safe.

9.3 ads.h File Reference

Abstract datastructure interface.

Classes

• class os::ptrComp

Pointer compare interface.

class os::adnode< dataType >

Abstract data-node.

class os::ads< dataType >

Abstract datastructure.

Namespaces

os

9.3.1 Detailed Description

Abstract datastructure interface.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

This file contains definitions of a set of class interfaces used by abstract datastructures and classes interfacing with abstract datastructures.

9.4 asyncAVL.h File Reference

Asynchronous AVL tree.

Classes

- class os::asyncAVLNode< dataType >
 Node for usage in an asynchronous AVL tree.
- class os::asyncAVLTree< dataType >
 Asynchronous balanced binary search tree.

Namespaces

• os

9.4.1 Detailed Description

Asynchronous AVL tree.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

This file contains a template class definition of an AVL tree and its nodes. This tree has insertion, search and deletion of O(log(n)) where n is the number of nodes in the tree. This tree is thread safe.

9.5 AVL.h File Reference

AVL tree.

Classes

- class os::AVLNode< dataType > Node for usage in an AVL tree.
- class os::AVLTree< dataType > Balanced binary search tree.

Namespaces

• os

9.5.1 Detailed Description

AVL tree.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file contains a template class definition of an AVL tree and its nodes. This tree has insertion, search and deletion of O(log(n)) where n is the number of nodes in the tree. This tree is not thread safe.

9.6 eventDriver.h File Reference

Event sender and receiver.

Classes

- class os::eventSender< receiverType >
 - Class which enables event sending.
- class os::eventReceiver< senderType >

Class which enables event receiving.

Namespaces

• os

Variables

std::recursive_mutex * os::eventLock
 Event processing mutex.

9.6.1 Detailed Description

Event sender and receiver.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

Both **os::eventReceiver** (p. 128) and **os::eventSender** (p. 131) are experimental classes and have not been tested or utilized.

9.7 eventDriver.cpp File Reference

Event driver implementation.

9.7.1 Detailed Description

Event driver implementation.

Author

Jonathan Bedard

Date

2/28/2016

Bug No known bugs.

This file implements **os::eventLock** (p. 89) for **os::eventSender** (p. 131) and **os::eventReceiver** (p. 128). These are experimental class and not yet used or tested

9.8 list.h File Reference

Doubly Linked List.

Classes

• class os::unsortedListNode< dataType >

Node for usage in a linked list.

class os::unsortedList< dataType >

Unsorted linked list.

Namespaces

os

9.8.1 Detailed Description

Doubly Linked List.

Author

Jonathan Bedard

Date

2/1/2016

Bug No known bugs.

This file contains a template class definition of a linked list and its nodes. This list has insertion, find and delete of O(n). The linked list provided is doubly linked, allowing for forward and backward traversal. This list is not thread safe.

9.9 matrix.h File Reference

Matrix templates.

Classes

• class os::matrix< dataType >

Raw matrix.

• class os::indirectMatrix< dataType >

Indirect matrix.

Namespaces

• os

Functions

• template<class dataType >

bool **os::compareSize** (const matrix< dataType > &m1, const matrix< dataType > &m2) Compares the size of two matrices.

• template<class dataType >

bool **os::compareSize** (const indirectMatrix< dataType > &m1, const matrix< dataType > &m2)

Compares the size of two matrices.

• template<class dataType >

bool **os::compareSize** (const matrix< dataType > &m1, const indirectMatrix< dataType > &m2)

Compares the size of two matrices.

template<class dataType >

bool **os::compareSize** (const indirectMatrix< dataType > &m1, const indirectMatrix< dataType > &m2)

Compares the size of two matrices.

template<class dataType >

bool os::testCross (const matrix< dataType > &m1, const matrix< dataType > &m2)

Tests if the cross-product is a legal operation.

• template<class dataType >

bool os::testCross (const indirectMatrix< dataType > &m1, const matrix< dataType > &m2)

Tests if the cross-product is a legal operation.

• template<class dataType >

bool os::testCross (const matrix< dataType > &m1, const indirectMatrix< dataType > &m2)

Tests if the cross-product is a legal operation.

• template<class dataType >

bool **os::testCross** (const indirectMatrix< dataType > &m1, const indirectMatrix< dataType > &m2)

Tests if the cross-product is a legal operation.

template<class dataType >

bool operator== (const os::matrix < dataType > &m1, const os::matrix < dataType > &m2)

Test for equality.

template<class dataType >

bool **operator==** (const **os::indirectMatrix**< dataType > &m1, const **os::matrix**< dataType > &m2)

Test for equality.

template<class dataType >

bool **operator==** (const **os::matrix**< dataType > &m1, const **os::indirectMatrix**< dataType > &m2)

Test for equality.

template<class dataType >

bool **operator==** (const **os::indirectMatrix**< dataType > &m1, const **os::indirectMatrix**< data

Type > &m2)

Test for equality.

• template<class dataType >

bool operator!= (const os::matrix< dataType > &m1, const os::matrix< dataType > &m2)

Test for inequality.

template<class dataType >

bool **operator!=** (const **os::indirectMatrix**< dataType > &m1, const **os::matrix**< dataType > &m2)

Test for inequality.

template<class dataType >

bool **operator!=** (const **os::matrix**< dataType > &m1, const **os::indirectMatrix**< dataType > &m2)

Test for inequality.

• template<class dataType >

bool **operator!=** (const **os::indirectMatrix**< dataType > &m1, const **os::indirectMatrix**< data

Type > &m2)

Test for inequality.

template<class dataType >

os::matrix< dataType > operator+ (const os::matrix< dataType > &m1, const os::matrix<
dataType > &m2)

Addition.

• template<class dataType >

os::matrix< dataType > operator+ (const os::indirectMatrix< dataType > &m1, const os ::matrix< dataType > &m2)

Addition.

• template<class dataType >

os::matrix< dataType > operator+ (const os::matrix< dataType > &m1, const os::indirect← Matrix< dataType > &m2)

Addition.

template<class dataType >

os::indirectMatrix< dataType > operator+ (const os::indirectMatrix< dataType > &m1, const
os::indirectMatrix< dataType > &m2)

Addition.

template<class dataType >

os::matrix< dataType > operator- (const os::matrix< dataType > &m1, const os::matrix<
dataType > &m2)

Subtraction.

• template<class dataType >

os::matrix< dataType > operator- (const os::indirectMatrix< dataType > &m1, const os::matrix< dataType > &m2)

Subtraction.

template<class dataType >

os::matrix< dataType > operator- (const os::matrix< dataType > &m1, const os::indirect ← Matrix< dataType > &m2)

Subtraction.

template<class dataType >

os::indirectMatrix< dataType > operator- (const os::indirectMatrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)

Subtraction.

template<class dataType >

os::matrix< dataType > operator* (const os::matrix< dataType > &m1, const os::matrix<
dataType > &m2)

Cross-product.

template<class dataType >

os::matrix< dataType > operator* (const os::indirectMatrix< dataType > &m1, const os ::matrix< dataType > &m2)

Cross-product.

• template<class dataType >

os::matrix< dataType > operator* (const os::matrix< dataType > &m1, const os::indirect ← Matrix< dataType > &m2)

Cross-product.

template<class dataType >

os::indirectMatrix< dataType > operator* (const os::indirectMatrix< dataType > &m1, const
os::indirectMatrix< dataType > &m2)

Cross-product.

• template<class dataType >

os::matrix< dataType > operator* (const dataType &d1, const os::matrix< dataType > &m1)

Scalar multiplication.

• template<class dataType >

os::matrix< dataType > operator* (const os::matrix< dataType > &m1, const dataType &d1)

Scalar multiplication.

template<class dataType >

os::matrix< dataType > operator/ (const os::matrix< dataType > &m1, const dataType &d1)
Scalar division.

• template<class dataType >

os::indirectMatrix< dataType > operator* (const dataType &d1, const os::indirectMatrix<
dataType > &m1)

Scalar multiplication.

• template<class dataType >

os::indirectMatrix< dataType > operator* (const os::indirectMatrix< dataType > &m1, const
dataType &d1)

Scalar multiplication.

template<class dataType >

os::indirectMatrix< dataType > operator/ (const os::indirectMatrix< dataType > &m1, const dataType &d1)

Scalar division.

• template<class dataType >

std::ostream & operator<< (std::ostream &os, const os::matrix< dataType > &dt)

Prints out a matrix.

• template<class dataType >

std::ostream & operator<< (std::ostream &os, const os::indirectMatrix< dataType > &dt)

Prints out a matrix.

9.9.1 Detailed Description

Matrix templates.

Author

Jonathan Bedard

Date

2/2/2016

Bug No known bugs.

This file contains two template class definitions for matrices. One of these is an "indirect" matrix, meaning that the is an array of pointers, and the other is a direct matrix, meaning the matrix is an array of values.

9.9.2 Function Documentation

template<class dataType > bool operator!= (const **os::matrix**< dataType > & m1, const **os::matrix**< dataType > & m2)

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Raw matrix reference

Returns

False if exactly equivalent

template<class dataType > bool operator!= (const os::indirectMatrix< dataType > & m1, const os::matrix< dataType > & m2)

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

Parameters

in	m1	Indirect matrix reference
in	m2	Raw matrix reference

Returns

False if exactly equivalent

template<class dataType > bool operator!= (const os::matrix< dataType > & m1, const os::indirectMatrix< dataType > & m2)

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

in	m1	Raw matrix reference
in	m2	Indirect matrix reference

Returns

False if exactly equivalent

 $template < class\ dataType > bool\ operator! = (\ const\ \textbf{os::indirectMatrix} < dataType > \&\ m1,\ const\ \textbf{os::indirectMatrix} < dataType > \&\ m2\)$

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

Parameters

j	in	m1	Indirect matrix reference
j	in	m2	Indirect matrix reference

Returns

False if exactly equivalent

template<class dataType > os::matrix<dataType> operator* (const os::matrix< dataType > & m1, const os::matrix< dataType > & m2)

Cross-product.

Preforms the cross-product. The cross- product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Raw matrix reference

Returns

m1 x m2 (raw matrix)

 $template < class \ dataType > \textbf{os::matrix} < dataType > operator* (\ const \ \textbf{os::indirectMatrix} < dataType > \& \ m1, \ const \ \textbf{os::matrix} < dataType > \& \ m2 \)$

Cross-product.

Preforms the cross-product. The cross- product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

in	m1	Indirect matrix reference
in	m2	Raw matrix reference

Returns

m1 x m2 (raw matrix)

template<class dataType > os::matrix<dataType> operator* (const os::matrix< dataType > & m1, const os::indirectMatrix< dataType > & m2)

Cross-product.

Preforms the cross-product. The cross- product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Indirect matrix reference

Returns

m1 x m2 (raw matrix)

template<class dataType > os::indirectMatrix<dataType> operator* (const os::indirectMatrix< dataType > & m1, const os::indirectMatrix< dataType > & m2)

Cross-product.

Preforms the cross-product. The cross- product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

Parameters

in	m1	Indirect matrix reference
in	m2	Indirect matrix reference

Returns

m1 x m2 (indirect matrix)

template<class dataType > os::matrix<dataType> operator* (const dataType & d1, const os::matrix< dataType > & m1)

Scalar multiplication.

Multiplies a matrix by a constant. This function depends on the '*' operator of the dataType.

in	d1	Scalar data type
in	m1	Raw matrix reference

Returns

d1 * m1 (raw matrix)

template<class dataType > **os::matrix**<dataType> operator* (const **os::matrix**< dataType > & m1, const dataType & d1)

Scalar multiplication.

Multiplies a matrix by a constant. This function depends on the '*' operator of the dataType.

Parameters

in	m1	Raw matrix reference
in	d1	Scalar data type

Returns

d1 * m1 (raw matrix)

template<class dataType > **os::indirectMatrix**<dataType> operator* (const dataType & d1, const **os::indirectMatrix**< dataType > & m1)

Scalar multiplication.

Multiplies an indirect matrix by a constant. This function depends on the '*' operator of the data \leftarrow Type.

Parameters

in	d1	Scalar data type
in	m1	Indirect matrix reference

Returns

d1 * m1 (indirect matrix)

 $template < class\ dataType > \textbf{os::indirectMatrix} < dataType > operator* (\ const\ \textbf{os::indirectMatrix} < dataType > \&\ m1,\ const\ dataType\ \&\ d1\)$

Scalar multiplication.

Multiplies an indirect matrix by a constant. This function depends on the '*' operator of the data \leftarrow Type.

in	m1	Indirect matrix reference
in	d1	Scalar data type

Returns

d1 * m1 (indirect matrix)

template<class dataType > os::matrix<dataType> operator+ (const os::matrix< dataType > & m1, const os::matrix< dataType > & m2)

Addition.

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Raw matrix reference

Returns

m1 + m2 (raw matrix)

template<class dataType > os::matrix<dataType> operator+ (const os::indirectMatrix< dataType > & m1, const os::matrix< dataType > & m2)

Addition

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

ir	m1	Indirect matrix reference
ir	m2	Raw matrix reference

Returns

m1 + m2 (raw matrix)

template<class dataType > os::matrix<dataType> operator+ (const os::matrix< dataType > & m1, const os::indirectMatrix< dataType > & m2)

Addition.

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Indirect matrix reference

Returns

m1 + m2 (raw matrix)

template<class dataType > os::indirectMatrix<dataType> operator+ (const os::indirectMatrix< dataType > & m1, const os::indirectMatrix< dataType > & m2)

Addition.

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

in	m1	Indirect matrix reference
in	m2	Indirect matrix reference

Returns

m1 + m2 (indirect matrix)

template<class dataType > os::matrix<dataType> operator- (const os::matrix< dataType > & m1, const os::matrix< dataType > & m2)

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Raw matrix reference

Returns

m1 - m2 (raw matrix)

template<class dataType > os::matrix<dataType> operator- (const os::indirectMatrix< dataType > & m1, const os::matrix< dataType > & m2)

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	m1	Indirect matrix reference
in	m2	Raw matrix reference

Returns

m1 - m2 (raw matrix)

template<class dataType > os::matrix<dataType> operator- (const os::matrix< dataType > & m1, const os::indirectMatrix< dataType > & m2)

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Indirect matrix reference

Returns

m1 - m2 (raw matrix)

 $template < class\ dataType > \textbf{os::indirectMatrix} < dataType > operator- (\ const\ \textbf{os::indirectMatrix} < dataType > \&\ m1,\ const\ \textbf{os::indirectMatrix} < dataType > \&\ m2\)$

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	m1	Indirect matrix reference
in	m2	Indirect matrix reference

Returns

m1 - m2 (indirect matrix)

template<class dataType > **os::matrix**<dataType> operator/ (const **os::matrix**< dataType > & m1, const dataType & d1)

Scalar division.

Divides a matrix by a constant. This function depends on the '/' operator of the dataType. No zero check, as the dataType is not defined.

Parameters

in	m1	Raw matrix reference
in	d1	Scalar data type

Returns

m1/d (raw matrix)

template<class dataType > os::indirectMatrix<dataType> operator/ (const os::indirectMatrix< dataType > & m1, const dataType & d1)

Scalar division.

Divides an indirect matrix by a constant. This function depends on the '/' operator of the dataType. No zero check, as the dataType is not defined.

Parameters

in	m1	Raw matrix reference
in	d1	Scalar data type

Returns

m1/d (raw matrix)

template < class data Type > std::ostream & operator << (std::ostream & os, const os::matrix < data Type > & dt)

Prints out a matrix.

Prints out the entire matrix in the provided output stream. This matrix will be printed out in text form and requires the dataType of the matrix to define an ostream operator.

Parameters

	[in/out]	os std::ostream reference
in	dt	Raw matrix reference

Returns

std::ostream os

template<class dataType > std::ostream& operator<< (std::ostream & os, const
os::indirectMatrix< dataType > & dt)

Prints out a matrix.

Prints out the entire matrix in the provided output stream. This matrix will be printed out in text form and requires the dataType of the matrix to define an ostream operator.

Parameters

	[in/out]	os std::ostream reference
in	dt	Indirect matrix reference

Returns

std::ostream os

template < class dataType > bool operator == (const os::matrix < dataType > & m1, const os::matrix < dataType > & m2)

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Raw matrix reference

Returns

True if exactly equivalent

template < class dataType > bool operator == (const os::indirectMatrix < dataType > & m1, const <math>os::matrix < dataType > & m2)

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	m1	Indirect matrix reference
in	m2	Raw matrix reference

Returns

True if exactly equivalent

template<class dataType > bool operator== (const **os::matrix**< dataType > & m1, const **os::indirectMatrix**< dataType > & m2)

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	m1	Raw matrix reference
in	m2	Indirect matrix reference

Returns

True if exactly equivalent

template<class dataType > bool operator== (const **os::indirectMatrix**< dataType > & m1, const **os::indirectMatrix**< dataType > & m2)

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	m1	Indirect matrix reference
in	m2	Indirect matrix reference

Returns

True if exactly equivalent

9.10 osLogger.h File Reference

Logging for os namespace.

Namespaces

• os

Functions

• std::ostream & os::osout_func ()

Standard out object for os namespace.

• std::ostream & os::oserr_func ()

Standard error object for os namespace.

Variables

- smart_ptr< std::ostream > os::osout_ptr
 Standard out pointer for os namespace.
- smart_ptr< std::ostream > os::oserr_ptr
 Standard error pointer for os namespace.

9.10.1 Detailed Description

Logging for os namespace.

Jonathan Bedard

Date

1/30/2016

Bug No known bugs.

This file contains declarations which are used for logging within the os namespace.

9.11 osLogger.cpp File Reference

Logging for os namespace, implementation.

9.11.1 Detailed Description

Logging for os namespace, implementation. Jonathan Bedard

Jonat

Date

2/15/2016

Bug No known bugs.

This file contains global functions and variables used for logging in the os namespace.

9.12 osVectors.h File Reference

Vector templates.

Classes

class os::vector2d< dataType >

2-dimensional vector

class os::vector3d< dataType >

3-dimensional vector

Namespaces

os

Typedefs

- typedef vector2d< int8_t > os::vector2d_88 bit 2-d vector
- typedef vector2d< uint8_t > os::vector2d_u8
 unsigned 8 bit 2-d vector
- typedef vector2d< int16_t > os::vector2d_1616 bit 2-d vector
- typedef vector2d< uint16_t > os::vector2d_u16 unsigned 16 bit 2-d vector
- typedef vector2d< int32_t > os::vector2d_3232 bit 2-d vector
- typedef vector2d< uint32_t > os::vector2d_u32
 unsigned 32 bit 2-d vector
- typedef vector2d< int64_t > os::vector2d_6464 bit 2-d vector
- typedef vector2d< uint64_t > os::vector2d_u64
 unsigned 64 bit 2-d vector
- typedef vector2d< float > os::vector2d_f
 float 2-d vector
- typedef vector2d< double > os::vector2d_d
 double 2-d vector
- typedef vector3d< int8_t > os::vector3d_88 bit 3-d vector
- typedef vector3d< uint8_t > os::vector3d_u8
 unsigned 8 bit 3-d vector
- typedef vector3d< int16_t > os::vector3d_16
 16 bit 3-d vector
- typedef vector3d< uint16_t > os::vector3d_u16
 unsigned 16 bit 3-d vector
- typedef vector3d< int32_t > os::vector3d_3232 bit 3-d vector
- typedef vector3d< uint32_t > os::vector3d_u32
 unsigned 32 bit 3-d vector
- typedef vector3d< int64_t > os::vector3d_64
 64 bit 3-d vector
- typedef vector3d< uint64_t > os::vector3d_u64
 unsigned 64 bit 3-d vector
- typedef vector3d< float > os::vector3d_f
 float 3-d vector
- typedef vector3d< double > os::vector3d_d
 double 3-d vector

9.12.1 Detailed Description

Vector templates.

Author

Jonathan Bedard

Date

3/12/2016

Bug No known bugs.

This file contains two template classes defining vector objects. Vectors can, in a broad sense, be used for any class which defines general mathematical operations. This particular file offers vector type definitions for all of the basic integer and floating point types.

9.13 set.h File Reference

Smart Set.

Classes

class os::smartSet< dataType >
 Smart set abstract data-structures.

Namespaces

• os

Enumerations

• enum os::setTypes { os::def_set =0, os::small_set, os::sorted_set }

Index of abstract data-structures.

9.13.1 Detailed Description

Smart Set.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file contains a template class defining a "smart set." A smart set wraps other forms of abstract data structures, allowing applications to define abstract data-structures by numbered indexes.

9.14 smartPointer.h File Reference

Template declaration of os::smart_ptr (p. 146).

Classes

• class os::smart_ptr< dataType >

Reference counted pointer.

Namespaces

os

Typedefs

typedef void(* os::void_rec) (void *)
 Deletion function typedef.

Enumerations

enum os::smart_pointer_type {
 os::null_type =0, os::raw_type, os::shared_type_array,
 os::shared_type_dynamic_delete }

Enumeration for types of os::smart_ptr (p. 146).

Functions

template<class targ , class src > smart_ptr< targ > os::cast (const os::smart_ptr< src > &conv)
 os::smart_ptr (p. 146) cast function

• template<class dataType >

bool operator== (const os::smart_ptr< dataType > &c1, const os::smart_ptr< dataType > &c2)

template<class dataType >

bool **operator==** (const **os::smart_ptr**< dataType > &c1, const dataType *c2)

template<class dataType >

bool **operator==** (const dataType *c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator==** (const **os::smart_ptr**< dataType > &c1, const void *c2)

template<class dataType >

bool **operator==** (const void *c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator==** (const **os::smart_ptr**< dataType > &c1, const int c2)

template<class dataType >

bool operator== (const int c1, const os::smart_ptr< dataType > &c2)

template<class dataType >

bool operator== (const os::smart_ptr< dataType > &c1, const long c2)

template<class dataType >

bool **operator==** (const long c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator==** (const **os::smart_ptr**< dataType > &c1, const unsigned long c2)

• template<class dataType >

bool **operator==** (const unsigned long c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator!=** (const **os::smart_ptr**< dataType > &c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator!=** (const **os::smart_ptr**< dataType > &c1, const dataType *c2)

template<class dataType >

bool operator!= (const dataType *c1, const os::smart ptr< dataType > &c2)

template < class dataType >

bool **operator!=** (const **os::smart_ptr**< dataType > &c1, const void *c2)

• template<class dataType >

bool operator!= (const void *c1, const os::smart ptr< dataType > &c2)

template<class dataType >

bool **operator!=** (const **os::smart_ptr**< dataType > &c1, const int c2)

template<class dataType >

bool **operator!=** (const int c1, const **os::smart_ptr**< dataType > &c2)

• template<class dataType >

bool operator!= (const os::smart ptr< dataType > &c1, const long c2)

template<class dataType >

bool operator!= (const long c1, const os::smart ptr< dataType > &c2)

template<class dataType >

bool **operator!=** (const **os::smart_ptr**< dataType > &c1, const unsigned long c2)

• template<class dataType >

bool **operator!=** (const unsigned long c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator**< (const **os::smart_ptr**< dataType > &c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool operator< (const os::smart_ptr< dataType > &c1, const dataType *c2)

template<class dataType >

bool operator< (const dataType *c1, const os::smart_ptr< dataType > &c2)

template<class dataType >

bool **operator**< (const **os::smart_ptr**< dataType > &c1, const void *c2)

template<class dataType >

bool **operator**< (const void *c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator**< (const **os::smart_ptr**< dataType > &c1, const int c2)

template<class dataType >

bool **operator**< (const int c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool operator< (const os::smart_ptr< dataType > &c1, const long c2)

template<class dataType >

bool operator< (const long c1, const os::smart ptr< dataType > &c2)

template<class dataType >

bool operator< (const os::smart_ptr< dataType > &c1, const unsigned long c2)

• template<class dataType >

bool operator< (const unsigned long c1, const os::smart_ptr< dataType > &c2)

template<class dataType >

bool operator<= (const os::smart_ptr< dataType > &c1, const os::smart_ptr< dataType > &c2)

template<class dataType >

bool **operator**<= (const **os::smart_ptr**< dataType > &c1, const dataType *c2)

template<class dataType >

bool operator<= (const dataType *c1, const os::smart_ptr< dataType > &c2)

template<class dataType >

bool operator<= (const os::smart ptr< dataType > &c1, const void *c2)

• template<class dataType >

bool operator<= (const void *c1, const os::smart ptr< dataType > &c2)

• template<class dataType >

bool operator<= (const os::smart ptr< dataType > &c1, const int c2)

template<class dataType >

bool **operator**<= (const int c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator**<= (const **os::smart_ptr**< dataType > &c1, const long c2)

• template<class dataType >

bool **operator**<= (const long c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool operator<= (const os::smart ptr< dataType > &c1, const unsigned long c2)

template<class dataType >

bool **operator**<= (const unsigned long c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool operator> (const os::smart_ptr< dataType > &c1, const os::smart_ptr< dataType > &c2)

template<class dataType >

bool **operator**> (const **os::smart_ptr**< dataType > &c1, const dataType *&c2)

template<class dataType >

bool **operator**> (const dataType *&c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator**> (const **os::smart_ptr**< dataType > &c1, const void *c2)

template<class dataType >

bool **operator**> (const void *c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator**> (const **os::smart_ptr**< dataType > &c1, const int c2)

template<class dataType >

bool **operator**> (const int c1, const **os::smart_ptr**< dataType > &c2)

template<class dataType >

bool **operator**> (const **os::smart_ptr**< dataType > &c1, const long c2)

template<class dataType >

bool operator> (const long c1, const $os::smart_ptr$ < dataType > &c2)

template<class dataType >

bool operator> (const os::smart ptr< dataType > &c1, const unsigned long c2)

- template<class dataType >
 - bool operator> (const unsigned long c1, const os::smart_ptr< dataType > &c2)
- template<class dataType >
 - bool operator>= (const os::smart_ptr< dataType > &c1, const os::smart_ptr< dataType > &c2)
- template<class dataType >
 - bool operator>= (const os::smart ptr< dataType > &c1, const dataType *&c2)
- template<class dataType >
 - bool operator>= (const dataType *&c1, const os::smart ptr< dataType > &c2)
- template<class dataType >
 - bool **operator**>= (const **os::smart_ptr**< dataType > &c1, const void *c2)
- template<class dataType >
 - bool **operator**>= (const void *c1, const **os::smart_ptr**< dataType > &c2)
- template<class dataType >
 - bool operator>= (const os::smart_ptr< dataType > &c1, const int c2)
- template<class dataType >
 - bool operator>= (const int c1, const os::smart ptr< dataType > &c2)
- template<class dataType >
 - bool **operator**>= (const **os::smart_ptr**< dataType > &c1, const long c2)
- template<class dataType >
 - bool **operator**>= (const long c1, const **os::smart_ptr**< dataType > &c2)
- template<class dataType >
 - bool **operator**>= (const **os::smart_ptr**< dataType > &c1, const unsigned long c2)
- template<class dataType >
 - bool **operator**>= (const unsigned long c1, const **os::smart_ptr**< dataType > &c2)

9.14.1 Detailed Description

Template declaration of os::smart ptr (p. 146).

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains a template declaration of **os::smart_ptr** (p. 146) and supporting constants and functions. Note that because **os::smart_ptr** (p. 146) is a template class, the implimentation of **os**← **::smart_ptr** (p. 146) occurs here as well.

9.14.2 Function Documentation

template<class dataType > bool operator!= (const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2) [inline]

```
template < class dataType > bool operator!= ( const os::smart_ptr < dataType > & c1, const dataType * c2 ) [inline]
```

template<class dataType > bool operator!= (const dataType * c1, const **os::smart_ptr**< dataType > & c2) [inline]

template < class dataType > bool operator!= (const os::smart_ptr < dataType > & c1, const void *
c2) [inline]

template < class dataType > bool operator!= (const void * c1, const os::smart_ptr < dataType > &
c2) [inline]

template < class dataType > bool operator!= (const os::smart_ptr < dataType > & c1, const int c2) [inline]

template<class dataType > bool operator!= (const int c1, const os::smart_ptr< dataType > & c2
) [inline]

 $\label{lem:lemplate} $$ \ensuremath{\sf template}$ < $$ \ensuremath{\sf class}$ $$ \ensuremath{\sf dataType}$ > $$ \ensuremath{\sf c1}$, const long c2) [inline] $$$

template < class dataType > bool operator!= (const long c1, const $os::smart_ptr < dataType > & c2$) [inline]

template < class dataType > bool operator!= (const os::smart_ptr < dataType > & c1, const unsigned long c2) [inline]

template < class dataType > bool operator!= (const unsigned long c1, const $os::smart_ptr < dataType > \& c2$) [inline]

template<class dataType > bool operator< (const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2) [inline]

 $\label{lem:lemplate} $$ \ensuremath{\sf template}$ < $$ \ensuremath{\sf class}$ $$ \ensuremath{\sf dataType}$ > \& c1, const $$ \ensuremath{\sf dataType}$ * c2) [inline]$

template<class dataType > bool operator< (const dataType * c1, const **os::smart_ptr**< dataType > & c2) [inline]

 $\label{lem:const} template < class \ data Type > bool \ operator < (\ const \ \textbf{os::smart_ptr} < \ data Type > \& \ c1, \ const \ void * c2 \) \ \ [inline]$

template < class dataType > bool operator < (const void * c1, const $os::smart_ptr < dataType > & c2$) [inline]

 $template < class \ data Type > bool \ operator < (\ const \ \textbf{os::smart_ptr} < \ data Type > \& \ c1, \ const \ int \ c2 \)$ [inline]

template<class dataType > bool operator< (const int c1, const os::smart_ptr< dataType > & c2) [inline]

 $template < class \ data Type > bool \ operator < (\ const \ \textbf{os::smart_ptr} < \ data Type > \& \ c1, \ const \ long \ c2 \\) \ \ [inline]$

```
template<class dataType > bool operator< ( const long c1, const os::smart_ptr< dataType > & c2
) [inline]
template<class dataType > bool operator< ( const os::smart ptr< dataType > & c1, const
unsigned long c2 ) [inline]
template<class dataType > bool operator< ( const unsigned long c1, const os::smart ptr<
dataType > & c2 ) [inline]
template<class dataType > bool operator<= ( const os::smart ptr< dataType > & c1, const
os::smart ptr< dataType > & c2 ) [inline]
template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const
dataType * c2 ) [inline]
template < class dataType > bool operator <= ( const dataType * c1, const os::smart_ptr <
dataType > & c2 ) [inline]
template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]
template < class dataType > bool operator <= ( const void * c1, const os::smart ptr < dataType > &
c2 ) [inline]
template<class dataType > bool operator<= ( const os::smart ptr< dataType > & c1, const int c2
) [inline]
template<class dataType > bool operator<= ( const int c1, const os::smart ptr< dataType > & c2
) [inline]
template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const long
c2 ) [inline]
template<class dataType > bool operator<= ( const long c1, const os::smart_ptr< dataType > &
c2 ) [inline]
template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]
template<class dataType > bool operator<= ( const unsigned long c1, const os::smart ptr<
dataType > & c2 ) [inline]
template < class dataType > bool operator == ( const os::smart_ptr < dataType > & c1, const
os::smart_ptr< dataType > & c2 ) [inline]
template < class dataType > bool operator == ( const os::smart ptr < dataType > & c1, const
dataType * c2 ) [inline]
template < class dataType > bool operator == ( const dataType * c1, const os::smart ptr <
dataType > & c2 ) [inline]
```

template<class dataType > bool operator== (const os::smart ptr< dataType > & c1, const void *

c2) [inline]

```
template<class dataType > bool operator== ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]
template < class dataType > bool operator == ( const os::smart ptr < dataType > & c1, const int c2
) [inline]
template<class dataType > bool operator== ( const int c1, const os::smart ptr< dataType > & c2
) [inline]
template < class dataType > bool operator == ( const os::smart ptr < dataType > & c1, const long
c2 ) [inline]
template < class dataType > bool operator == ( const long c1, const os::smart ptr < dataType > &
c2 ) [inline]
template<class dataType > bool operator== ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]
template < class dataType > bool operator == ( const unsigned long c1, const os::smart_ptr <
dataType > & c2 ) [inline]
template < class dataType > bool operator> ( const os::smart ptr < dataType > & c1, const
os::smart ptr< dataType > & c2 ) [inline]
template < class dataType > bool operator> ( const os::smart ptr < dataType > & c1, const
dataType *& c2 ) [inline]
template < class dataType > bool operator> ( const dataType *& c1, const os::smart ptr <
dataType > & c2 ) [inline]
template<class dataType > bool operator> ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]
template<class dataType > bool operator> ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]
template < class dataType > bool operator> ( const os::smart_ptr < dataType > & c1, const int c2 )
[inline]
template < class dataType > bool operator> ( const int c1, const os::smart_ptr < dataType > & c2 )
[inline]
template < class dataType > bool operator > ( const os::smart_ptr < dataType > & c1, const long c2
) [inline]
template < class dataType > bool operator > ( const long c1, const os::smart ptr < dataType > & c2
) [inline]
template<class dataType > bool operator> ( const os::smart ptr< dataType > & c1, const
unsigned long c2 ) [inline]
template < class dataType > bool operator > ( const unsigned long c1, const os::smart ptr <
```

dataType > & c2) [inline]

template<class dataType > bool operator>= (const os::smart_ptr< dataType > & c1, const os::smart_ptr< dataType > & c2) [inline]

template < class dataType > bool operator >= (const $os::smart_ptr < dataType > & c1$, const dataType *& c2) [inline]

template < class dataType > bool operator >= (const dataType *& c1, const os::smart_ptr <
dataType > & c2) [inline]

template < class dataType > bool operator >= (const $os::smart_ptr < dataType > & c1, const void * c2) [inline]$

template < class dataType > bool operator >= (const void * c1, const os::smart_ptr < dataType > &
c2) [inline]

template<class dataType > bool operator>= (const os::smart_ptr< dataType > & c1, const int c2
) [inline]

template<class dataType > bool operator>= (const int c1, const os::smart_ptr< dataType > & c2
) [inline]

template<class dataType > bool operator>= (const os::smart_ptr< dataType > & c1, const long c2) [inline]

template<class dataType > bool operator>= (const long c1, const os::smart_ptr< dataType > &
c2) [inline]

template < class dataType > bool operator >= (const os::smart_ptr < dataType > & c1, const unsigned long c2) [inline]

template < class data Type > bool operator >= (const unsigned long c1, const $os::smart_ptr < data Type > & c2$) [inline]

9.15 staticConstantPrinter.h File Reference

Constant printing support.

Classes

• class os::constantPrinter

Prints constant arrays to files.

Namespaces

os

9.15.1 Detailed Description

Constant printing support.

Author

Jonathan Bedard

Date

1/31/2016

Bug No known bugs.

This file contains a class which helps facilitate printing massive tables of constants. It outputs .h and .cpp files with configured arrays of constants.

9.16 staticConstantPrinter.cpp File Reference

Constant printing support, implementation.

9.16.1 Detailed Description

Constant printing support, implementation.

Author

Jonathan Bedard

Date

4/618/2016

Bug No known bugs.

This file implements **os::constantPrinter** (p. 124). Consult **staticConstantPrinter.h** (p. 74) for detailed documentation.

Chapter 10

Class Index

10.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:
os::adnode< dataType >
Abstract data-node
os::ads< dataType >
Abstract datastructure
os::asyncAVLNode< dataType >
Node for usage in an asynchronous AVL tree
os::asyncAVLTree< dataType >
Asynchronous balanced binary search tree
os::AVLNode< dataType >
Node for usage in an AVL tree
os::AVLTree< dataType >
Balanced binary search tree
os::constantPrinter
Prints constant arrays to files
os::eventReceiver< senderType >
Class which enables event receiving
os::eventSender< receiverType >
Class which enables event sending
os::indirectMatrix< dataType >
Indirect matrix
os::matrix< dataType >
Raw matrix
os::ptrComp
Pointer compare interface
os::smart_ptr< dataType >
Reference counted pointer
os::smartSet< dataType >
Smart set abstract data-structures
os::unsortedList< dataType >
Unsorted linked list

os::unsortedListNode< dataType >	
Node for usage in a linked list	165
os::vector2d< dataType >	
2-dimensional vector	168
os::vector3d< dataType >	
3-dimensional vector	178

Chapter 11

Namespace Documentation

11.1 os Namespace Reference

Classes

• class adnode

Abstract data-node.

• class ads

Abstract datastructure.

• class asyncAVLNode

Node for usage in an asynchronous AVL tree.

• class asyncAVLTree

Asynchronous balanced binary search tree.

• class AVLNode

Node for usage in an AVL tree.

• class AVLTree

Balanced binary search tree.

• class constantPrinter

Prints constant arrays to files.

• class eventReceiver

Class which enables event receiving.

• class eventSender

Class which enables event sending.

• class indirectMatrix

Indirect matrix.

• class matrix

Raw matrix.

class ptrComp

Pointer compare interface.

class smart_ptr

Reference counted pointer.

• class smartSet

Smart set abstract data-structures.

class unsortedList

Unsorted linked list.

class unsortedListNode

Node for usage in a linked list.

• class vector2d

2-dimensional vector

class vector3d

3-dimensional vector

Typedefs

typedef vector2d< int8_t > vector2d_88 bit 2-d vector

typedef vector2d< uint8_t > vector2d_u8
 unsigned 8 bit 2-d vector

• typedef vector2d< int16_t > vector2d_16

16 bit 2-d vector

typedef vector2d< uint16_t > vector2d_u16
 unsigned 16 bit 2-d vector

typedef vector2d< int32_t > vector2d_3232 bit 2-d vector

typedef vector2d< uint32_t > vector2d_u32
 unsigned 32 bit 2-d vector

typedef vector2d< int64_t > vector2d_64
 64 bit 2-d vector

typedef vector2d< uint64_t > vector2d_u64
 unsigned 64 bit 2-d vector

• typedef vector2d< float > vector2d_f

float 2-d vector

 typedef vector2d< double > vector2d_d double 2-d vector

typedef vector3d< int8_t > vector3d_88 bit 3-d vector

typedef vector3d< uint8_t > vector3d_u8
 unsigned 8 bit 3-d vector

typedef vector3d< int16_t > vector3d_16
 16 bit 3-d vector

typedef vector3d< uint16_t > vector3d_u16

typedef vector3d< int32_t > vector3d_3232 bit 3-d vector

unsigned 16 bit 3-d vector

• typedef vector3d< uint32_t > vector3d_u32

unsigned 32 bit 3-d vector

typedef vector3d< int64_t > vector3d_64

64 bit 3-d vector

typedef vector3d< uint64_t > vector3d_u64

unsigned 64 bit 3-d vector

typedef vector3d< float > vector3d_f

float 3-d vector

typedef vector3d< double > vector3d_d

double 3-d vector

• typedef void(* void_rec) (void *)

Deletion function typedef.

Enumerations

• enum setTypes { def_set =0, small_set, sorted_set }

Index of abstract data-structures.

• enum smart pointer type {

null_type =0, raw_type, shared_type, shared_type_array, shared_type_dynamic_delete }

Enumeration for types of os::smart ptr (p. 146).

Functions

• template<class dataType >

int **defaultCompareSort** (const dataType &v1, const dataType &v2)

Basic compare.

template<class dataType >

int pointerCompareSort (smart_ptr< dataType > ptr1, smart_ptr< dataType > ptr2)

Raw pointer compare.

template<class dataType >

void quicksort (dataType *arr, unsigned int length, int(*sort_comparison)(const dataType &,
const dataType &)=&defaultCompareSort)

Template quick-sort.

• template<class dataType >

void **pointerQuicksort** (**smart_ptr**< **smart_ptr**< dataType > > arr, unsigned int length, int(*sort ← comparison)(**smart_ptr**< dataType >)=&**pointerCompareSort**)

Template for quick-sort, pointer version.

• template<class dataType >

bool compareSize (const matrix< dataType > &m1, const matrix< dataType > &m2)

Compares the size of two matrices.

• template<class dataType >

 $bool\ \textbf{compareSize}\ (const\ \textbf{indirectMatrix} < dataType > \&m1,\ const\ \textbf{matrix} < dataType > \&m2)$

Compares the size of two matrices.

• template<class dataType >

 $bool\ \textbf{compareSize}\ (const\ \textbf{matrix} < data Type > \&m1,\ const\ \textbf{indirectMatrix} < data Type > \&m2)$

Compares the size of two matrices.

• template<class dataType >

bool **compareSize** (const **indirectMatrix**< dataType > &m1, const **indirectMatrix**< dataType > &m2)

Compares the size of two matrices.

template<class dataType >

bool **testCross** (const **matrix**< dataType > &m1, const **matrix**< dataType > &m2)

Tests if the cross-product is a legal operation.

template<class dataType >

bool testCross (const indirectMatrix< dataType > &m1, const matrix< dataType > &m2)

Tests if the cross-product is a legal operation.

template<class dataType >

bool testCross (const matrix < dataType > &m1, const indirectMatrix < dataType > &m2)

Tests if the cross-product is a legal operation.

• template<class dataType >

bool **testCross** (const **indirectMatrix**< dataType > &m1, const **indirectMatrix**< dataType > &m2)

Tests if the cross-product is a legal operation.

• std::ostream & osout func ()

Standard out object for os namespace.

std::ostream & oserr_func ()

Standard error object for os namespace.

• template<class targ , class src >

smart_ptr< targ > cast (const os::smart_ptr< src > &conv)

os::smart_ptr (p. 146) cast function

Variables

• std::recursive mutex * eventLock

Event processing mutex.

• smart_ptr< std::ostream > osout_ptr

Standard out pointer for os namespace.

• smart_ptr< std::ostream > oserr_ptr

Standard error pointer for os namespace.

11.1.1 Typedef Documentation

typedef vector2d<int16_t> os::vector2d_16

16 bit 2-d vector

typedef vector2d<int32_t> os::vector2d_32

32 bit 2-d vector

typedef vector2d<int64_t> os::vector2d_64

64 bit 2-d vector

typedef vector2d<int8_t> os::vector2d_8

8 bit 2-d vector

typedef vector2d<double> os::vector2d_d

double 2-d vector

typedef vector2d<float> os::vector2d_f

float 2-d vector

typedef vector2d<uint16_t> os::vector2d_u16

unsigned 16 bit 2-d vector

typedef vector2d<uint32_t> os::vector2d_u32

unsigned 32 bit 2-d vector

typedef vector2d<uint64_t> os::vector2d_u64

unsigned 64 bit 2-d vector

typedef vector2d<uint8_t> os::vector2d_u8

unsigned 8 bit 2-d vector

typedef vector3d<int16_t> os::vector3d_16

16 bit 3-d vector

typedef vector3d<int32_t> os::vector3d_32

32 bit 3-d vector

typedef vector3d<int64_t> os::vector3d_64

64 bit 3-d vector

typedef vector3d<int8_t> os::vector3d_8

8 bit 3-d vector

typedef vector3d<double> os::vector3d_d

double 3-d vector

typedef vector3d<float> os::vector3d_f

float 3-d vector

typedef vector3d<uint16_t> os::vector3d_u16

unsigned 16 bit 3-d vector

typedef vector3d<uint32_t> os::vector3d_u32

unsigned 32 bit 3-d vector

typedef vector3d<uint64_t> os::vector3d_u64

unsigned 64 bit 3-d vector

typedef vector3d<uint8_t> os::vector3d_u8

unsigned 8 bit 3-d vector

typedef void(* os::void_rec) (void *)

Deletion function typedef.

The **os::void_rec** (p. 83) function pointer typedef is used by **os::smart_ptr** (p. 146) when it is of type **os::shared_type_dynamic_delete** (p. 84) to destroy non-standard pointers, usually when interfacing with C code.

Parameters

|--|

Returns

void

11.1.2 Enumeration Type Documentation

enum os::setTypes

Index of abstract data-structures.

This enumeration contains a numbered reference to all of the available abstract data-structures. Enumerator

def_set Default set enumeration. Currently defaults to a small set.

small_set Small memory burden set. The small set uses an unsorted linked list to store data.
sorted_set Sorted set. The sorted set uses an AVL tree to store data.

enum os::smart_pointer_type

Enumeration for types of os::smart_ptr (p. 146).

Defines types of **os::smart_ptr** (p. 146). These types are used to define the deletion behaviour of the pointer.

Enumerator

- null_type No type. os::null_type (p. 84) pointers are the default type of os::smart_ptr (p. 146).
 Any os::smart_ptr (p. 146) of type os::null_type (p. 84) can be guaranteed to hold a N←
 ULL pointer.
- raw_type Raw pointer. os::raw_type (p. 84) pointers are the default type of os::smart ptr (p. 146) when instantiated with a standard pointer. Any os::smart_ptr (p. 146) of type os::raw_type (p. 84) is not responsible for the deletion of it's pointer and makes no guarantees as to the availability of it's pointer.
- shared_type Reference counted pointer. os::shared_type (p. 84) pointers must be instantiated from an os::smart_ptr (p. 146) of this type or explicitly through os::smart_ptr (p. 146) constructor arguments. os::shared_type (p. 84) pointers will automatically delete the pointer contained within the object when the reference count of the os::smart_ptr (p. 146) reaches 0.
- shared_type_array Reference counted array. Similar in usage and instantiation to os::raw ← type (p. 84). os::smart_ptr (p. 146) of type os::shared_type_array (p. 84) are designed to be used with array and will run delete [] when the reference count reaches 0 instead of delete.
- shared_type_dynamic_delete Reference pointer with non-standard deletion. Similar in usage and instantiation to os::raw_type (p. 84). os::smart_ptr (p. 146) of type os::shared type_dynamic_delete (p. 84) are used when the deletion of a pointer is not contained within the object destructor. This is specifically designed for interface with C code not using "new" and "delete."

11.1.3 Function Documentation

 $template < class \ targ \ , \ class \ src > \textbf{smart_ptr} < targ > os::cast \ (\ const \ \textbf{os::smart_ptr} < src > \& \ conv \)$ $\lceil inline \rceil$

os::smart_ptr (p. 146) cast function

Casts an os::smart_ptr<src> to and os::smart_ptr<targ>. This function is a template function, targ and src are the templates respectively. Note that the is an explicit cast and is not guranteed to be safe.

Parameters

in	conv	Reference to os::smart_ptr <src> to be converted</src>
----	------	--

Returns

New os::smart ptr<targ> constructed from the received os::smart ptr (p. 146)

template<class dataType > bool os::compareSize (const matrix< dataType > & m1, const matrix< dataType > & m2)

Compares the size of two matrices.

Compares the size of two raw matrices. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	m1	Raw matrix reference
in	m2	Raw matrix reference

Returns

True if the matrices are the same size

 $template < class\ dataType > bool\ os::compareSize\ (\ const\ \textbf{indirectMatrix} < dataType > \&\ m1,\ const\ \textbf{matrix} < dataType > \&\ m2\)$

Compares the size of two matrices.

Compares the size of an indirect matrix and a raw matrix in that order. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	m1	Indirect matrix reference
in	m2	Raw matrix reference

Returns

True if the matrices are the same size

 $template < class\ dataType > bool\ os::compareSize\ (\ const\ \textbf{matrix} < dataType > \&\ m1,\ const\ \textbf{indirectMatrix} < dataType > \&\ m2\)$

Compares the size of two matrices.

Compares the size of a raw matrix and an indirect matrix in that order. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	m1	Raw matrix reference
in	m2	Indirect matrix reference

Returns

True if the matrices are the same size

template<class dataType > bool os::compareSize (const indirectMatrix< dataType > & m1, const indirectMatrix< dataType > & m2)

Compares the size of two matrices.

Compares the size of two indirect matrices. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	m1	Indirect matrix reference
in	m2	Indirect matrix reference

Returns

True if the matrices are the same size

template<class dataType > int os::defaultCompareSort (const dataType & v1, const dataType & v2)

Basic compare.

Acts as a default comparison function for sorting. This function compares the data as if it is in integer form.

Parameters

in	v1	Reference 1 to compare
in	v2	Reference 2 to compare

Returns

1 if greater than, -1 if less than, 0 if equal to

std::ostream& os::oserr_func ()

Standard error object for os namespace.

#define statements allow the user to call this function with "os::oserr." Logging is achieved by using "os::oserr" as one would use "std::cerr."

std::ostream& os::osout func ()

Standard out object for os namespace.

#define statements allow the user to call this function with "os::osout." Logging is achieved by using "os::osout" as one would use "std::cout."

 $template < class\ dataType > int\ os::pointerCompareSort\ (\ \textbf{smart_ptr} < \ dataType > ptr1,\ \textbf{smart_ptr} < \ dataType > ptr2\)$

Raw pointer compare.

Acts as a default comparison function for pointer sorting. Compares the raw pointer values of the two arguements and returns the result.

Parameters

in	ptr1	Pointer 1 to compare
in	ptr2	Pointer 2 to compare

Returns

1 if greater than, -1 if less than, 0 if equal to

 $template < class \ dataType > void \ os::pointerQuicksort \ (\ smart_ptr < smart_ptr < \ dataType >> arr, unsigned int length, int(*)(smart_ptr < dataType >>, smart_ptr < dataType >) sort_comparison = &pointerCompareSort \)$

Template for quick-sort, pointer version.

Preforms quick sort on the provided array of the given length where the array is of pointers to the data type instead of the data type.

Parameters

	[in/out]	array Set of data to be sorted
in	length	Length of array to be sorted
in	sort_comparison	Comparison function definition

Returns

void

 $template < class \ dataType > void \ os:: quicksort (\ dataType * arr, \ unsigned \ int \ length, \ int(*)(const \ dataType \&, \ const \ dataType \&) \ sort_comparison = \& \textbf{defaultCompareSort})$

Template quick-sort.

Preforms quick sort on the provided array of the given length with the given comparison function. The default comparison function is one which uses the comparison operators

Parameters

	[in/out]	array Set of data to be sorted
in	length	Length of array to be sorted
in	sort_comparison	Comparison function definition

Returns

void

template<class dataType > bool os::testCross (const matrix< dataType > & m1, const matrix< dataType > & m2)

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	m1	Raw matrix reference
in	m2	Raw matrix reference

Returns

True if the cross-product is defined

 $template < class \ dataType > bool \ os::testCross \ (\ const \ \textbf{indirectMatrix} < \ dataType > \& \ m1, \ const \ \textbf{matrix} < \ dataType > \& \ m2 \)$

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	m1	Indirect matrix reference
in	m2	Raw matrix reference

Returns

True if the cross-product is defined

 $template < class\ dataType > bool\ os:: testCross\ (\ const\ \textbf{matrix} < dataType > \&\ m1,\ const\ \textbf{indirectMatrix} < dataType > \&\ m2\)$

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	m1	Raw matrix reference
in	m2	Indirect matrix reference

Returns

True if the cross-product is defined

 $template < class\ dataType > bool\ os:: testCross\ (\ const\ \textbf{indirectMatrix} < dataType > \&\ m1,\ const\ \textbf{indirectMatrix} < dataType > \&\ m2\)$

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	m1	Indirect matrix reference
in	m2	Indirect matrix reference

Returns

True if the cross-product is defined

11.1.4 Variable Documentation

std::recursive mutex* os::eventLock

Event processing mutex.

Locks when events are being created, destroyed, bound or triggered. This allows events to be thread safe. The mutex is declared to be recursive to allow for nested event calls.

smart_ptr<std::ostream> os::oserr_ptr

Standard error pointer for os namespace.

This std::ostream is used as standard error for the os namespace. This pointer can be swapped out to programmatically redirect standard error for the os namespace.

smart_ptr<std::ostream> os::osout_ptr

Standard out pointer for os namespace.

This std::ostream is used as standard out for the os namespace. This pointer can be swapped out to programmatically redirect standard out for the os namespace.


Chapter 12

Class Documentation

12.1 os::adnode< dataType > Class Template Reference

Abstract data-node.

Inheritance diagram for os::adnode< dataType >:



Public Member Functions

• adnode (smart_ptr< dataType > d)

Abstract data-node constructor.

• virtual ~adnode ()

Virtual destructor.

• int compare (smart_ptr< adnode< dataType > > inp, bool rawComp=false)

Compares two abstract data-nodes.

• smart_ptr< dataType > & getData ()

Return a reference to the data pointer.

• smart_ptr< dataType > & operator* ()

Return a reference to the data pointer.

virtual smart_ptr< adnode< dataType > > getNext ()

Find the next node.

virtual smart_ptr< adnode< dataType > > getPrev ()

Find the previous node.

Protected Attributes

• smart_ptr< dataType > data

Data pointer.

12.1.1 Detailed Description

template < class dataType >
class os::adnode < dataType >

Abstract data-node.

A generalized node class used for linked lists, trees, queues and various other abstract data structures. Primarily, this structure is focused on providing access to the node data and allowing traversal of the data-structure.

12.1.2 Constructor & Destructor Documentation

template<class dataType> os::adnode< dataType >::adnode (smart_ptr< dataType > d)
[inline]

Abstract data-node constructor.

An abstract data-node is meaningless without a pointer to it's dataType. The constructor requires this pointer to initialize the node.

Parameters

Data to be bound to t	the node
-----------------------	----------

template<class dataType> virtual **os::adnode**< dataType >::~adnode() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.1.3 Member Function Documentation

template < class dataType > int $os::adnode < dataType > ::compare (smart_ptr < adnode < dataType > > inp, bool rawComp = false) [inline]$

Compares two abstract data-nodes.

Abstract data nodes use the comparison functions defined by their data pointers to determine their comparison

Parameters

in inp Data-node be	eing compared with
---------------------	--------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

template<class dataType> smart_ptr<dataType>& os::adnode< dataType >::getData ()
[inline]

Return a reference to the data pointer.

Returns

```
adnode<datqType>::data (p. 93)
```

```
template<class dataType> virtual smart_ptr<adnode<dataType> > os::adnode< dataType
>::getNext( ) [inline], [virtual]
```

Find the next node.

This functions attempts to search for the next node in the structure. By default, or if this node either cannot be found or does not exist, a NULL pointer is returned.

Returns

Pointer to the next node in the structure

Reimplemented in os::asyncAVLNode< dataType > (p. 100), os::asyncAVLNode< sender \leftarrow Type > (p. 100), os::asyncAVLNode< receiverType > (p. 100), os::AVLNode< dataType > (p. 113), and os::unsortedListNode< dataType > (p. 166).

```
template < class dataType > virtual smart_ptr < adnode < dataType > > os::adnode < dataType
>::getPrev( ) [inline], [virtual]
```

Find the previous node.

This functions attempts to search for the previous node in the structure. By default, or if this node either cannot be found or does not exist, a NULL pointer is returned.

Returns

Pointer to the previous node in the structure

Reimplemented in os::AVLNode< dataType > (p. 114), os::asyncAVLNode< dataType > (p. 100), os::asyncAVLNode< senderType > (p. 100), os::asyncAVLNode< receiverType > (p. 100), and os::unsortedListNode< dataType > (p. 167).

template<class dataType> smart_ptr<dataType>& os::adnode< dataType >::operator* ()
[inline]

Return a reference to the data pointer.

Returns

adnode<datqType>::data (p. 93)

12.1.4 Member Data Documentation

template<class dataType> smart_ptr<dataType> os::adnode< dataType >::data [protected]

Data pointer.

A pointer to the data being held by the node. This is used to compare nodes as well.

12.2 os::ads< dataType > Class Template Reference

Abstract datastructure.

Inheritance diagram for os::ads< dataType >:



Public Member Functions

• ads ()

Default constructor.

• virtual ~ads ()

Virtual destructor.

virtual bool insert (smart_ptr< dataType > x)

Inserts a data pointer.

• virtual unsigned int size () const

Returns the number of elements in the datastructure.

virtual smart_ptr< adnode< dataType > > find (smart_ptr< dataType > x)

Finds a matching node.

virtual bool findDelete (smart_ptr< dataType > x)

Finds a matching node and removes it.

virtual smart_ptr< adnode< dataType > > getFirst ()

Returns the first node.

virtual smart_ptr< adnode< dataType > > getLast ()

Returns the last node.

virtual bool insert (smart_ptr< ads< dataType > > x)

Inserts an entire datastructure.

bool rawInsert (smart_ptr< dataType > x)

Inserts a data pointer.

• bool rawCompare () const

Return state of raw compare.

• void setRawCompare (bool rwcmp)

Set raw-compare.

Protected Attributes

• bool _rawCompare

Allows for raw compare data-structures.

12.2.1 Detailed Description

```
template < class dataType >
class os::ads < dataType >
```

Abstract datastructure.

A generalized datastructure class which acts as an interface for all datastructures classes. If not extended, the abstract datastructures class is useless.

12.2.2 Constructor & Destructor Documentation

```
template<class dataType> os::ads< dataType >::ads ( ) [inline]
```

Default constructor.

This constructor does nothing, as there are no objects to initialize.

```
template<class dataType> virtual os::ads< dataType>::~ads( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.2.3 Member Function Documentation

```
template<class dataType> virtual smart_ptr<adnode<dataType> > os::ads< dataType > ::find ( smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). Each datastructure which inherits from this class will re-implement this function.

[in] x dataType pointer to be compared against

Returns

The found node if applicable, else NULL

Reimplemented in os::AVLTree< dataType > (p. 120), os::asyncAVLTree< dataType > (p. 107), os::asyncAVLTree< senderType > (p. 107), os::asyncAVLTree< receiverType > (p. 107), os::unsortedList< dataType > (p. 163), and os::smartSet< dataType > (p. 159).

template < class dataType > virtual bool os::ads < dataType > ::findDelete (smart_ptr < dataType >
x) [inline], [virtual]

Finds a matching node and removes it.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). Each datastructure which inherits from this class will re-implement this function. After finding a node, it will be removed from the datastructure.

[in] x dataType pointer to be compared against

Returns

true if the node was found and deleted, else false

Reimplemented in os::AVLTree< dataType > (p. 121), os::asyncAVLTree< dataType > (p. 108), os::asyncAVLTree< senderType > (p. 108), os::asyncAVLTree< receiverType > (p. 108), os::unsortedList< dataType > (p. 163), and os::smartSet< dataType > (p. 159).

template<class dataType> virtual smart_ptr<adnode<dataType> > os::ads< dataType >::getFirst
() [inline], [virtual]

Returns the first node.

Each datastructure has a different definition of what defines "first." By default, this function returns NULL. Datastructures which inherit from this class must re-implement this function.

Returns

The first node, if it exists

Reimplemented in os::asyncAVLTree< dataType > (p. 109), os::asyncAVLTree< senderType > (p. 109), os::asyncAVLTree< receiverType > (p. 109), os::AVLTree< dataType > (p. 122), os::unsortedList< dataType > (p. 163), and os::smartSet< dataType > (p. 159).

template<class dataType> virtual smart_ptr<adnode<dataType> > os::ads< dataType >::getLast
() [inline], [virtual]

Returns the last node.

Each datastructure has a different definition of what defines "last." By default, this function returns NULL. Datastructures which inherit from this class must re-implement this function.

Returns

The last node, if it exists

Reimplemented in os::asyncAVLTree< dataType > (p. 109), os::asyncAVLTree< senderType > (p. 109), os::asyncAVLTree< receiverType > (p. 109), os::AVLTree< dataType > (p. 122), os \leftarrow ::unsortedList< dataType > (p. 164), and os::smartSet< dataType > (p. 160).

template < class dataType > virtual bool os::ads < dataType > ::insert (smart_ptr < dataType > x)
[inline], [virtual]

Inserts a data pointer.

Inserts a pointer to an object of type "dataType." Each datastructure which inherits from this class will re-implement this function

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented in os::AVLTree< dataType > (p. 123), os::asyncAVLTree< dataType > (p. 110), os::asyncAVLTree< senderType > (p. 110), os::asyncAVLTree< receiverType > (p. 110), os::unsortedList< dataType > (p. 164), and os::smartSet< dataType > (p. 160).

template < class dataType > virtual bool **os::ads** < dataType > ::insert ($smart_ptr < ads < dataType > > x$) [inline], [virtual]

Inserts an entire datastructure.

This function may be redefined to speed-up insertion. Currently, this function will be O(n * insertionTime) where n is the number of elements in x

[in] x datastructure of type dataType to be inserted

Returns

true if successful, false if failed

Reimplemented in os::AVLTree< dataType > (p. 123), os::asyncAVLTree< dataType > (p. 109), os::asyncAVLTree< senderType > (p. 109), os::asyncAVLTree< receiverType > (p. 109), os::unsortedList< dataType > (p. 164), and os::smartSet< dataType > (p. 160).

template<class dataType> bool **os::ads**< dataType >::rawCompare () const [inline]

Return state of raw compare.

Returns

_rawCompare

template < class dataType > bool os::ads < dataType > ::rawInsert (smart_ptr < dataType > x)
[inline]

Inserts a data pointer.

Inserts a pointer to an object of type "dataType." This function disabiguates certain calls to insert. [in] x dataType pointer to be inserted

Returns

true if successful, false if failed

template<class dataType> void **os::ads**< dataType>::setRawCompare (bool rwcmp) [inline] Set raw-compare.

Parameters

in rwcmp Value of raw compare to set

Returns

void

template < class dataType > virtual unsigned int os::ads < dataType >::size () const [inline],
[virtual]

Returns the number of elements in the datastructure.

This function must be re-implemented by all classes which inherit from this class. By default, this function returns 0.

Returns

number of elements as an unsigned integer

Reimplemented in os::asyncAVLTree< dataType > (p. 110), os::asyncAVLTree< senderType > (p. 110), os::asyncAVLTree< receiverType > (p. 110), os::AVLTree< dataType > (p. 123), os \rightleftharpoons ::unsortedList< dataType > (p. 164), and os::smartSet< dataType > (p. 161).

12.2.4 Member Data Documentation


template < class dataType > bool os::ads < dataType >::_rawCompare [protected]

Allows for raw compare data-structures.

12.3 os::asyncAVLNode< dataType > Class Template Reference

Node for usage in an asynchronous AVL tree.

Inheritance diagram for os::asyncAVLNode< dataType >:

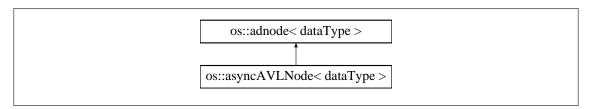

Public Member Functions

- asyncAVLNode (smart_ptr< dataType > d, asyncAVLTree< dataType > *master)
 - Abstract data-node constructor.
- virtual ~asyncAVLNode ()

Virtual destructor.

• smart_ptr< adnode< dataType > > getNext ()

Find the next node.

smart_ptr< adnode< dataType > > getPrev ()

Find the previous node.

Protected Member Functions

• smart_ptr< asyncAVLNode< dataType > > getParent ()

Returns the parent node.

• smart_ptr< asyncAVLNode< dataType > > getChild (int x)

Returns a child by index.

• int getHeight () const

Returns the height of the sub-tree.

• void setHeight ()

Sets the height of the sub-tree.

void setChild (smart ptr< asyncAVLNode< dataType > > c, bool rawCompare)

Add a child to this node.

void setParent (smart_ptr< asyncAVLNode< dataType > > p, smart_ptr< asyncAVLNode< dataType > > self_pointer, bool _rawCompare)

Sets the parent node.

• void removeChild (smart_ptr< asyncAVLNode< dataType > > c, bool _rawCompare)

Remove a child from this node.

• void removeChild (int pos)

Remove a child from this node.

• void removeParent ()

Remove the parent node.

• void remove ()

Remove all children and parents.

Protected Attributes

• smart ptr< asyncAVLNode< dataType > > parent

Parent node one level up in the tree.

smart_ptr< asyncAVLNode< dataType > > child1

Left child one level down in the tree.

• smart_ptr< asyncAVLNode< dataType > > child2

Right child one level down in the tree.

• int height

The height of the tree.

• asyncAVLTree< dataType > * masterTree

Reference to source tree.

Friends

• class asyncAVLTree< dataType >

AVL Tree must know details of node implementation.

12.3.1 Detailed Description

template < class dataType >
class os::asyncAVLNode < dataType >

Node for usage in an asynchronous AVL tree.

The AVL node class implements a number of functions unique to an AVL tree. This node has knowledge of the structure of the AVL tree through its parent and children.

12.3.2 Constructor & Destructor Documentation

template<class dataType> os::asyncAVLNode< dataType >::asyncAVLNode (smart_ptr< dataType > d, asyncAVLTree< dataType > * master) [inline]

Abstract data-node constructor.

An AVL node is meaningless without a pointer to it's dataType. The constructor requires this pointer to initialize the node. Parent and children nodes are, by default, initialized to 0.

Parameters

	in	d	Data to be bound to the node
--	----	---	------------------------------

template<class dataType> virtual **os::asyncAVLNode**< dataType >::~asyncAVLNode () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.3.3 Member Function Documentation

template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<
dataType >::getChild (int x) [inline], [protected]

Returns a child by index.

Returns child node by index. 0 indicates the left child, asyncAVLNode<dataType>::child1 (p. 102). 1 indicates the right child, asyncAVLNode<dataType>::child2 (p. 102). All other indices will return NULL.

Returns

os::asyncAVLNode<dataType>::child1 (p. 102) for x==0, asyncAVLNode<dataType>::child2 (p. 102) for x==1

template < class dataType > int os::asyncAVLNode < dataType > ::getHeight () const [inline],
[protected]

Returns the height of the sub-tree.

Returns

os::asyncAVLNode<dataType>::height (p. 103)

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLNode< dataType
>::getNext( ) [virtual]
```

Find the next node.

This functions attempts to search for the next node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the next node.

Returns

Pointer to the next node in the structure

Reimplemented from os::adnode < dataType > (p. 92).

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<
dataType >::getParent( ) [inline], [protected]
```

Returns the parent node.

Returns

```
os::asyncAVLNode<dataType>::parent (p. 103)
```

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLNode< dataType
>::getPrev( ) [virtual]
```

Find the previous node.

This functions attempts to search for the previous node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the previous node.

Returns

Pointer to the previous node in the structure

Reimplemented from os::adnode< dataType > (p. 92).

```
template < class dataType > void os::asyncAVLNode < dataType >::remove ( ) [inline],
[protected]
```

Remove all children and parents.

This function is important because nodes are of type **os::smart_ptr** (p. 146), since there are co-dependencies, failure to run this function on deletion of the tree will cause a memory leak.

Returns

void

```
template < class dataType > void os::asyncAVLNode < dataType > ::removeChild ( smart_ptr <
asyncAVLNode < dataType > > c, bool _rawCompare ) [inline], [protected]
```

Remove a child from this node.

Checks os::asyncAVLNode<dataType>::child1 (p. 102) and os::asyncAVLNode<dataType> ← ::child2 (p. 102) for equality with the the node received as a parameter.

Parameters

in c No	de to be removed
---------	------------------

Returns

void

template<class dataType> void os::asyncAVLNode< dataType >::removeChild (int pos)
[inline], [protected]

Remove a child from this node.

Remove os::asyncAVLNode<dataType>::child1 (p. 102) if position is 0 and os::asyncAVL \hookleftarrow Node<dataType>::child2 (p. 102) if position is 1.

Parameters

	in	pos	Node index to be removed
--	----	-----	--------------------------

Returns

void

template < class dataType > void os::asyncAVLNode < dataType > ::removeParent() [inline],
[protected]

Remove the parent node.

Returns

void

 $template < class \ dataType > void \ os::asyncAVLNode < \ dataType > ::setChild (\ smart_ptr < asyncAVLNode < \ dataType > > c, \ bool_rawCompare) \ [inline], [protected]$

Add a child to this node.

Set os::asyncAVLNode<dataType>::child1 (p. 102) or os::asyncAVLNode<dataType>::child2 (p. 102) based on the comparison of the node to be inserted with the current node.

Parameters

in	С	Node to be inserted

Returns

void

template < class dataType > void os::asyncAVLNode < dataType > ::setHeight () [inline],
[protected]

Sets the height of the sub-tree.

Uses the height of the sub-tree of the node's children to calculate the heigh of the sub-tree of this node.

Returns

void

template<class dataType> void os::asyncAVLNode< dataType>::setParent (smart_ptr< asyncAVLNode< dataType>> p, smart_ptr< asyncAVLNode< dataType> > self_pointer, bool _rawCompare) [inline], [protected]

Sets the parent node.

Sets the parent node of the current node. This function requires a pointer to the current node for memory management.

Parameters

in	p	Parent node
in	self_pointer	Pointer to self, with memory management

Returns

void

12.3.4 Friends And Related Function Documentation

template < class dataType > friend class asyncAVLTree < dataType > [friend]

AVL Tree must know details of node implementation.

Since the AVL node implements many of the unique functions of the AVL tree, the tree must be aware of the private members of it's nodes.

12.3.5 Member Data Documentation

template<class dataType> **smart_ptr**<**asyncAVLNode**<dataType> > **os::asyncAVLNode**<dataType> ::child1 [protected]

Left child one level down in the tree.

template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<
dataType >::child2 [protected]

Right child one level down in the tree.

template < class dataType > int os::asyncAVLNode < dataType > ::height [protected]

The height of the tree.

This variable is kept to reduce computation time. It is dependent on the height of a node's children nodes. The **asyncAVLNode**<**dataType**>::**setHeight()** (p. 102) resets the height based on the height of the node's children.

template<class dataType> **asyncAVLTree**<dataType>* **os::asyncAVLNode**< dataType >::masterTree [protected]

Reference to source tree.

This reference to the source tree is used when incrementing or decrementing the node, locking the tree temporarily.


template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<
dataType >::parent [protected]

Parent node one level up in the tree.

12.4 os::asyncAVLTree< dataType > Class Template Reference

Asynchronous balanced binary search tree.

Inheritance diagram for os::asyncAVLTree< dataType >:

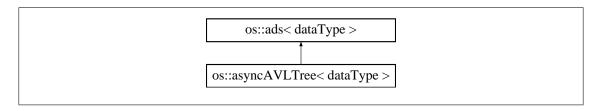

Public Member Functions

• asyncAVLTree ()

Default constructor.

virtual ~asyncAVLTree ()

Virtual destructor.

bool insert (smart_ptr< ads< dataType > > x)

Inserts an os::ads<dataType>

bool insert (smart_ptr< dataType > x)

Inserts a data node.

smart_ptr< asyncAVLNode< dataType > > getRoot ()

Return the root of the tree.

smart_ptr< adnode< dataType > > find (smart_ptr< dataType > x)

Finds a matching node.

 $\bullet \ \, \textbf{smart_ptr} < \textbf{adnode} < \texttt{dataType} > > \textbf{find} \ \, (\textbf{smart_ptr} < \textbf{adnode} < \texttt{dataType} > > \textbf{x}) \\$

Finds by adnode node.

smart_ptr< asyncAVLNode< dataType > > find (smart_ptr< asyncAVLNode< dataType > > x)

Finds by asyncAVLNode (p. 97) node.

bool findDelete (smart ptr< dataType > x)

Finds and delete a matching node.

• bool findDelete (long x)

Finds and delete a matching node.

• bool findDelete (smart_ptr< asyncAVLNode< dataType > > x)

Finds and delete by node.

• virtual unsigned int size () const

Finds and delete a matching node.

smart_ptr< adnode< dataType > > getFirst ()

Returns the first node.

smart_ptr< adnode< dataType > > getLast ()

Returns the last node.

Protected Member Functions

• bool balanceDelete (smart_ptr< asyncAVLNode< dataType > > x, bool _rawCompare)

Removes a node and balances the tree.

bool checkBalance (smart_ptr< asyncAVLNode< dataType > > x)

Checks if a sub-tree is balanced.

void balanceUp (smart_ptr< asyncAVLNode< dataType > > x)

Balances this node and ancestor nodes.

bool balance (smart_ptr< asyncAVLNode< dataType > > x)

Balances a single node.

bool singleRotation (smart_ptr< asyncAVLNode< dataType > > r, int dir)

Rotates a node

bool doubleRotation (smart_ptr< asyncAVLNode< dataType > > r, int dir)

Double-rotate a node.

smart_ptr< asyncAVLNode< dataType > > findBottom (smart_ptr< asyncAVLNode< data⇔
Type > > x, int dir)

Find first or last node in a tree.

Protected Attributes

smart_ptr< asyncAVLNode< dataType > > root

Root node of the tree.

• unsigned int numElements

Number of elements in the tree.

std::mutex mtx

Mutex to ensure synchronous access.

Friends

class asyncAVLNode< dataType >

AVL Node must have access to mutex.

12.4.1 Detailed Description

```
template < class dataType >
class os::asyncAVLTree < dataType >
```

Asynchronous balanced binary search tree.

The AVL Tree rigorously balances a binary search tree. As a template class, it can hold any kind of dataType so long as the data type implements basic comparison functions.

12.4.2 Constructor & Destructor Documentation

```
template<class dataType> os::asyncAVLTree< dataType>::asyncAVLTree( ) [inline]
```

Default constructor.

Sets the number of elements to 0 and the root to NULL.

```
template<class dataType> virtual os::asyncAVLTree< dataType >::~asyncAVLTree ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. The AVL tree must explicitly force deletion through the **async**← **AVLNode**<**dataType**>::remove() (p. 100) function.

12.4.3 Member Function Documentation

```
template<class dataType> bool os::asyncAVLTree< dataType>::balance ( smart_ptr< asyncAVLNode< dataType>> x ) [inline], [protected]
```

Balances a single node.

Parameters

in	Χ	Node to be balanced
----	---	---------------------

Returns

true if the node is already balanced, else, false

```
template<class dataType> bool os::asyncAVLTree< dataType >::balanceDelete ( smart_ptr< asyncAVLNode< dataType > > x, bool _rawCompare ) [inline], [protected]
```

Removes a node and balances the tree.

Must receive as an argument a node in the tree. This function removes the node from the tree and re-balances the tree.

Parameters

in	X	Node to be deleted
TIL	^	Trode to be deleted

Returns

true if successful, false if failed

template<class dataType> void os::asyncAVLTree< dataType>::balanceUp ($smart_ptr$ < asyncAVLNode< dataType>> x) [inline], [protected]

Balances this node and ancestor nodes.

Balances the current node then orders it's parent node to be balanced as well. This process continues until a node has no parent (indicating the node is the root)

Parameters

in	Χ	Node to be balanced
----	---	---------------------

Returns

void

template<class dataType> bool os::asyncAVLTree< dataType>::checkBalance ($smart_ptr$ < asyncAVLNode< dataType>> x) [inline], [protected]

Checks if a sub-tree is balanced.

Checks if the received node is balanced. This operation is inexpensive as it merely involves comparing the heights of the children nodes.

Parameters

in	X	Node to be checked

Returns

true if balanced, false if not

 $\label{template} $$ \ensuremath{\mathsf{class}}$ $ \ensuremath{\mathsf{dataType}} > \ensuremath{\mathsf{bool}}$ $ \ensuremath{\mathsf{os::asyncAVLTree}} < \ensuremath{\mathsf{dataType}} > \ensuremath{\mathsf{r}}, \ensuremath{\mathsf{inline}}, \ensuremath{\mathsf{[protected]}} $ $ \ensuremath{\mathsf{ensuremath{\mathsf{chall}}}} $ $ \ensuremath{\mathsf{ensuremath{\mathsf{ensuremath{\mathsf{chall}}}}} $ $ \ensuremath{\mathsf{ensuremath{\mathsf{ensuremath{\mathsf{chall}}}}} $ $ \ensuremath{\mathsf{ensuremath{\mathsf{ensuremath{\mathsf{ensuremath{\mathsf{chall}}}}}} $ $ $ \ensuremath{\mathsf{ensuremath$

Double-rotate a node.

Double-rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	X	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType
>::find (smart ptr< dataType > x) [inline], [virtual]

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType>>). This function takes O(log(n)) where n is the number of elements in the tree.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from **os::ads**< **dataType** > (p. 94).

template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType >::find (smart ptr< adnode< dataType > > x) [inline]

Finds by adnode node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType>>). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x os::adnode<dataType> pointer to be compared against

Returns

true if the node was found and deleted, else false

 $\label{template} template < class \ data Type > \\ smart_ptr < \\ async AVLNode < \\ data Type > \\ :: find (\\ smart_ptr < \\ async AVLNode < \\ data Type > > \\ x) [inline]$

Finds by asyncAVLNode (p. 97) node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x os::asyncAVLNode<dataType> pointer to be compared against

Returns

true if the node was found and deleted, else false

template < class dataType > smart_ptr < asyncAVLNode < dataType > > os::asyncAVLTree <
dataType > ::findBottom (smart_ptr < asyncAVLNode < dataType > > x, int dir) [inline],
[protected]

Find first or last node in a tree.

Finds the first or last node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	X	Starting node
in	dir	Direction node to search in

Returns

First or last node in sub-tree

template < class dataType > bool os::asyncAVLTree < dataType > ::findDelete (smart_ptr < dataType > x) [inline], [virtual]

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x dataType pointer to be compared against

Returns

true if the node was found and deleted, else false

Reimplemented from os::ads< dataType > (p. 95).

template<class dataType> bool os::asyncAVLTree< dataType >::findDelete (long x) [inline]

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x dataType pointer to be compared against

Returns

true if the node was found and deleted, else false

template<class dataType> bool os::asyncAVLTree< dataType >::findDelete (smart_ptr< asyncAVLNode< dataType > > x) [inline]

Finds and delete by node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node and removes it. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<data

Type> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x os::asyncAVLNode<dataType> pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType
>::getFirst( ) [inline], [virtual]
```

Returns the first node.

For the AVL tree, the first node is defined as the child at index 1. Note that while an os⇔ ::adnode<dataType> is returned, the true type of the pointer returned is os::asyncAVLNode<data⇔ Type>. This function is O(log(n)).

Returns

The first node, if it exists

Reimplemented from os::ads< dataType > (p. 95).

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType
>::getLast( ) [inline], [virtual]
```

Returns the last node.

For the AVL tree, the last node is defined as the child at index 0. Note that while an os⇔ ::adnode<dataType> is returned, the true type of the pointer returned is os::asyncAVLNode<data⇔ Type>. This function is O(log(n)).

Returns

The last node, if it exists

Reimplemented from os::ads< dataType > (p. 95).

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLTree<
dataType >::getRoot( ) [inline]
```

Return the root of the tree.

Returns

```
os::asyncAVLTree<dataType>::root (p. 111)
```

```
template < class data Type > bool os::asyncAVLTree < data Type > ::insert ( smart_ptr < ads < data Type > > x ) [inline], [virtual]
```

Inserts an os::ads<dataType>

Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function of os::ads<dataType>

[in] x pointer to os::ads<dataType>

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 96).

template<class dataType> bool os::asyncAVLTree< dataType > ::insert (smart_ptr< dataType > x) [inline], [virtual]

Inserts a data node.

Inserts a pointer to an object of type "dataType." This insertion will place the node into the binary tree and balance the tree. This function takes O(log(n)) where n is the number of elements in the tree.

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 95).

template<class dataType> bool **os::asyncAVLTree**< dataType >::singleRotation (**smart_ptr**< **asyncAVLNode**< dataType > > r, int dir) [inline], [protected]

Rotates a node.

Rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	Χ	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

 $template < class \ dataType > virtual \ unsigned \ int \ \textbf{os::asyncAVLTree} < \ dataType > ::size \ (\quad) \ const \ [inline], \ [virtual]$

Finds and delete a matching node.

Returns

os::asyncAVLTree<dataType>::numElements (p. 111)

Reimplemented from os::ads < dataType > (p. 97).

12.4.4 Friends And Related Function Documentation

template<class dataType> friend class asyncAVLNode< dataType > [friend]

AVL Node must have access to mutex.

When the **AVLNode** (p. 111) finds the next element or finds the previous element, it must lock the mutex to prevent insertion and deletion into the tree.

12.4.5 Member Data Documentation

template<class dataType> std::mutex os::asyncAVLTree< dataType>::mtx [protected]

Mutex to ensure synchronous access.

template < class dataType > unsigned int os::asyncAVLTree < dataType >::numElements
[protected]

Number of elements in the tree.


template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLTree<
dataType >::root [protected]

Root node of the tree.

12.5 os::AVLNode< dataType > Class Template Reference

Node for usage in an AVL tree.

Inheritance diagram for os::AVLNode< dataType >:

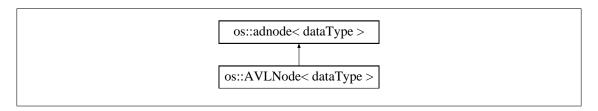

Public Member Functions

• AVLNode (smart_ptr< dataType > d)

Abstract data-node constructor.

• virtual ~AVLNode ()

Virtual destructor.

• smart_ptr< adnode< dataType > > getNext ()

Find the next node.

 $\bullet \ \, \textbf{smart_ptr} < \textbf{adnode} < \texttt{dataType} > > \textbf{getPrev} \; () \\$

Find the previous node.

Protected Member Functions

• smart_ptr< AVLNode< dataType > > getParent ()

Returns the parent node.

• smart_ptr< AVLNode< dataType > > getChild (int x)

Returns a child by index.

• int getHeight () const

Returns the height of the sub-tree.

• void setHeight ()

Sets the height of the sub-tree.

void setChild (smart_ptr< AVLNode< dataType > > c)

Add a child to this node.

void setParent (smart_ptr< AVLNode< dataType > > p, smart_ptr< AVLNode< dataType > > self pointer)

Sets the parent node.

• void removeChild (smart_ptr< AVLNode< dataType > > c)

Remove a child from this node.

void removeChild (int pos)

Remove a child from this node.

• void removeParent ()

Remove the parent node.

• void remove ()

Remove all children and parents.

Protected Attributes

smart_ptr< AVLNode< dataType > > parent

Parent node one level up in the tree.

• smart ptr< AVLNode< dataType > > child1

Left child one level down in the tree.

• smart_ptr< AVLNode< dataType > > child2

Right child one level down in the tree.

• int height

The height of the tree.

Friends

class AVLTree< dataType >

AVL Tree must know details of node implementation.

12.5.1 Detailed Description

template<class dataType> class os::AVLNode< dataType >

Node for usage in an AVL tree.

The AVL node class implements a number of functions unique to an AVL tree. This node has knowledge of the structure of the AVL tree through its parent and children.

12.5.2 Constructor & Destructor Documentation

template < class dataType > os::AVLNode < dataType > ::AVLNode (smart_ptr < dataType > d)
[inline]

Abstract data-node constructor.

An AVL node is meaningless without a pointer to it's dataType. The constructor requires this pointer to initialize the node. Parent and children nodes are, by default, initialized to 0.

Parameters

template < class dataType > virtual os::AVLNode < dataType >::~AVLNode () [inline],
[virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.5.3 Member Function Documentation

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType
>::getChild ( int x ) [inline], [protected]
```

Returns a child by index.

Returns child node by index. 0 indicates the left child, **AVLNode**<**dataType**>::**child1** (p. 116). 1 indicates the right child, **AVLNode**<**dataType**>::**child2** (p. 116). All other indices will return NULL.

Returns

```
os::AVLNode<dataType>::child1 (p. 116) for x==0, AVLNode<dataType>::child2 (p. 116) for x==1
```

template < class dataType > int os::AVLNode < dataType > ::getHeight () const [inline],
[protected]

Returns the height of the sub-tree.

Returns

os::AVLNode<dataType>::height (p. 116)

Find the next node.

This functions attempts to search for the next node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the next node.

Returns

Pointer to the next node in the structure

Reimplemented from os::adnode< dataType > (p. 92).

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType
>::getParent( ) [inline], [protected]
```

Returns the parent node.

Returns

```
os::AVLNode<dataType>::parent (p. 116)
```

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLNode< dataType > ::getPrev
( ) [inline], [virtual]
```

Find the previous node.

This functions attempts to search for the previous node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the previous node.

Returns

Pointer to the previous node in the structure

Reimplemented from os::adnode < dataType > (p. 92).

```
template < class dataType > void os::AVLNode < dataType > ::remove ( ) [inline],
[protected]
```

Remove all children and parents.

This function is important because nodes are of type **os::smart_ptr** (p. 146), since there are co-dependencies, failure to run this function on deletion of the tree will cause a memory leak.

Returns

void

```
template < class dataType > void os::AVLNode < dataType > ::removeChild ( <math>smart\_ptr < AVLNode < dataType > > c ) [inline], [protected]
```

Remove a child from this node.

Checks **os::AVLNode**<**dataType**>::**child1** (p. 116) and **os::AVLNode**<**dataType**>::**child2** (p. 116) for equality with the node received as a parameter.

Parameters

in c	Node to be removed
------	--------------------

void

template < class dataType > void os::AVLNode < dataType > ::removeChild (int pos) [inline],
[protected]

Remove a child from this node.

Remove os::AVLNode<dataType>::child1 (p. 116) if position is 0 and os::AVLNode<data

Type>::child2 (p. 116) if position is 1.

Parameters

Returns

void

template < class dataType > void os::AVLNode < dataType >::removeParent() [inline],
[protected]

Remove the parent node.

Returns

void

template < class dataType > void os::AVLNode < dataType > ::setChild (smart_ptr < AVLNode <
dataType > > c) [inline], [protected]

Add a child to this node.

Set os::AVLNode<dataType>::child1 (p. 116) or os::AVLNode<dataType>::child2 (p. 116) based on the comparison of the node to be inserted with the current node.

Parameters

in c	Node to be inserted
------	---------------------

Returns

void

template<class dataType > void os::AVLNode< dataType >::setHeight () [inline],
[protected]

Sets the height of the sub-tree.

Uses the height of the sub-tree of the node's children to calculate the heigh of the sub-tree of this node.

void

template<class dataType > void os::AVLNode< dataType >::setParent (smart_ptr< AVLNode<
dataType > > p, smart_ptr< AVLNode< dataType > > self_pointer) [inline], [protected]

Sets the parent node.

Sets the parent node of the current node. This function requires a pointer to the current node for memory management.

Parameters

in	р	Parent node
in	self_pointer	Pointer to self, with memory management

Returns

void

12.5.4 Friends And Related Function Documentation

template<class dataType > friend class AVLTree< dataType > [friend]

AVL Tree must know details of node implementation.

Since the AVL node implements many of the unique functions of the AVL tree, the tree must be aware of the private members of it's nodes.

12.5.5 Member Data Documentation

template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType
>::child1 [protected]

Left child one level down in the tree.

template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType
>::child2 [protected]

Right child one level down in the tree.

template<class dataType > int os::AVLNode< dataType >::height [protected]

The height of the tree.

This variable is kept to reduce computation time. It is dependent on the height of a node's children nodes. The **AVLNode**<**dataType**>::setHeight() (p. 115) resets the height based on the height of the node's children.


template<class dataType > **smart_ptr**<**AVLNode**<dataType> > **os::AVLNode**< dataType >::parent [protected]

Parent node one level up in the tree.

12.6 os::AVLTree< dataType > Class Template Reference

Balanced binary search tree.

Inheritance diagram for os::AVLTree< dataType >:

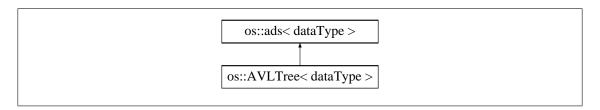

Public Member Functions

• AVLTree ()

Default constructor.

• virtual ~AVLTree ()

Virtual destructor.

bool insert (smart_ptr< ads< dataType > > x)

Inserts an os::ads<dataType>

bool insert (smart ptr< dataType > x)

Inserts a data node.

smart_ptr< AVLNode< dataType > > getRoot ()

Return the root of the tree.

• smart_ptr< adnode< dataType > > find (smart_ptr< dataType > x)

Finds a matching node.

• smart_ptr< adnode< dataType > > find (smart_ptr< adnode< dataType > > x)

Finds by adnode node.

• smart_ptr< AVLNode< dataType > > find (smart_ptr< AVLNode< dataType > > x)

Finds by **AVLNode** (p. 111) node.

bool findDelete (smart_ptr< dataType > x)

Finds and delete a matching node.

bool findDelete (smart_ptr< AVLNode< dataType > > x)

Finds and delete by node.

• virtual unsigned int size () const

Finds and delete a matching node.

• smart_ptr< adnode< dataType > > getFirst ()

Returns the first node.

• smart_ptr< adnode< dataType > > getLast ()

Returns the last node.

Protected Member Functions

• bool balanceDelete (smart_ptr< AVLNode< dataType > > x)

Removes a node and balances the tree.

bool checkBalance (smart_ptr< AVLNode< dataType > > x)

Checks if a sub-tree is balanced.

void balanceUp (smart ptr< AVLNode< dataType > > x)

Balances this node and ancestor nodes.

bool balance (smart_ptr< AVLNode< dataType > > x)

Balances a single node.

• bool singleRotation (smart ptr< AVLNode< dataType > > r, int dir)

Rotates a node.

bool doubleRotation (smart_ptr< AVLNode< dataType > > r, int dir)

Double-rotate a node.

smart_ptr< AVLNode< dataType > > findBottom (smart_ptr< AVLNode< dataType > > x, int dir)

Find first or last node in a tree.

Protected Attributes

• smart_ptr< AVLNode< dataType > > root

Root node of the tree.

• unsigned int numElements

Number of elements in the tree.

12.6.1 Detailed Description

template<class dataType> class os::AVLTree< dataType >

Balanced binary search tree.

The AVL Tree rigorously balances a binary search tree. As a template class, it can hold any kind of dataType so long as the data type implements basic comparison functions.

12.6.2 Constructor & Destructor Documentation

```
template < class dataType > os::AVLTree < dataType > ::AVLTree ( ) [inline]
```

Default constructor.

Sets the number of elements to 0 and the root to NULL.

```
template < class dataType > virtual os::AVLTree < dataType >::~AVLTree ( ) [inline],
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. The AVL tree must explicitly force deletion through the AVL Node (0. 114) function.

12.6.3 Member Function Documentation

template < class dataType > bool $os::AVLTree < dataType > ::balance (smart_ptr < AVLNode < dataType > > x) [inline], [protected]$

Balances a single node.

Parameters

in	X	Node to be balanced
----	---	---------------------

Returns

true if the node is already balanced, else, false

template < class dataType > bool $os::AVLTree < dataType > ::balanceDelete (<math>smart_ptr < AVLNode < dataType > > x) [inline], [protected]$

Removes a node and balances the tree.

Must receive as an argument a node in the tree. This function removes the node from the tree and re-balances the tree.

Parameters

in x	Node to be deleted
------	--------------------

Returns

true if successful, false if failed

template < class dataType > void os::AVLTree < dataType > ::balanceUp (smart_ptr < AVLNode <
dataType > > x) [inline], [protected]

Balances this node and ancestor nodes.

Balances the current node then orders it's parent node to be balanced as well. This process continues until a node has no parent (indicating the node is the root)

Parameters

in	X	Node to be balanced

Returns

void

 $\label{lem:lemplate} $$ \ensuremath{\sf template}$ < $$ \ensuremath{\sf class}$ $$ \ensuremath{\sf dataType}$ > $$ \ensuremath{\sf bool}$ $$ \ensuremath{\sf os::AVLTree}$ < $$ \ensuremath{\sf dataType}$ > $$ x $ \ensuremath{\sf lensuremath{\sf linline}}$, [protected] $$ $$ \ensuremath{\sf ensuremath{\sf dataType}}$ > $$ x $ \ensuremath{\sf linline}$, [protected] $$ $$ \ensuremath{\sf ensuremath{\sf dataType}}$ > $$ \ensuremath{\sf linline}$.$

Checks if a sub-tree is balanced.

Checks if the received node is balanced. This operation is inexpensive as it merely involves comparing the heights of the children nodes.

Parameters

in	Χ	Node to be checked
----	---	--------------------

Returns

true if balanced, false if not

```
template<class dataType > bool os::AVLTree< dataType >::doubleRotation ( smart_ptr< AVLNode< dataType > > r, int dir ) [inline], [protected]
```

Double-rotate a node.

Double-rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	X	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType > ::find ( smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType>>). This function takes O(log(n)) where n is the number of elements in the tree.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from **os::ads**< **dataType** > (p. 94).

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType > ::find ( smart_ptr< adnode< dataType > > x ) [inline]
```

Finds by adnode node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x os::adnode<dataType> pointer to be compared against

true if the node was found and deleted, else false

template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLTree< dataType > ::find (smart ptr< AVLNode< dataType > > x) [inline]

Finds by AVLNode (p. 111) node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x os::AVLNode<dataType> pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLTree< dataType >::findBottom ( smart ptr< AVLNode< dataType >> x, int dir ) [inline], [protected]
```

Find first or last node in a tree.

Finds the first or last node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	Х	Starting node
in	dir	Direction node to search in

Returns

First or last node in sub-tree

template < class dataType > bool os::AVLTree < dataType > ::findDelete (smart_ptr < dataType > x
) [inline], [virtual]

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x dataType pointer to be compared against

Returns

true if the node was found and deleted, else false

Reimplemented from **os::ads**< **dataType** > (p. 95).

template < class dataType > bool $os::AVLTree < dataType > ::findDelete (<math>smart_ptr < AVLNode < dataType > > x) [inline]$

Finds and delete by node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node and removes it. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<data \leftarrow Type> >). This function takes O(log(n)) where n is the number of elements in the tree and will re-balance the tree

[in] x os::AVLNode<dataType> pointer to be compared against

Returns

true if the node was found and deleted, else false

template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType > ::getFirst (
) [inline], [virtual]

Returns the first node.

For the AVL tree, the first node is defined as the child at index 1. Note that while an oscilladnode<dataType> is returned, the true type of the pointer returned is os::AVLNode<dataType>. This function is O(log(n)).

Returns

The first node, if it exists

Reimplemented from os::ads< dataType > (p. 95).

template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType >::getLast()
 [inline], [virtual]

Returns the last node.

For the AVL tree, the last node is defined as the child at index 0. Note that while an oscilladnode<dataType> is returned, the true type of the pointer returned is os::AVLNode<dataType>. This function is O(log(n)).

Returns

The last node, if it exists

Reimplemented from os::ads< dataType > (p. 95).

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLTree< dataType
>::getRoot( ) [inline]
```

Return the root of the tree.

Returns

os::AVLTree<dataType>::root (p. 124)

Inserts an os::ads<dataType>

Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function of os::ads<dataType>

[in] x pointer to os::ads<dataType>

Returns

true if successful, false if failed

Reimplemented from os::ads< dataType > (p. 96).

template < class dataType > bool os::AVLTree < dataType > ::insert (smart_ptr < dataType > x)
[inline], [virtual]

Inserts a data node.

Inserts a pointer to an object of type "dataType." This insertion will place the node into the binary tree and balance the tree. This function takes O(log(n)) where n is the number of elements in the tree.

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented from os::ads< dataType > (p. 95).

template < class dataType > bool os::AVLTree < dataType > ::singleRotation ($smart_ptr < AVLNode < dataType > > r$, int dir) [inline], [protected]

Rotates a node.

Rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	Χ	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

template < class dataType > virtual unsigned int os::AVLTree < dataType >::size () const [inline], [virtual]

Finds and delete a matching node.

os::AVLTree<dataType>::numElements (p. 124)

Reimplemented from os::ads< dataType > (p. 97).

12.6.4 Member Data Documentation

template < class dataType > unsigned int os::AVLTree < dataType >::numElements [protected]

Number of elements in the tree.

template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLTree< dataType >::root
[protected]

Root node of the tree.

12.7 os::constantPrinter Class Reference

Prints constant arrays to files.

Public Member Functions

• constantPrinter (std::string fileName, bool has cpp=false)

Single constructor.

• virtual ~constantPrinter ()

Virtual destructor.

• void addInclude (std::string includeName)

Add include file.

• void addNamespace (std::string namesp)

Add a namespace.

• void removeNamespace ()

Remove namespace.

void addComment (std::string comment)

Insert a comment.

• bool hasCPP () const

Returns if the object is writing to a .cpp file.

• bool **good** () const

Checks file status.

• void addArray (std::string name, uint32_t *arr, unsigned int length)

Add a uin32_t* array.

Private Member Functions

• std::string capitalize (std::string str) const

Capitalizes the string argument.

• std::string tabs () const

Returns current tab depth.

Private Attributes

• std::ofstream hFile

Output file for the .h file.

• std::ofstream cppFile

Output file for the .cpp file.

• bool _has_cpp

Holds if the object is generating a .cpp.

• unsigned int namespaceDepth

Current namespace depth.

12.7.1 Detailed Description

Prints constant arrays to files.

This class outputs configured and populated constant arrays into .h and .cpp files, depending on the configuration. This class is meant to be used as a tool for automatically generating source code files.

12.7.2 Constructor & Destructor Documentation

os::constantPrinter::constantPrinter (std::string fileName, bool has_cpp = false)

Single constructor.

Creates a file of "filename.h" and, if has_cpp is set to "true," "filename.cpp" with appropriate include guards and a comment indicating the source of the file.

Parameters

in	fileName	String representing the file name
in	has_cpp	Optional boolean defining if a .cpp will be written

virtual os::constantPrinter::~constantPrinter() [virtual]

Virtual destructor.

Closes all namespaces and #ifdefs, closes the .h file and .cpp if appropriate.

12.7.3 Member Function Documentation

void os::constantPrinter::addArray (std::string name, uint32_t * arr, unsigned int length)

Add a uin32_t* array.

Added an unsigned 32 bit integer array to the .h and .cpp file. Note that this array will be declared as constant.

in	arr	Array to be written to the files
----	-----	----------------------------------

Parameters

	in	length	Length of the received array	
--	----	--------	------------------------------	--

Returns

void

void os::constantPrinter::addComment (std::string comment)

Insert a comment.

Adds a comment. If the comment is a single line, '//' will be used, otherwise, a standard multi-line comment format will be used.

Parameters

i	in comment
---	------------

Returns

void

void os::constantPrinter::addInclude (std::string includeName)

Add include file.

Prints out "#include includeName" to the .h file. Since the .cpp file includes the .h file, it will include all of the .h file's includes

Parameters

|--|

Returns

void

void os::constantPrinter::addNamespace (std::string namesp)

Add a namespace.

Adds a new namespace. Namespaces nest, so this function increments **constantPrinter** *⇔* ::namespaceDepth (p. 128). Both the .h and .cpp file have this namespace added.

in	namesp	Namespace added to the file
----	--------	-----------------------------

void

std::string os::constantPrinter::capitalize (std::string str) const [private]

Capitalizes the string argument.

Primarily used for #ifdef and #define include guards, this function returns the string it is passed but with every single letter capitalized.

Parameters

in	str	String to be capitalized
----	-----	--------------------------

Returns

std::string with each letter capitalized

bool os::constantPrinter::good () const [inline]

Checks file status.

Checks to ensure that both the .h and .cpp file can be written to. Will not consider the .cpp file if the .cpp file is not being written to.

Returns

file status

bool os::constantPrinter::hasCPP() const [inline]

Returns if the object is writing to a .cpp file.

Returns

constantPrinter::_has_cpp (p. 128)

void os::constantPrinter::removeNamespace ()

Remove namespace.

Ends the current namespace with a '}' in both the .h and .cpp file. Decrements **constantPrinter** ← ::namespaceDepth (p. 128).

Returns

void

std::string os::constantPrinter::tabs () const [private]

Returns current tab depth.

Again used to streamline large projects. This function returns an std::string with tab characters equal to the current number of nested namespaces.

std::string containing os::constantPrinter::namespaceDepth (p. 128) tabs

12.7.4 Member Data Documentation

bool os::constantPrinter::_has_cpp [private]

Holds if the object is generating a .cpp.

std::ofstream os::constantPrinter::cppFile [private]

Output file for the .cpp file.

std::ofstream os::constantPrinter::hFile [private]

Output file for the .h file.

unsigned int os::constantPrinter::namespaceDepth [private]


Current namespace depth.

In order to streamline large projects, arrays of constants should be placed inside namespaces. This variable allows for the creation and management of nested namespaces.

12.8 os::eventReceiver< senderType > Class Template Reference

Class which enables event receiving.

Inheritance diagram for os::eventReceiver< senderType >:

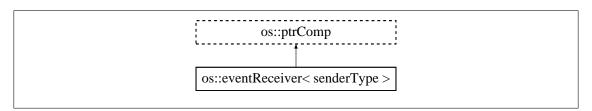

Public Member Functions

• eventReceiver ()

Default constructor.

• virtual ~eventReceiver ()

Virtual destructor.

void pushSender (smart_ptr< senderType > ptr)

Add a sender to the list.

• void removeSender (smart ptr< senderType > ptr)

Remove sender from the sender list.

Private Member Functions

• virtual void receiveEvent (smart ptr< senderType > src)

Receive event notification.

Private Attributes

• asyncAVLTree< senderType > senders

List of sender.

Friends

template<typename receiverType > class eventSender

12.8.1 Detailed Description

template<class senderType>
class os::eventReceiver< senderType >

Class which enables event receiving.

Each receiver contains a list of senders. When the receiver is destroyed, it removes itself from all senders to which it is registered.

12.8.2 Constructor & Destructor Documentation

template<class senderType > os::eventReceiver< senderType >::eventReceiver() [inline]

Default constructor.

The default constructor for the smart set configures the only data type in this class properly. No additional constructor arguments are required.

 $template < class \ sender Type > virtual \ \textbf{os::eventReceiver} < sender Type > :: \sim \textbf{eventReceiver} \ (\) \\ [virtual]$

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.8.3 Member Function Documentation

 $template < class \ sender Type > void \ \textbf{os::eventReceiver} < sender Type > ::push Sender (\ \textbf{smart_ptr} < sender Type > ptr)$

Add a sender to the list.

Adds a sender of the sender type expected by this receiver type. Note that the sender type is expected to inherit from **os::eventSender** (p. 131).

Parameters

ptr | Sender to be added to the set

Returns

void

template<class senderType > virtual void os::eventReceiver< senderType >::receiveEvent (
smart_ptr< senderType > src) [inline], [private], [virtual]

Receive event notification.

This function is meant to be reimplemented by all event receivers to do some action on the event.

Parameters

Returns

void

template<class senderType > void os::eventReceiver< senderType >::removeSender (smart_ptr< senderType > ptr)

Remove sender from the sender list.

Removes a sender from the sender list. Note that this also removes this receiver from the receiver list of the sender which it is passed.

Parameters

ptr	Sender to be removed to the set

Returns

void

12.8.4 Friends And Related Function Documentation

template<class senderType > template<typename receiverType > friend class eventSender
[friend]

The sender must be able to remove itself from the private senders list inside the event receiver. Additionally, the sender must be able to send an event to the receiver.

12.8.5 Member Data Documentation

template<class senderType > asyncAVLTree<senderType> os::eventReceiver< senderType
>::senders [private]


List of sender.

When the receiver is destroyed, this list is used to remove itself from all its senders.

12.9 os::eventSender< receiverType > Class Template Reference

Class which enables event sending.

Inheritance diagram for os::eventSender< receiverType >:

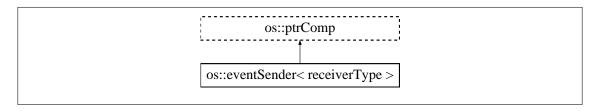

Public Member Functions

• eventSender ()

Default constructor.

virtual ~eventSender ()

Virtual destructor.

void pushReceivers (smart_ptr< receiverType > ptr)

Add a receiver to the list.

• void removeReceivers (smart_ptr< receiverType > ptr)

Remove receiver from the receiver list.

Protected Member Functions

• virtual void **sendEvent** (**smart_ptr**< receiverType > ptr)

Receive event notification.

• void triggerEvent ()

Sends an event to all receivers.

Private Attributes

• asyncAVLTree< receiverType > receivers

List of receivers.

Friends

template<typename senderType > class eventReceiver

12.9.1 Detailed Description

template<class receiverType>
class os::eventSender< receiverType >

Class which enables event sending.

Each sender contains a list of receivers. When an event is triggered, the sender iterates through the list to send the event to all receivers.

12.9.2 Constructor & Destructor Documentation

template < class receiverType > os::eventSender < receiverType > ::eventSender () [inline]

Default constructor.

The default constructor for the smart set configures the only data type in this class properly. No additional constructor arguments are required.

template<class receiverType > virtual os::eventSender< receiverType >::~eventSender ()
[virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.9.3 Member Function Documentation

template<class receiverType > void **os::eventSender**< receiverType >::pushReceivers (**smart_ptr**< receiverType > ptr)

Add a receiver to the list.

Adds a receiver of the receiver type expected by this sender type. Note that the receiver type is expected to inherit from **os::eventReceiver** (p. 128).

Parameters

ptr Receiver to be added to the set

Returns

void

template < class receiverType > void os::eventSender < receiverType > ::removeReceivers (smart_ptr < receiverType > ptr)

Remove receiver from the receiver list.

Removes a receiver from the receiver list. Note that this also removes this sender from the sender list of the receiver which it is passed.

Parameters

ptr | Receiver to be removed to the set

void

template<class receiverType > virtual void os::eventSender< receiverType >::sendEvent (
smart_ptr< receiverType > ptr) [protected], [virtual]

Receive event notification.

This function can be re-implemented by event senders. This function allows some function other than "receiveEvent" to be sent by the event sender to an event receiver.

Parameters

ptr The target of the event

Returns

void

template<class receiverType > void os::eventSender< receiverType >::triggerEvent ()
[protected]

Sends an event to all receivers.

Iterates through the set of receivers and sends an event to each one. This calls the os::event ← Sender<receiverType>::sendEvent (p. 133) function with each receiver as an argument.

Returns

void

12.9.4 Friends And Related Function Documentation

template<class receiverType > template<typename senderType > friend class **eventReceiver** [friend]

The receiver must be able to remove itself from the private receivers list inside the event sender.

12.9.5 Member Data Documentation

template<class receiverType > asyncAVLTree<receiverType> os::eventSender< receiverType
>::receivers [private]

List of receivers.

This list is used to send events to all receivers. When the sender is destroyed, it must remove itself from all its receivers.

12.10 os::indirectMatrix< dataType > Class Template Reference

Indirect matrix.

Public Member Functions

• indirectMatrix (uint32 t w=0, uint32 t h=0)

Default constructor.

• indirectMatrix (const matrix< dataType > &m)

Copy constructor.

• indirectMatrix (const indirectMatrix < dataType > &m)

Copy constructor.

• indirectMatrix (const smart_ptr< dataType > d, uint32_t w, uint32_t h)

Data array constructor.

• indirectMatrix (smart ptr< smart ptr< dataType > > d, uint32 t w, uint32 t h)

Indirect data array constructor.

virtual ~indirectMatrix ()

Virtual destructor.

• indirectMatrix< dataType > & operator= (const matrix< dataType > &m)

Equality constructor.

• indirectMatrix< dataType > & operator= (const indirectMatrix< dataType > &m)

Equality constructor.

• smart_ptr< dataType > & get (uint32_t w, uint32_t h)

Return pointer to a matrix element.

• const smart ptr< dataType > & constGet (uint32 t w, uint32 t h) const

Return constant pointer to a matrix element.

• smart_ptr< dataType > & operator() (uint32_t w, uint32_t h)

Return pointer to a matrix element.

smart_ptr< smart_ptr< dataType > > getArray ()

Return pointer to the pointer array.

• const smart_ptr< smart_ptr< dataType > > getConstArray () const

Return a constant pointer to the pointer array.

• uint32_t getWidth () const

Return width of matrix.

• uint32_t getHeight () const

Return height of matrix.

Private Attributes

• uint32 t width

Width of the matrix.

• uint32_t height

Height of the matrix.

• smart_ptr< smart_ptr< dataType > > data

Data array pointers.

Friends

• class matrix< dataType >

Raw matrix interacting with indirect matrix.

12.10.1 Detailed Description

template < class dataType >
class os::indirectMatrix < dataType >

Indirect matrix.

This matrix class contains an array to pointers of the data type. It can interact with os::matrix<data⇔ Type>.

12.10.2 Constructor & Destructor Documentation

template < class dataType > $os::indirectMatrix < dataType > ::indirectMatrix (uint32_t w = 0, uint32_t h = 0)$

Default constructor.

Constructs array of size w*h and sets all of the data to 0. If no width and height are provided, the data array is not initialized.

Parameters

in	W	Width of matrix, default 0
in	h	Height of matrix, default 0

template<class dataType> **os::indirectMatrix**< dataType >::**indirectMatrix** (const **matrix**< dataType > & m)

Copy constructor.

Constructs a new indirect matrix from the given raw matrix. The indirect matrix converts the array of object to an array of pointers.

Parameters

in	m	Indirect matrix to be copied

 $template < class\ dataType > \textbf{os::indirectMatrix} <\ dataType > :: \textbf{indirectMatrix} <\ (\ constinuity constitution of the constitution of the$

Copy constructor.

Constructs a new indirect matrix from the given indirect matrix. The two indirect matrices do not share data array, the new indirect matrix builds its own array.

Parameters

in m Indirect matrix t	o be copied
------------------------	-------------

template<class dataType> os::indirectMatrix< dataType >::indirectMatrix (const smart_ptr< dataType > d, uint32_t w, uint32_t h)

Data array constructor.

Constructs a new indirect matrix from an array of the correct data type. This constructor will build an new indirect array based on the specified size.

Parameters

in	d	Data array to be copied
in	W	Width of matrix
in	d	Height of matrix

template<class dataType> os::indirectMatrix< dataType>::indirectMatrix ($smart_ptr$ < $smart_ptr$ < dataType> > d, uint32_t w, uint32_t h)

Indirect data array constructor.

Constructs a new indirect matrix from an indirect array of the correct data type. This constructor will build an new indirect array based on the specified size.

Parameters

in	d	Indirect data array to be copied
in	W	Width of matrix
in	d	Height of matrix

template<class dataType> virtual os::indirectMatrix< dataType >::~indirectMatrix ()
[inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.10.3 Member Function Documentation

template<class dataType> const smart_ptr<dataType>& os::indirectMatrix< dataType
>::constGet (uint32_t w, uint32_t h) const

Return constant pointer to a matrix element.

Uses a width and height position to index an element of the array. This function returns a constant reference, meaning changes cannot be made to the matrix.

Parameters

in	W	X position
in	h	Y position

Returns

Constant reference to matrix element pointer

```
template<class dataType> smart_ptr<dataType>& os::indirectMatrix< dataType >::get ( uint32_t w, uint32_t h )
```

Return pointer to a matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

Parameters

in	W	X position
in	h	Y position

Returns

Modifiable reference to matrix element pointer

```
template<class dataType> smart_ptr<smart_ptr<dataType> > os::indirectMatrix< dataType
>::getArray( ) [inline]
```

Return pointer to the pointer array.

The array which is returned allows for modification of the array. It is up to functions using this array to ensure the integrity of the indirect matrix.

Returns

os::indirectMatrix<dataType>::data (p. 139)

```
\label{template} template < class \ data Type > const \ \textbf{smart\_ptr} < smart\_ptr < data Type > > \ os::indirect \textbf{Matrix} < data Type > ::get Const Array ( ) const [inline]
```

Return a constant pointer to the pointer array.

The array which is returned allows for access to the array. The provided array may not be modified.

Returns

os::indirectMatrix<dataType>::data (p. 139)

template<class dataType> uint32_t os::indirectMatrix< dataType >::getHeight () const [inline]

Return height of matrix.

indirectMatrix<dataType>::height (p. 139)

template < class dataType > uint32_t os::indirectMatrix < dataType > ::getWidth () const
[inline]

Return width of matrix.

Returns

indirectMatrix<dataType>::width (p. 139)

template<class dataType> smart_ptr<dataType>& os::indirectMatrix< dataType >::operator() (
uint32_t w, uint32_t h) [inline]

Return pointer to a matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

Parameters

in	W	X position
in	h	Y position

Returns

Modifiable reference to matrix element pointer

template<class dataType> indirectMatrix<dataType>& os::indirectMatrix< dataType>::operator= (const matrix< dataType > & m)

Equality constructor.

Re-constructs the indirect matrix from a raw matrix. Note that the two matrices do not share the same data array.

Parameters

	in	m	Reference to matrix being copied
--	----	---	----------------------------------

Returns

Reference to self

template<class dataType> indirectMatrix<dataType>& os::indirectMatrix< dataType>::operator= (const indirectMatrix< dataType > & m)

Equality constructor.

Re-constructs the indirect matrix from another indirect matrix. Note that the two matrices do not share the same data array.

Parameters

in	m	Reference to matrix being copied
----	---	----------------------------------

Returns

Reference to self

12.10.4 Friends And Related Function Documentation

template<class dataType> friend class matrix< dataType> [friend]

Raw matrix interacting with indirect matrix.

The os::matrix<dataType> class must be able to access the size and data of the indirect matrix because and raw matrix can be constructed from an indirect matrix.

12.10.5 Member Data Documentation

template < class dataType > smart_ptr < smart_ptr < dataType > os::indirectMatrix < dataType
>::data [private]

Data array pointers.

For the indirect matrix class, this array contains pointers to all of the data used by the matrix in a block of size width*height.

template<class dataType> uint32_t os::indirectMatrix< dataType >::height [private]

Height of the matrix.

template < class dataType > uint32_t os::indirectMatrix < dataType >::width [private]

Width of the matrix.

12.11 os::matrix< dataType > Class Template Reference

Raw matrix.

Public Member Functions

• matrix (uint32_t w=0, uint32_t h=0)

Default constructor.

matrix (const matrix < dataType > &m)

Copy constructor.

• matrix (const indirectMatrix< dataType > &m)

Copy constructor.

• matrix (const smart_ptr< dataType > d, uint32_t w, uint32_t h)

Data array constructor.

• matrix (smart_ptr< smart_ptr< dataType > > d, uint32_t w, uint32_t h)

Indirect data array constructor.

• virtual ~matrix ()

Virtual destructor.

• matrix< dataType > & operator= (const matrix< dataType > &m)

Equality constructor.

• matrix< dataType > & operator= (const indirectMatrix< dataType > &m)

Equality constructor.

• dataType & get (uint32_t w, uint32_t h)

Return matrix element.

• const dataType & constGet (uint32_t w, uint32_t h) const

Return constant matrix element.

• dataType & operator() (uint32_t w, uint32_t h)

Return matrix element.

• smart_ptr< dataType > getArray ()

Return pointer to the array.

• const smart_ptr< dataType > getConstArray () const

Return a constant pointer to the array.

• uint32_t getWidth () const

Return width of matrix.

• uint32_t getHeight () const

Return height of matrix.

Private Attributes

• uint32 t width

Width of the matrix.

• uint32_t height

Height of the matrix.

• smart_ptr< dataType > data

Data array.

Friends

• class indirectMatrix< dataType >

Indirect matrix interacting with raw matrix.

12.11.1 Detailed Description

template < class dataType >
class os::matrix < dataType >

Raw matrix.

This matrix class contains an array of the data type. It can interact with os::indirectMatrix<data

Type>.

12.11.2 Constructor & Destructor Documentation

template<class dataType> os::matrix< dataType>::matrix (uint32_t w = 0, uint32_t h = 0)

Default constructor.

Constructs array of size w*h and sets all of the data to 0. If no width and height are provided, the data array is not initialized.

Parameters

in	W	Width of matrix, default 0
in	h	Height of matrix, default 0

template<class dataType> os::matrix< dataType >::matrix (const matrix< dataType > & m)

Copy constructor.

Constructs a new raw matrix from the given raw matrix. The two matrices do not share the same data array.

Parameters

in n	n Matr	rix to be copied
------	--------	------------------

template<class dataType> **os::matrix**< dataType>::**matrix** (const **indirectMatrix**< dataType> & m)

Copy constructor.

Constructs a new raw matrix from the given indirect matrix. The raw matrix converts the array of pointers to an array of objects

Parameters

in	m	Indirect matrix to be copied
----	---	------------------------------

template<class dataType> **os::matrix**< dataType>::**matrix** (const **smart_ptr**< dataType> d, uint32 t w, uint32 t h)

Data array constructor.

Constructs a new raw matrix from an array of the correct data type. This constructor will build an new array based on the specified size.

in	d	Data array to be copied
in	W	Width of matrix
in	d	Height of matrix

template<class dataType> **os::matrix**< dataType>::**matrix** (**smart_ptr**< **smart_ptr**< dataType> > d, uint32_t w, uint32_t h)

Indirect data array constructor.

Constructs a new raw matrix from an indirect array of the correct data type. This constructor will build an new array based on the specified size.

Parameters

in	d	Indirect data array to be copied
in	W	Width of matrix
in	d	Height of matrix

template<class dataType> virtual **os::matrix**< dataType >::~matrix () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.11.3 Member Function Documentation

template<class dataType> const dataType& **os::matrix**< dataType >::constGet (uint32_t w, uint32_t h) const

Return constant matrix element.

Uses a width and height position to index an element of the array. This function returns a constant reference, meaning changes cannot be made to the matrix.

Parameters

in	W	X position
in	h	Y position

Returns

Constant reference to matrix element

 $template < class \ data Type > \ data Type \\ \textbf{os::matrix} < \ data Type > :: get \ (\ uint 32_t \ w, \ uint 32_t \ h \)$

Return matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

in	W	X position
in	h	Y position

Modifiable reference to matrix element

template<class dataType> smart_ptr<dataType> os::matrix< dataType >::getArray ()
[inline]

Return pointer to the array.

The array which is returned allows for modification of the array. It is up to functions using this array to ensure the integrity of the matrix.

Returns

```
os::matrix<dataType>::data (p. 144)
```

template<class dataType> const smart_ptr<dataType> os::matrix< dataType >::getConstArray (
) const [inline]

Return a constant pointer to the array.

The array which is returned allows for access to the array. The provided array may not be modified.

Returns

```
os::matrix<dataType>::data (p. 144)
```

 $template < class\ data Type > uint 32_t\ \textbf{os::matrix} < \ data Type > :: get Height\ (\quad)\ const\quad [inline]$

Return height of matrix.

Returns

```
matrix<dataType>::height (p. 145)
```

template<class dataType> uint32_t os::matrix< dataType >::getWidth () const [inline]

Return width of matrix.

Returns

```
matrix<dataType>::width (p. 145)
```

template < class dataType > dataType & os::matrix < dataType >::operator() (uint32_t w, uint32_t h
) [inline]

Return matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

in	W	X position
in	h	Y position

Modifiable reference to matrix element

template<class dataType> matrix<dataType>& os::matrix< dataType >::operator= (const matrix< dataType > & m)

Equality constructor.

Re-constructs the raw matrix from another raw matrix. Note that the two matrices do not share the same data array.

Parameters

in	m	Reference to matrix being copied
----	---	----------------------------------

Returns

Reference to self

 $template < class\ dataType > \ \textbf{matrix} < dataType > \&\ \textbf{os::matrix} < \ dataType > ::operator = (\ constinuity constitution of the constituti$

Equality constructor.

Re-constructs the raw matrix from an indirect matrix. Note that the two matrices do not share the same data array.

Parameters

ir	ı m	Reference to matrix being copied
----	-----	----------------------------------

Returns

Reference to self

12.11.4 Friends And Related Function Documentation

template<class dataType> friend class indirectMatrix< dataType> [friend]

Indirect matrix interacting with raw matrix.

The os::indirectMatrix<dataType> class must be able to access the size and data of the raw matrix because and indirect matrix can be constructed from a raw matrix.

12.11.5 Member Data Documentation

template<class dataType> smart_ptr<dataType> os::matrix< dataType >::data [private]

Data array.

For the raw matrix class, this array contains all of the data used by the matrix in a block of size width*height.

template < class dataType > uint32_t os::matrix < dataType > ::height [private] Height of the matrix.


 $template < class \ data Type > \ uint 32_t \ \textbf{os::matrix} < \ data Type > :: width \quad \texttt{[private]}$

Width of the matrix.

12.12 os::ptrComp Class Reference

Pointer compare interface.

Inheritance diagram for os::ptrComp:

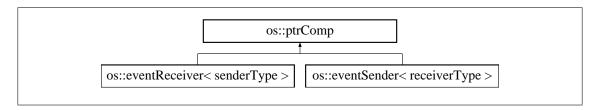

Public Member Functions

• virtual ~ptrComp ()

Virtual destructor.

- virtual bool operator== (const ptrComp &I) const Equality test.
- virtual bool **operator**> (const **ptrComp** &I) const

Greater than test.

virtual bool operator< (const ptrComp &I) const

Less than test.

- virtual bool **operator**>= (const **ptrComp** &I) const Greater than/equal to test.
- virtual bool **operator**<= (const **ptrComp** &I) const

Less than/equal to test.

12.12.1 Detailed Description

Pointer compare interface.

Allows a class which does not define comparison operators to be placed into an abstract datastructure by defining comparison to be address comparison.

12.12.2 Constructor & Destructor Documentation

virtual os::ptrComp::~ptrComp() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.12.3 Member Function Documentation

virtual bool os::ptrComp::operator< (const **ptrComp** & I) const [inline], [virtual] Less than test.

virtual bool os::ptrComp::operator<= (const **ptrComp** & I) const [inline], [virtual] Less than/equal to test.

virtual bool os::ptrComp::operator== (const ptrComp & |) const [inline], [virtual]
Equality test.

virtual bool os::ptrComp::operator> (const **ptrComp** & I) const [inline], [virtual] Greater than test.

virtual bool os::ptrComp::operator>= (const ptrComp & I) const [inline], [virtual]
Greater than/equal to test.

12.13 os::smart_ptr< dataType > Class Template Reference

Reference counted pointer.

Public Member Functions

• smart_ptr ()

Default constructor.

smart_ptr (const smart_pointer_type t, const std::atomic< unsigned long > *rc, const data
 — Type *rp, const void_rec f)

Forced constructor.

smart_ptr (const smart_ptr< dataType > &sp)

Copy constructor.

• smart_ptr (const dataType *rp, smart_pointer_type typ=raw_type)

Standard constructor.

• smart_ptr (const dataType *rp, const void_rec destructor)

Dynamic deletion constructor.

virtual ~smart_ptr ()

Virtual destructor.

• **smart_ptr** (const int rp)

Integer constructor.

• **smart_ptr** (const long rp)

Long constructor.

• smart_ptr (const unsigned long rp)

Unsigned long constructor.

• smart_pointer_type getType () const

Return type.

• dataType * get ()

Return data.

• const dataType * get () const

Return constant data.

const dataType * constGet () const

Return constant data.

• const std::atomic< unsigned long > * getRefCount () const

Return constant reference count.

• void_rec getFunc () const

Return deletion function.

• bool operator! () const

Inverted boolean conversion.

• operator bool () const

Boolean conversion.

dataType & operator* ()

De-reference conversion.

• const dataType & operator* () const

Constant de-reference conversion.

dataType * operator-> ()

Pointer pass.

• const dataType * operator-> () const

Constant pointer pass.

• dataType & operator[] (unsigned int i)

Array de-reference.

• const dataType & operator[] (unsigned int i) const

Constant array de-reference.

• smart ptr< dataType > & bind (smart ptr< dataType > sp)

Bind copy.

• **smart_ptr**< dataType > & **bind** (const dataType *rp)

Bind raw copy.

• smart_ptr< dataType > & operator= (const smart_ptr< dataType > source)

Equals copy.

• **smart_ptr**< dataType > & **operator=** (const dataType *source)

Bind raw copy.

• smart_ptr< dataType > & operator= (const int source)

Bind integer copy.

• **smart_ptr**< dataType > & **operator=** (const long source)

Bind long copy.

• smart_ptr< dataType > & operator= (const unsigned long source)

Bind unsigned long copy.

• int compare (const smart_ptr< dataType > &c) const

Compare os::smart_ptr (p. 146).

• int compare (const dataType *c) const

Compare raw pointers.

• int compare (const unsigned long c) const

Compare cast long.

Private Member Functions

• void teardown ()

Delete data.

Private Attributes

• smart_pointer_type type

Stores the type.

• std::atomic< unsigned long > * ref_count

Reference count.

dataType * raw_ptr

Pointer to data.

void_rec func

Non-standard deletion.

12.13.1 Detailed Description

template < class dataType >
class os::smart_ptr< dataType >

Reference counted pointer.

The os::smart_ptr (p. 146) template class allows for automatic memory management. os. ::smart_ptr (p. 146)'s have a type defined by os::smart_pointer_type (p. 84) which defines the copy and deletion behaviour of the object.

12.13.2 Constructor & Destructor Documentation

template<class dataType> os::smart_ptr< dataType >::smart_ptr() [inline]

Default constructor.

Constructs an **os::smart_ptr** (p. 146) of type **os::null_type** (p. 84). All private data is set to 0 or NULL.

template<class dataType> **os::smart_ptr**< dataType >::**smart_ptr** (const **smart_pointer_type** t, const std::atomic< unsigned long > * rc, const dataType * rp, const **void_rec** f) [inline]

Forced constructor.

Constructs an **os::smart_ptr** (p. 146) explicitly from each of the parameters provided. This constructor is primarily used for testing purposes.

Parameters

in	t	Type definition for the object
in,out	rp	Pointer to the reference count
in	rp	Raw pointer object is managing
in	f	Dynamic deletion function

template < class dataType > os::smart_ptr < dataType > ::smart_ptr (const smart_ptr < dataType >
& sp) [inline]

Copy constructor.

Constructs an **os::smart_ptr** (p. 146) from an existing **os::smart_ptr** (p. 146). Will increment the reference count as defined by the received **os::smart_pointer_type** (p. 84).

Parameters

in,out	sp	Reference to data being copied
--------	----	--------------------------------

template<class dataType> os::smart_ptr< dataType >::smart_ptr (const dataType * rp, smart_pointer_type typ = raw_type) [inline]

Standard constructor.

Constructs an **os::smart_ptr** (p. 146) from a raw pointer and a type. This is the most commonly used **os::smart_ptr** (p. 146) constructor, other than the copy constructor. Note that **os::shared_** \leftarrow **type_dynamic_delete** (p. 84) cannot be constructed through this method.

Parameters

in	rp	Raw pointer object is managing
in	typ	Defines reference count behaviour

template<class dataType> os::smart_ptr< dataType >::smart_ptr (const dataType * rp, const void_rec destructor) [inline]

Dynamic deletion constructor.

Constructs an **os::smart_ptr** (p. 146) from a raw pointer and a destruction function. This constructor generates an **os::smart_ptr** (p. 146) of type **os::shared_type_dynamic_delete** (p. 84).

Parameters

in	rp	Raw pointer object is managing
in	destructor	Defines the function to be executed on destroy

template<class dataType> virtual os::smart_ptr< dataType >::~smart_ptr () [inline],
[virtual]

Virtual destructor.

Calls os::smart ptr<dataType>::teardown() (p. 156) before destroying the object.

template<class dataType> os::smart_ptr< dataType>::smart_ptr(const int rp) [inline] Integer constructor.

Constructs an **os::smart_ptr** (p. 146) from an integer. The assumption is that this integer is 0 (or NULL). This function is still legal if the integer is not NULL, this allows for casting, although such usage is discouraged.

Parameters

in	rp	Integer cast to raw pointer
----	----	-----------------------------

template<class dataType> os::smart_ptr< dataType >::smart_ptr (const long rp) [inline]

Long constructor.

Constructs an **os::smart_ptr** (p. 146) from an long. The assumption is that this long is 0 (or NULL). This function is still legal if the long is not NULL, this allows for casting, although such usage is discouraged.

Parameters

ir	L	rp	Long cast to raw pointer
----	---	----	--------------------------

template < class dataType > os::smart_ptr < dataType > ::smart_ptr (const unsigned long rp)
[inline]

Unsigned long constructor.

Constructs an **os::smart_ptr** (p. 146) from an unsigned long. The assumption is that this unsigned long is 0 (or NULL). This function is still legal if the unsigned long is not NULL, this allows for casting, although such usage is discouraged.

i	n	rp	Unsigned long cast to raw pointer
---	---	----	-----------------------------------

12.13.3 Member Function Documentation

template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::bind (
smart_ptr< dataType > sp) [inline]

Bind copy.

Binds to an **os::smart_ptr** (p. 146) from an existing **os::smart_ptr** (p. 146). Will increment the reference count as defined by the received **os::smart_pointer type** (p. 84).

Parameters

	in	sp	Reference to data being copied
--	----	----	--------------------------------

Returns

Reference to self

template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::bind (const dataType * rp) [inline]

Bind raw copy.

Binds to an os::smart_ptr (p. 146) from a dataType pointer. This new os::smart_ptr (p. 146) will be of type os::raw_type (p. 84) unless the dataType pointer is NULL, then it will be of type os::null ← _type (p. 84).

Parameters

|--|

Returns

Reference to self

 $\label{template} $$ \text{template}$ < \text{class dataType} > \text{int } os::smart_ptr$ < dataType >::compare (const smart_ptr$ < dataType > & c) const [inline]$

Compare os::smart_ptr (p. 146).

Compares two pointers to the same type by address and returns the result in the form of a 1,0 or -1. Note that the **os::smart_ptr<dataType>::type** (p. 157) of the objects does not factor into this comparison.

Parameters

	in	С	os::smart_ptr <datatype></datatype>
--	----	---	-------------------------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

 $template < class \ data Type > int \ \textbf{os::smart_ptr} < \ data Type > ::compare \ (\ const \ data Type * c \) \ const \ [inline]$

Compare raw pointers.

Compares a os::smart_ptr<dataType> and a raw pointer of type dataType and returns the result in the form of a 1,0 or -1.

Parameters

in c Raw dataTy	ype pointer
-----------------	-------------

Returns

1, 0, -1 (Greater than, equal to, less than)

 $template < class \ data Type > int \ \textbf{os::smart_ptr} < \ data Type > ::compare \ (\ const \ unsigned \ long \ c \)$ $const \ \ [inline]$

Compare cast long.

Compares a os::smart_ptr<dataType> and an unsigned long, returning the result in the form of a 1.0 or -1.

Parameters

in	С	Unsigned long cast to dataType pointer
----	---	--

Returns

1, 0, -1 (Greater than, equal to, less than)

 $template < class \ dataType > const \ dataType * \ \textbf{os::smart_ptr} < \ dataType > ::constGet \ (\quad) \ const \ [inline]$

Return constant data.

Returns the constant dataType pointer of the os::smart_ptr (p. 146).

Returns

dataType* in constant form, os::smart_ptr<dataType>::raw_ptr (p. 156)

template<class dataType> dataType* os::smart_ptr< dataType >::get () [inline]

Return data.

Returns the dataType pointer of the os::smart_ptr (p. 146).

Returns

dataType* in modifiable form, os::smart_ptr<dataType>::raw_ptr (p. 156)

```
template<class dataType> const dataType* os::smart_ptr< dataType >::get( ) const [inline]
Return constant data.
   Returns the constant dataType pointer of the os::smart_ptr (p. 146).
Returns
     dataType* in constant form, os::smart ptr<dataType>::raw ptr (p. 156)
template<class dataType> void rec os::smart ptr< dataType>::getFunc( ) const [inline]
Return deletion function.
   Returns the deletion function if it exists. (Note that the deletion function only exists in os ←
::shared type dynamic delete (p. 84) mode)
Returns
     os::void_rec (p. 83) os::smart_ptr<dataType>::func (p. 156)
template<class dataType> const std::atomic<unsigned long>* os::smart ptr< dataType
>::getRefCount() const [inline]
Return constant reference count.
   Returns a constant pointer of the reference count.
Returns
     unsigned long* in constant form, os::smart ptr<dataType>::ref count (p. 157)
template<class dataType> smart pointer type os::smart ptr< dataType >::getType ( ) const
[inline]
Return type.
   Returns the os::smart pointer type (p. 84) of the os::smart ptr (p. 146).
Returns
     os::smart_pointer_type (p. 84) os::smart_ptr<dataType>::type (p. 157)
template<class dataType> os::smart ptr< dataType>::operator bool( ) const [inline]
Boolean conversion.
Returns
     os::smart_ptr<dataType>::raw_ptr (p. 156) cast to boolean
```

template<class dataType> bool **os::smart_ptr**< dataType>::operator! () const [inline] Inverted boolean conversion.

Returns

Inverse of os::smart_ptr<dataType>::raw_ptr (p. 156) cast to boolean

template < class dataType > dataType & os::smart_ptr < dataType >::operator* () [inline]

De-reference conversion.

Returns

dataType reference of os::smart_ptr<dataType>::raw_ptr (p. 156) de-referenced

template < class dataType > const dataType & os::smart_ptr < dataType >::operator* () const [inline]

Constant de-reference conversion.

Returns

Constant dataType reference of os::smart ptr<dataType>::raw ptr (p. 156) de-referenced

template<class dataType> dataType* **os::smart_ptr**< dataType >::operator-> () [inline]

Pointer pass.

Returns

os::smart_ptr<dataType>::raw_ptr (p. 156)

template<class dataType> const dataType* os::smart_ptr< dataType >::operator-> () const [inline]

Constant pointer pass.

Returns

Constant os::smart_ptr<dataType>::raw_ptr (p. 156)

 $\label{template} $$ \ensuremath{\sf template}$ - class dataType> $$ \ensuremath{\sf smart_ptr}$ - dataType> ::operator= (const $$ \ensuremath{\sf smart_ptr}$ - dataType> source) [inline]$

Equals copy.

Calls os::smart_ptr<dataType>::bind (p. 151).

Parameters

in	source	Reference to data being copied
----	--------	--------------------------------

Returns

Reference to self

template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::operator= (const dataType * source) [inline]

Bind raw copy.

Calls os::smart_ptr<dataType>::bind (p. 151).

Parameters

in	source	Reference to dataType pointer
----	--------	-------------------------------

Returns

Reference to self

template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::operator= (const int source) [inline]

Bind integer copy.

Calls os::smart_ptr<dataType>::bind (p. 151) with the integer cast to a dataType pointer.

Parameters

in	source	Integer cast to raw pointer
----	--------	-----------------------------

Returns

Reference to self

Bind long copy.

Calls os::smart_ptr<dataType>::bind (p. 151) with the long cast to a dataType pointer.

Parameters

in	source	Long cast to raw pointer

Returns

Reference to self

Bind unsigned long copy.

Calls **os::smart_ptr<dataType>::bind** (p. 151) with the unsigned long cast to a dataType pointer.

in	source	Unsigned long cast to raw pointer

Reference to self

template < class dataType > dataType & os::smart_ptr < dataType > ::operator[] (unsigned int i)
[inline]

Array de-reference.

Returns

dataType reference of os::smart_ptr<dataType>::raw_ptr (p. 156) incremented i de-referenced

template < class dataType > const dataType & os::smart_ptr < dataType > ::operator[] (unsigned int
i) const [inline]

Constant array de-reference.

Returns

Constant dataType reference of **os::smart_ptr**<dataType>::raw_ptr (p. 156) incremented i de-referenced

template<class dataType> void os::smart_ptr< dataType >::teardown() [inline], [private]

Delete data.

Tears down the os::smart_ptr (p. 146). Decrements the reference counter, if not of os::raw_type (p. 84) or os::null_type (p. 84), and delete os::smart_ptr<dataType>::raw_ptr (p. 156) if needed. Note that if os::smart_ptr<dataType>::raw_ptr (p. 156) is deleted, so is os::smart_ptr<data
Type>::ref count (p. 157).

Returns

void

12.13.4 Member Data Documentation

template<class dataType> void rec os::smart ptr< dataType >::func [private]

Non-standard deletion.

This is a pointer to a function used when the os::smart_ptr (p. 146) is of type os::shared_type
_dynamic_delete (p. 84).

template < class dataType > dataType * os::smart_ptr < dataType > ::raw_ptr [private]

Pointer to data.

The os::smart_ptr<dataType>::raw_ptr (p. 156) holds the pointer to the block of memory to be managed by the os::smart_ptr (p. 146). If this pointer is NULL, the os::smart_ptr (p. 146) is of type os::null_type (p. 84).

template < class dataType > std::atomic < unsigned long >* os::smart_ptr < dataType >::ref_count
[private]

Reference count.

This pointer stores the current reference count of the os::smart_ptr (p. 146). Note that all os ::smart_ptr (p. 146)'s which point to the same memory address with share the same reference counter. This counter is deleted with the pointer and if this counter is NULL, the os::smart_ptr (p. 146) is either of type os::null_type (p. 84) or os::raw_type (p. 84).

template<class dataType> smart_pointer_type os::smart_ptr< dataType >::type [private]


Stores the type.

Defines the type of the **os::smart_ptr** (p. 146). See **os::smart_pointer_type** (p. 84) for details on the available types.

12.14 os::smartSet< dataType > Class Template Reference

Smart set abstract data-structures.

Inheritance diagram for os::smartSet< dataType >:

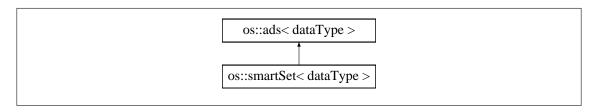

Public Member Functions

• smartSet (setTypes typ=def set)

Default constructor.

virtual ~smartSet ()

Virtual destructor.

void rebuild (setTypes typ)

Set set type.

• setTypes getType () const

Return set type.

• bool insert (smart ptr< ads< dataType > > x)

Inserts an os::ads<dataType>

bool insert (smart_ptr< dataType > x)

Inserts a data node.

smart_ptr< adnode< dataType > > find (smart_ptr< dataType > x)

Finds a matching node.

bool findDelete (smart_ptr< dataType > x)

Finds and delete a matching node.

• unsigned int size () const

Returns the number of elements in the set.

• smart_ptr< adnode< dataType > > getFirst ()

Return the first element.

smart_ptr< adnode< dataType > > getLast ()

Return the last element.

Private Member Functions

• void **build** (**setTypes** typ)

Private Attributes

setTypes type

Stores the set type.

• smart ptr< ads< dataType > > current struct

Abstract data-structure storing data.

Additional Inherited Members

12.14.1 Detailed Description

template < class dataType >
class os::smartSet < dataType >

Smart set abstract data-structures.

Wraps other forms of abstract data structures, allowing applications to define abstract datastructures by numbered indexes.

12.14.2 Constructor & Destructor Documentation

template < class dataType > os::smartSet < dataType > ::smartSet (setTypes typ = def_set)
[inline]

Default constructor.

This constructor builds the smart set based on a set type. Will call os::smartSet<dataType> ← ::build (p. 159).

Parameters

_			
	in	typ	Set type, default is os::def_set (p. 83)

 $template < class \ dataType > virtual \ \textbf{os::smartSet} < \ dataType > :: \sim \textbf{smartSet} \ (\ \) \ \ [inline], \\ [virtual]$

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.14.3 Member Function Documentation

template < class dataType > void os::smartSet < dataType >::build (setTypes typ) [inline],
[private]

template < class dataType > smart_ptr < adnode < dataType > os::smartSet < dataType > ::find (
smart_ptr < dataType > x) [inline], [virtual]

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. Adopts the find function of the abstract data-structure used for this set type. If no abstract data-structure exists, return false.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from os::ads< dataType > (p. 94).

template < class dataType > bool os::smartSet < dataType > ::findDelete (smart_ptr < dataType > x
) [inline], [virtual]

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and remove it. Adopts the findDelete function of the abstract data-structure used for this set type. If no abstract data-structure exists, return false.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from **os::ads**< **dataType** > (p. 95).

template<class dataType > smart_ptr<adnode<dataType> > os::smartSet< dataType >::getFirst
() [inline], [virtual]

Return the first element.

Adopts the getFirst function of the abstract data-structure used for this set type. If no abstract data-structure exists, return NULL.

Returns

```
os::smartSet<dataType>::current_struct (p. 161)->getFirst() (p. 159)
```

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template < class dataType > smart_ptr < adnode < dataType > os::smartSet < dataType > ::getLast
( ) [inline], [virtual]
```

Return the last element.

Adopts the getLast function of the abstract data-structure used for this set type. If no abstract data-structure exists, return NULL.

Returns

```
os::smartSet<dataType>::current_struct (p. 161)->getLast() (p. 160)
```

Reimplemented from **os::ads**< **dataType** > (p. 95).

 $template < class \ data Type > \textbf{setTypes os::smartSet} < \ data Type > :: getType \ (\quad) \ const \quad [inline]$

Return set type.

Returns

```
os::smartSet<dataType>::type (p. 161)
```

template < class dataType > bool os::smartSet < dataType > ::insert (smart_ptr < ads < dataType >
> x) [inline], [virtual]

Inserts an os::ads<dataType>

Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function of os::ads<dataType>

[in] x pointer to os::ads<dataType>

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 96).

template < class dataType > bool os::smartSet < dataType > ::insert (smart_ptr < dataType > x)
[inline], [virtual]

Inserts a data node.

Adopts the insertion function of the abstract data-structure used for this set type. If no abstract data-structure exists, return false.

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 95).

template < class dataType > void os::smartSet < dataType >::rebuild (setTypes typ) [inline] Set set type.

Sets the type of the set, rebuilding the set if the requested type and current type do not match.

Parameters

in <i>type</i>	Set type
----------------	----------

Returns

void

template < class dataType > unsigned int os::smartSet < dataType >::size () const [inline],
[virtual]

Returns the number of elements in the set.

Adopts the size function of the abstract data-structure used for this set type. If no abstract data-structure exists, return 0.

Returns

os::smartSet<dataType>::current_struct (p. 161)->size() (p. 161)

Reimplemented from os::ads< dataType > (p. 97).

12.14.4 Member Data Documentation

template<class dataType > smart_ptr<ads<dataType> > os::smartSet< dataType
>::current_struct [private]


Abstract data-structure storing data.

template < class dataType > setTypes os::smartSet < dataType >::type [private] Stores the set type.

12.15 os::unsortedList< dataType > Class Template Reference

Unsorted linked list.

Inheritance diagram for os::unsortedList< dataType >:

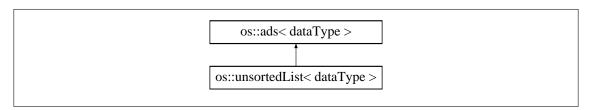

Public Member Functions

• unsortedList ()

Default constructor.

• virtual ~unsortedList ()

Virtual destructor.

• bool insert (smart ptr< ads< dataType > > x)

Inserts an os::ads<dataType>

bool insert (smart_ptr< dataType > x)

Inserts a data node.

• virtual unsigned int size () const

Returns the number of elements in the list.

• smart_ptr< adnode< dataType > > find (smart_ptr< dataType > x)

Finds a matching node.

• bool findDelete (smart_ptr< dataType > x)

Finds and delete a matching node.

smart_ptr< adnode< dataType > > getFirst ()

Return the head.

smart ptr< adnode< dataType > > getLast ()

Return the tail.

Private Attributes

• smart_ptr< unsortedListNode< dataType > > head

Head node

• smart_ptr< unsortedListNode< dataType > > tail

Tail node.

• unsigned int _size

Number of elements in the list.

Additional Inherited Members

12.15.1 Detailed Description

template<class dataType>

class os::unsortedList< dataType >

Unsorted linked list.

The list defined by this class is searchable but unsorted. Insert checks to see if the element being inserted is already contained inside the list. Elements are inserted from the front of the list.

12.15.2 Constructor & Destructor Documentation

template < class dataType > os::unsortedList < dataType > ::unsortedList () [inline]

Default constructor.

Sets the number of elements to 0 and the head and tail to NULL.

template < class dataType > virtual os::unsortedList < dataType >::~unsortedList () [inline],
[virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. The list must explicitly force deletion through setting all of the next and previous references of nodes to NULL.

12.15.3 Member Function Documentation

template < class dataType > smart_ptr < adnode < dataType > os::unsortedList < dataType > ::find
(smart ptr < dataType > x) [inline], [virtual]

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(n) where n is the number of elements in the list.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from **os::ads**< **dataType** > (p. 94).

template < class dataType > bool os::unsortedList < dataType > ::findDelete (smart_ptr < dataType
> x) [inline], [virtual]

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >). This function takes O(n) where n is the number of elements in the list.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template < class dataType > smart_ptr < adnode < dataType > os::unsortedList < dataType
>::getFirst( ) [inline], [virtual]
```

Return the head.

This function is O(1)

Returns

os::unsortedList<dataType>::head (p. 165)

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType > smart_ptr<adnode<dataType> > os::unsortedList< dataType
>::getLast( ) [inline], [virtual]
Return the tail.
   This function is O(1).
Returns
     os::unsortedList<dataType>::tail (p. 165)
   Reimplemented from os::ads< dataType > (p. 95).
template<class dataType > bool os::unsortedList< dataType >::insert ( smart_ptr< ads<
dataType > > x ) [inline], [virtual]
Inserts an os::ads<dataType>
   Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function
of os::ads<dataType>
   [in] x pointer to os::ads<dataType>
Returns
     true if successful, false if failed
   Reimplemented from os::ads< dataType > (p. 96).
template < class dataType > bool os::unsortedList < dataType > ::insert ( smart_ptr < dataType > x
) [inline], [virtual]
Inserts a data node.
   Inserts a pointer to an object of type "dataType." This insertion will place the node into the list at
the beginning. If the node already exists, it will not be inserted. This means that this function must
first attempt to find the node being inserted. This function is O(n).
   [in] x dataType pointer to be inserted
Returns
     true if successful, false if failed
   Reimplemented from os::ads< dataType > (p. 95).
template < class dataType > virtual unsigned int os::unsortedList < dataType >::size ( ) const
[inline], [virtual]
Returns the number of elements in the list.
Returns
     os::unsortedList<dataType>::numElements
```

Reimplemented from os::ads< dataType > (p. 97).

12.15.4 Member Data Documentation

template<class dataType > unsigned int os::unsortedList< dataType >::_size [private]

Number of elements in the list.

template<class dataType > smart_ptr<unsortedListNode<dataType> > os::unsortedList<
dataType >::head [private]

Head node.

Contains a pointer to the head node in the list. If this node is NULL, the list is empty.

template<class dataType > smart_ptr<unsortedListNode<dataType> > os::unsortedList<
dataType >::tail [private]


Tail node.

Contains a pointer to the tail node in the list. If this node is NULL, the list is empty.

12.16 os::unsortedListNode< dataType > Class Template Reference

Node for usage in a linked list.

Inheritance diagram for os::unsortedListNode< dataType >:

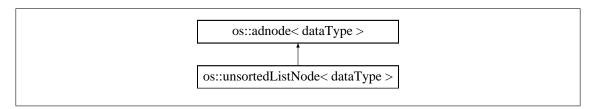

Public Member Functions

• unsortedListNode (smart_ptr< dataType > d)

Abstract data-node constructor.

• virtual ~unsortedListNode ()

Virtual destructor.

• smart_ptr< adnode< dataType > > getNext ()

Return the next node.

• smart_ptr< adnode< dataType > > getPrev ()

Return the previous node.

Protected Member Functions

• void remove ()

Remove this node from the list.

Protected Attributes

- smart_ptr< unsortedListNode< dataType > > prev
 Previous node.
- smart_ptr< unsortedListNode< dataType > > next Next node.

Friends

class unsortedList< dataType >

List aware of it's nodes.

12.16.1 Detailed Description

template<class dataType>
class os::unsortedListNode< dataType >

Node for usage in a linked list.

This class is a simple extension of the os::adnode<dataType> class. It holds the previous and next node inside of it as well as a pointer to its data. Note that the os::unsortedLlst<dataType> class implements the mechanics of the list.

12.16.2 Constructor & Destructor Documentation

```
template<class dataType > os::unsortedListNode< dataType >::unsortedListNode (
smart ptr< dataType > d ) [inline]
```

Abstract data-node constructor.

A list node is meaningless without a pointer to it's dataType. The constructor requires this pointer to initialize the node. Next and previous nodes are, by default, initialized to zero.

Parameters

in	d	Data to be bound to the node

template<class dataType > virtual **os::unsortedListNode**< dataType >::~**unsortedListNode**() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.16.3 Member Function Documentation

template<class dataType > smart_ptr<adnode<dataType> > os::unsortedListNode< dataType
>::getNext() [inline], [virtual]

Return the next node.

Note that os::unsortedListNode<dataType>::next (p. 167) is of type os::unsortedListNode<data⇔
Type>, but this function returns type of os::adnode<dataType>. os::unsortedListNode<data⇔
Type>::next (p. 167) must be case before returning.

Returns

os::unsortedListNode<dataType>::next (p. 167)

Reimplemented from os::adnode< dataType > (p. 92).

template<class dataType > smart_ptr<adnode<dataType> > os::unsortedListNode< dataType
>::getPrev() [inline], [virtual]

Return the previous node.

Note that **os::unsortedListNode**<**dataType**>**::prev** (p. 168) is of type os::unsortedListNode<data⇔ Type>, but this function returns type of os::adnode<dataType>. **os::unsortedListNode**<**data**⇔ **Type**>**::prev** (p. 168) must be case before returning.

Returns

os::unsortedListNode<dataType>::prev (p. 168)

Reimplemented from os::adnode< dataType > (p. 92).

template < class dataType > void os::unsortedListNode < dataType >::remove () [inline],
[protected]

Remove this node from the list.

Removes the references to this node from the next and previous node, if they exists. Sets the previous and next nodes to NULL.

Returns

void

12.16.4 Friends And Related Function Documentation

template < class dataType > friend class unsortedList < dataType > [friend]

List aware of it's nodes.

The unsorted list must be aware of the inner-workings of its nodes. Only the unsorted list is permitted to access the private members of this class.

12.16.5 Member Data Documentation

template < class dataType > smart_ptr < unsortedListNode < dataType > os::unsortedListNode <
dataType >::next [protected]

Next node.

Contains a pointer to the next node in the list. If this node is the tail of the list, the next node is NULL.

template<class dataType > smart_ptr<unsortedListNode<dataType> > os::unsortedListNode< dataType>::prev [protected]

Previous node.

Contains a pointer to the previous node in the list. If this node is the head of the list, the previous node is NULL.

12.17 os::vector2d< dataType > Class Template Reference

2-dimensional vector

Public Member Functions

vector2d ()

Default constructor.

vector2d (dataType xv, dataType yv)

Value constructor.

vector2d (const vector2d< dataType > &vec)

Copy constructor.

• vector2d< dataType > & operator= (const vector2d< dataType > &vec)

Equality constructor.

• vector2d< dataType > & operator() (const dataType &X, const dataType &Y)

Value setter.

• virtual ~vector2d ()

Virtual destructor s* Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

• dataType length () const

Return length of the vector.

vector2d< dataType > & scaleSelf (dataType target=1)

Scales this vector.

• **vector2d**< dataType > **scale** (dataType target=1) const

Return a scaled vector.

- int compare (const vector2d< dataType > &vec) const
- bool **operator==** (const **vector2d**< dataType > &vec) const

Equality comparison operator.

bool operator!= (const vector2d< dataType > &vec) const

Not-equals comparison operator.

• bool **operator**< (const **vector2d**< dataType > &vec) const

Less-than comparison operator.

• bool operator<= (const vector2d< dataType > &vec) const

Less-than or equals to comparison operator.

• bool **operator**> (const **vector2d**< dataType > &vec) const

Less-than comparison operator.

• bool operator>= (const vector2d< dataType > &vec) const

- vector2d< dataType > & addSelf (const vector2d< dataType > &vec)
 Add vector to self.
- vector2d< dataType > add (const vector2d< dataType > &vec) const Add two vectors.
- vector2d< dataType > operator+ (const vector2d< dataType > &vec) const
 Add two vectors.
- vector2d< dataType > & operator+= (const vector2d< dataType > &vec)
 Add vector to self.
- vector2d< dataType > & operator++ ()

Increment.

vector2d< dataType > operator++ (int dummy)

Increment.

• vector2d< dataType > operator- () const

Invert vector.

- vector2d< dataType > & subtractSelf (const vector2d< dataType > &vec)
 Subtract vector from self.
- vector2d< dataType > subtract (const vector2d< dataType > &vec) const Subtract two vectors.
- **vector2d**< dataType > **operator-** (const **vector2d**< dataType > &vec) const *Subtracts two vectors.*
- vector2d< dataType > & operator-= (const vector2d< dataType > &vec)
 Subtracts vector from self.
- vector2d< dataType > & operator-- ()

Decrement.

vector2d< dataType > operator-- (int dummy)

Decrement.

- dataType dotProduct (const vector2d< dataType > &vec) const Dot-product.
- vector2d< dataType > rotate (const vector2d< dataType > &vec) const Rotates a point around 0, 0.
- **vector2d**< dataType > **rotateSelf** (const **vector2d**< dataType > &vec)

 Rotates self around 0, 0.

Public Attributes

dataType x

X axis vector component.

• dataType y

Y axis vector component.

12.17.1 Detailed Description

template < class dataType >
class os::vector2d < dataType >

2-dimensional vector

This template class contains the functions and operators needed to preform arithmetic on a 2 dimensional vector

12.17.2 Constructor & Destructor Documentation

template<class dataType> os::vector2d< dataType >::vector2d () [inline]

Default constructor.

Constructs a 2 dimensional vector with x and y as 0.

template<class dataType> os::vector2d< dataType >::vector2d (dataType xv, dataType yv)
[inline]

Value constructor.

Constructs a 2 dimensional vector with a x and a y value.

Parameters

in	XV	Value of x dimension
in	yv	Value of y dimension

template<class dataType> os::vector2d< dataType >::vector2d (const vector2d< dataType > & vec) [inline]

Copy constructor.

Constructs a 2 dimensional vector from a 2 dimensional vector

Parameters

in <i>vec</i>	Vector to be copied
---------------	---------------------

template<class dataType> virtual os::vector2d< dataType >::~vector2d () [inline],
[virtual]

Virtual destructor s* Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.17.3 Member Function Documentation

template < class dataType > vector2d < dataType > os::vector2d < dataType > ::add (const vector2d < dataType > & vec) const [inline]

Add two vectors.

Adds the provided vector to the current vector and returns a new vector. This function is essentially the function version of the '+' operator.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

Result of the vector addition

 $template < class\ dataType > \textbf{vector2d} < dataType > \&\ \textbf{os::vector2d} < \ dataType > ::addSelf\ (\ const. \textbf{vector2d} < dataType > ::addSelf\ (\ const. \textbf{vector2d} < dataType > & vec.) \ [inline]$

Add vector to self.

Adds the provided vector to the current vector. This function is essentially the function version of the '+=' operator.

Parameters

Returns

Reference to self

template<class dataType> int **os::vector2d**< dataType>::compare (const **vector2d**< dataType> & vec) const [inline]

Compares two vectors

This function compares two vectors for equality. It does not change either vector. This function returns 1 if this object is greater that the object reference received, 0 if the two are equal and -1 if the received reference is greater than the object.

in <i>vec</i> Refe	erence to object compared against
--------------------	-----------------------------------

1 if greater than, 0 if equal to, -1 if less than

template<class dataType> dataType os::vector2d< dataType >::dotProduct (const vector2d<
dataType > & vec) const [inline]

Dot-product.

Calculates the scalar dot-product. Note that this function does not return a vector, but rather, returns a scalar.

Parameters

in vec Reference to vector	in	ı <i>vec</i>	Reference to vector
--------------------------------	----	--------------	---------------------

Returns

Scalar dot product

template<class dataType> dataType os::vector2d< dataType >::length () const [inline]

Return length of the vector.

Returns $sqrt(x^2+y^2)$, or the length of the vector.

Returns

Length of the vector

 $template < class \ dataType > bool \ \textbf{os::vector2d} < \ dataType > ::operator! = (\ const \ \textbf{vector2d} < \ dataType > \& \ vec \) \ const \ \ [inline]$

Not-equals comparison operator.

Parameters

in	vec	Reference to object compared against

Returns

true if vectors are not equal

template<class dataType> **vector2d**<dataType>& **os::vector2d**< dataType >::operator() (const dataType & X, const dataType & Y) [inline]

Value setter.

Sets the values of a 2 dimensional vector with a x and a y value.

in	Χ	Value of x dimension
in	Y	Value of y dimension

Reference to this vector

template<class dataType> vector2d<dataType> os::vector2d< dataType >::operator+ (const vector2d< dataType > & vec) const [inline]

Add two vectors.

Parameters

Returns

vector2d<dataType>::add(vec)

template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator++ ()
[inline]

Increment.

Increments this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

 $template < class \ data Type > \textbf{vector2d} < data Type > \textbf{os::vector2d} < \ data Type > ::operator + + \ (\ int \ dummy \) \ [inline]$

Increment.

Copies this vector then increments this vector by the unit vector of the same direction and then returns the original copy.

Parameters

in	dummy	Parameter required to define operator
----	-------	---------------------------------------

Returns

Original copy

 $template < class \ dataType > \textbf{vector2d} < dataType > \& \ \textbf{os::vector2d} < \ dataType > ::operator += (\ const \ \textbf{vector2d} < \ dataType > \& \ \textbf{vec} \) \quad [inline]$

Add vector to self.

in	vec	Reference to vector to be added

vector3d<dataType>::addSelf(vec)

Invert vector.

Constructs a new vector with an inverted x and inverted y.

Returns

Inverted vector

template<class dataType> vector2d<dataType> os::vector2d< dataType >::operator- (const vector2d< dataType > & vec) const [inline]

Subtracts two vectors.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

vector2d<dataType>::subtract(vec)

template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator-- ()
[inline]

Decrement.

Decrements this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

 $template < class \ data Type > \textbf{vector2d} < data Type > \textbf{os::vector2d} < \ data Type > ::operator-- (int dummy) [inline]$

Decrement.

Copies this vector then decrements this vector by the unit vector of the same direction and then returns the original copy.

in	dummy	Parameter required to define operator
----	-------	---------------------------------------

Original copy

 $template < class \ dataType > \textbf{vector2d} < dataType > \& \ \textbf{os::vector2d} < \ dataType > ::operator = (\ const \ \textbf{vector2d} < \ dataType > \& \ vec \) \ [inline]$

Subtracts vector from self.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

vector3d<dataType>::subtractSelf(vec)

template < class dataType > bool os::vector2d < dataType > ::operator < (const vector2d < dataType
> & vec) const [inline]

Less-than comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is less than vec

template<class dataType> bool os::vector2d< dataType >::operator<= (const vector2d<
dataType > & vec) const [inline]

Less-than or equals to comparison operator.

Parameters

	in	vec	Reference to object compared against
--	----	-----	--------------------------------------

Returns

true if this is less than vec

 $template < class \ dataType > \textbf{vector2d} < dataType > \& \ \textbf{os::vector2d} < \ dataType > ::operator = (\ const \ \textbf{vector2d} < \ dataType > \& \ \textbf{vec} \) \ [inline]$

Equality constructor.

Set the values of a 2 dimensional vector from a another 2 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

template < class dataType > bool os::vector2d < dataType > ::operator == (const vector2d < dataType > & vec) const [inline]

Equality comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if vectors are equal

template < class dataType > bool os::vector2d < dataType > ::operator > (const vector2d < dataType
> & vec) const [inline]

Less-than comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is less than vec

template<class dataType> bool os::vector2d< dataType >::operator>= (const vector2d<
dataType > & vec) const [inline]

 $template < class \ dataType > \textbf{vector2d} < dataType > \textbf{os::vector2d} < \ dataType > ::rotate \ (\ const \ \textbf{vector2d} < \ dataType > \& \ vec \) \ const \ \ [inline]$

Rotates a point around 0, 0.

in vec Vector representing an an

Rotated point

 $template < class \ dataType > \textbf{vector2d} < dataType > \textbf{os::vector2d} < \ dataType > ::rotateSelf (\ const \ \textbf{vector2d} < \ dataType > \& \ vec \) \ [inline]$

Rotates self around 0, 0.

Parameters

in <i>vec</i> Vecto	r representing an angle
---------------------	-------------------------

Returns

Rotated point

 $template < class \ data Type > \textbf{vector2d} < data Type > \textbf{os::vector2d} < \ data Type > ::scale \ (\ data Type target = 1 \) \ const \ [inline]$

Return a scaled vector.

Returns a vector scaled to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

Parameters

	in	target	Vector length to be scaled to	
--	----	--------	-------------------------------	--

Returns

The scaled vector

 $template < class \ dataType > \textbf{vector2d} < dataType > \& \ \textbf{os::vector2d} < \ dataType > ::scaleSelf (\ dataType \ target = 1 \) \ [inline]$

Scales this vector.

Scales this vector to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

in	target	Vector length to be scaled to
----	--------	-------------------------------

Reference to this

 $template < class \ dataType > \textbf{vector2d} < dataType > \textbf{os::vector2d} < \ dataType > ::subtract \ (\ const \ \textbf{vector2d} < \ dataType > \& \ vec \) \ const \ \ [inline]$

Subtract two vectors.

Subtracts the provided vector from the current vector and returns a new vector. This function is essentially the function version of the '-' operator.

Parameters

j	in	vec	Reference to vector to be subtracted
---	----	-----	--------------------------------------

Returns

Result of the vector subtraction

 $template < class \ dataType > \textbf{vector2d} < dataType > \& \ \textbf{os::vector2d} < \ dataType > ::subtractSelf (\ const \ \textbf{vector2d} < \ dataType > \& \ \textbf{vec} \) \quad [inline]$

Subtract vector from self.

Subtracts the provided vector from the current vector. This function is essentially the function version of the '-=' operator.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

Reference to self

12.17.4 Member Data Documentation

template<class dataType> dataType os::vector2d< dataType >::x

X axis vector component.

template<class dataType> dataType os::vector2d< dataType >::y

Y axis vector component.

12.18 os::vector3d< dataType > Class Template Reference

3-dimensional vector

Public Member Functions

vector3d ()

Default constructor.

• **vector3d** (dataType xv, dataType yv, dataType zv=0)

Value constructor.

• vector3d (const vector3d< dataType > &vec)

Copy constructor.

vector3d (const vector2d< dataType > &vec)

Copy constructor.

vector3d< dataType > & operator= (const vector3d< dataType > &vec)

Equality constructor.

vector3d< dataType > & operator() (const dataType &X, const dataType &Y, const dataType &Z)

Value setter.

virtual ~vector3d ()

Virtual destructor s* Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

• dataType length () const

Return length of the vector.

vector3d< dataType > & scaleSelf (dataType target=1)

Scales this vector.

vector3d< dataType > scale (dataType target=1) const

Return a scaled vector.

- int compare (const vector3d &vec) const
- bool **operator==** (const **vector3d**< dataType > &vec) const

Equality comparison operator.

• bool operator!= (const vector3d< dataType > &vec) const

Not-equals comparison operator.

• bool **operator**< (const **vector3d**< dataType > &vec) const

Less-than comparison operator.

bool operator<= (const vector3d< dataType > &vec) const

Less-than or equal to comparison operator.

bool operator> (const vector3d< dataType > &vec) const

Greater-than comparison operator.

• bool **operator**>= (const **vector3d**< dataType > &vec) const

Greater-than or equal to comparison operator.

vector3d< dataType > & addSelf (const vector3d< dataType > &vec)

Add vector to self.

 $\bullet \ \ \textbf{vector3d} < \ \text{dataType} > \textbf{add} \ \ (\text{const} \ \textbf{vector3d} < \ \text{dataType} > \& \text{vec}) \ \ \text{const} \\$

Add two vectors.

vector3d< dataType > operator+ (const vector3d< dataType > &vec) const

Add two vectors.

vector3d< dataType > & operator+= (const vector3d< dataType > &vec)

Add vector to self.

• vector3d< dataType > & operator++ ()

Increment.

• **vector3d**< dataType > **operator++** (int dummy)

Increment.

• vector3d< dataType > operator- () const

Invert vector.

- vector3d< dataType > & subtractSelf (const vector3d< dataType > &vec)
 Subtract vector from self.
- vector3d< dataType > subtract (const vector3d< dataType > &vec) const Subtract two vectors.
- vector3d< dataType > operator- (const vector3d< dataType > &vec) const Subtracts two vectors.
- vector3d< dataType > & operator-= (const vector3d< dataType > &vec)
 Subtracts vector from self.
- vector3d< dataType > & operator-- ()

Decrement

• vector3d< dataType > operator-- (int dummy)

Decrement

- dataType dotProduct (const vector3d< dataType > &vec) const Dot-product.
- vector3d< dataType > crossProduct (const vector3d< dataType > &vec) const Cross-product.
- vector3d< dataType > & crossSelf (const vector3d< dataType > &vec)
 Cross-product to self.
- vector3d< dataType > operator* (const vector3d< dataType > &vec) const Cross-product.
- vector3d< dataType > & operator*= (const vector3d< dataType > &vec)
 Self cross-product.

Public Attributes

dataType x

X axis vector component.

• dataType **y**

Y axis vector component.

• dataType z

Z axis vector component.

12.18.1 Detailed Description

template < class dataType >
class os::vector3d < dataType >

3-dimensional vector

This template class contains the functions and operators needed to preform arithmetic on a 3 dimensional vector

12.18.2 Constructor & Destructor Documentation

template<class dataType> os::vector3d< dataType >::vector3d () [inline]

Default constructor.

Constructs a 3 dimensional vector with x, y and z as 0.

template < class data Type > os::vector3d < data Type >::vector3d (data Type xv, data Type yv, data Type zv = 0) [inline]

Value constructor.

Constructs a 3 dimensional vector with x, y and z values. Z, by default, is initialized as 0.

Parameters

in	χV	Value of x dimension
in	yv	Value of y dimension
in	ZV	Value of z dimension

 $template < class \ data Type > \textbf{os::vector3d} < \ data Type > :: \textbf{vector3d} \ (\ const \ \textbf{vector3d} < \ data Type > \& \ \textbf{vec} \) \ \ [inline]$

Copy constructor.

Constructs a 3 dimensional vector from another 3 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

 $template < class \ data Type > \textbf{os::vector3d} < \ data Type > :: \textbf{vector3d} \ (\ const \ \textbf{vector2d} < \ data Type > \& \ \textbf{vec} \) \ \ [inline]$

Copy constructor.

Constructs a 3 dimensional vector from a 2 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

template<class dataType> virtual os::vector3d< dataType >::~vector3d () [inline],
[virtual]

Virtual destructor s* Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.18.3 Member Function Documentation

template < class dataType > vector3d < dataType > os::vector3d < dataType > ::add (const vector3d < dataType > & vec) const [inline]

Add two vectors.

Adds the provided vector to the current vector and returns a new vector. This function is essentially the function version of the '+' operator.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

Result of the vector addition

 $template < class \ dataType > \textbf{vector3d} < dataType > \& \ \textbf{os::vector3d} < \ dataType > ::addSelf (\ const \ \textbf{vector3d} < \ dataType > \& \ vec \) \ [inline]$

Add vector to self.

Adds the provided vector to the current vector. This function is essentially the function version of the '+=' operator.

in	1/00	Reference to vector to be added
111	Vec	helerence to vector to be added

Reference to self

template < class dataType > int os::vector3d < dataType > ::compare (const vector3d < dataType >
& vec) const [inline]

Compares two vectors

This function compares two vectors for equality. It does not change either vector. This function returns 1 if this object is greater that the object reference received, 0 if the two are equal and -1 if the received reference is greater than the object.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

1 if greater than, 0 if equal to, -1 if less than

 $template < class \ dataType > \textbf{vector3d} < dataType > \textbf{os::vector3d} < \ dataType > ::crossProduct \ (\ const \ \textbf{vector3d} < \ dataType > \& \ vec \) \ const \ \ [inline]$

Cross-product.

Preform the cross-product computation on this vector and the vector argument provided. Unlike the dot-product, the cross product returns a vector.

Parameters

in	vec	Reference to vector to be computed
----	-----	------------------------------------

Returns

Result of the cross-product

 $template < class \ dataType > \textbf{vector3d} < dataType > \& \ \textbf{os::vector3d} < \ dataType > ::crossSelf \ (\ const \ \textbf{vector3d} < \ dataType > \& \ \textbf{vec} \) \quad [inline]$

Cross-product to self.

Preform the cross-product computation on this vector and the vector argument provided. Binds the result to this and returns a reference to this vector.

in	vec	Reference to vector to be computed
----	-----	------------------------------------

Reference to self

template<class dataType> dataType os::vector3d< dataType >::dotProduct (const vector3d<
dataType > & vec) const [inline]

Dot-product.

Calculates the scalar dot-product. Note that this function does not return a vector, but rather, returns a scalar.

Parameters

in vec Reference to vector

Returns

Scalar dot product

template<class dataType> dataType os::vector3d< dataType >::length () const [inline]

Return length of the vector.

Returns $sqrt(x^2+y^2+z^2)$, or the length of the vector.

Returns

Length of the vector

 $\label{template} $$ \ensuremath{\sf template}$ < \ensuremath{\sf class}$ \ensuremath{\sf dataType}$ > ::operator!= (\ensuremath{\sf const} \ensuremath{\sf vector3d}$ < \ensuremath{\sf dataType}$ > & \ensuremath{\sf vec}$) \ensuremath{\sf const}$ [inline]$

Not-equals comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if vectors are not equal

 $template < class \ dataType > \textbf{vector3d} < dataType > \& \ \textbf{os::vector3d} < \ dataType > ::operator() \ (\ const \ dataType \& \ X, \ const \ dataType \& \ Z \) \ \ [inline]$

Value setter.

Sets values of a 3 dimensional vector with x, y and z values.

in	X	Value of x dimension

Parameters

in	Y	Value of y dimension
in	Z	Value of z dimension

Returns

Reference to this vector

 $template < class \ dataType > \textbf{vector3d} < dataType > \textbf{os::vector3d} < \ dataType > ::operator* (\ const \ \textbf{vector3d} < \ dataType > \& \ vec \) \ const \ \ [inline]$

Cross-product.

Parameters

in	vec	Reference to vector to be computed with
----	-----	---

Returns

vector3d<dataType>::crossProduct(vec)

template<class dataType> **vector3d**<dataType>& **os::vector3d**< dataType>::operator*= (const **vector3d**< dataType > & vec) [inline]

Self cross-product.

Parameters

in	vec	Reference to vector to be computed with
----	-----	---

Returns

vector3d<dataType>::crossSelf(vec)

 $template < class \ data Type > \textbf{vector3d} < data Type > \textbf{os::vector3d} < \ data Type > \textbf{::operator+} \ (\ const \ \textbf{vector3d} < \ data Type > \ \& \ vec \) \ const \ \ [inline]$

Add two vectors.

Parameters

j	in	vec	Reference to vector to be added

Returns

vector3d<dataType>::add(vec)

template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator++ ()
[inline]

Increment.

Increments this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

 $template < class \ data Type > \textbf{vector3d} < data Type > \textbf{os::vector3d} < \ data Type > ::operator + + \ (\ int \ dummy \) \ [inline]$

Increment.

Copies this vector then increments this vector by the unit vector of the same direction and then returns the original copy.

Parameters

in	dummy	Parameter required to define operator	1
----	-------	---------------------------------------	---

Returns

Original copy

 $template < class \ dataType > \textbf{vector3d} < dataType > \text{::vector3d} < \ dataType > \text{::operator+= (const } \textbf{vector3d} < \ dataType > \text{::vector3d} < dataType > \text{::operator+= (const } \textbf{vector3d} < dataType > \text{::operator+= (const } \textbf{vect$

Add vector to self.

Parameters

	in	vec	Reference to vector to be added
--	----	-----	---------------------------------

Returns

vector3d<dataType>::addSelf(vec)

template<class dataType> **vector3d**<dataType> **os::vector3d**< dataType >::operator- () const [inline]

Invert vector.

Constructs a new vector with an inverted x, inverted y and inverted z.

Returns

Inverted vector

 $template < class \ dataType > \textbf{vector3d} < dataType > \textbf{os::vector3d} < \ dataType > ::operator- (\ const \ \textbf{vector3d} < \ dataType > \& \ vec \) \ const \ \ [inline]$

Subtracts two vectors.

Parameters

i	ı	vec	Reference to vector to be subtracted
---	---	-----	--------------------------------------

Returns

vector3d<dataType>::subtract(vec)

template<class dataType> **vector3d**<dataType>& **os::vector3d**< dataType >::operator-- () [inline]

Decrement.

Decrements this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

 $template < class \ data Type > \textbf{vector3d} < data Type > \textbf{os::vector3d} < \ data Type > ::operator -- (introdummy) \ [inline]$

Decrement.

Copies this vector then decrements this vector by the unit vector of the same direction and then returns the original copy.

Parameters

in	dummy	Parameter required to define operator
----	-------	---------------------------------------

Returns

Original copy

 $template < class \ dataType > \textbf{vector3d} < dataType > \& \ \textbf{os::vector3d} < \ dataType > ::operator = (\ const \ \textbf{vector3d} < \ dataType > \& \ vec \) \ [inline]$

Subtracts vector from self.

Parameters

in	vec	Reference to vector to be subtracted

Returns

vector3d<dataType>::subtractSelf(vec)

template < class dataType > bool os::vector3d < dataType > ::operator < (const vector3d < dataType
> & vec) const [inline]

Less-than comparison operator.

Parameters

Returns

true if this is less than vec

template<class dataType> bool os::vector3d< dataType >::operator<= (const vector3d<
dataType > & vec) const [inline]

Less-than or equal to comparison operator.

Parameters

in	vec	Reference to object compared against	
----	-----	--------------------------------------	--

Returns

true if this is less than or equal to vec

 $template < class \ data Type > \textbf{vector3d} < data Type > \& \ \textbf{os::vector3d} < \ data Type > ::operator = (\ const \ \textbf{vector3d} < \ data Type > \& \ \textbf{vec} \) \ [inline]$

Equality constructor.

Set the values of a 3 dimensional vector from a another 3 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

template<class dataType> bool os::vector3d< dataType >::operator== (const vector3d<
dataType > & vec) const [inline]

Equality comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if vectors are equal

template < class dataType > bool os::vector3d < dataType > ::operator > (const vector3d < dataType
> & vec) const [inline]

Greater-than comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is greater than vec

template<class dataType> bool os::vector3d< dataType >::operator>= (const vector3d<
dataType > & vec) const [inline]

Greater-than or equal to comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is greater than or equal to vec

 $template < class \ dataType > \textbf{vector3d} < dataType > \textbf{os::vector3d} < \ dataType > ::scale \ (\ dataType + target = 1 \) \ const \ [inline]$

Return a scaled vector.

Returns a vector scaled to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

Parameters

in	target	Vector length to be scaled to
----	--------	-------------------------------

Returns

The scaled vector

template < class data Type > vector3d < data Type > vector3d < data Type >::scale Self (data Type target = 1) [inline]

Scales this vector.

Scales this vector to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

Parameters

in	target	Vector length to be scaled to
----	--------	-------------------------------

Returns

Reference to this

template<class dataType> vector3d<dataType> os::vector3d< dataType >::subtract (const vector3d< dataType > & vec) const [inline]

Subtract two vectors.

Subtracts the provided vector to the current vector and returns a new vector. This function is essentially the function version of the '-' operator.

Parameters

in	vec	Reference to vector to be subtracted

Returns

Result of the vector subtraction

 $template < class\ dataType > \textbf{vector3d} < dataType > \&\ os:: \textbf{vector3d} < \ dataType > :: subtractSelf\ (\ const\ \textbf{vector3d} < \ dataType > \&\ vec\) \quad [inline]$

Subtract vector from self.

Subtracts the provided vector from the current vector. This function is essentially the function version of the '-=' operator.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

Reference to self

12.18.4 Member Data Documentation

template<class dataType> dataType **os::vector3d**< dataType>::x
X axis vector component.

template < class dataType > dataType os::vector3d < dataType > ::y
Y axis vector component.

template<class dataType> dataType **os::vector3d**< dataType>::z
Z axis vector component.

Part III Unit Test Library

Introduction

The UnitTest library contains classes which preform automated unit tests while a project is under development. Utilizing C++ exceptions, the UnitTest library separates its test battery into libraries tested, suites in libraries and tests in suites. The UnitTest library iterates through instantiated libraries running every test suite in the library.

13.1 Namespace test

The test namespace is designed to hold all of the classes and functions related to unit testing. Classes and functions in the test namespace should not be included in the final release application. It is expected that libraries add to this namespace and place their own testing assets here. Note that the test namespace uses elements from the os namespace, all of these elements are defined in the Datastructures library.

13.2 Datastructures Testing

The Datastructures library is rigorously unit tested by the UnitTest library, and the Datastructures unit tests are automatically included in any system unit test unless specifically removed. The Datastructures UnitTests are particularly important because the Datastructures library serves as a base for memory management and data organization. These tests fall broadly into two categories: deterministic and random.

Deterministic tests preform the exact same test every iteration. Deterministic tests are used to ensure that specific functions and operators are returning expected data. Deterministic tests don't merely identify the existence of an error, but usually identify the precise nature of the error as well.

Random tests use a random number generator to preform a unique test with every iteration. This allows unit tests to, over time, catch edge cases with complex data structures. In contrast to deterministic tests, random testing will usually not identify the precise nature of the error.

Note that as a general rule, the implementation of tests is not documented. The location of test suites is documented, through both .h and .cpp files, but the classes and functions which make up these tests are not included.

File Index

14.1 File List

Here is a list of all files with brief descriptions: DatastructuresTest.cpp DatastructuresTest.h Datastructures library test defaultTestInit.cpp masterTestHolder.cpp masterTestHolder.h singleTest.cpp 197 singleTest.h Single test class TestSuite.cpp Single test class TestSuite.h Single test class UnitTest.cpp UnitTest.h Unit Test header file UnitTestExceptions.h UnitTestMain.cpp ??

File Documentation

15.1 DatastructuresTest.h File Reference

Datastructures library test.

15.1.1 Detailed Description

Datastructures library test.

Author

Jonathan Bedard

Date

2/4/2016

Bug No known bugs.

Contains the declaration of the Datastructures library test. Note that this library test is automatically added to all Unit Test executables.

15.2 DatastructuresTest.cpp File Reference

Datastructures library test implementation.

15.2.1 Detailed Description

Datastructures library test implementation.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

Implements the Datastructures library test. These tests are designed to guarantee the functionality of each of the elements in the Datastructures library.

15.3 masterTestHolder.h File Reference

Library tests, masterTestHolder singleton.

Classes

• class test::libraryTests

Library test group.

• class test::masterTestHolder

Unit Test singleton.

Namespaces

test

15.3.1 Detailed Description

Library tests, masterTestHolder singleton. Jonathan Bedard

Date

4/11/2016

Bug No known bugs.

This file contains declarations for the library test base class and **test::masterTestHolder** (p. 215) singleton class. This file represents the top level of the Unit Test driver classes.

15.4 masterTestHolder.cpp File Reference

 $Library\ tests,\ master Test Holder\ singleton\ implementations.$

15.4.1 Detailed Description

Library tests, masterTestHolder singleton implementations. Jonathan Bedard Date

4/11/2016

Bug No known bugs.

This file contains implementations for the library test base class and **test::masterTestHolder** (p. 215) singleton class. Consult **masterTestHolder.h** (p. 196) for details.

15.5 singleTest.h File Reference

Single test class.

Classes

• class test::singleTest

Single unit test class.

• class test::singleFunctionTest

Single unit test from function.

Namespaces

test

Typedefs

typedef void(* test::testFunction) ()

Typedef for single test function.

15.5.1 Detailed Description

Single test class.

Jonathan Bedard

Date

2/6/2016

Bug No known bugs.

This file contains declarations for a single unit test. Unit tests can be defined as separate class or a simple test function.

15.6 singleTest.cpp File Reference

Single test class implementation.

15.6.1 Detailed Description

Single test class implementation.

Jonathan Bedard

Date

2/6/2016

Bug No known bugs.

This file contains implementation for a single unit test. Consult singeTest.h for details.

15.7 TestSuite.h File Reference

Single test class.

Classes

• class test::testSuite

Namespaces

test

15.7.1 Detailed Description

Single test class.

Jonathan Bedard

Date

4/11/2016

Bug No known bugs.

This file contains declarations for a test suite. Test suites contain lists of unit tests.

15.8 TestSuite.cpp File Reference

Single test class.

15.8.1 Detailed Description

Single test class.

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file contains declarations for a test suite. Consult **testSuite.h** (p. 198) for details.

15.9 UnitTest.h File Reference

Unit Test header file.

Namespaces

• test

Functions

• void test::startTests ()

Print out header for Unit Tests.

• void test::endTestsError (os::smart ptr< std::exception > except)

End tests in error.

• void test::endTestsSuccess ()

End tests successfully.

• void test::testInit (int argc=0, char **argv=NULL)

Test initialization.

15.9.1 Detailed Description

Unit Test header file.

Author

Jonathan Bedard

Date

4/2/2016

Bug No known bugs.

Packages all headers required for the UnitTest library and declares a number of global test functions used for initializing and ending a Unit Test battery.

15.10 UnitTest.cpp File Reference

Unit Test logging and global functions.

15.10.1 Detailed Description

Unit Test logging and global functions.

Author

Jonathan Bedard

Date

2/4/2016

Bug No known bugs.

Implements logging in the test namespace. Implements a number of global test functions used for initializing and ending a Unit Test battery.

15.11 UnitTestLog.h File Reference

Namespaces

• test

Functions

- std::ostream & test::testout_func ()
 Standard out object for test namespace.
- std::ostream & test::testerr_func ()

 Standard error object for test namespace.

Variables

- os::smart_ptr< std::ostream > test::testout_ptr Standard out pointer for test namespace.
- os::smart_ptr< std::ostream > test::testerr_ptr Standard error pointer for test namespace.

15.12 UnitTestExceptions.h File Reference

Common exceptions thrown by unit tests.

Classes

- class test::generalTestException
 - Base class for test exceptions.
- class test::unknownException

Unknown exception class.

• class test::nullFunctionException

NULL function exception class.

Namespaces

test

15.12.1 Detailed Description

Common exceptions thrown by unit tests. Jonathan Bedard

Date

2/19/2016

Bug No known bugs.

This file contains a number of common test exceptions used by unit tests. All of these classes extend std::exception.

Class Index

16.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:	
test::generalTestException	
Base class for test exceptions	206
test::libraryTests	
Library test group	208
test::masterTestHolder	
Unit Test singleton	215
test::nullFunctionException	
NULL function exception class	218
test::singleFunctionTest	
Single unit test from function	219
test: single Test	
Single unit test class	220
test::testSuite	
test::unknownException	
Unknown exception class	220

Namespace Documentation

17.1 test Namespace Reference

Classes

• class generalTestException

Base class for test exceptions.

• class libraryTests

Library test group.

• class masterTestHolder

Unit Test singleton.

• class nullFunctionException

NULL function exception class.

• class singleFunctionTest

Single unit test from function.

• class singleTest

Single unit test class.

- class testSuite
- class unknownException

Unknown exception class.

Typedefs

• typedef void(* testFunction) ()

Typedef for single test function.

Functions

• void startTests ()

Print out header for Unit Tests.

• void endTestsError (os::smart_ptr< std::exception > except)

End tests in error.

• void endTestsSuccess ()

End tests successfully.

void testInit (int argc=0, char **argv=NULL)

Test initialization.

• std::ostream & testout_func ()

Standard out object for test namespace.

• std::ostream & testerr_func ()

Standard error object for test namespace.

Variables

os::smart_ptr< std::ostream > testout_ptr
 Standard out pointer for test namespace.

 $\bullet \ \, \text{os::smart_ptr} < \text{std::ostream} > \textbf{testerr_ptr} \\$

Standard error pointer for test namespace.

17.1.1 Typedef Documentation

typedef void(* test::testFunction) ()

Typedef for single test function.

This typedef defines what a single test function looks like. For simplicity, a single unit test can be defined by a function of this type instead of inheriting from **test::singleTest** (p. 220).

Returns

void

17.1.2 Function Documentation

void test::endTestsError (os::smart_ptr< std::exception > except)

End tests in error.

Prints out a global division block line of '=' characters, then the information provided in the exception passed to the function then another global division block

Parameters

in	except	Exception which caused the error
----	--------	----------------------------------

Returns

void

void test::endTestsSuccess ()

End tests successfully.

Prints out a global division block line of '=' characters, then the test results data provided by the **test::masterTestHolder** (p. 215) then another global division block

Returns

void

```
void test::startTests ( )
```

Print out header for Unit Tests.

Prints out a global division block line of '=' characters, then 'Unit Test Battery' and then another global division block.

Returns

void

```
std::ostream& test::testerr_func ( )
```

Standard error object for test namespace.

#define statements allow the user to call this function with "test::testerr." Logging is achieved by using "test::testerr" as one would use "std::cerr."

```
void test::testInit ( int argc = 0, char ** argv = NULL )
```

Test initialization.

This function is re-implemented by each executable which uses the UnitTest library. This function is used to bind all of the library tests, except the Datastructures library test.

Returns

void

```
std::ostream& test::testout_func ( )
```

Standard out object for test namespace.

#define statements allow the user to call this function with "test::testout." Logging is achieved by using "test::testout" as one would use "std::cout."

17.1.3 Variable Documentation

```
os::smart ptr<std::ostream> test::testerr ptr
```

Standard error pointer for test namespace.

This std::ostream is used as standard error for the test namespace. This pointer can be swapped out to programmatically redirect standard error for the test namespace.

```
os::smart_ptr<std::ostream> test::testout_ptr
```

Standard out pointer for test namespace.


This std::ostream is used as standard out for the test namespace. This pointer can be swapped out to programmatically redirect standard out for the test namespace.

Class Documentation

18.1 test::generalTestException Class Reference

Base class for test exceptions.

Inheritance diagram for test::generalTestException:

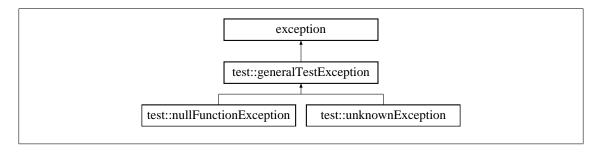

Public Member Functions

• generalTestException (std::string err, std::string loc)

Construct exception with error and location.

• virtual ~generalTestException () throw ()

Virtual destructor.

virtual const char * what () const throw ()

std::exception overload

• const std::string & getLocation () const

Location description.

• const std::string & getString () const

Error description.

Private Attributes

• std::string location

The location where the error came from.

• std::string _error

A description of the error.

• std::string total_error

Combination of the error and location.

18.1.1 Detailed Description

Base class for test exceptions.

This class defines an exception which has a location. Because this class holds multiple std::string objects, the error description can be dynamically set.

18.1.2 Constructor & Destructor Documentation

test::generalTestException::generalTestException (std::string err, std::string loc) [inline]

Construct exception with error and location.

Constructs the exception with an error string and a location string. Also builds the **test::general** ← **TestException::total error** (p. 208) string for use by the "what()" function.

Parameters

in err		Error string	
in	loc	Location string	

virtual test::generalTestException::~generalTestException() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.1.3 Member Function Documentation

const std::string& test::generalTestException::getLocation () const [inline]

Location description.

Returns

test::generalTestException::location (p. 208)

const std::string& test::generalTestException::getString() const [inline]

Error description.

Returns

test::generalTestException::_error (p. 208)

virtual const char* test::generalTestException::what () const throw) [inline], [virtual]

std::exception overload

Overloaded from std::exception. This function outputs the complete description, which contains both the error description and location description.

Returns

character pointer to the complete description

18.1.4 Member Data Documentation

std::string test::generalTestException::_error [private]

A description of the error.

std::string test::generalTestException::location [private]

The location where the error came from.

std::string test::generalTestException::total_error [private]

Combination of the error and location.

This string is constructed in the constructor so that "what()" can refer to a location in memory. This std::string is a combination of test::generalTestException::_error (p. 208) and test::generalTest ← Exception::location (p. 208).

18.2 test::libraryTests Class Reference

Library test group.

Public Member Functions

• libraryTests (std::string ln)

Library test constructor.

• virtual ~libraryTests ()

Virtual destructor.

void runTests () throw (os::smart_ptr<std::exception>)

Runs all of the test suites.

• virtual void onSetup ()

Runs on shutdown of the group.

• virtual void onTeardown ()

Runs on teardown of the group.

• void logBegin ()

Logs the beginning of a library test.

bool logEnd (os::smart_ptr< std::exception > except=NULL)

Logs the end of a library test.

• int getNumSuites () const

Number of suites in the set.

• int getNumSuccess () const

Number of suites successfully completed.

• int getNumRun () const

Number of suites attempted to run.

• void **pushSuite** (os::smart_ptr< **testSuite** > suite)

Add suite to the set.

• void removeSuite (os::smart_ptr< testSuite > suite)

Remove suite from the set.

• bool operator== (const libraryTests <) const

Equality comparison.

• bool operator!= (const libraryTests <) const

Not-equals comparison.

• bool operator> (const libraryTests <) const

Greater-than comparison.

• bool operator< (const libraryTests <) const

Less-than comparison.

• bool operator>= (const libraryTests <) const

Greater-than or equal to comparison.

bool operator<= (const libraryTests <) const

Less-than or equal to comparison.

Private Attributes

• std::string libName

Name of library to be tested.

• os::smartSet< testSuite > suiteList

Set of test suites.

int suitesCompleted

Number of suites successfully completed.

• int suitesRun

Number of suites attempted to run.

18.2.1 Detailed Description

Library test group.

This class contains a set of test suites which are designed to a specific library. Each library must define it's own version of this class in-order to be tested.

18.2.2 Constructor & Destructor Documentation

test::libraryTests::libraryTests (std::string In)

Library test constructor.

This constructor initializes the number of suites completed and number of suites run to 0, along with sets the name of library being tested.

Parameters

in /	n Nam	e of library to be tested
------	-------	---------------------------

virtual test::libraryTests::~libraryTests() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.2.3 Member Function Documentation

```
int test::libraryTests::getNumRun ( ) const [inline]
```

Number of suites attempted to run.

Returns

```
test::libraryTests::suitesRun (p. 215)
```

```
int test::libraryTests::getNumSuccess ( ) const [inline]
```

Number of suites successfully completed.

Returns

test::libraryTests::suitesCompleted (p. 215)

```
int test::libraryTests::getNumSuites ( ) const [inline]
```

Number of suites in the set.

Returns

```
test::libraryTests::suiteList.size()
```

void test::libraryTests::logBegin ()

Logs the beginning of a library test.

Outputs the name of the library to be tested along with a line break made of '+' characters.

Returns

void

```
bool test::libraryTests::logEnd ( os::smart_ptr< std::exception > except = NULL )
```

Logs the end of a library test.

Outputs the number of suites run and how many of these suites were both successful and how many of these suites failed.

Returns

True if all suites successful, else false

virtual void test::libraryTests::onSetup () [inline], [virtual]

Runs on shutdown of the group.

Each library group calls this funciton as it starts up, allowing groups to define actions performed to setup the group.

Returns

void

virtual void test::libraryTests::onTeardown() [inline], [virtual]

Runs on teardown of the group.

Guranteed to run even if the group itself fails. A custom tear-down for the group can re-impliment this class.

Returns

void

bool test::libraryTests::operator!= (const libraryTests & lt) const [inline]

Not-equals comparison.

Compares two test::libraryTest based on the library name. If the two names are not-equal, the library tests are not-equal.

Parameters

in	lt	Reference to test::libraryTest to be compared against
----	----	---

Returns

this->libName!=lt.libName

bool test::libraryTests::operator< (const libraryTests & lt) const [inline]

Less-than comparison.

Compares two test::libraryTest based on the library name. If the name of this object is less than the name of the reference object, return true.

Parameters

in	lt	Reference to test::libraryTest to be compared against
----	----	---

Returns

this->libName<lt.libName

bool test::libraryTests::operator<= (const libraryTests & lt) const [inline]</pre>

Less-than or equal to comparison.

Compares two test::libraryTest based on the library name. If the name of this object is less than or equal to the name of the reference object, return true.

Parameters

in	It	Reference to test::libraryTest to be compared against

Returns

this->libName<=lt.libName

bool test::libraryTests::operator== (const libraryTests & lt) const [inline]

Equality comparison.

Compares two test::libraryTest based on the library name. If the two names are equal, the library tests are equal.

Parameters

	in	It	Reference to test::libraryTest to be compared against
--	----	----	---

Returns

this->libName==lt.libName

bool test::libraryTests::operator> (const libraryTests & lt) const [inline]

Greater-than comparison.

Compares two test::libraryTest based on the library name. If the name of this object is greater than the name of the reference object, return true.

Parameters

in	It	Reference to test::libraryTest to be compared against
----	----	---

Returns

this->libName>lt.libName

bool test::libraryTests::operator>= (const libraryTests & lt) const [inline]

Greater-than or equal to comparison.

Compares two test::libraryTest based on the library name. If the name of this object is greater than or equal to the name of the reference object, return true.

Parameters

in	lt	Reference to test::libraryTest to be compared against
----	----	---

Returns

this->libName>=lt.libName

void test::libraryTests::pushSuite (os::smart ptr< testSuite > suite) [inline]

Add suite to the set.

Adds a **test::testSuite** (p. 223) to the set of suites to be tested.

Parameters

in	suite	Test suite to be added to set

Returns

void

void test::libraryTests::removeSuite (os::smart_ptr< testSuite > suite) [inline]

Remove suite from the set.

Removes a **test::testSuite** (p. 223) from the set of suites to be tested.

Parameters

	in	suite	Test suite to be removed from the set	1
--	----	-------	---------------------------------------	---

Returns

void

void test::libraryTests::runTests () throw os::smart_ptr< std::exception >)

Runs all of the test suites.

Runs all test suites bound to this class. Each suite should manage its own errors, but it is possible that this function will throw an error of type os::smart_ptr<std::exception>.

Returns

void

18.2.4 Member Data Documentation

std::string test::libraryTests::libName [private]

Name of library to be tested.

os::smartSet<**testSuite**> test::libraryTests::suiteList [private]

Set of test suites.

int test::libraryTests::suitesCompleted [private]

Number of suites successfully completed.

int test::libraryTests::suitesRun [private]

Number of suites attempted to run.

18.3 test::masterTestHolder Class Reference

Unit Test singleton.

Public Member Functions

• virtual ~masterTestHolder ()

Virtual destructor.

bool runTests () throw (os::smart_ptr<std::exception>)

Runs all of the library tests.

• int getNumLibs () const

Number of libraries in the set.

• int getNumSuccess () const

Number of libraries successfully completed.

• int getNumRun () const

Number of libraries attempted to run.

• void **pushLibrary** (os::smart_ptr< **libraryTests** > lib)

Add library to the set.

• void removeLibrary (os::smart_ptr< libraryTests > lib)

Remove library from the set.

Static Public Member Functions

• static os::smart_ptr< masterTestHolder > singleton () Singleton access.

Private Member Functions

• masterTestHolder ()

Private constructor.

Private Attributes

• os::smartSet< libraryTests > libraryList

Set of library tests.

• int libsCompleted

Number of libraries successfully completed.

• int libsRun

Number of libraries attempted to run.

18.3.1 Detailed Description

Unit Test singleton.

This class contains a set of library tests. Every library test must add itself to this class in-order to be tested. The **test::masterTestHolder::runTests()** (p. 217) function runs all of the library tests.

18.3.2 Constructor & Destructor Documentation

test::masterTestHolder::masterTestHolder() [private]

Private constructor.

The **test::masterTestHolder** (p. 215) class is a singleton class. This constructor initializes the number of libraries completed and number of libraries run to 0.

virtual test::masterTestHolder::~masterTestHolder() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.3.3 Member Function Documentation

int test::masterTestHolder::getNumLibs () const [inline]

Number of libraries in the set.

Returns

test::masterTestHolder::libraryList.size()

int test::masterTestHolder::getNumRun () const [inline]

Number of libraries attempted to run.

Returns

test::masterTestHolder::libsRun (p. 218)

int test::masterTestHolder::getNumSuccess () const [inline]

Number of libraries successfully completed.

Returns

test::masterTestHolder::libsCompleted (p. 218)

void test::masterTestHolder::pushLibrary (os::smart ptr< libraryTests > lib) [inline]

Add library to the set.

Adds a **test::libraryTests** (p. 208) to the set of library tests to be tested.

Parameters

in	lib	Library test to be added to set

Returns

void

void test::masterTestHolder::removeLibrary (os::smart_ptr< libraryTests > lib) [inline]

Remove library from the set.

Removes a **test::libraryTests** (p. 208) from the set of library tests to be tested.

Parameters

	in	lib	Library test to be removed from the set	
--	----	-----	---	--

Returns

void

bool test::masterTestHolder::runTests () throw os::smart_ptr< std::exception >)

Runs all of the library tests.

Runs all library tests bound to this class. Each library should manage its own errors, but it is possible that this function will throw an error of type os::smart_ptr<std::exception>.

Returns

True if all the tests were successful, else, false

static os::smart ptr<masterTestHolder> test::masterTestHolder::singleton() [static]

Singleton access.

This function constructs the single reference to the **test::masterTestHolder** (p. 215) class if needed. Then, it returns a pointer to this single reference.

Returns

Singleton reference to **test::masterTestHolder** (p. 215)

18.3.4 Member Data Documentation

os::smartSet<libraryTests> test::masterTestHolder::libraryList [private]

Set of library tests.

int test::masterTestHolder::libsCompleted [private]

Number of libraries successfully completed.


int test::masterTestHolder::libsRun [private]

Number of libraries attempted to run.

18.4 test::nullFunctionException Class Reference

NULL function exception class.

Inheritance diagram for test::nullFunctionException:

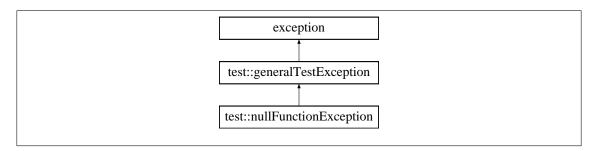

Public Member Functions

• nullFunctionException (std::string loc)

Construct exception with location.

• virtual ~nullFunctionException () throw ()

Virtual destructor.

18.4.1 Detailed Description

NULL function exception class.

This class defines the common exception case where a NULL function pointer is received.

18.4.2 Constructor & Destructor Documentation

test::nullFunctionException::nullFunctionException(std::string loc) [inline]

Construct exception with location.

Constructs a **test::generalTestException** (p. 206) with the provided location and the static string for a NULL function exception.

Parameters

in <i>loc</i>	Location string
---------------	-----------------

virtual test::nullFunctionException::~nullFunctionException() throw) [inline], [virtual]


Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.5 test::singleFunctionTest Class Reference

Single unit test from function.

Inheritance diagram for test::singleFunctionTest:

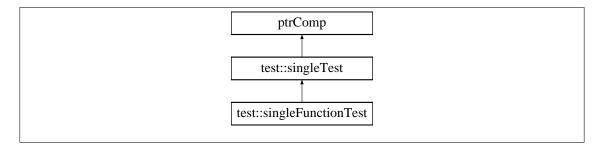

Public Member Functions

• singleFunctionTest (std::string tn, testFunction f)

Single unit test constructor.

• virtual ~singleFunctionTest ()

Virtual destructor.

void test () throw (os::smart_ptr<std::exception>)

Call unit test function.

Private Attributes

• testFunction func

Reference to unit test function.

18.5.1 Detailed Description

Single unit test from function.

This class allows a **test::singleTest** (p. 220) to be defined by a single test function.

18.5.2 Constructor & Destructor Documentation

test::singleFunctionTest::singleFunctionTest (std::string tn, testFunction f)

Single unit test constructor.

Parameters

in	tn	Name of unit test
in	f	Function which defines test

virtual test::singleFunctionTest::~singleFunctionTest() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.5.3 Member Function Documentation

void test::singleFunctionTest::test () throw os::smart ptr< std::exception >) [virtual]

Call unit test function.

Calls the function bound to this class in the constructor pointed to by **test::singleFunctionTest ::func** (p. 220). If the function pointed to by the function pointer throws an exception, this function will throw the same exception.

Returns

void

Reimplemented from test::singleTest (p. 223).

18.5.4 Member Data Documentation


testFunction test::singleFunctionTest::func [private]

Reference to unit test function.

18.6 test::singleTest Class Reference

Single unit test class.

Inheritance diagram for test::singleTest:

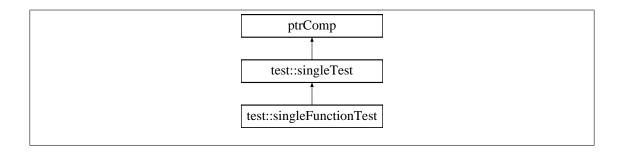

Public Member Functions

• singleTest (std::string tn)

Single unit test constructor.

• virtual ~singleTest ()

Virtual destructor.

virtual void setupTest () throw (os::smart_ptr<std::exception>)

Preforms any test set-up.

• virtual void **test** () throw (os::smart_ptr<std::exception>)

Preforms core unit-test.

• virtual void **teardownTest** () throw (os::smart_ptr<std::exception>)

Preforms any test tear-down.

• void logBegin ()

Prints out the name of the test.

bool logEnd (os::smart_ptr< std::exception > except=NULL)

Logs errors for test.

Private Attributes

• std::string testName

Name of unit test.

18.6.1 Detailed Description

Single unit test class.

This class acts as the base class for all unit tests. It inherits from the os::ptrComp class to allow it to be inserted into abstract data-structures.

18.6.2 Constructor & Destructor Documentation

test::singleTest::singleTest (std::string tn)

Single unit test constructor.

Parameters

in	tn	Name of unit test

```
virtual test::singleTest::~singleTest( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.6.3 Member Function Documentation

```
void test::singleTest::logBegin ( )
```

Prints out the name of the test.

Returns

void

bool test::singleTest::logEnd (os::smart_ptr< std::exception > except = NULL)

Logs errors for test.

If the passed exception is NULL, no logging is preformed. Otherwise, the "what()" function of the exception is printed. This function return true if NULL is passed as the exception.

Parameters

	in	except	Exception to be printed, NULL by default
--	----	--------	--

Returns

True if except is NULL

```
virtual void test::singleTest::setupTest ( ) throw os::smart_ptr< std::exception >)    [inline],
[virtual]
```

Preforms any test set-up.

This function is designed to preform any set-up a test requires. This is especially useful if a class of tests require the same set-up routine. This function assumes that the **test::testSuite** (p. 223) will catch exceptions in this function if they are thrown.

Returns

void

virtual void test::singleTest::teardownTest () throw os::smart_ptr< std::exception >) [inline],
[virtual]

Preforms any test tear-down.

This function is designed to preform any tear-down a test requires. This is especially useful if a class of tests require the same tear-down routine. This function assumes that the **test::testSuite** (p. 223) will catch exceptions in this function if they are thrown.

Returns

void

virtual void test::singleTest::test () throw os::smart ptr< std::exception >) [virtual]

Preforms core unit-test.

This function is designed to preform the actual unit test. This function assumes that the **test**← ::testSuite (p. 223) will catch exceptions in this function if they are thrown.

Returns

void

Reimplemented in test::singleFunctionTest (p. 220).

18.6.4 Member Data Documentation

std::string test::singleTest::testName [private]

Name of unit test.

18.7 test::testSuite Class Reference

Public Member Functions

• testSuite (std::string sn)

Test suite constructor.

• virtual ~testSuite ()

Virtual destructor.

• void runTests () throw (os::smart_ptr<std::exception>)

Runs all of the tests.

• virtual void onSetup ()

Runs on shutdown.

• virtual void onTeardown ()

Runs on teardown of the suite.

• void logBegin ()

Logs the beginning of a suite test.

• bool logEnd (os::smart_ptr< std::exception > except=NULL)

Logs the end of a suite test.

• int getNumTests () const

Number of tests in the set.

• int getNumSuccess () const

Number of tests successfully completed.

• int **getNumRun** () const

Number of tests attempted to run.

void pushTest (os::smart_ptr< singleTest > tst)

Add test to the set.

• void removeTest (os::smart ptr< singleTest > tst)

Remove test to the set.

• virtual void **pushTest** (std::string str, **testFunction** tst)

Add test to the set.

• bool operator== (const testSuite <) const

Equality comparison.

• bool operator!= (const testSuite <) const

Not-equals comparison.

• bool operator> (const testSuite <) const

Greater-than comparison.

• bool operator< (const testSuite <) const

Less-than comparison.

• bool operator>= (const testSuite <) const

Greater-than or equal to comparison.

• bool operator<= (const testSuite <) const

Less-than or equal to comparison.

Private Attributes

• std::string suiteName

Name of test suite.

• os::smartSet< singleTest > testList

Set of tests.

• int testsCompleted

Number of tests successfully completed.

• int testsRun

Number of tests attempted to run.

18.7.1 Constructor & Destructor Documentation

test::testSuite::testSuite (std::string sn)

Test suite constructor.

This constructor initializes the number of tests completed and number of tests run to 0, along with sets the name of suite being tested.

Parameters

in sn Name of suite to be	tested
---------------------------	--------

virtual test::testSuite::~testSuite() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.7.2 Member Function Documentation

the suite.

```
int test::testSuite::getNumRun() const [inline]
Number of tests attempted to run.
Returns
     test::testSuite::testsRun (p. 229)
int test::testSuite::getNumSuccess ( ) const [inline]
Number of tests successfully completed.
Returns
     test::testSuite::testsCompleted (p. 229)
int test::testSuite::getNumTests ( ) const [inline]
Number of tests in the set.
Returns
     test::testSuite::testList.size()
void test::testSuite::logBegin ( )
Logs the beginning of a suite test.
   Outputs the name of the suite to be tested along with a line break made of '-' characters.
Returns
     void
bool test::testSuite::logEnd ( os::smart_ptr< std::exception > except = NULL )
Logs the end of a suite test.
   Outputs the number of tests run and how many of these tests were both successful and how
many of these tests failed.
Returns
     True if all tests successful, else false
virtual void test::testSuite::onSetup ( ) [inline], [virtual]
Runs on shutdown.
```

Each suite calls this funciton as it starts up, allowing suites to define actions performed to setup

Returns

void

virtual void test::testSuite::onTeardown() [inline], [virtual]

Runs on teardown of the suite.

Guranteed to run even if the suite itself fails. A custom tear-down for the suite can re-impliment this class.

Returns

void

bool test::testSuite::operator!= (const testSuite & lt) const [inline]

Not-equals comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the two names are not-equal, the suites are not-equal.

Parameters

	in	lt	Reference to test::testSuite (p. 223) to be compared against	
--	----	----	--	--

Returns

this->suiteName!=It.suiteName

bool test::testSuite::operator< (const testSuite & lt) const [inline]

Less-than comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is less than the name of the reference object, return true.

Parameters

in	lt	Reference to test::testSuite (p. 223) to be compared against
----	----	---

Returns

this->suiteName<It.suiteName

bool test::testSuite::operator<= (const testSuite & lt) const [inline]</pre>

Less-than or equal to comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is less than or equal to the name of the reference object, return true.

Parameters

in	l†	Reference to test::testSuite (p. 223) to be compared against
TIL	11	Treference to testtestourte (p. 220) to be compared against

Returns

this->suiteName<=lt.suiteName

bool test::testSuite::operator== (const **testSuite** & lt) const [inline]

Equality comparison.

Compares two **test::testSuite** (p. 223) based on the suite name. If the two names are equal, the suites are equal.

Parameters

	in	lt	Reference to test::testSuite (p. 223) to be compared against
--	----	----	--

Returns

this->suiteName==lt.suiteName

bool test::testSuite::operator> (const testSuite & lt) const [inline]

Greater-than comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is greater than the name of the reference object, return true.

Parameters

	in	lt	Reference to test::testSuite (p. 223) to be compared against
--	----	----	---

Returns

this->suiteName>lt.suiteName

bool test::testSuite::operator>= (const **testSuite** & lt) const [inline]

Greater-than or equal to comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is greater than or equal to the name of the reference object, return true.

Parameters

in	It	Reference to test::testSuite (p. 223) to be compared against
----	----	---

Returns

this->suiteName>=It.suiteName

void test::testSuite::pushTest (os::smart_ptr< singleTest > tst) [inline]

Add test to the set.

Adds a **test::singleTest** (p. 220) to the set of tests to be tested.

Parameters

Returns

void

virtual void test::testSuite::pushTest (std::string str, testFunction tst) [inline], [virtual]

Add test to the set.

Adds a **test::testFunction** (p. 204) to the set of tests to be tested. Constructs a **test::singleTest** (p. 220) from a function and a test name

Parameters

in	str	Test name
in	tst	Function which defines test

Returns

void

void test::testSuite::removeTest (os::smart_ptr< singleTest > tst) [inline]

Remove test to the set.

Removes a **test::singleTest** (p. 220) from the set of tests to be tested.

Parameters

in	tst	Test to be removed from the set
----	-----	---------------------------------

Returns

void

void test::testSuite::runTests () throw os::smart_ptr< std::exception >)

Runs all of the tests.

Runs all tests bound to this class. This function catches exceptions thrown by **test::singleTest** (p. 220) and logs the results.

Returns

void

18.7.3 Member Data Documentation

std::string test::testSuite::suiteName [private]

Name of test suite.

os::smartSet<**singleTest**> test::testSuite::testList [private]

Set of tests.

int test::testSuite::testsCompleted [private]

Number of tests successfully completed.


int test::testSuite::testsRun [private]

Number of tests attempted to run.

18.8 test::unknownException Class Reference

Unknown exception class.

Inheritance diagram for test::unknownException:

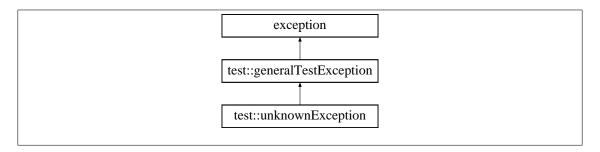

Public Member Functions

• unknownException (std::string loc)

Construct exception with location.

virtual ~unknownException () throw ()

Virtual destructor.

18.8.1 Detailed Description

Unknown exception class.

This class defines the common exception case where the precise nature of the exception is unknown.

18.8.2 Constructor & Destructor Documentation

test::unknownException::unknownException (std::string loc) [inline]

Construct exception with location.

Constructs a **test::generalTestException** (p. 206) with the provided location and the static string for an unknown exception.

Parameters

in <i>loc</i>	Location string
---------------	-----------------

virtual test::unknownException::~unknownException() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

Part IV osMechanics Library

Introduction

The osMechanics library contains classes which are general tools for navigating file systems, thread management and logging. Some classes, particularly those dealing with threading, sockets and file access, differ from operating system to operating system. CMake should handle all operating system variances.

19.1 Namespace

osMechanics extends the os namespace. The os namespace is designed for tools, algorithms and data-structures used in programs of all types. Note that the Datastructures library also uses the os namespace.

File Index

20.1 File List

re is a list of all files with brief descriptions:	
logger.cpp	
Logger implementation file	35
logger.h	
Logger header file	36
multiLock.cpp	
MultiLock implementation file	36
multiLock.h	
MultiLock header file	37
osFunctions.cpp	
OsFunctions implementation file	37
osFunctions.h	
OsFunctions header file	38
osMechanics.h	
OsMechanics header file	39
osMechanicsTest.cpp	
Test implimentaiton for osMechanics	39
osMechanicsTest.h	
OsMechanics tests	10
osThreads.cpp	
Threads implementation file	10
osThreads.h	
OsThreads header file	11
safeQueue.h	
Safe queue header file	11
savableClass.cpp	
Implementation of the generalized savable class	12
savableClass.h	
Defines a set of classes facilitating saving	12
Serial.h	
Determines which serial methods are needed	ŧ3

serialThread.cpp	
SerialThread implementation file	243
serialThread.h	
Serial thread header file	244
socketFrame.cpp	
SocketFrame implementation file	244
socketFrame.h	
Socket frame header file	245
spinLock.cpp	
SpinLock file	246
spinLock.h	
SpinLock file	246
threadDistribution.cpp	
Thread distribution implementation file	246
threadDistribution.h	
Thread distribution header file	247
unix_osFunctions.cpp	
Os functions implementation file	248
unix_osFunctions.h	
Os functions header file	248
unix_Serial.h	
Serial header file	250
unix_spinLock.cpp	
SpinLock implementation file	251
unix_spinLock.h	
Spin lock header file	251
USBAccess.cpp	
USBAccess implementation file	252
USBAccess.h	
USBAccess header file	252
win_osFunctions.cpp	
Os functions implementation file	253
win_osFunctions.h	
Os functions header file	253
win_Serial.h	
Serial header file	253
win_spinLock.cpp	
SpinLock implementation file	254
win_spinLock.h	
Spin lock header file	254
XMLParser.cpp	
XML parser implementation file	254
XMLParser.h	
XML Parser header file	255
XMLTest.cpp	
XML tests	256
XMLTest.h	
SMI test header file	256

File Documentation

21.1 logger.cpp File Reference

logger implementation file

Functions

• static void loggerSavingThread (void *ptr, smart_ptr< threadHolder > th)

Variables

- smart_ptr< Log > _single_log
- static bool singleton_bool = false

21.1.1 Detailed Description

logger implementation file Jonathan Bedard

Date

4/23/2015

Bug No known bugs.

The implementation of our logging systems are in this file. The logger records various timing, operation, and debug information and places it in various files so that we can better analyze our own system's performance.

21.1.2 Function Documentation

static void loggerSavingThread (void * ptr, smart_ptr< threadHolder > th) [static]

21.1.3 Variable Documentation

smart_ptr<Log> _single_log

21.2 logger.h File Reference

logger header file

Classes

- class os::logStatusHolder
- class os::logStatusListener
- struct os::logLine
- class os::LogStreamListener
- class os::LineLogger
- class os::LogSaver
- class os::LineSaver
- class os::LineSaverListener
- class os::Log
- class os::LogDirectedStream

Namespaces

os

Variables

- logStatusHolder os::logStatus
- Log & os::logger =*Log::singleton()

21.2.1 Detailed Description

logger header file Jonathan Bedard

Date

4/23/2016

Bug No known bugs.

All of the headers in the Datastructures library are held in this file. When using the Datastructures library, it is expected that this header is included instead of the individual required headers.

21.3 multiLock.cpp File Reference

multiLock implementation file

21.3.1 Detailed Description

multiLock implementation file Jonathan Bedard

Date

9/29/2015

Bug No known bugs.

This is the implementation of our multiLock. It is platform agnostic.

21.4 multiLock.h File Reference

multiLock header file

Classes

• class os::multiLock

os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods

Namespaces

• os

21.4.1 Detailed Description

multiLock header file Jonathan Bedard

Date

1/30/2016

Bug No known bugs.

This is the multilock header we are using. It has reading and writing locks, allowing multiple users to read, but only one to write at any given time.

21.5 osFunctions.cpp File Reference

osFunctions implementation file

21.5.1 Detailed Description

osFunctions implementation file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the implementation of the osFunctions that do not care about operating system. This is mostly converting bit structures between different hardware platforms.

21.6 osFunctions.h File Reference

osFunctions header file

Namespaces

os

Functions

• uint16 t os::to comp mode (uint16 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

• uint16 t os::from comp mode (uint16 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

• uint32 t os::to comp mode (uint32 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

• uint32 t os::from comp mode (uint32 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

• uint64_t os::to_comp_mode (uint64_t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

• uint64 t os::from comp mode (uint64 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

uint64_t os::getTimestamp ()

Gets a timestamp Generates a time stamp from the time function.

bool os::testCreateFolder (std::string n)

Test if a folder exists Checks if a given folder exists. If it does not exist, this function will create said folder.

• std::string os::convertTimestamp (uint64_t stamp)

Type conversion on timestamp Converts the timestamp from an integer into a string.

21.6.1 Detailed Description

osFunctions header file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the definitions for some of our compatibility functions.

21.7 osMechanics.h File Reference

osMechanics header file

21.7.1 Detailed Description

osMechanics header file Jonathan Bedard

Date

2/24/2015

Bug No known bugs.

This file includes all of our headers, so that other libraries can easily include the osMechanics library with one include.

21.8 osMechanicsTest.cpp File Reference

Test implimentaiton for osMechanics.

21.8.1 Detailed Description

Test implimentaiton for osMechanics.

Author

Adrian Bedard

Date

4/12/2016

Bug No known bugs.

Binds all osMechanics test suites. These suites test the basic funcitonality of the osMechanics library. Projects which utilize osMechanics are suggested to bind the osMechanics library tests to their own test suite.

21.9 osMechanicsTest.h File Reference

osMechanics tests

21.9.1 Detailed Description

osMechanics tests Jonathan Bedard

Date

4/11/2016

Bug No known bugs.

This is the test suite for the osMechanics library.

21.10 osThreads.cpp File Reference

threads implementation file

Functions

- void **temp_thread_call** (void *ptr_array, bool typ, std::string thread_info)
- void wait_for_threads ()

Variables

- static spinLock globalThreadLock
- static threadTracker * static_ref = NULL

21.10.1 Detailed Description

threads implementation file Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This is the implementation of our multi threading system.

21.10.2 Function Documentation

```
void temp_thread_call ( void * ptr_array, bool typ, std::string thread_info )
void wait_for_threads ( )
21.10.3 Variable Documentation
spinLock globalThreadLock [static]
threadTracker* static_ref = NULL [static]
```

21.11 osThreads.h File Reference

osThreads header file

Classes

- class os::threadHolder
- class os::threadTracker

Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.

Namespaces

os

Functions

- smart_ptr< std::thread > os::spawnThread (void(*func)(void *), void *ptr, std::string thread
 __info="")
- smart_ptr< std::thread > os::spawnThread (void(*func)(void *, smart_ptr< threadHolder >), void *ptr, std::string thread_info="")

21.11.1 Detailed Description

osThreads header file Jonathan Bedard

Date

4/13/2016

Bug No known bugs.

This is the osThreads header we are using. This header allows us to use multithreading with our own types, pointers, and management

21.12 safeQueue.h File Reference

safe queue header file

Classes

class os::safeQueue< dataType >

This is the **safeQueue** (p. 291) class The **safeQueue** (p. 291) class is thread safe. It is a template class.

Namespaces

• os

21.12.1 Detailed Description

safe queue header file Jonathan Bedard

Date

11/9/2015

Bug No known bugs.

This is a thread safe queue, so we can multi thread safely.

21.13 savableClass.cpp File Reference

Implementation of the generalized savable class.

21.13.1 Detailed Description

Implementation of the generalized savable class.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

Provides an implementation of the savable class, used to tie together multiple classes which need to be saved as a group.

21.14 savableClass.h File Reference

Defines a set of classes facilitating saving.

Classes

• class os::savable

Basic saving class.

• class os::savingGroup

Group of saving classes.

Namespaces

• os

21.14.1 Detailed Description

Defines a set of classes facilitating saving.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

Provides a definition of user which has a user-name, password and associated bank of public keys.

21.15 Serial.h File Reference

determines which serial methods are needed.

21.15.1 Detailed Description

determines which serial methods are needed.

Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This header determines if we are on a windows or unix system, then includes a different header for each.

21.16 serialThread.cpp File Reference

serialThread implementation file

Functions

• static void serialSearch (void *ptr, smart_ptr< threadHolder > th)

21.16.1 Detailed Description

serialThread implementation file Jonathan Bedard

Date

11/1/2015

Bug No known bugs.

These implementations allow us to create threads for monitoring serial communication

21.16.2 Function Documentation

static void serialSearch (void * ptr, smart_ptr< threadHolder > th) [static]

21.17 serialThread.h File Reference

serial thread header file

Classes

• class os::serialThread

Serial (p. 300) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.

Namespaces

• os

21.17.1 Detailed Description

serial thread header file Jonathan Bedard

Date

11/9/2015

Bug No known bugs.

This is a serial thread class. This class allows us to monitor multiple ports effectively simultaneously.

21.18 socketFrame.cpp File Reference

socketFrame implementation file

Functions

• void close_all_sockets ()

Variables

• static smart_ptr< socketTracker > st_instance = NULL

21.18.1 Detailed Description

socketFrame implementation file Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This is the implementation of our socket user, UDP socket, and socket tracker. Socket communication is important for us, and this allows us to safely have reliable sockets.

21.18.2 Function Documentation

```
void close_all_sockets ( )
```

21.18.3 Variable Documentation

smart_ptr<socketTracker> st_instance = NULL [static]

21.19 socketFrame.h File Reference

socket frame header file

Classes

• class os::socketUser

Socket user class This class allows us to manage sockets.

• class os::UDPSocket

UDPSocket (p. 331) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.

• class os::socketTracker

socketTracker (p. 307) class Tracks all currently active sockets.

Namespaces

os

21.19.1 Detailed Description

socket frame header file Jonathan Bedard

Date

4/12/2016

Bug No known bugs.

Generalized socket class.

21.20 spinLock.cpp File Reference

spinLock file

21.20.1 Detailed Description

spinLock file

Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This file includes different implementations of our spin lock depending on the operating system.

21.21 spinLock.h File Reference

spinLock file

21.21.1 Detailed Description

spinLock file

Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This header includes different versions of the spin lock header depending on the operating system.

21.22 threadDistribution.cpp File Reference

thread distribution implementation file

Functions

• static void executor_thread_starter (void *ptr, smart_ptr< threadHolder > th)

21.22.1 Detailed Description

thread distribution implementation file Jonathan Bedard

Date

4/18/2015

Bug No known bugs.

These methods determine which thread will operate next.

21.22.2 Function Documentation

static void executor_thread_starter (void * ptr, smart_ptr< threadHolder > th) [static]

21.23 threadDistribution.h File Reference

thread distribution header file

Classes

class os::threadActor

threadActor (p. 311) class This class holds information for determining which thread goes at a give time

• class os::threadDistributor

Distributes threads This class allows us to determine which thread should execute at any given time.

• class os::executorThread

executorThread (p. 267) class This class holds a thread which has multiple steps.

• class os::singleAction

single action class This class is for a thread with only one action.

Namespaces

• os

Functions

• float os::getSysTime ()

gets time Gets the current system time.

21.23.1 Detailed Description

thread distribution header file
Jonathan Bedard

4/18/2015

Bug No known bugs.

This the thread distribution system.

21.24 unix_osFunctions.cpp File Reference

os functions implementation file

Functions

- static void receiveThreadServerIPV4 (void *ptr, smart ptr< threadHolder > th)
- static void receiveThreadServerIPV6 (void *ptr, smart ptr< threadHolder > th)

Variables

- static os::smart_ptr< threadDistributor > ipthread = NULL
- static std::string local_path = ""

21.24.1 Detailed Description

os functions implementation file Jonathan Bedard Date

5/20/2016

Bug No known bugs.

This is the implementation of the UNIX specific functions.

21.24.2 Function Documentation

```
static\ void\ receive Thread Server IPV4\ (\ void\ *\ ptr,\ smart\_ptr < \textbf{thread Holder} > th\ ) \quad [static] static\ void\ receive Thread Server IPV6\ (\ void\ *\ ptr,\ smart\_ptr < \textbf{thread Holder} > th\ ) \quad [static]
```

21.24.3 Variable Documentation

```
os::smart_ptr<threadDistributor> ipthread = NULL [static]
std::string local_path = "" [static]
```

21.25 unix_osFunctions.h File Reference

os functions header file

Classes

class os::IPAddress

os::IPAddress (p. 269) class definition This is an IP Address class It has 2 variables and 10 methods

class os::mylPAddress

Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.

class os::UDPPacket
class os::UDPClient
struct os::UDPAVLNode
class os::UDPServer

Namespaces

OS

Functions

• void os::sleep (int32 t x)

Sleep the thread for a certain amount of time This is a simple sleep function, it takes in a length of time to sleep and return nothing.

void os::startInternet (bool multiThread=true)

Activates Internet Spawns an IP thread distributor, if one does not currently exist.

void os::closeInternet ()

Deactivates Internet deletes the IP thread distributor and sets the thread pointer to null.

smart_ptr< threadDistributor > os::internetThreads ()

Return IP thread distributor Gives the ipthread distributor to the caller.

• int32_t os::cp_clock_gettime (int32_t X, struct timeval *tv)

Gets time Returns the current time to the caller. This is designed to work across a range of platforms and format the time to a high precision.

• void **os::strcpy_s** (char *output, int32_t inlen, const char *input)

String copier Safely calls string copy.

• bool os::is_directory (std::string file)

Determines if a file is a directory Checks if a given file is a directory.

• bool **os::check_exists** (std::string name)

Checks if a given file exists Takes a file and checks if it exists. A directory is considered existing.

• smart ptr< std::string > os::list files (std::string directory, uint32 t &len)

Return contents of directory Creates an array of strings of all the names inside a given directory. This is not recursive.

std::string os::extract_name (std::string full_path)

Extracts a given file Extracts a file or directory.

• void os::delete file (std::string path)

Deletes a file Deletes the file or directory at the given path. This is a recursive delete.

void os::setLocalPath (int argc, char **argv)

Sets local path Sets the local path given the received arguments.

• std::string os::getLocalPath ()

Returns local path.

• static int32_t os::fopen_s (FILE **fp, const char *file_name, const char *typ)

fopen_s for windows This is a file open function for windows so that we can more efficiently write multiplatform code.

Variables

- const uint32_t CLOCK_REALTIME =0
- const uint32_t CLOCK_MONOTONIC =1
- const uint32_t os::BUFLEN =512
- const std::string os::DEFAULT_IP ="127.0.0.1"
- const uint32 t os::MY MESSAGE NOTIFICATION =1048

21.25.1 Detailed Description

os functions header file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the file which contains the declarations for the OS unique functions.

21.25.2 Variable Documentation

const uint32_t CLOCK_MONOTONIC =1 const uint32_t CLOCK_REALTIME =0

21.26 unix Serial.h File Reference

Serial header file.

Classes

• class os::Serial

This is the **Serial** (p. 300) class. **Serial** (p. 300) objects allow us to abstract out most of the platform irregularities across multiple systems.

Namespaces

os

Variables

• const uint32_t os::ARDUINO_WAIT_TIME =2000

21.26.1 Detailed Description

Serial header file.

Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the Serial thread. It allows us to establish serial communication across a range of systems. There are multiple versions of this header and C file. Which version is used is determined by the current platform. This is the UNIX version.

21.27 unix_spinLock.cpp File Reference

spinLock implementation file

21.27.1 Detailed Description

spinLock implementation file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the UNIX implementation of our spin lock.

21.28 unix_spinLock.h File Reference

spin lock header file

Classes

• class os::spinLock

Namespaces

• os

21.28.1 Detailed Description

spin lock header file Jonathan Bedard Date

5/20/2016

Bug No known bugs.

This is the spinLock that we use to safely multi thread.

21.29 USBAccess.cpp File Reference

USBAccess implementation file.

21.29.1 Detailed Description

USBAccess implementation file. Jonathan Bedard

Date

11/3/2015

Bug No known bugs.

These are simple USB methods. They are unused in our larger project.

21.30 USBAccess.h File Reference

USBAccess header file.

Classes

• class os::USBNode

This class stores the location of a USB device.

• class os::USBFile

Namespaces

• os

21.30.1 Detailed Description

USBAccess header file. Jonathan Bedard

Date

6/21/2015

Bug No known bugs.

This is a pair of simple classes for working with USB devices.

21.31 win osFunctions.cpp File Reference

os functions implementation file

21.31.1 Detailed Description

os functions implementation file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the implementation of the windows specific functions.

21.32 win osFunctions.h File Reference

os functions header file

21.32.1 Detailed Description

os functions header file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the file which contains the declarations for the OS unique functions.

21.33 win Serial.h File Reference

Serial header file.

21.33.1 Detailed Description

Serial header file. Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the Serial thread. It allows us to establish serial communication across a range of systems. There are multiple versions of this header and C file. Which version is used is determined by the current platform. This is the windows version.

21.34 win_spinLock.cpp File Reference

spinLock implementation file

21.34.1 Detailed Description

spinLock implementation file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the windows implementation of our spin lock.

21.35 win_spinLock.h File Reference

spin lock header file

21.35.1 Detailed Description

spin lock header file Jonathan Bedard

Date

5/20/2016

Bug No known bugs.

This is the spinLock that we use to safely multi thread.

21.36 XMLParser.cpp File Reference

XML parser implementation file.

21.36.1 Detailed Description

XML parser implementation file.
Jonathan Bedard

Date

2/7/2015

Bug No known bugs.

Our XML parse is implemented in this file. We have several functions that allow us to easily convert XML data from file to program and vice versa.

21.37 XMLParser.h File Reference

XML Parser header file.

Classes

• class os::XML_Node

XML Node class The core node of our XML parsing.

Namespaces

- os
- os::xml

Typedefs

- typedef smart_ptr< XML_Node > os::smartXMLNode
- typedef smart ptr< unsortedList< XML Node > > os::smartXMLNodeList

Functions

• bool **os::XML_Output** (std::string path, **smartXMLNode** head)

outputs tree Outputs an XML tree into a file.

smartXMLNode os::XML Input (std::string path)

imports tree Imports an XML tree from a file.

• void os::xml::insertTabs (std::ofstream &f, int32_t x)

adds tabs Adds tabs.

• void os::xml::writeNode (std::ofstream &f, smartXMLNode node, int32_t depth)

writes nodes Writes all the nodes to a file. This function runs recursively.

• std::vector< std::string > os::xml::readTillTag (std::ifstream &f)

reads until next tag Reads a file until the next tag is found.

• std::string os::xml::readThroughTag (std::ifstream &f)

reads through the next tag Reads a file until a tag is found, including that tag.

• smartXMLNode os::xml::parseNode (std::ifstream &f)

parses a node Pulls a node from a file and returns it.

bool os::xml::compareTrees (smartXMLNode n1, smartXMLNode n2)

compares trees Determines if two nodes are equivalent.

21.37.1 Detailed Description

XML Parser header file.

Jonathan Bedard

Date

2/7/2015

Bug No known bugs.

This is our XML Parser, so we can standardize use across systems.

21.38 XMLTest.cpp File Reference

XML tests.

21.38.1 Detailed Description

XML tests.

Jonathan Bedard

Date

2/29/2016

Bug No known bugs.

These are the tests for our XML classes.

21.39 XMLTest.h File Reference

SML test header file.

21.39.1 Detailed Description

SML test header file. Jonathan Bedard

Date

4/12/2016

Bug No known bugs.

This is the test suite for the XML tests.

Class Index

22.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:	
os::executorThread	
ExecutorThread class This class holds a thread which has multiple steps	267
os::IPAddress	
Os::IPAddress class definition This is an IP Address class It has 2 variables and	
10 methods	269
os::LineLogger	271
os::LineSaver	273
os::LineSaverListener	275
os::Log	276
os::LogDirectedStream	279
os::logLine	280
os::LogSaver	281
os::logStatusHolder	282
os::logStatusListener	284
os::LogStreamListener	285
os::multiLock	
Os::multilock class definition Defines the os::multilock class. This class has 4 vari-	
ables and 8 methods	286
os::myIPAddress	
Holds a node's own IP address Every node needs it's own IP address. This class	
holds that value, as well as provide several functions for determining priorities	289
os::safeQueue< dataType >	
This is the safeQueue (p. 291) class The safeQueue (p. 291) class is thread safe.	
It is a template class	291
os::savable	
Basic saving class	293
os::savingGroup	
Group of saving classes	298
os::Serial	
This is the Serial (p. 300) class. Serial (p. 300) objects allow us to abstract out	
most of the platform irregularities across multiple systems	300

os::seriai i nread	
Serial (p. 300) communication thread The is a serial class that runs as a thread.	
Thanks to this fact, we can run multiple serial communication threads as well as	000
run a primary set of threads at once	302
os::singleAction	
Single action class This class is for a thread with only one action	305
os::socketTracker	
SocketTracker class Tracks all currently active sockets	307
os::socketUser	
Socket user class This class allows us to manage sockets	309
os::spinLock	309
os::threadActor	
ThreadActor class This class holds information for determining which thread goes	
at a give time	311
os::threadDistributor	
Distributes threads This class allows us to determine which thread should execute	
at any given time	313
os::threadHolder	315
os::threadTracker	
Monitors a range of threads This class holds a range of threadHolders. This in-	
cludes both active and expired threads, ensuring the ability to operate on many	
threads in mass	317
os::UDPAVLNode	321
os::UDPClient	321
os::UDPPacket	325
os::UDPServer	328
os::UDPSocket	0_0
UDPSocket (p. 331) class A class for UDPSockets, which in turn allows us to multi	
thread the packet send/receive functionality	331
os::USBFile	334
os::USBNode	554
This class stores the location of a USB device	334
	JJ4
os::XML_Node	005
XML Node class The core node of our XML parsing	335

Chapter 23

Namespace Documentation

23.1 os Namespace Reference

Namespaces

xml

Classes

class executorThread

executorThread (p. 267) class This class holds a thread which has multiple steps.

class IPAddress

os::IPAddress (p. 269) class definition This is an IP Address class It has 2 variables and 10 methods

- class LineLogger
- class LineSaver
- class LineSaverListener
- class Log
- class LogDirectedStream
- struct logLine
- class LogSaver
- class logStatusHolder
- class logStatusListener
- class LogStreamListener
- class multiLock

os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods

• class myIPAddress

Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.

• class safeQueue

This is the **safeQueue** (p. 291) class The **safeQueue** (p. 291) class is thread safe. It is a template class.

• class savable

Basic saving class.

• class savingGroup

Group of saving classes.

• class Serial

This is the **Serial** (p. 300) class. **Serial** (p. 300) objects allow us to abstract out most of the platform irregularities across multiple systems.

class serialThread

Serial (p. 300) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.

• class singleAction

single action class This class is for a thread with only one action.

• class socketTracker

socketTracker (p. 307) class Tracks all currently active sockets.

class socketUser

Socket user class This class allows us to manage sockets.

- class spinLock
- class threadActor

threadActor (p. 311) class This class holds information for determining which thread goes at a give time.

class threadDistributor

Distributes threads This class allows us to determine which thread should execute at any given time.

- class threadHolder
- class threadTracker

Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.

- struct UDPAVLNode
- class UDPClient
- class UDPPacket
- class UDPServer
- class UDPSocket

UDPSocket (p. 331) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.

- class USBFile
- class USBNode

This class stores the location of a USB device.

• class XML Node

XML Node class The core node of our XML parsing.

Typedefs

- typedef smart_ptr< XML_Node > smartXMLNode
- typedef smart_ptr< unsortedList< XML_Node > > smartXMLNodeList

Functions

• uint16_t to_comp_mode (uint16_t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

• uint16_t from_comp_mode (uint16_t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

• uint32 t to comp mode (uint32 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

• uint32 t from comp mode (uint32 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

• uint64 t to comp mode (uint64 t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

• uint64_t from_comp_mode (uint64_t i)

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

uint64_t getTimestamp ()

Gets a timestamp Generates a time stamp from the time function.

• bool testCreateFolder (std::string n)

Test if a folder exists Checks if a given folder exists. If it does not exist, this function will create said folder.

std::string convertTimestamp (uint64_t stamp)

Type conversion on timestamp Converts the timestamp from an integer into a string.

- smart_ptr< std::thread > spawnThread (void(*func)(void *), void *ptr, std::string thread_← info="")
- smart_ptr< std::thread > spawnThread (void(*func)(void *, smart_ptr< threadHolder >), void *ptr, std::string thread_info="")
- float getSysTime ()

gets time Gets the current system time.

bool XML Output (std::string path, smartXMLNode head)

outputs tree Outputs an XML tree into a file.

smartXMLNode XML_Input (std::string path)

imports tree Imports an XML tree from a file.

• void **sleep** (int32_t x)

Sleep the thread for a certain amount of time This is a simple sleep function, it takes in a length of time to sleep and return nothing.

void startInternet (bool multiThread=true)

Activates Internet Spawns an IP thread distributor, if one does not currently exist.

void closeInternet ()

Deactivates Internet deletes the IP thread distributor and sets the thread pointer to null.

• smart_ptr< threadDistributor > internetThreads ()

Return IP thread distributor Gives the ipthread distributor to the caller.

• int32_t cp_clock_gettime (int32_t X, struct timeval *tv)

Gets time Returns the current time to the caller. This is designed to work across a range of platforms and format the time to a high precision.

• void **strcpy_s** (char *output, int32_t inlen, const char *input)

String copier Safely calls string copy.

• bool is_directory (std::string file)

Determines if a file is a directory Checks if a given file is a directory.

• bool **check_exists** (std::string name)

Checks if a given file exists Takes a file and checks if it exists. A directory is considered existing.

• smart_ptr< std::string > list_files (std::string directory, uint32_t &len)

Return contents of directory Creates an array of strings of all the names inside a given directory. This is not recursive.

std::string extract_name (std::string full_path)

Extracts a given file Extracts a file or directory.

• void delete_file (std::string path)

Deletes a file Deletes the file or directory at the given path. This is a recursive delete.

void setLocalPath (int argc, char **argv)

Sets local path Sets the local path given the received arguments.

std::string getLocalPath ()

Returns local path.

static int32_t fopen_s (FILE **fp, const char *file_name, const char *typ)

fopen_s for windows This is a file open function for windows so that we can more efficiently write multiplatform code.

Variables

- logStatusHolder logStatus
- Log & logger =*Log::singleton()
- const uint32 t BUFLEN =512
- const std::string **DEFAULT IP** ="127.0.0.1"
- const uint32 t MY MESSAGE NOTIFICATION =1048
- const uint32_t ARDUINO_WAIT_TIME =2000

23.1.1 Typedef Documentation

typedef smart_ptr<XML_Node> os::smartXMLNode

typedef smart_ptr<unsortedList<XML_Node> > os::smartXMLNodeList

23.1.2 Function Documentation

bool os::check exists (std::string name)

Checks if a given file exists Takes a file and checks if it exists. A directory is considered existing.

Returns

bool

```
void os::closeInternet ( )
```

Deactivates Internet deletes the IP thread distributor and sets the thread pointer to null.

```
std::string os::convertTimestamp ( uint64_t stamp )
```

Type conversion on timestamp Converts the timestamp from an integer into a string.

Returns

std::string

```
int32_t os::cp_clock_gettime ( int32_t X, struct timeval * tv )
```

Gets time Returns the current time to the caller. This is designed to work across a range of platforms and format the time to a high precision.

Returns

```
unit32_t
```

```
void os::delete_file ( std::string path )
```

Deletes a file Deletes the file or directory at the given path. This is a recursive delete.

```
std::string os::extract_name ( std::string full_path )
```

Extracts a given file Extracts a file or directory.

Returns

string

```
static int32_t os::fopen_s ( FILE ** fp, const char * file_name, const char * typ ) [static]
```

fopen_s for windows This is a file open function for windows so that we can more efficiently write multi platform code.

Returns

```
uint32_t
```

```
uint16_t os::from_comp_mode ( uint16_t i )
```

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

Returns

uint16_t

```
uint32_t os::from_comp_mode ( uint32_t i )
Changes bit order for compatibility Depending on the system at hand, bits may be in several different
orders. This function swaps from compatibility mode.
Returns
     uint32_t
uint64_t os::from_comp_mode ( uint64_t i )
Changes bit order for compatibility Depending on the system at hand, bits may be in several different
orders. This function swaps from compatibility mode.
Returns
     uint64 t
std::string os::getLocalPath ( )
Returns local path.
Returns
     string
float os::getSysTime ( )
gets time Gets the current system time.
Returns
     float
uint64_t os::getTimestamp ( )
Gets a timestamp Generates a time stamp from the time function.
Returns
     uint64 t
smart_ptr< threadDistributor > os::internetThreads ( )
Return IP thread distributor Gives the ipthread distributor to the caller.
Returns
     smart_ptr<threadDistributor>
```

bool os::is directory (std::string file)

Returns

bool

Determines if a file is a directory Checks if a given file is a directory.

```
smart_ptr< std::string > os::list_files ( std::string directory, uint32_t & len )
```

Return contents of directory Creates an array of strings of all the names inside a given directory. This is not recursive.

Returns

```
os::smart_ptr<string>
```

void os::setLocalPath (int argc, char ** argv)

Sets local path Sets the local path given the received arguments.

```
void os::sleep ( int32 t x )
```

Sleep the thread for a certain amount of time This is a simple sleep function, it takes in a length of time to sleep and return nothing.

```
smart\_ptr < std::thread > os::spawnThread ( void(*)(void *) func, void * ptr, std::string thread\_info = "" ) \\ smart\_ptr < std::thread > os::spawnThread ( void(*)(void *, smart\_ptr < threadHolder >) func, void * ptr, std::string thread\_info = "" ) \\ void os::startInternet ( bool multiThread = true ) \\
```

Activates Internet Spawns an IP thread distributor, if one does not currently exist.

```
void os::strcpy_s ( char * output, int32_t inlen, const char * input )
```

String copier Safely calls string copy.

```
bool os::testCreateFolder ( std::string n )
```

Test if a folder exists Checks if a given folder exists. If it does not exist, this function will create said folder.

Returns

bool

```
uint16_t os::to_comp_mode ( uint16_t i )
```

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

Returns

uint16 t

```
uint32_t os::to_comp_mode ( uint32_t i )
```

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

```
Returns
```

```
uint32_t
```

```
uint64 t os::to comp mode ( uint64 t i )
```

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

Returns

uint64_t

```
smartXMLNode os::XML_Input ( std::string path )
```

imports tree Imports an XML tree from a file.

Returns

```
smart_ptr<XMLNode>
```

bool os::XML_Output (std::string path, smartXMLNode head)

outputs tree Outputs an XML tree into a file.

Returns

bool

23.1.3 Variable Documentation

```
const uint32_t os::ARDUINO_WAIT_TIME =2000
```

const uint32_t os::BUFLEN =512

const std::string os::DEFAULT IP ="127.0.0.1"

Log & os::logger =*Log::singleton()

logStatusHolder os::logStatus

const uint32_t os::MY_MESSAGE_NOTIFICATION =1048

Chapter 24

Class Documentation

24.1 os::executorThread Class Reference

executorThread (p. 267) class This class holds a thread which has multiple steps.

Public Member Functions

- executorThread (uint32_t id, smart_ptr< threadDistributor > d)
- virtual ~executorThread ()
- bool isRunning () const

indicates running Indicates if a thread is currently running.

• uint32_t getThreadID () const

gives thread_id Gives the thread identifier to the caller.

• void killThread ()

kills thread Kills the thread associated with this executor.

• void **primary_thread_loop** (smart_ptr< **threadHolder** > th)

runs thread Runs the associated thread and manages others.

Private Attributes

• spinLock killLock

lock for killing threads Allows us to kill a thread without changing into it.

• uint32_t thread_id

thread identifier An identifier for the thread.

• volatile bool active

indicates readiness Indicates if a thread is ready to run.

• bool running

indicates running Indicates if a thread is currently running.

• smart_ptr< threadDistributor > distro

distributor Indicates the thread distributor for this executor thread.

24.1.1 Detailed Description

executorThread (p. 267) class This class holds a thread which has multiple steps.

```
24.1.2 Constructor & Destructor Documentation

executorThread::executorThread ( uint32_t id, smart_ptr< threadDistributor > d )

executorThread::~executorThread ( ) [virtual]

24.1.3 Member Function Documentation

uint32_t os::executorThread::getThreadID ( ) const [inline]

gives thread_id Gives the thread identifier to the caller.

Returns

uint32_t

bool os::executorThread::isRunning ( ) const [inline]

indicates running Indicates if a thread is currently running.

Returns

bool

void executorThread::killThread ( )

kills thread Kills the thread associated with this executor.

void executorThread::primary thread loop ( smart ptr< threadHolder > th )
```

24.1.4 Member Data Documentation

```
volatile bool os::executorThread::active [private] indicates readiness Indicates if a thread is ready to run.
```

runs thread Runs the associated thread and manages others.

```
smart_ptr<threadDistributor> os::executorThread::distro [private] distributor Indicates the thread distributor for this executor thread.
```

```
spinLock os::executorThread::killLock [private]
lock for killing threads Allows us to kill a thread without changing into it.
```

bool os::executorThread::running [private] indicates running Indicates if a thread is currently running.

uint32_t os::executorThread::thread_id [private]

thread identifier An identifier for the thread.

24.2 os::IPAddress Class Reference

os::IPAddress (p. 269) class definition This is an IP Address class It has 2 variables and 10 methods

Public Member Functions

- IPAddress ()
- IPAddress (std::string x)
- IPAddress (const IPAddress &x)
- IPAddress (smart_ptr< IPAddress > x)
- virtual ~IPAddress ()
- bool isIPv6 () const

Return if an IPAdress is IPv6 returns the _isIPv6 boolean to the caller.

char * printAddress ()

Return IP Address Gives a pointer to the IPAddress (p. 269) to the caller.

const char * getConstAddress () const

Return IP Address Gives a pointer to the IPAddress (p. 269) to the caller.

• int32_t compare (const os::smart_ptr< IPAddress > comp) const

Compares IP Addresses Compares two IPAddresses and returns the difference.

• int32_t compare (const IPAddress *comp) const

Protected Attributes

• char **name** [80]

Actual data of IP address. The actual IP is a critical element, as it allows for the core communication. We allocate 80 bytes so that we have enough memory for both the IPv4 and IPv6 addresses.

bool _islPv6

Holds if an address is IPv6 An address has this flag for easy analysis of IPv6 and IPv4 status. Thanks to this, we can use one IP address class for both standards.

24.2.1 Detailed Description

os::IPAddress (p. 269) class definition This is an IP Address class It has 2 variables and 10 methods

24.2.2 Constructor & Destructor Documentation

```
IPAddress::IPAddress ( )
IPAddress::IPAddress ( std::string x )
IPAddress::IPAddress ( const IPAddress & x )
IPAddress::IPAddress ( smart_ptr< IPAddress > x )
```

```
IPAddress::~IPAddress( ) [virtual]
24.2.3 Member Function Documentation
int32 t IPAddress::compare ( const os::smart ptr< IPAddress > comp ) const
Compares IP Addresses Compares two IPAddresses and returns the difference.
Returns
     int32 t
int32_t IPAddress::compare ( const IPAddress * comp ) const
const char* os::IPAddress::getConstAddress ( ) const [inline]
Return IP Address Gives a pointer to the IPAddress (p. 269) to the caller.
Returns
     char*
bool os::IPAddress::isIPv6( ) const [inline]
Return if an IPAdress is IPv6 returns the _isIPv6 boolean to the caller.
Returns
     bool
char* os::IPAddress::printAddress( ) [inline]
Return IP Address Gives a pointer to the IPAddress (p. 269) to the caller.
Returns
```

24.2.4 Member Data Documentation

```
bool os::IPAddress::_isIPv6 [protected]
```

char*


Holds if an address is IPv6 An address has this flag for easy analysis of IPv6 and IPv4 status. Thanks to this, we can use one IP address class for both standards.

```
char os::IPAddress::name[80] [protected]
```

Actual data of IP address. The actual IP is a critical element, as it allows for the core communication. We allocate 80 bytes so that we have enough memory for both the IPv4 and IPv6 addresses.

24.3 os::LineLogger Class Reference

Inheritance diagram for os::LineLogger:

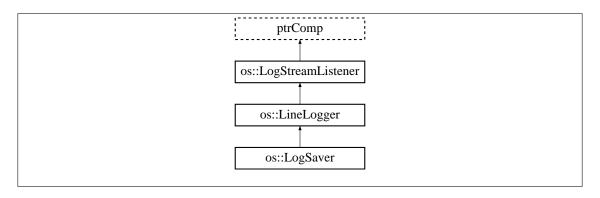

Public Member Functions

- LineLogger (smart ptr< std::ostream > s)
- **LineLogger** (smart_ptr< std::ostream > s, std::string head)
- virtual ~LineLogger ()
- void setLogTime (bool lt)
- void setPrintName (bool pn)
- void setIsOn (bool io)
- bool getLogTime () const
- bool getPrintName () const
- bool isOn () const
- void setSpecialCase (bool isSpecial)
- bool getSpecialCase () const
- virtual void logHeader (uint64_t timestamp, LogDirectedStream &source)
- virtual void **logChar** (int32_t c)
- virtual void log_endl ()
- virtual void log (smart_ptr< logLine > line)
- virtual void emergencyNewLine (LogDirectedStream &source)
- virtual void emergencyArrival (LogDirectedStream &source, int32_t c)
- virtual void **stringArrival** (smart_ptr< **logLine** > line)

Protected Attributes

- bool isSpecialCase
- smart_ptr< std::ostream > strm
- bool _isOn
- bool logTime
- bool printName

```
24.3.1 Constructor & Destructor Documentation
LineLogger::LineLogger ( smart ptr< std::ostream > s )
LineLogger::LineLogger ( smart_ptr< std::ostream > s, std::string head )
virtual os::LineLogger::~LineLogger( ) [inline], [virtual]
24.3.2 Member Function Documentation
void LineLogger::emergencyArrival ( LogDirectedStream & source, int32_t c ) [virtual]
Reimplemented from os::LogStreamListener (p. 286).
void LineLogger::emergencyNewLine ( LogDirectedStream & source ) [virtual]
Reimplemented from os::LogStreamListener (p. 286).
bool os::LineLogger::getLogTime ( ) const [inline]
bool os::LineLogger::getPrintName ( ) const [inline]
bool os::LineLogger::getSpecialCase ( ) const [inline]
bool os::LineLogger::isOn ( ) const [inline]
void LineLogger::log ( smart ptr< logLine > line ) [virtual]
Reimplemented in os::LogSaver (p. 282).
void LineLogger::log_endl( ) [virtual]
Reimplemented in os::LogSaver (p. 282).
void LineLogger::logChar( int32_t c ) [virtual]
Reimplemented in os::LogSaver (p. 282).
void LineLogger::logHeader ( uint64 t timestamp, LogDirectedStream & source ) [virtual]
Reimplemented in os::LogSaver (p. 282).
void os::LineLogger::setIsOn ( bool io ) [inline]
void os::LineLogger::setLogTime ( bool lt ) [inline]
void os::LineLogger::setPrintName ( bool pn ) [inline]
void os::LineLogger::setSpecialCase ( bool isSpecial ) [inline]
void LineLogger::stringArrival ( smart_ptr< logLine > line ) [virtual]
Reimplemented from os::LogStreamListener (p. 286).
```

24.3.3 Member Data Documentation

bool os::LineLogger::_isOn [protected]

bool os::LineLogger::isSpecialCase [protected]


bool os::LineLogger::logTime [protected]

bool os::LineLogger::printName [protected]

smart ptr<std::ostream> os::LineLogger::strm [protected]

24.4 os::LineSaver Class Reference

Inheritance diagram for os::LineSaver:



Public Member Functions

- LineSaver ()
- virtual ~LineSaver ()
- void setSize (uint32_t s)
- uint32_t getSize () const
- uint32_t getNumLines () const
- void addListener (smart_ptr< LineSaverListener > I)
- void removeListener (smart_ptr< LineSaverListener > I)
- void **pushLine** (smart_ptr< **logLine** > line)
- smart_ptr< logLine > popLine (uint32_t x)
- void setSpecialCase (bool isSpecial)
- bool getSpecialCase () const

Private Member Functions

- void priv_addListener (smart_ptr< LineSaverListener > I)
- void priv_removeListener (smart_ptr< LineSaverListener > I)

Private Attributes

- bool isSpecialCase
- uint32_t size
- uint32_t beginning_pos
- uint32_t next_pos
- std::vector< smart_ptr< logLine > > lineList

- os::spinLock lock
- smartSet< LineSaverListener > listener


Friends

• class LineSaverListener

```
Constructor & Destructor Documentation
LineSaver::LineSaver()
LineSaver::~LineSaver() [virtual]
24.4.2 Member Function Documentation
void LineSaver::addListener ( smart ptr< LineSaverListener > I )
uint32_t LineSaver::getNumLines ( ) const
uint32_t os::LineSaver::getSize ( ) const [inline]
bool os::LineSaver::getSpecialCase ( ) const [inline]
smart ptr< logLine > LineSaver::popLine ( uint32 t x )
void LineSaver::priv_addListener ( smart_ptr< LineSaverListener > I ) [private]
void LineSaver::priv_removeListener ( smart_ptr< LineSaverListener > I ) [private]
void LineSaver::pushLine ( smart ptr< logLine > line )
void LineSaver::removeListener ( smart ptr< LineSaverListener > 1 )
void LineSaver::setSize ( uint32_t s )
void os::LineSaver::setSpecialCase ( bool isSpecial ) [inline]
24.4.3 Friends And Related Function Documentation
friend class LineSaverListener [friend]
24.4.4 Member Data Documentation
uint32 t os::LineSaver::beginning pos [private]
bool os::LineSaver::isSpecialCase [private]
std::vector<smart_ptr<logLine> > os::LineSaver::lineList [private]
smartSet<LineSaverListener> os::LineSaver::listener [private]
os::spinLock os::LineSaver::lock [private]
uint32_t os::LineSaver::next_pos [private]
uint32_t os::LineSaver::size [private]
```

24.5 os::LineSaverListener Class Reference

Inheritance diagram for os::LineSaverListener:

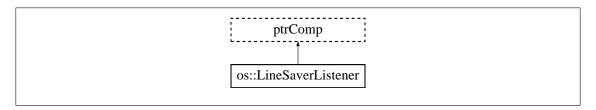

Public Member Functions

- virtual ~LineSaverListener ()
- void addSaver (smart ptr< LineSaver > I)
- void removeSaver (smart_ptr< LineSaver > I)

Protected Member Functions

• virtual void receiveLine (smart_ptr< LineSaver > source, smart_ptr< logLine > message)

Private Member Functions

- void priv_addSaver (smart_ptr< LineSaver > I)
- void priv removeSaver (smart ptr< LineSaver > I)

Private Attributes

- os::spinLock lock
- smartSet< LineSaver > saver

Friends

• class LineSaver

24.5.1 Constructor & Destructor Documentation

LineSaverListener::~LineSaverListener() [virtual]

24.5.2 Member Function Documentation

```
void LineSaverListener::addSaver ( smart_ptr< LineSaver > I )
void LineSaverListener::priv_addSaver ( smart_ptr< LineSaver > I ) [private]
void LineSaverListener::priv_removeSaver ( smart_ptr< LineSaver > I ) [private]
virtual void os::LineSaverListener::receiveLine ( smart_ptr< LineSaver > source, smart_ptr< logLine > message ) [inline], [protected], [virtual]
```

void LineSaverListener::removeSaver (smart_ptr< LineSaver > I)

24.5.3 Friends And Related Function Documentation

friend class LineSaver [friend]


24.5.4 Member Data Documentation

os::spinLock os::LineSaverListener::lock [private]

smartSet<LineSaver> os::LineSaverListener::saver [private]

24.6 os::Log Class Reference

Inheritance diagram for os::Log:

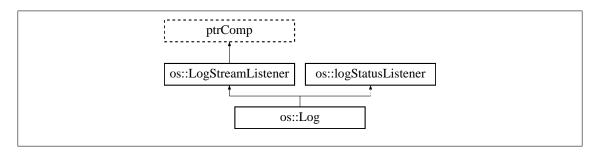

Public Member Functions

- virtual ~Log ()
- void **pushFilePath** (std::string fp)
- void startSavingThread ()
- void savingThread (os::smart_ptr< os::threadHolder > th)
- std::string getFilePath () const
- bool isSavingThreadActive () const
- void exitSaveThread ()
- const LineSaver & getMainStream () const
- smart_ptr< LineSaver > getMainStreamReference ()
- void setSaverSize (uint32_t size)
- void setSaveIsOn (bool ison)
- void setSaveLogTime (bool It)
- void setSaveLogName (bool In)
- void setSTDIsOn (bool ison)
- void setSTDLogTime (bool lt)
- void setSTDLogName (bool In)
- void setIsOn (bool ison)
- void setLogTime (bool It)
- void setLogName (bool In)
- smart_ptr< LogDirectedStream > newTargetStream (std::string name, bool isError)
- smart ptr< std::ostream > castNewTargetStream (std::string name, bool isError)

- smart_ptr< LogDirectedStream > find (std::string name)
- smart_ptr< std::ostream > castFind (std::string name)
- bool **deleteStream** (std::string name)
- virtual void **stringArrival** (smart_ptr< **logLine** > line)
- void removeListener (smart ptr< LogStreamListener > lst)

Static Public Member Functions

• static smart_ptr< Log > singleton ()

Protected Member Functions

• void receiveChanged (smart ptr< logStatusHolder > h)

Private Member Functions

• Log ()

Private Attributes

- AVLTree< LogDirectedStream > streams
- smart_ptr< LineLogger > std_log
- smart_ptr< LineLogger > err_log
- spinLock mainStreamLock
- LineSaver mainStream
- std::string file path
- smart ptr< LogSaver > primary save file
- smart_ptr< LogSaver > std_save_file
- smart_ptr< LogSaver > err_save_file
- spinLock logSaverLock
- bool isSavingThread
- bool continue_saving

24.6.1 Constructor & Destructor Documentation

```
Log::Log( ) [private]
Log::~Log( ) [virtual]
```

24.6.2 Member Function Documentation

```
smart_ptr< std::ostream > Log::castFind ( std::string name )
smart_ptr< std::ostream > Log::castNewTargetStream ( std::string name, bool isError )
bool Log::deleteStream ( std::string name )
void os::Log::exitSaveThread ( ) [inline]
```

```
smart_ptr< LogDirectedStream > Log::find ( std::string name )
std::string os::Log::getFilePath ( ) const [inline]
const LineSaver& os::Log::getMainStream ( ) const [inline]
smart_ptr<LineSaver> os::Log::getMainStreamReference( ) [inline]
bool os::Log::isSavingThreadActive ( ) const [inline]
smart_ptr< LogDirectedStream > Log::newTargetStream ( std::string name, bool isError )
void Log::pushFilePath ( std::string fp )
void Log::receiveChanged ( smart_ptr< logStatusHolder > h ) [protected], [virtual]
Reimplemented from os::logStatusListener (p. 285).
void Log::removeListener ( smart ptr< LogStreamListener > lst )
void Log::savingThread ( os::smart_ptr< os::threadHolder > th )
void Log::setIsOn (bool ison)
void Log::setLogName ( bool In )
void Log::setLogTime ( bool lt )
void Log::setSaveIsOn ( bool ison )
void Log::setSaveLogName ( bool In )
void Log::setSaveLogTime ( bool lt )
void Log::setSaverSize ( uint32_t size )
void Log::setSTDIsOn ( bool ison )
void Log::setSTDLogName ( bool In )
void Log::setSTDLogTime ( bool lt )
smart_ptr< Log > Log::singleton( ) [static]
void Log::startSavingThread ( )
void Log::stringArrival ( smart_ptr< logLine > line ) [virtual]
Reimplemented from os::LogStreamListener (p. 286).
24.6.3 Member Data Documentation
bool os::Log::continue saving [private]
smart_ptr<LineLogger> os::Log::err_log [private]
smart_ptr<LogSaver> os::Log::err_save_file [private]
```

```
std::string os::Log::file_path [private]
bool os::Log::isSavingThread [private]

spinLock os::Log::logSaverLock [private]

LineSaver os::Log::mainStream [private]

spinLock os::Log::mainStreamLock [private]

smart_ptr<LogSaver> os::Log::primary_save_file [private]


smart_ptr<LineLogger> os::Log::std_log [private]

smart_ptr<LogSaver> os::Log::std_save_file [private]

AVLTree<LogDirectedStream> os::Log::streams [private]
```

24.7 os::LogDirectedStream Class Reference

Inheritance diagram for os::LogDirectedStream:



Public Member Functions

- LogDirectedStream (std::string n, bool ie)
- virtual ~LogDirectedStream ()
- virtual int32 t overflow (int32 t c)
- void addListener (smart_ptr< LogStreamListener > lst)
- void removeListener (smart_ptr< LogStreamListener > lst)
- std::string getName () const
- bool isError () const
- const LineSaver & getLines () const
- LineSaver & modLines ()
- const bool operator== (const LogDirectedStream &comp) const
- const bool operator> (const LogDirectedStream &comp) const

Private Attributes

- std::string name
- bool isError
- LineSaver saver
- smartSet< LogStreamListener > listeners
- std::string current_line

24.7.1 Constructor & Destructor Documentation

 $\label{logDirectedStream} LogDirectedStream (std::string n, boolie) $$ virtual os::LogDirectedStream::~LogDirectedStream () [inline], [virtual] $$ virtual os::LogDirectedStream () [inline], [virtual] $$ virtual os::L$

24.7.2 Member Function Documentation

void LogDirectedStream::addListener (smart_ptr< LogStreamListener > lst)
const LineSaver& os::LogDirectedStream::getLines () const [inline]
std::string os::LogDirectedStream::getName () const [inline]
bool os::LogDirectedStream::isError () const [inline]

LineSaver& os::LogDirectedStream::modLines() [inline]

 $\label{logDirectedStream:const} const \ bool \ LogDirectedStream::operator == (\ const \ \textbf{LogDirectedStream} \ \& \ comp \) \ const \ const \ bool \ LogDirectedStream::operator > (\ const \ \textbf{LogDirectedStream} \ \& \ comp \) \ const \ int 32_t \ LogDirectedStream::overflow (\ int 32_t \ c \) \ \ [virtual]$

void LogDirectedStream::removeListener (smart_ptr< LogStreamListener > lst)

24.7.3 Member Data Documentation

bool os::LogDirectedStream::_isError [private]
std::string os::LogDirectedStream::current_line [private]
smartSet<LogStreamListener> os::LogDirectedStream::listeners [private]
std::string os::LogDirectedStream::name [private]
LineSaver os::LogDirectedStream::saver [private]

24.8 os::logLine Struct Reference

Public Member Functions

• virtual ~logLine ()

Public Attributes

- smart_ptr< LogDirectedStream > source
- std::string line
- uint64 t timestamp

24.8.1 Constructor & Destructor Documentation

virtual os::logLine::~logLine() [inline], [virtual]

24.8.2 Member Data Documentation


std::string os::logLine::line

smart_ptr<LogDirectedStream> os::logLine::source

uint64_t os::logLine::timestamp

24.9 os::LogSaver Class Reference

Inheritance diagram for os::LogSaver:

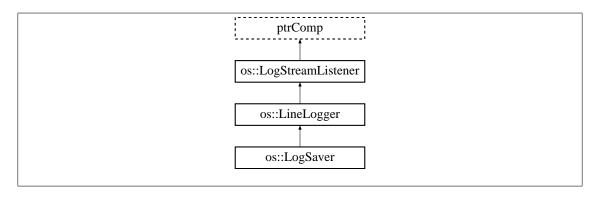

Public Member Functions

- LogSaver (std::string file)
- LogSaver (std::string file, std::string head)
- virtual ~LogSaver ()
- void saveLog ()
- virtual void logHeader (uint64_t timestamp, LogDirectedStream &source)
- virtual void **logChar** (int32_t c)
- virtual void log_endl ()
- virtual void log (smart_ptr< logLine > line)

Private Attributes

- os::spinLock file_lock
- std::queue< smart_ptr< logLine > > lineQueue

Additional Inherited Members

24.9.1 Constructor & Destructor Documentation

LogSaver::LogSaver (std::string file)

LogSaver::LogSaver (std::string file, std::string head)

LogSaver::~LogSaver() [virtual]

24.9.2 Member Function Documentation

```
void LogSaver::log ( smart_ptr< logLine > line ) [virtual]
Reimplemented from os::LineLogger (p. 272).

void LogSaver::log_endl ( ) [virtual]
Reimplemented from os::LineLogger (p. 272).

void LogSaver::logChar ( int32_t c ) [virtual]
Reimplemented from os::LineLogger (p. 272).


void LogSaver::logHeader ( uint64_t timestamp, LogDirectedStream & source ) [virtual]
Reimplemented from os::LineLogger (p. 272).

void LogSaver::saveLog ( )

24.9.3 Member Data Documentation
os::spinLock os::LogSaver::file_lock [private]
std::queue<smart_ptr<logLine> > os::LogSaver::lineQueue [private]
```

24.10 os::logStatusHolder Class Reference

Inheritance diagram for os::logStatusHolder:



Public Member Functions

- logStatusHolder ()
- virtual ~logStatusHolder ()
- void addListener (smart_ptr< logStatusListener > I)
- void removeListener (smart_ptr< logStatusListener > I)
- void **setSTDStatus** (bool std)
- void setERRStatus (bool err)
- bool getSTDStatus () const
- bool **getERRStatus** () const

Private Member Functions

- void triggerChange ()
- void priv_addListener (smart_ptr< logStatusListener > I)
- void priv_removeListener (smart_ptr< logStatusListener > I)

Private Attributes

- bool stdstatus
- bool errstatus
- spinLock lisLock
- smartSet< logStatusListener > listener


Friends

• class logStatusListener

```
24.10.1 Constructor & Destructor Documentation
logStatusHolder::logStatusHolder()
logStatusHolder::~logStatusHolder( ) [virtual]
24.10.2 Member Function Documentation
void logStatusHolder::addListener ( smart ptr< logStatusListener > I )
bool os::logStatusHolder::getERRStatus() const [inline]
bool os::logStatusHolder::getSTDStatus( ) const [inline]
void logStatusHolder::priv_addListener ( smart_ptr< logStatusListener > l ) [private]
void logStatusHolder::priv removeListener ( smart ptr< logStatusListener > I ) [private]
void logStatusHolder::removeListener ( smart_ptr< logStatusListener > I )
void logStatusHolder::setERRStatus ( bool err )
void logStatusHolder::setSTDStatus ( bool std )
void logStatusHolder::triggerChange( ) [private]
24.10.3 Friends And Related Function Documentation
friend class logStatusListener [friend]
24.10.4 Member Data Documentation
bool os::logStatusHolder::errstatus [private]
spinLock os::logStatusHolder::lisLock [private]
smartSet<logStatusListener> os::logStatusHolder::listener [private]
```

24.11 os::logStatusListener Class Reference

Inheritance diagram for os::logStatusListener:

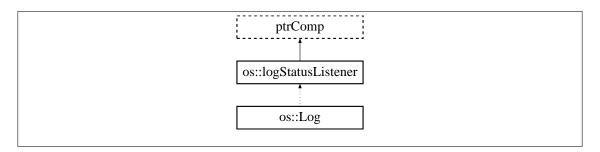

Public Member Functions

- virtual ~logStatusListener ()
- void addHolder (smart_ptr< logStatusHolder > I)
- void removeHolder (smart_ptr< logStatusHolder > I)

Protected Member Functions

• virtual void receiveChanged (smart_ptr< logStatusHolder > h)

Private Member Functions

- void priv_addHolder (smart_ptr< logStatusHolder > I)
- void priv_removeHolder (smart_ptr< logStatusHolder > I)

Private Attributes

- spinLock senLock
- smartSet< logStatusHolder > sender

Friends

• class logStatusHolder

24.11.1 Constructor & Destructor Documentation

logStatusListener::~logStatusListener() [virtual]

24.11.2 Member Function Documentation

void logStatusListener::addHolder (smart_ptr< logStatusHolder > I)

```
void logStatusListener::priv_addHolder( smart_ptr< logStatusHolder > I ) [private]
void logStatusListener::priv_removeHolder( smart_ptr< logStatusHolder > I ) [private]
virtual void os::logStatusListener::receiveChanged( smart_ptr< logStatusHolder > h )
[inline], [protected], [virtual]
```

Reimplemented in os::Log (p. 278).

void logStatusListener::removeHolder (smart_ptr< logStatusHolder > I)

24.11.3 Friends And Related Function Documentation

friend class logStatusHolder [friend]


24.11.4 Member Data Documentation

smartSet<logStatusHolder> os::logStatusListener::sender [private]

spinLock os::logStatusListener::senLock [private]

24.12 os::LogStreamListener Class Reference

Inheritance diagram for os::LogStreamListener:

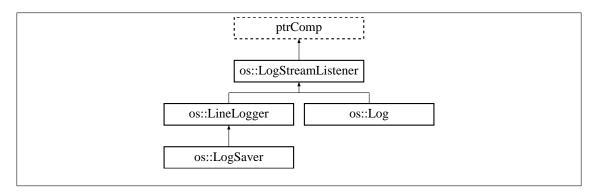

Public Member Functions

- virtual ~LogStreamListener ()
- virtual void emergencyNewLine (LogDirectedStream &source)
- virtual void emergencyArrival (LogDirectedStream &source, int32_t c)
- virtual void stringArrival (smart_ptr< logLine > line)

24.12.1 Constructor & Destructor Documentation

virtual os::LogStreamListener::~LogStreamListener() [inline], [virtual]

24.12.2 Member Function Documentation

virtual void os::LogStreamListener::emergencyArrival (LogDirectedStream & source, int32_t c) [inline], [virtual]

Reimplemented in os::LineLogger (p. 272).

virtual void os::LogStreamListener::emergencyNewLine (LogDirectedStream & source)
[inline], [virtual]

Reimplemented in os::LineLogger (p. 272).

virtual void os::LogStreamListener::stringArrival (smart_ptr< logLine > line) [inline],
[virtual]

Reimplemented in os::Log (p. 278), and os::LineLogger (p. 272).

24.13 os::multiLock Class Reference

os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods

Public Member Functions

• multiLock ()

multilock constructor This method constructs a multilock. We do not have a copy constructor or any custom constructors of any type.

virtual ~multiLock ()

multilock destructor The destructor is virtual, so that if we decide to inherent for any reason, the multilock class will already be prepared.

• bool isLocked () const

returns_locked status This allows us to determine whether or not a multilock is being written to. This can be used both in general classes as well as in the multilock class as well.

• uint32_t getCounter () const

returns _counter The amount of readers is variable, so this method returns the amount of readers currently looking at the multilock. This method can be used both by those outside the multilock as well as by other multilock methods.

void increment ()

allows someone to read When a user wants to read, they can call increment. This ensures that the multilock can be safely read. If the multilock cannot be read, increment waits until a read is available.

• void decrement ()

allows a thread to stop reading the multilock When a thread has finished reading, it calls decrement in order to return the multilock. This ensures that other threads can read the multilock

• void lock ()

allows a thread to write Only one thread can write at any given time. The lock method ensures that no one else is reading or writing, then acquires and writes.

• void unlock ()

allows other threads to write Once a thread has finished writing, it should call unlock so that other threads can read and write. The unlock method ends the period of writing for a thread.

Private Attributes

spinLock dLock

spinlock The spinlock prevents a multilock from being modified by more than 1 thread at any given time. If more than 1 thread were to attempt to read for example, a miscount of the number of readers could permanently lock the multilock or allow for unsafe writing.

• bool locked

locked boolean The _locked variable is to indicate whether or nor a multilock is being written. Should a multilock be actively written, it would be unsafe to read or have another thread attempt to read.

uint32 t counter

counter for readers The _counter represents how many threads are currently reading though whatever the multilock is protecting.

• uint32_t _max

most allowable readers Given that there may be a maximum amount of threads that should be reading something at any given time, the _max variable allows us to define how many readers a given multilock can have.

24.13.1 Detailed Description

os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods

24.13.2 Constructor & Destructor Documentation

```
multiLock::multiLock()
```

multilock constructor This method constructs a multilock. We do not have a copy constructor or any custom constructors of any type.

```
multiLock::~multiLock( ) [virtual]
```

multilock destructor The destructor is virtual, so that if we decide to inherent for any reason, the multilock class will already be prepared.

24.13.3 Member Function Documentation

```
void multiLock::decrement ( )
```

allows a thread to stop reading the multilock When a thread has finished reading, it calls decrement in order to return the multilock. This ensures that other threads can read the multilock

Returns

void

```
uint32_t os::multiLock::getCounter( ) const [inline]
```

returns _counter The amount of readers is variable, so this method returns the amount of readers currently looking at the multilock. This method can be used both by those outside the multilock as well as by other multilock methods.

Returns

uint32_t

void multiLock::increment ()

allows someone to read When a user wants to read, they can call increment. This ensures that the multilock can be safely read. If the multilock cannot be read, increment waits until a read is available.

Returns

void

bool os::multiLock::isLocked() const [inline]

returns _locked status This allows us to determine whether or not a multilock is being written to. This can be used both in general classes as well as in the multilock class as well.

Returns

boolean

void multiLock::lock ()

allows a thread to write Only one thread can write at any given time. The lock method ensures that no one else is reading or writing, then acquires and writes.

Returns

void

void multiLock::unlock ()

allows other threads to write Once a thread has finished writing, it should call unlock so that other threads can read and write. The unlock method ends the period of writing for a thread.

Returns

void

24.13.4 Member Data Documentation

```
uint32_t os::multiLock::_counter [private]
```

counter for readers The _counter represents how many threads are currently reading though whatever the multilock is protecting.

```
bool os::multiLock:: locked [private]
```

locked boolean The _locked variable is to indicate whether or nor a multilock is being written. Should a multilock be actively written, it would be unsafe to read or have another thread attempt to read.

```
uint32_t os::multiLock::_max [private]
```

most allowable readers Given that there may be a maximum amount of threads that should be reading something at any given time, the _max variable allows us to define how many readers a given multilock can have.

```
spinLock os::multiLock::dLock [private]
```

spinlock The spinlock prevents a multilock from being modified by more than 1 thread at any given time. If more than 1 thread were to attempt to read for example, a miscount of the number of readers could permanently lock the multilock or allow for unsafe writing.

24.14 os::myIPAddress Class Reference

Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.

Public Member Functions

- mylPAddress ()
- virtual ~mylPAddress ()
- IPAddress getAddress ()
- char * getIPString ()
- IPAddress getIPv6Address ()
- IPAddress getIPv4Address ()
- bool isMe (const IPAddress &addr) const
- bool isV6Priority () const
- void **setV6Priority** (bool p)

Private Member Functions

• IPAddress resetAddress ()

Private Attributes

- IPAddress address
- IPAddress ip6Address
- IPAddress ip4Address
- clock t last
- bool v6_prioriity

24.14.1 Detailed Description

Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.

```
24.14.2 Constructor & Destructor Documentation
myIPAddress::myIPAddress()
myIPAddress::~myIPAddress( ) [virtual]
24.14.3 Member Function Documentation
IPAddress myIPAddress::getAddress ( )
brief returns address Updates the IP addresses if necessary and return the current IP address.
Returns
     IPAddress (p. 269)
char * myIPAddress::getIPString ( )
brief Returns IP address as a string Returns the IP address as a string.
Returns
     char*
IPAddress os::myIPAddress::getIPv4Address( ) [inline]
brief gives IPv4 Returns the IPv4 address.
Returns
     IPAddress (p. 269)
IPAddress os::myIPAddress::getIPv6Address( ) [inline]
brief gives IPv6 Returns the IPv6 address.
Returns
     IPAddress (p. 269)
bool myIPAddress::isMe ( const IPAddress & addr ) const
brief is a given address mine Determines if a given address is the same as the address of this object.
Returns
     bool
bool os::myIPAddress::isV6Priority( ) const [inline]
brief returns IPv6 priority Tells the caller if this object prioritizes IPv6.
Returns
     bool
```

IPAddress myIPAddress::resetAddress() [private]

brief resets IP address Resets the IP addresses of the object.

Returns

IPAddress (p. 269)

void myIPAddress::setV6Priority (bool p)

brief sets IPv6 priority Sets IPv6 priority.

24.14.4 Member Data Documentation

IPAddress os::myIPAddress::address [private]

brief IP address A base IP address, can be either IPv4 or IPv6.

IPAddress os::myIPAddress::ip4Address [private]

brief IPv4 address The IPv4 address of the current object.

IPAddress os::myIPAddress::ip6Address [private]

brief IPv6 address The IPv6 address of the current object.

clock_t os::myIPAddress::last [private]

brief last time IP address updated Holds the last time the IP addresses were updated.

bool os::myIPAddress::v6_prioriity [private]

brief IP type priority Indicates if a node wants to prioritize IPv6.

24.15 os::safeQueue< dataType > Class Template Reference

This is the **safeQueue** (p. 291) class The **safeQueue** (p. 291) class is thread safe. It is a template class.

Public Member Functions

- safeQueue (int32_t s)
- safeQueue ()
- virtual ~safeQueue ()
- void push (smart_ptr< dataType > x)

Add a value to the queue This method pushes an element into the queue, assuming that space exists in the queue.

• smart_ptr< dataType > pop ()

Removes the head of the queue This method pops the head of the queue, if it exists. It also adjusts the queue so that the next element is available without moving every element in the queue.

• bool empty ()

Checks if the queue is empty. This method checks if any elements are in the queue.

Private Attributes

• int32 t size

Size of the queue We store the size of the queue. This integer holds that value.

smart_ptr< dataType > * array

Elements in the gueue We store all the elements for the gueue is this vector.

• int32 t start

The start of the queue This stores the location of the start of the queue.

• int32 t end

The end of the queue This stores the end of the queue.

spinLock lock

Lock for threads This **spinLock** (p. 309) allows us to safely access the queue from multiple threads.

24.15.1 Detailed Description

```
template < class dataType >
class os::safeQueue < dataType >
```

This is the **safeQueue** (p. 291) class The **safeQueue** (p. 291) class is thread safe. It is a template class.

24.15.2 Constructor & Destructor Documentation

```
template < class dataType > os::safeQueue < dataType > ::safeQueue ( int32_t s ) [inline] template < class dataType > os::safeQueue < dataType > ::safeQueue ( ) [inline] template < class dataType > virtual os::safeQueue < dataType > ::~safeQueue ( ) [inline], [virtual]
```

24.15.3 Member Function Documentation

```
template<class dataType> bool os::safeQueue< dataType >::empty ( ) [inline]
```

Checks if the queue is empty. This method checks if any elements are in the queue.

Returns

bool

template<class dataType> smart_ptr<dataType> os::safeQueue< dataType >::pop ()
[inline]

Removes the head of the queue This method pops the head of the queue, if it exists. It also adjusts the queue so that the next element is available without moving every element in the queue.

Returns

smart_ptr<dataType>

template<class dataType> void os::safeQueue< dataType >::push (smart_ptr< dataType > x)
[inline]

Add a value to the queue This method pushes an element into the queue, assuming that space exists in the queue.

24.15.4 Member Data Documentation

 $template < class \ data Type > smart_ptr < data Type > * \ os::safeQueue < \ data Type > ::array \ [private]$

Elements in the queue We store all the elements for the queue is this vector.

template<class dataType> int32 t os::safeQueue< dataType >::end [private]

The end of the queue This stores the end of the queue.

template<class dataType> spinLock os::safeQueue< dataType >::lock [private]

Lock for threads This spinLock (p. 309) allows us to safely access the queue from multiple threads.

template < class dataType > int32_t os::safeQueue < dataType > ::size [private]

Size of the queue We store the size of the queue. This integer holds that value.


template<class dataType> int32_t os::safeQueue< dataType >::start [private]

The start of the queue This stores the location of the start of the queue.

24.16 os::savable Class Reference

Basic saving class.

Inheritance diagram for os::savable:

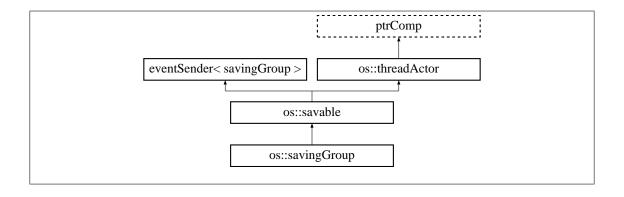

Public Member Functions

• savable ()

Default savable constructor.

• virtual ~savable ()

Virtual destructor.

• void markChanged ()

Mark change in savable class.

• bool needsSaving () const

Check if class needs to be saved.

• virtual void save ()

Saves the class.

• bool hasError () const

Returns if this class has a logged error.

• const std::string & getLastError () const

Returns the logged error.

• void clearError ()

Clears the logged error.

• void perform action ()

Saves the class.

• virtual bool singleCase () const

Indicates if a thread is a single function.

• virtual bool action_ready ()

Indicates if a function is available.

Static Public Member Functions

• static smart_ptr< threadDistributor > getThread ()

Access saving thread.

• static void unbindThread ()

Un-bind saving thread.

• static bool **setThread** (smart_ptr< **threadDistributor** > thr)

Set the saving thread-distributor.

Protected Member Functions

• void finishedSaving ()

Reset os::savable::_needsSaving (p. 298).

• void **errorSaving** (std::string err)

Logs error while saving.

Private Attributes

• bool _needsSaving

Holds if this class needs saving.

• std::string lastError

String representation of the last error.

24.16.1 Detailed Description

Basic saving class.

Class which defines itself as savable. A savable class alerts its listeners when it needs to be re-saved.

24.16.2 Constructor & Destructor Documentation

```
os::savable::savable()
```

Default savable constructor.

```
virtual os::savable::~savable( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

24.16.3 Member Function Documentation

```
virtual bool os::savable::action_ready( ) [inline], [virtual]
```

Indicates if a function is available.

Returns

needsSaving

Reimplemented from os::threadActor (p. 312).

```
void os::savable::clearError ( )
```

Clears the logged error.

Returns

void

```
void os::savable::errorSaving ( std::string err ) [protected]
Logs error while saving.
   Sets the savable class into the error state, logging the given error.
Parameters
      err
              Error to be logged
 in
Returns
     void
void os::savable::finishedSaving( ) [protected]
Reset os::savable::_needsSaving (p. 298).
   Called when a savable class has finished saving itself.
Returns
     void
const std::string& os::savable::getLastError( ) const [inline]
Returns the logged error.
Returns
     os::savable:: lastError
static smart_ptr<threadDistributor> os::savable::getThread( ) [static]
Access saving thread.
   Returns a reference to the thread-distributor used to save files. This distributor is NULL unless
explicitly set.
Returns
     Saving thread-distributor
```

```
bool os::savable::hasError( ) const [inline]
```

Returns if this class has a logged error.

Returns

```
os::savable::_lastError != ""
```

```
void os::savable::markChanged ( )
Mark change in savable class.
   Slots this class for saving. Flips os::savable::_needsSaving (p. 298).
Returns
     void
bool os::savable::needsSaving ( ) const [inline]
Check if class needs to be saved.
Returns
     os::savable::_needsSaving (p. 298)
void os::savable::perform_action( ) [inline], [virtual]
Saves the class.
Returns
     void
   Reimplemented from os::threadActor (p. 312).
virtual void os::savable::save ( ) [inline], [virtual]
Saves the class.
   This function must be re-implemented by classes which inherit from the savable class.
Returns
     void
   Reimplemented in os::savingGroup (p. 300).
static bool os::savable::setThread ( smart ptr< threadDistributor > thr ) [static]
Set the saving thread-distributor.
   Will not set the thread-distributor if the provided arguement is NULL or the current saving thread-
distributor is defined.
Returns
     True if successful, else, False
virtual bool os::savable::singleCase( ) const [inline], [virtual]
Indicates if a thread is a single function.
Returns
     true
   Reimplemented from os::threadActor (p. 312).
```

static void os::savable::unbindThread() [static]

Un-bind saving thread.

Sets the current saving thread to NULL. Assuming the saving distributor is not shared, this will delete the thread-distributor.

Returns

void

24.16.4 Member Data Documentation

bool os::savable::_needsSaving [private]

Holds if this class needs saving.


std::string os::savable::lastError [private]

String representation of the last error.

24.17 os::savingGroup Class Reference

Group of saving classes.

Inheritance diagram for os::savingGroup:

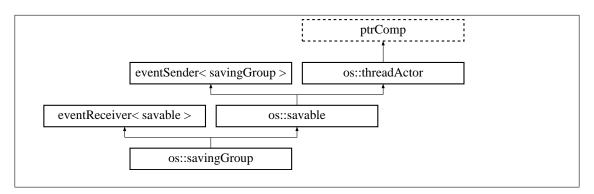

Public Member Functions

• savingGroup ()

Default savingGroup (p. 298) constructor.

• virtual ~savingGroup ()

Virtual destructor.

• virtual void save ()

Saves the class.

void bindSavable (smart_ptr< savable > sr)

Checks if a savable class needs to be queued.

Protected Member Functions

• void receiveEvent (smart_ptr< savable > sr)

Receives a change event.

Private Attributes

• os::spinLock queueLock

Mutex for save queue.

• os::smart_ptr< os::unsortedList< savable > > saveQueue

Queue of savable classes to be re-saved.

Friends

• class eventSender < savingGroup >

Friendship with event sender.

Additional Inherited Members

24.17.1 Detailed Description

Group of saving classes.

Class which defines listens for save triggers from a set of slave classes. Note that this class is itself savable.

24.17.2 Constructor & Destructor Documentation

os::savingGroup::savingGroup() [inline]

Default **savingGroup** (p. 298) constructor.

virtual os::savingGroup::~savingGroup() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

24.17.3 Member Function Documentation

void os::savingGroup::bindSavable (smart_ptr< savable > sr)

Checks if a savable class needs to be queued.

Binds a savable class to this receiver checking its current status to see if it needs to be queued for saving.

Parameters

in	sav	Savable node to be bound
----	-----	--------------------------

Returns

void

void os::savingGroup::receiveEvent (smart ptr< savable > sr) [protected]

Receives a change event.

This function is triggered by a savable class to which this listener is registered to.

Parameters

in	cr	Pointer to savable class
TIL	31	i unitei tu savabie ciass

Returns

void

virtual void os::savingGroup::save() [virtual]

Saves the class.

This function must be re-implemented by classes which inherit from the savable class.

Returns

void

Reimplemented from os::savable (p. 297).

24.17.4 Friends And Related Function Documentation

friend class eventSender< savingGroup > [friend]

Friendship with event sender.

The eventSender must be able to access the **savingGroup::receiveEvent** (p. 300) function.

24.17.5 Member Data Documentation

os::spinLock os::savingGroup::queueLock [private]

Mutex for save queue.

os::smart_ptr<os::unsortedList<savable> > os::savingGroup::saveQueue [private]

Queue of savable classes to be re-saved.

24.18 os::Serial Class Reference

This is the **Serial** (p. 300) class. **Serial** (p. 300) objects allow us to abstract out most of the platform irregularities across multiple systems.

Public Member Functions

• Serial (char *portName, bool t)

Serial (p. 300) constructor Initializes serial communication on a given COM port.

virtual ~Serial ()

Serial (p. 300) destructor Closes a serial connection.

• int **ReadData** (uint8 t *buffer, uint32 t nbChar)

Read from a serial port Read data in a buffer, if nbChar is greater than the maximum number of bytes available, it will return only the bytes available. The function return -1 when nothing could be read, the number of bytes actually read.

bool WriteData (uint8_t *buffer, uint32_t nbChar)

Write to a serial port Writes data from a buffer through the **Serial** (p. 300) connection. Returns true on success.

bool IsConnected ()

Check connection Checks on the status of the serial port.

Private Attributes

• uint32 t hSerial

Comm Handler Holds an unsigned integer, which is used for status information.

• bool connected

Connection indicator A boolean which holds whether or not this **Serial** (p. 300) object is connected to a port.

• bool track

Variable for debugging Allows us to determine whether or not a particular **Serial** (p. 300) object needs to print out debugging information.

24.18.1 Detailed Description

This is the **Serial** (p. 300) class. **Serial** (p. 300) objects allow us to abstract out most of the platform irregularities across multiple systems.

24.18.2 Constructor & Destructor Documentation

Serial::Serial (char * portName, bool t)

Serial (p. 300) constructor Initializes serial communication on a given COM port.

Serial::~Serial() [virtual]

Serial (p. 300) destructor Closes a serial connection.

24.18.3 Member Function Documentation

bool Serial::IsConnected ()

Check connection Checks on the status of the serial port.

Returns

bool

```
int32 t Serial::ReadData ( uint8 t * buffer, uint32 t nbChar )
```

Read from a serial port Read data in a buffer, if nbChar is greater than the maximum number of bytes available, it will return only the bytes available. The function return -1 when nothing could be read, the number of bytes actually read.

Returns

int

bool Serial::WriteData (uint8_t * buffer, uint32_t nbChar)

Write to a serial port Writes data from a buffer through the **Serial** (p. 300) connection. Returns true on success.

Returns

bool

24.18.4 Member Data Documentation

bool os::Serial::connected [private]

Connection indicator A boolean which holds whether or not this **Serial** (p. 300) object is connected to a port.

```
uint32 t os::Serial::hSerial [private]
```

Comm Handler Holds an unsigned integer, which is used for status information.

```
boolos::Serial::track [private]
```

Variable for debugging Allows us to determine whether or not a particular **Serial** (p. 300) object needs to print out debugging information.

24.19 os::serialThread Class Reference

Serial (p. 300) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.

Public Member Functions

- serialThread ()
- serialThread (bool track)
- virtual ~serialThread ()
- void serialLoop (os::smart_ptr< os::threadHolder > th)

connection management method This method monitors makes sure that active connections are still active.

void sendData (uint8 t *x, uint32 t nb)

Sends data Sends data to a given location.

• int32 t receiveData (uint8 t *x, uint32 t nb)

receives data Gets data.

Private Member Functions

• void build (bool track)

Build serial thread This is a method that builds the serial thread and determines if said thread will have debugging statements.

void search (os::smart_ptr< os::threadHolder > th)

Creates serial objects Goes through all possible ports and creates serial objects for those ports which need serial objects.

• void listen ()

Private Attributes

• Serial * connection

The connection itself This is a pointer to the actual Serial (p. 300) object.

• char * conName

Name for the connection Stores the name of this connection.

• std::string * nameList

Stores port names There is a set of possible names for ports. This pointer to string holds the names of various possible ports.

• int32 t numNames

The number of ports This stores the number of unique ports on a given platform.

• int32_t resetTest

Used to detect loss of connection. Stores the number of consecutive failures in sending data. If this variable increases beyond 10, the connection is deleted.

• bool print

Debug variable Used to activate debugging statements.

• bool active

Thread activity Holds if the current serial thread should be active.

24.19.1 Detailed Description

Serial (p. 300) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.

24.19.2 Constructor & Destructor Documentation

```
serialThread::serialThread( )
serialThread::serialThread( bool track )
serialThread::~serialThread( ) [virtual]
```

24.19.3 Member Function Documentation

```
void serialThread::build ( bool track ) [private]
```

Build serial thread This is a method that builds the serial thread and determines if said thread will have debugging statements.

```
\label{lem:condition} \begin{tabular}{ll} void os::serialThread::listen ( ) & [private] \\ int 32_t serialThread::receiveData ( uint 8_t * x, uint 32_t nb ) \\ \end{tabular}
```

receives data Gets data.

Returns

int32_t

void serialThread::search (os::smart ptr< os::threadHolder > th) [private]

Creates serial objects Goes through all possible ports and creates serial objects for those ports which need serial objects.

```
void serialThread::sendData ( uint8_t * x, uint32_t nb )
```

Sends data Sends data to a given location.

```
void serialThread::serialLoop ( os::smart_ptr< os::threadHolder > th )
```

connection management method This method monitors makes sure that active connections are still active.

24.19.4 Member Data Documentation

```
bool os::serialThread::active [private]
```

Thread activity Holds if the current serial thread should be active.

```
char* os::serialThread::conName [private]
```

Name for the connection Stores the name of this connection.

```
Serial* os::serialThread::connection [private]
```

The connection itself This is a pointer to the actual **Serial** (p. 300) object.

std::string* os::serialThread::nameList [private]

Stores port names There is a set of possible names for ports. This pointer to string holds the names of various possible ports.

int32_t os::serialThread::numNames [private]

The number of ports This stores the number of unique ports on a given platform.

bool os::serialThread::print [private]


Debug variable Used to activate debugging statements.

int32_t os::serialThread::resetTest [private]

Used to detect loss of connection. Stores the number of consecutive failures in sending data. If this variable increases beyond 10, the connection is deleted.

24.20 os::singleAction Class Reference

single action class This class is for a thread with only one action. Inheritance diagram for os::singleAction:



Public Member Functions

- singleAction (smart_ptr< threadDistributor > dist, void(*rf)(void *), void *rp)
- virtual ~singleAction ()
- virtual bool singleCase () const

indicates singleCase Tells the caller that this threadActor (p. 311) has only one action

• virtual bool mustDelete () const

indicates deletion Tells the caller that this threadActor (p. 311) must be deleted.

virtual void perform_action ()

calls function Runs the function that was passed when this object was created.

virtual bool action_ready ()

Indicates readiness Tells the caller that this function is ready to run.

Private Attributes

- void(* recieveFunction)(void *)
 - function to run This is a pointer to the function that will run when this thread is called.
- void * recievePointer

function parameters parameters for the thread that will be run.

Additional Inherited Members

24.20.1 Detailed Description

single action class This class is for a thread with only one action.

```
24.20.2 Constructor & Destructor Documentation
```

```
single Action:: single Action ( smart_ptr < \textbf{threadDistributor} > dist, \ void(*)(void *) \ rf, \ void * rp ) \\ virtual os:: single Action:: \sim single Action ( ) [inline], [virtual]
```

24.20.3 Member Function Documentation

```
virtual bool os::singleAction::action_ready( ) [inline], [virtual]
```

Indicates readiness Tells the caller that this function is ready to run.

Returns

bool

Reimplemented from **os::threadActor** (p. 312).

```
virtual bool os::singleAction::mustDelete ( ) const [inline], [virtual]
```

indicates deletion Tells the caller that this threadActor (p. 311) must be deleted.

Returns

bool

```
void singleAction::perform_action( ) [virtual]
```

calls function Runs the function that was passed when this object was created.

Reimplemented from os::threadActor (p. 312).

```
virtual bool os::singleAction::singleCase ( ) const [inline], [virtual]
```

indicates singleCase Tells the caller that this threadActor (p. 311) has only one action

Returns

bool

Reimplemented from os::threadActor (p. 312).

24.20.4 Member Data Documentation

void(* os::singleAction::recieveFunction) (void *) [private]

function to run This is a pointer to the function that will run when this thread is called.

void* os::singleAction::recievePointer [private]

function parameters parameters for the thread that will be run.

24.21 os::socketTracker Class Reference

socketTracker (p. 307) class Tracks all currently active sockets.

Public Member Functions

- virtual ~socketTracker ()
- uint32_t getNumSockets ()

Gives the number of sockets Returns the number of sockets currently in the socketTracker (p. 307).

• void closeAll ()

Close all sockets Closes all the sockets in the socketHolder.

Static Public Member Functions

static smart_ptr< socketTracker > singleton ()

Public constructor Creates a **socketTracker** (p. 307) if one does not exists. Returns the **socket**← **Tracker** (p. 307) if one does exist.

Private Member Functions

void add (smart_ptr< socketUser > use)

Add a socket Adds a socket to the socketTracker (p. 307).

• void remove (smart ptr< socketUser > use)

Remove a socket Removes a socket from the socketTracker (p. 307).

• socketTracker ()

Private Attributes

• spinLock userLock

Lock for safety Ensures safety in multi threaded operation.

• AVLTree< socketUser > users

Holds sockets Holds all socket users.

Friends

class socketUser


24.21.1 Detailed Description

socketTracker (p. 307) class Tracks all currently active sockets.

```
24.21.2 Constructor & Destructor Documentation
socketTracker::socketTracker( ) [private]
socketTracker::~socketTracker( ) [virtual]
24.21.3 Member Function Documentation
void socketTracker::add ( smart_ptr< socketUser > use ) [private]
Add a socket Adds a socket to the socketTracker (p. 307).
void socketTracker::closeAll ( )
Close all sockets Closes all the sockets in the socketHolder.
uint32_t os::socketTracker::getNumSockets( ) [inline]
Gives the number of sockets Returns the number of sockets currently in the socketTracker (p. 307).
Returns
     uint32_t
void socketTracker::remove ( smart_ptr< socketUser > use ) [private]
Remove a socket Removes a socket from the socketTracker (p. 307).
smart_ptr< socketTracker > socketTracker::singleton( ) [static]
Public constructor Creates a socketTracker (p. 307) if one does not exists. Returns the socket←
Tracker (p. 307) if one does exist.
Returns
     smart_ptr<socketTracker>
24.21.4 Friends And Related Function Documentation
friend class socketUser [friend]
24.21.5 Member Data Documentation
spinLock os::socketTracker::userLock [private]
Lock for safety Ensures safety in multi threaded operation.
AVLTree<socketUser> os::socketTracker::users [private]
Holds sockets Holds all socket users.
```

24.22 os::socketUser Class Reference

Socket user class This class allows us to manage sockets. Inheritance diagram for os::socketUser:

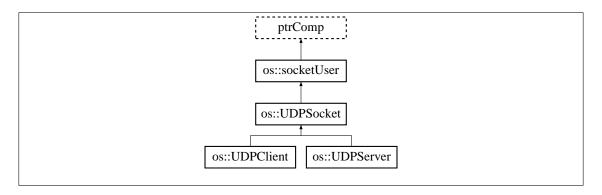

Public Member Functions

- socketUser ()
- virtual ~socketUser ()
- virtual void openSocket ()
- virtual void closeSocket ()

24.22.1 Detailed Description

Socket user class This class allows us to manage sockets.

24.22.2 Constructor & Destructor Documentation

```
socketUser::socketUser( )
socketUser::~socketUser( ) [virtual]
```

24.22.3 Member Function Documentation

virtual void os::socketUser::closeSocket() [inline], [virtual]

Reimplemented in os::UDPServer (p. 329), and os::UDPClient (p. 323).

virtual void os::socketUser::openSocket() [inline], [virtual]

Reimplemented in os::UDPServer (p. 330), and os::UDPClient (p. 324).

24.23 os::spinLock Class Reference

Public Member Functions

• spinLock ()

- virtual ~spinLock ()
- void acquire ()
- void release ()
- bool isTaken ()

Private Attributes

- pthread_mutex_t spinlock
- bool taken

24.23.1 Detailed Description

brief **spinLock** (p. 309) class This is the **spinLock** (p. 309) class we are using. There is nothing particularly complex, but this wraps the available mutex into a cross platform lock. This class has different implementations across different platforms, but the same methods regardless of platform.

24.23.2 Constructor & Destructor Documentation

```
spinLock::spinLock( )
spinLock::~spinLock( ) [virtual]
```

24.23.3 Member Function Documentation

```
void spinLock::acquire ( )
```

brief acquires lock This method allows a thread to acquire this **spinLock** (p. 309).

```
bool spinLock::isTaken ( )
```

brief indicates lock status This method indicates if the lock is taken, without acquiring the lock.

Returns

bool

```
void spinLock::release ( )
```

brief releases lock This method allows a thread to release this **spinLock** (p. 309).

24.23.4 Member Data Documentation

```
pthread_mutex_t os::spinLock::spinlock [private]
```

brief the base lock This is the base **spinLock** (p. 309). This is the element that changes most significantly across different platforms.


```
bool os::spinLock::taken [private]
```

brief taken This boolean indicates if the **spinLock** (p. 309) is currently taken.

24.24 os::threadActor Class Reference

threadActor (p. 311) class This class holds information for determining which thread goes at a give time.

Inheritance diagram for os::threadActor:

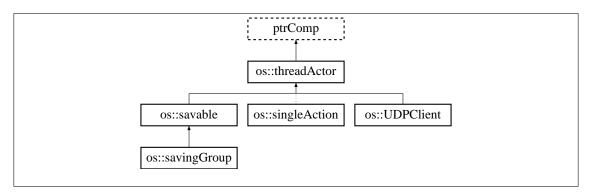

Public Member Functions

- threadActor ()
- virtual ~threadActor ()
- void pushDistributor (smart_ptr< threadDistributor > dist)

Adds actor Adds the actor to a given threadDistributor (p. 313).

void removeDistributor ()

Removes actor from distributor Removes the actor from it's current distributor.

• virtual bool singleCase () const

Indicates if a thread is a single function Indicates if thread is single function.//Access Functions bool isSpecialCase;.

• virtual void perform_action ()

calls thread action If a thread is a single action and has an associated function, that function will be called.

• virtual bool action ready ()

Indicates if a function is available If the thread is ready to call its function, it will indicate that.

Private Attributes

• smart_ptr< threadDistributor > distributor

Distributor for actor This is the distributor for this actor.

Friends

• class threadDistributor

24.24.1 Detailed Description

threadActor (p. 311) class This class holds information for determining which thread goes at a give time.

24.24.2 Constructor & Destructor Documentation threadActor::threadActor() threadActor::~threadActor() [virtual] 24.24.3 Member Function Documentation virtual bool os::threadActor::action_ready() [inline], [virtual] Indicates if a function is available If the thread is ready to call its function, it will indicate that. Returns bool Reimplemented in os::UDPClient (p. 323), os::singleAction (p. 306), and os::savable (p. 295). virtual void os::threadActor::perform action() [inline], [virtual] calls thread action If a thread is a single action and has an associated function, that function will be called. Reimplemented in os::UDPClient (p. 324), os::singleAction (p. 306), and os::savable (p. 297). void threadActor::pushDistributor (smart ptr< threadDistributor > dist) Adds actor Adds the actor to a given threadDistributor (p. 313). void threadActor::removeDistributor () Removes actor from distributor Removes the actor from it's current distributor. virtual bool os::threadActor::singleCase() const [inline], [virtual] Indicates if a thread is a single function Indicates if thread is single function.//Access Functions bool isSpecialCase;. uint32 t size; uint32 t beginning pos; uint32 t next pos; std::vector<smart ptr<logLine> > lineList; friend class LineSaverListener (p. 275); os::spinLock (p. 309) lock; smartSet<LineSaverListener> void priv_addListener(smart_ptr<LineSaverListener> I); void priv_removeListener(smart_ptr<← LineSaverListener> I); @return bool Reimplemented in os::singleAction (p. 306), and os::savable (p. 297). 24.24.4 Friends And Related Function Documentation friend class threadDistributor [friend] 24.24.5 Member Data Documentation smart ptr<threadDistributor> os::threadActor::distributor [private]

Distributor for actor This is the distributor for this actor.

24.25 os::threadDistributor Class Reference

Distributes threads This class allows us to determine which thread should execute at any given time.

Public Member Functions

- threadDistributor ()
- threadDistributor (uint32 t nt)
- virtual ~threadDistributor ()
- void **setNumThreads** (uint32_t nt)

sets thread count Sets the number of threads allowed in the distributor.

• uint32_t getNumThreads () const

gives thread count Give the number of threads in the exe_thread_list.

• smart ptr< threadActor > popNext ()

Gives next element in the queue Removes the next element in the actor queue that is ready to operate.

• void **pushDone** (smart ptr< **threadActor** > dn)

puts an actor onto the queue Places a thread actor onto the actor queue.

Private Member Functions

• void addActor (smart ptr< threadActor > act)

Adds actor Adds an actor to the distributor.

• void removeActor (smart ptr< threadActor > act)

Removes actor Removes an actor from the distributor. It will still be in the queue, but not the list.

Private Attributes

spinLock dataLock

lock to ensure safe distribution This lock ensures we are operating safely.

• std::queue< smart ptr< threadActor > > actor queue

holds actors This is a queue of actors. This is for ordering.

smartSet< threadActor > actor_list

holds actors This is a set of actors.

std::vector< smart_ptr< executorThread > > exe_thread_list

holds executors for threads Holds executors for threads, also helps for ordering.

Friends

class threadActor

24.25.1 Detailed Description

Distributes threads This class allows us to determine which thread should execute at any given time.

```
24.25.2 Constructor & Destructor Documentation
threadDistributor::threadDistributor()
threadDistributor::threadDistributor ( uint32_t nt )
threadDistributor::~threadDistributor( ) [virtual]
24.25.3 Member Function Documentation
void threadDistributor::addActor ( smart_ptr< threadActor > act ) [private]
Adds actor Adds an actor to the distributor.
uint32_t os::threadDistributor::getNumThreads( ) const [inline]
gives thread count Give the number of threads in the exe_thread_list.
Returns
     uint32 t
smart_ptr< threadActor > threadDistributor::popNext ( )
Gives next element in the queue Removes the next element in the actor queue that is ready to
operate.
Returns
     smart_ptr<threadActor>
void threadDistributor::pushDone ( smart_ptr< threadActor > dn )
puts an actor onto the queue Places a thread actor onto the actor queue.
void threadDistributor::removeActor ( smart_ptr< threadActor > act ) [private]
Removes actor Removes an actor from the distributor. It will still be in the queue, but not the list.
void threadDistributor::setNumThreads ( uint32_t nt )
sets thread count Sets the number of threads allowed in the distributor.
24.25.4 Friends And Related Function Documentation
friend class threadActor [friend]
24.25.5 Member Data Documentation
smartSet<threadActor> os::threadDistributor::actor list [private]
```

holds actors This is a set of actors.

std::queue<smart_ptr<threadActor> > os::threadDistributor::actor_queue [private]

holds actors This is a queue of actors. This is for ordering.

spinLock os::threadDistributor::dataLock [private]

lock to ensure safe distribution This lock ensures we are operating safely.

std::vector<smart_ptr<executorThread> > os::threadDistributor::exe_thread_list [private]

holds executors for threads Holds executors for threads, also helps for ordering.

24.26 os::threadHolder Class Reference

Public Member Functions

- threadHolder (smart_ptr< std::thread > tp, std::string ti="")
- virtual ~threadHolder ()
- void markFinished ()

Indicates that a thread is finished Inside a threaded function, this method is called so that the thread handler knows the status of the thread it is monitoring.

• void kill ()

Notes the thread for killing This method tells the thread handler that the thread is ready to be killed.

• const bool running () const

Gives run status This method simply returns the status of the running boolean.

• const std::string & threadInfo () const

Gives threadInfo variable Gives the thread information string to the calling object.

• const bool & killed ()

Gives _was_killed variable This gives the kill status of the thread back to the calling object.

• smart ptr< std::thread > thread ()

Gives a smart pointer to the thread Gives a pointer to the thread for this particular threadHandler to the calling onject.

- const bool operator== (const threadHolder &th) const
- const bool operator!= (const threadHolder &th) const
- const bool operator<= (const threadHolder &th) const
- const bool **operator**>= (const **threadHolder** &th) const
- const bool operator< (const threadHolder &th) const
- const bool operator> (const threadHolder &th) const

Private Attributes

• std::string threadInfo

Thread data Each thread holder gives a variety of relevant information. The _threadInfo string stores this information.

smart_ptr< std::thread > _thread_ptr

Points at relevant thread Because the thread holder remains in the calling thread, this pointer allows us to know where exactly the thread actually is.

• bool running

Indicates if a thread is operating This lets a thread check on the operation status of another thread.

• bool was killed

Gives status on a thread If a thread must be killed, this boolean indicates the status of the thread.

24.26.1 Constructor & Destructor Documentation

```
threadHolder::threadHolder (\ smart\_ptr< std::thread> tp,\ std::string\ ti="""\ ) virtual\ os::threadHolder::\sim threadHolder (\ )\ [inline],\ [virtual]
```

24.26.2 Member Function Documentation

```
void os::threadHolder::kill( ) [inline]
```

Notes the thread for killing This method tells the thread handler that the thread is ready to be killed.

```
const bool& os::threadHolder::killed ( ) [inline]
```

Gives was killed variable This gives the kill status of the thread back to the calling object.

Returns

os::threadHolder::_was_killed (p. 317)

```
void os::threadHolder::markFinished( ) [inline]
```

Indicates that a thread is finished Inside a threaded function, this method is called so that the thread handler knows the status of the thread it is monitoring.

```
const bool os::threadHolder::operator!= ( const threadHolder & th ) const [inline] const bool os::threadHolder::operator< ( const threadHolder & th ) const [inline] const bool os::threadHolder::operator<= ( const threadHolder & th ) const [inline] const bool os::threadHolder::operator== ( const threadHolder & th ) const [inline] const bool os::threadHolder::operator> ( const threadHolder & th ) const [inline] const bool os::threadHolder::operator>= ( const threadHolder & th ) const [inline] const bool os::threadHolder::running ( ) const [inline]
```

Gives run status This method simply returns the status of the running boolean.

Returns

os::threadHolder::_running (p. 317)

smart_ptr<std::thread> os::threadHolder::thread () [inline]

Gives a smart pointer to the thread Gives a pointer to the thread for this particular threadHandler to the calling onject.

Returns

```
os::threadHolder::_thread_ptr (p. 317)
```

const std::string& os::threadHolder::threadInfo () const [inline]

Gives _threadInfo variable Gives the thread information string to the calling object.

Returns

os::threadHolder::_threadInfo (p. 317)

24.26.3 Member Data Documentation

bool os::threadHolder::_running [private]

Indicates if a thread is operating This lets a thread check on the operation status of another thread.

```
smart_ptr<std::thread> os::threadHolder::_thread_ptr [private]
```

Points at relevant thread Because the thread holder remains in the calling thread, this pointer allows us to know where exactly the thread actually is.

```
std::string os::threadHolder:: threadInfo [private]
```

Thread data Each thread holder gives a variety of relevant information. The _threadInfo string stores this information.

```
bool os::threadHolder:: was killed [private]
```

Gives status on a thread If a thread must be killed, this boolean indicates the status of the thread.

24.27 os::threadTracker Class Reference

Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.

Public Member Functions

- virtual ~threadTracker ()
- uint32 t killTime () const

Gives kill time value This method returns the current killTime. killTime is the amount of time a thread can operate before it is automatically killed.

• void **setKillTime** (uint32_t kt)

Sets killTime This method allows a user to set the killTime for a given threadTracker (p. 317).

• bool shutdown ()

Kills all threads currently running When a program is ending, this method allows us to kill all threads. If a thread doesn't exit, this will throw an error.

void logShutdownFailures ()

Logs shut-down failures.

void logThreads ()

Logging method This method logs thread information into osout.

void errorLogThreads ()

Logging method This method logs thread information into oserr.

• void add (smart ptr< threadHolder > th)

Add a thread holder Adds a thread holder to the thread tracker. Will error out if the thread cannot be inserted.

• void remove (smart ptr< threadHolder > th)

Remove a thread holder Removes a thread holder from the thread tracker. Will error out if the thread cannot be found.

• uint32 t getNumThreads () const

Gives the number of threads Returns the number of threads in the thread tracker.

Static Public Member Functions

• static smart ptr< threadTracker > singleton ()

Thread tracker creator Given that we only want one **threadTracker** (p. 317) at any given time, The singleton method checks is a **threadTracker** (p. 317) has already been made. If it has, it retruns a pointer to the **threadTracker** (p. 317). If not, it creates a new **threadTracker** (p. 317) and returns the pointer.

Private Member Functions

• void checkKillList ()

Removes expired threads When a thread expires, it is not automatically removes. This thread finds and deletes expired threads.

• threadTracker ()

void log (smart_ptr< std::ostream > t)

Logging method This allows the threadTracker (p. 317) to perform logging duties.

Private Attributes

• AVLTree< threadHolder > killList

Tree of threads expired These threads have expired, but not yet deleted.

$\bullet \ \ \mathsf{AVLTree} < \textbf{threadHolder} > \textbf{threadList} \\$

Tree of threads running These threads are currently in operation.

spinLock lock

Safety **spinLock** (p. 309) This lock ensures that only one thread can update Trees at any given time.

• uint32 t killTime

Time before a thread expires Threads can only run so long before we must kill them. This variable allows us to vary how long a thread can run before we kill it.

24.27.1 Detailed Description

Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.

threadTracker::threadTracker() [private] virtual os::threadTracker::~threadTracker() [inline], [virtual] 24.27.3 Member Function Documentation void threadTracker::add(smart_ptr< threadHolder > th) Add a thread holder Adds a thread holder to the thread tracker. Will error out

24.27.2 Constructor & Destructor Documentation

Add a thread holder Adds a thread holder to the thread tracker. Will error out if the thread cannot be inserted.

```
void threadTracker::checkKillList( ) [private]
```

Removes expired threads When a thread expires, it is not automatically removes. This thread finds and deletes expired threads.

```
void threadTracker::errorLogThreads ( )
```

Logging method This method logs thread information into oserr.

```
uint32 t os::threadTracker::getNumThreads( ) const [inline]
```

Gives the number of threads Returns the number of threads in the thread tracker.

Returns

```
uint32 t
```

```
uint32_t os::threadTracker::killTime ( ) const [inline]
```

Gives kill time value This method returns the current killTime. killTime is the amount of time a thread can operate before it is automatically killed.

Returns

```
uint32_t
```

```
void threadTracker::log ( smart_ptr< std::ostream > t )  [private]
```

Logging method This allows the threadTracker (p. 317) to perform logging duties.

```
void threadTracker::logShutdownFailures ( )
```

Logs shut-down failures.

```
void threadTracker::logThreads ( )
```

Logging method This method logs thread information into osout.

```
void threadTracker::remove ( smart_ptr< threadHolder > th )
```

Remove a thread holder Removes a thread holder from the thread tracker. Will error out if the thread cannot be found.

```
void os::threadTracker::setKillTime ( uint32_t kt ) [inline]
```

Sets killTime This method allows a user to set the killTime for a given threadTracker (p. 317).

```
bool threadTracker::shutdown ( )
```

Kills all threads currently running When a program is ending, this method allows us to kill all threads. If a thread doesn't exit, this will throw an error.

```
smart_ptr< threadTracker > threadTracker::singleton( ) [static]
```

Thread tracker creator Given that we only want one **threadTracker** (p. 317) at any given time, The singleton method checks is a **threadTracker** (p. 317) has already been made. If it has, it retruns a pointer to the **threadTracker** (p. 317). If not, it creates a new **threadTracker** (p. 317) and returns the pointer.

Returns

smart_ptr<threadTracker>

24.27.4 Member Data Documentation

```
uint32_t os::threadTracker::_killTime [private]
```

Time before a thread expires Threads can only run so long before we must kill them. This variable allows us to vary how long a thread can run before we kill it.

```
AVLTree<threadHolder> os::threadTracker::killList [private]
```

Tree of threads expired These threads have expired, but not yet deleted.

```
spinLock os::threadTracker::lock [private]
```

Safety spinLock (p. 309) This lock ensures that only one thread can update Trees at any given time.

```
AVLTree<threadHolder> os::threadTracker::threadList [private]
```

Tree of threads running These threads are currently in operation.

24.28 os::UDPAVLNode Struct Reference

Public Member Functions

- virtual ~UDPAVLNode ()
- const bool **operator==** (const **UDPAVLNode** &comp) const
- const bool operator> (const UDPAVLNode &comp) const

Public Attributes

- struct sockaddr_in ipv4_addr
- struct sockaddr_in6 ipv6_addr
- IPAddress address

24.28.1 Detailed Description

brief UDPAVLNode (p. 321) struct Node used by the UDP server for path rectifying.

24.28.2 Constructor & Destructor Documentation

virtual os::UDPAVLNode::~UDPAVLNode() [inline], [virtual]

24.28.3 Member Function Documentation

const bool os::UDPAVLNode::operator== (const UDPAVLNode & comp) const [inline]
const bool os::UDPAVLNode::operator> (const UDPAVLNode & comp) const [inline]

24.28.4 Member Data Documentation

IPAddress os::UDPAVLNode::address

brief IPAddress (p. 269) of node IP address of the node.

struct sockaddr in os::UDPAVLNode::ipv4 addr


brief IPv4 address IPv4 address of the node.

struct sockaddr_in6 os::UDPAVLNode::ipv6_addr

brief IPv6 address IPv6 address of the node.

24.29 os::UDPClient Class Reference

Inheritance diagram for os::UDPClient:

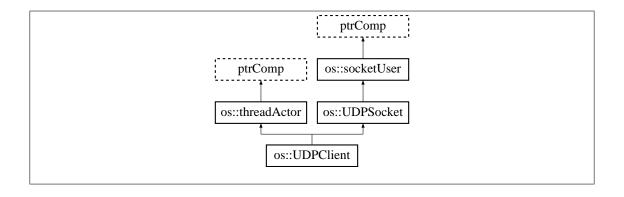

Public Member Functions

- **UDPClient** (int32_t v4_port, int32_t v6_port, const **IPAddress** &address)
- UDPClient (int32_t v4_port, int32_t v6_port, smart_ptr< myIPAddress > ip4_requires=NULL)
- virtual ~ UDPClient ()
- void openSocket ()
- void closeSocket ()
- void connect ()
- void disconnect ()
- virtual void perform action ()
- virtual bool action_ready ()
- bool getActive ()
- bool getConnected ()
- void **setReset** (float x)
- bool send (smart_ptr< UDPPacket > pck)

Private Attributes

- int32_t intlPv4_Port
- int32_t intlPv6_Port
- bool active
- volatile bool connected
- float conTrack
- float resetVal
- spinLock safeDelete
- os::smart_ptr< mylPAddress > mylP
- IPAddress addr
- struct sockaddr_in ipv4_addr
- struct sockaddr_in6 ipv6_addr
- int32_t **s**
- int32 t slen
- bool broadcast

Additional Inherited Members

24.29.1 Detailed Description

24.29.2 Constructor & Destructor Documentation

Reimplemented from os::UDPSocket (p. 333).

brief UDP Client class This is the class for the UDP Client. The client and server are independent classes.

```
UDPClient::UDPClient (int32 t v4 port, int32 t v6 port, const IPAddress & address)
UDPClient::UDPClient ( int32_t v4_port, int32_t v6_port, smart_ptr< mylPAddress >
ip4_requires = NULL )
UDPClient::~UDPClient( ) [virtual]
24.29.3 Member Function Documentation
bool UDPClient::action ready( ) [virtual]
brief checks if a message is available. Checks if a message is available.
Returns
     bool
   Reimplemented from os::threadActor (p. 312).
void UDPClient::closeSocket( ) [virtual]
brief closes socket Closes the socket of the client.
   Reimplemented from os::socketUser (p. 309).
void UDPClient::connect ( )
brief begins connection Initiates the connection for this client.
void UDPClient::disconnect( )
brief forces disconnection Forcibly closes the connection.
bool UDPClient::getActive( ) [virtual]
brief gives activity status. Gives the active boolean to caller.
Returns
     bool
```

```
bool UDPClient::getConnected( ) [virtual]
brief gives connection status Calculates if the client is currently connected.
Returns
     bool
   Reimplemented from os::UDPSocket (p. 333).
void UDPClient::openSocket( ) [virtual]
brief opens socket Opens the socket of the client.
   Reimplemented from os::socketUser (p. 309).
void UDPClient::perform action( ) [virtual]
brief receives a message Receives a message.
   Reimplemented from os::threadActor (p. 312).
bool UDPClient::send ( smart_ptr< UDPPacket > pck ) [virtual]
brief sends data Attempts to send data. Will report on the success or failure of the transmission.
Returns
     bool
   Reimplemented from os::UDPSocket (p. 333).
void UDPClient::setReset ( float x )
brief sets reset Sets the amount of time time allowed before the connection is considered dead.
24.29.4 Member Data Documentation
bool os::UDPClient::active [private]
brief indicates if active Indicates if this client is active.
IPAddress os::UDPClient::addr [private]
brief address of target Holds the IP address of the target device.
bool os::UDPClient::broadcast [private]
brief indicates broadcast mode Stores if the client is broadcasting.
volatile bool os::UDPClient::connected [private]
brief indicates if connected Indicates if this client is currently connected.
```

float os::UDPClient::conTrack [private]

brief holds time Holds the time for determining connection status.

int32_t os::UDPClient::intlPv4_Port [private]

brief port for IPv4 Holds the port for IPv4 transmissions.

int32_t os::UDPClient::intIPv6_Port [private]

brief port for IPv6 Holds the port for IPv6 transmissions.

struct sockaddr_in os::UDPClient::ipv4_addr [private]

brief IPv4 address of target Holds the IPv4 address of the target device.

struct sockaddr_in6 os::UDPClient::ipv6_addr [private]

brief IPv6 address of target Holds the IPv6 address of the target device.

os::smart_ptr<mylPAddress> os::UDPClient::mylP [private]

brief client's IP address Holds the client's own IP address

float os::UDPClient::resetVal [private]

brief holds timeout Holds the amount of time that must pass before a connection is considered inactive.

int32_t os::UDPClient::s [private]

brief socket Socket used in data transmission.

spinLock os::UDPClient::safeDelete [private]

brief lock for safety Ensures that the client can be safely multi threaded.

int32 t os::UDPClient::slen [private]

brief length of address of target socket This is the length of the address of the target socket.

24.30 os::UDPPacket Class Reference

Public Member Functions

- UDPPacket (uint8_t *input, const IPAddress &i, int32_t p)
- UDPPacket (uint8_t *output, int32_t l, int32_t t, const IPAddress &i, int32_t p)
- virtual ~UDPPacket ()
- int32 t getLength () const

- int32_t getType () const
- uint8_t * getData ()
- const IPAddress & getAddress () const
- int32_t getPort () const
- os::smart_ptr< byte > sendData () const

Private Attributes

- IPAddress ip
- bool in_or_out
- int32_t port
- uint8_t * data
- uint16_t length
- uint8_t type

24.30.1 Detailed Description

brief **UDPPacket** (p. 325) class This is the UDP Packet class, it can be sent and received.

```
24.30.2 Constructor & Destructor Documentation
```

```
UDPPacket::UDPPacket ( uint8 t * input, const IPAddress & i, int32 t p )
```

brief receiving initializer Sets up a packet to be received.

```
\label{localization} \mbox{UDPPacket}: \mbox{UDPPacket} \; ( \; \mbox{uint8} \mbox{$\underline{t}$} \; * \; \mbox{output}, \; \mbox{int32} \mbox{$\underline{t}$} \; l, \; \mbox
```

brief sending initializer Sets up a packet to be sent.

```
UDPPacket::~UDPPacket( ) [virtual]
```

24.30.3 Member Function Documentation

```
const IPAddress & UDPPacket::getAddress ( ) const
```

brief gets IP address Returns the IP address of the packet.

Returns

```
smart_ptr<IPAddress>
```

```
uint8_t * UDPPacket::getData ( )
```

brief gets data Returns the data from the packet.

Returns

uint8_t*

```
int32_t UDPPacket::getLength ( ) const
```

brief gets length Returns the length of the packet.

Returns

```
int32 t
```

int32_t UDPPacket::getPort () const

brief gets port Returns the port of the packet.

Returns

int32 t

int32_t UDPPacket::getType () const

brief gets type Returns the type of the packet.

Returns

int32_t

```
os::smart_ptr< byte > UDPPacket::sendData ( ) const
```

brief preps data for transmission Prepares the data for transmission. This packs the type, length, and data into a single variable.

Returns

uint8_t*

24.30.4 Member Data Documentation

```
uint8_t* os::UDPPacket::data [private]
```

brief packet contents Holds the information this packet is transmitting.

```
bool os::UDPPacket::in_or_out [private]
```

brief indicates direction of data flow This value is true if the packet is being received. This value is false if this packet is being received.

IPAddress os::UDPPacket::ip [private]

brief IP address of target The location of the target of this packet.

```
uint16_t os::UDPPacket::length [private]
```

brief length of transmitted data This holds the length of the data in the packet.

int32_t os::UDPPacket::port [private]


brief port for connection Holds the port for the packet.

uint8_t os::UDPPacket::type [private]

brief type of packet Stores the type of the packet.

24.31 os::UDPServer Class Reference

Inheritance diagram for os::UDPServer:

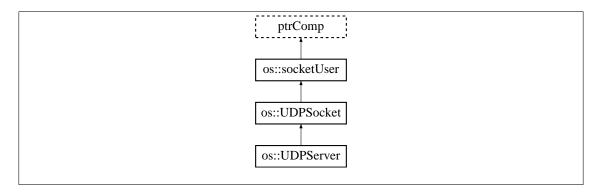

Public Member Functions

- UDPServer (int32_t v4_port, int32_t v6_port)
- virtual ~UDPServer ()
- void openSocket ()
- void closeSocket ()
- void start ()
- void end ()
- void receiveLoopIPV4 (smart_ptr< threadHolder > th)
- void receiveLoopIPV6 (smart_ptr< threadHolder > th)
- bool getActive ()
- bool **send** (smart_ptr< **UDPPacket** > pck)
- bool getConnected ()

Private Attributes

- int32 t intlPv4 Port
- int32_t intlPv6_Port
- bool ip4_active
- bool ip6_active
- volatile bool connected
- spinLock safeDelete
- AVLTree< UDPAVLNode > ipAddressRef

- spinLock avlLock
- struct sockaddr in ipv4 addr
- struct sockaddr_in6 ipv6_addr
- int32_t **ip4_soc**
- int32_t **ip6_soc**
- socklen t ip4 len
- socklen tip6 len

Additional Inherited Members

24.31.1 Detailed Description

brief **UDPServer** (p. 328) class This is the class for the server half of our socket connection.

```
24.31.2 Constructor & Destructor Documentation
UDPServer::UDPServer ( int32_t v4_port, int32_t v6_port )
UDPServer::~UDPServer( ) [virtual]
24.31.3 Member Function Documentation
void UDPServer::closeSocket( ) [virtual]
brief closes sockets Closes the server's sockets.
   Reimplemented from os::socketUser (p. 309).
void UDPServer::end ( )
brief shuts down the server Ends current connections and closes the active sockets.
bool UDPServer::getActive( ) [virtual]
brief gets active Returns the active status to the caller.
Returns
     bool
   Reimplemented from os::UDPSocket (p. 333).
bool UDPServer::getConnected( ) [virtual]
brief gets the connection status Gives the connection status to the caller.
Returns
     bool
   Reimplemented from os::UDPSocket (p. 333).
```

```
void UDPServer::openSocket( ) [virtual]
```

brief opens sockets Opens the server's sockets.

Reimplemented from os::socketUser (p. 309).

```
void UDPServer::receiveLoopIPV4 ( smart_ptr< threadHolder > th )
```

brief receive loop for IPv4 This method is intended to run in it's own thread, where it will read in information. This method adds clients to the AVL tree of nodes. It also calls the received method method so that other threads know that new data has arrived.

```
void UDPServer::receiveLoopIPV6 ( smart ptr< threadHolder > th )
```

brief receive loop for IPv6 This method is intended to run in it's own thread, where it will read in information. This method adds clients to the AVL tree of nodes. It also calls the received method method so that other threads know that new data has arrived.

```
bool UDPServer::send ( smart ptr< UDPPacket > pck ) [virtual]
```

brief sends a packet This method sends a provided UDPPacket (p. 325) to its target.

Returns

bool

Reimplemented from os::UDPSocket (p. 333).

```
void UDPServer::start ( )
```

brief starts the server This method starts the server by creating the necessary sockets and starting the listening threads for IPv4 and IPv6 transmission.

24.31.4 Member Data Documentation

```
spinLock os::UDPServer::avlLock [private]
```

brief tree lock Allows us to access the tree of nodes while multi-threading.

```
volatile bool os::UDPServer::connected [private]
```

brief server connection status Indicates if the server is currently connected to a client.

```
int32_t os::UDPServer::intIPv4_Port [private]
```

brief IPv4 address of server This is the IPv4 address of the server. (This node).

```
int32_t os::UDPServer::intIPv6_Port [private]
```

brief IPv6 address of the server This is the IPv6 address of the server. (This node).

bool os::UDPServer::ip4_active [private]

brief IPv4 activity Indicates if the IPv4 address is currently active.

socklen_t os::UDPServer::ip4_len [private]

brief size of target socket This is the size of the target's IPv4 socket.

int32_t os::UDPServer::ip4_soc [private]

brief IPv4 socket Address of the IPv4 socket for this server.

bool os::UDPServer::ip6_active [private]

brief IPv6 activity Indicates if the IPv6 address is currently active.

socklen_t os::UDPServer::ip6_len [private]

brief size of target socket This is the size of the target's IPv6 socket.

int32_t os::UDPServer::ip6_soc [private]

brief IPv6 socket Address of the IPv6 socket for this server.

AVLTree<UDPAVLNode> os::UDPServer::ipAddressRef [private]

brief tree of nodes This is a tree of target nodes that this server knows of.

struct sockaddr_in os::UDPServer::ipv4_addr [private]

brief IPv4 address of target This is the IPv4 address of the current client of this server.

struct sockaddr_in6 os::UDPServer::ipv6_addr [private]

brief IPv6 address of target This is the IPv6 address of the current client of this server.


spinLock os::UDPServer::safeDelete [private]

brief deletion lock This lock allows us to safely delete things while multi-threading.

24.32 os::UDPSocket Class Reference

UDPSocket (p. 331) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.

Inheritance diagram for os::UDPSocket:

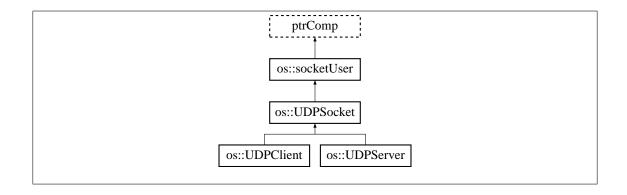

Public Member Functions

- UDPSocket ()
- virtual ~UDPSocket ()
- virtual bool getActive ()

returns state of socket. Gives the status of the current socket.

void setReceiveEvent (void(*func)(void *), void *ptr)

Sets receive functionality Determines what function and parameters will be activated when the receive event occurs.

virtual bool send (smart_ptr< UDPPacket > pck)

Send a **UDPPacket** (p. 325) Sends a **UDPPacket** (p. 325) and returns whether or not the packet was sent successfully.

virtual bool getConnected ()

Gives connection status Returns the status of the socket.

• bool available ()

Indicates if a packet can be received Lets the caller know if there are packets available to read.

• smart_ptr< UDPPacket > receive ()

Gives the next packet Gives the next packet in the queue.

Protected Attributes

• safeQueue< UDPPacket > incomingPackets

Incoming data A queue of incoming packets. This is thread safe so we can run things concurrently.

spinLock popLock

Lock for popping. Ensures we can safely pop the packet queue.

void(* receiveFunction)(void *)

Called on packet received Determines what function will be called when a packet is received.

void * receivePointer

Parameters for receiveFunction Parameters for the called function.

24.32.1 Detailed Description

UDPSocket (p. 331) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.

```
24.32.2 Constructor & Destructor Documentation
UDPSocket::UDPSocket()
UDPSocket::~UDPSocket( ) [virtual]
24.32.3 Member Function Documentation
bool os::UDPSocket::available ( ) [inline]
Indicates if a packet can be received Lets the caller know if there are packets available to read.
Returns
     bool
virtual bool os::UDPSocket::getActive( ) [inline], [virtual]
returns state of socket. Gives the status of the current socket.
Returns
    bool
   Reimplemented in os::UDPServer (p. 329), and os::UDPClient (p. 323).
virtual bool os::UDPSocket::getConnected( ) [inline], [virtual]
Gives connection status Returns the status of the socket.
Returns
     bool
   Reimplemented in os::UDPServer (p. 329), and os::UDPClient (p. 324).
smart_ptr< UDPPacket > UDPSocket::receive ( )
Gives the next packet Gives the next packet in the queue.
Returns
     smart_ptr<UDPPacket>
virtual bool os::UDPSocket::send ( smart_ptr< UDPPacket > pck ) [inline], [virtual]
Send a UDPPacket (p. 325) Sends a UDPPacket (p. 325) and returns whether or not the packet was
sent successfully.
Returns
     bool
   Reimplemented in os::UDPServer (p. 330), and os::UDPClient (p. 324).
```

```
void UDPSocket::setReceiveEvent ( void(*)(void *) func, void * ptr )
```

Sets receive functionality Determines what function and parameters will be activated when the receive event occurs.

24.32.4 Member Data Documentation

```
safeQueue<UDPPacket> os::UDPSocket::incomingPackets [protected]
```

Incoming data A queue of incoming packets. This is thread safe so we can run things concurrently.

```
spinLock os::UDPSocket::popLock [protected]
```

Lock for popping. Ensures we can safely pop the packet queue.

```
void(* os::UDPSocket::receiveFunction) (void *) [protected]
```

Called on packet received Determines what function will be called when a packet is received.

```
void* os::UDPSocket::receivePointer [protected]
```

Parameters for receiveFunction Parameters for the called function.

24.33 os::USBFile Class Reference

Public Member Functions

- USBFile ()
- virtual ~USBFile ()
- bool isUSBDrive ()
- USBNode * getCurrentDrive ()

24.33.1 Constructor & Destructor Documentation

```
USBFile::USBFile ( )
USBFile::~USBFile ( ) [virtual]
24.33.2 Member Function Documentation
USBNode * USBFile::getCurrentDrive ( )
```

bool USBFile::isUSBDrive ()

24.34 os::USBNode Class Reference

This class stores the location of a USB device.

Public Member Functions

- USBNode (std::string p)
- std::string getPath ()

Getter for the path string. This is a simple getter, it returns a string.

Private Attributes

• std::string path

USB path This string holds the path to a USB device.

24.34.1 Detailed Description

This class stores the location of a USB device.

24.34.2 Constructor & Destructor Documentation

USBNode::USBNode (std::string p)

24.34.3 Member Function Documentation

std::string USBNode::getPath ()

Getter for the path string. This is a simple getter, it returns a string.

Returns

std::string::path


24.34.4 Member Data Documentation

std::string os::USBNode::path [private]

USB path This string holds the path to a USB device.

24.35 os::XML Node Class Reference

XML Node class The core node of our XML parsing. Inheritance diagram for os::XML Node:

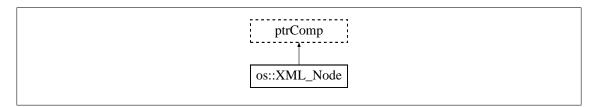

Public Member Functions

- XML_Node (std::string _id)
- virtual ~XML Node ()
- void **setData** (std::string str)

sets data Sets the data element to a given string.

• smartXMLNodeList findElement (std::string id)

finds node Returns the a list with each node that has the given identifier.

void deleteElement (std::string _id)

removes element Removes all nodes with a given identifier and their children.

• void addElement (smartXMLNode node)

adds element Adds an element to the children of the current node.

• const std::string & getID () const

gets identifier Returns the identifier of a node.

• const std::string & getData () const

gets data Returns the data of a node.

• smartXMLNodeList & getChildren ()

returns children Returns the children of a node.

• const smartXMLNodeList getChildren () const

returns children Returns the children of a node.

• const std::vector< std::string > & getDataList () const

returns dataList Returns the dataLust of a node.

• std::vector< std::string > & getDataList ()

returns dataList Returns the dataLust of a node.

Private Attributes

• std::string ID

node identifier Identifies the node with a specific name.

• std::string data

Holds datum Holds one piece of data, assuming this node holds only one piece of data.

• smartXMLNodeList children

children of node The children of this node, as this system is structured as a tree.

• std::vector< std::string > dataList

Holds data Holds a list of data, assuming we have more than one piece of data to store in this node.

24.35.1 Detailed Description

XML Node class The core node of our XML parsing.

```
24.35.2 Constructor & Destructor Documentation
XML_Node::XML_Node ( std::string _id )
virtual os::XML_Node::~XML_Node( ) [inline], [virtual]
24.35.3 Member Function Documentation
void XML_Node::addElement ( smartXMLNode node )
adds element Adds an element to the children of the current node.
void XML_Node::deleteElement ( std::string _id )
removes element Removes all nodes with a given identifier and their children.
smartXMLNodeList XML Node::findElement ( std::string id )
finds node Returns the a list with each node that has the given identifier.
Returns
     smart_ptr<unsortedList<XMLNode> >
smartXMLNodeList& os::XML Node::getChildren( ) [inline]
returns children Returns the children of a node.
Returns
     smart_ptr<unsortedList<XMLNode> >&
const smartXMLNodeList os::XML_Node::getChildren ( ) const [inline]
returns children Returns the children of a node.
Returns
    const smart_ptr<unsortedList<XMLNode> >
const std::string& os::XML_Node::getData ( ) const [inline]
gets data Returns the data of a node.
Returns
     const std::string&
const std::vector<std::string>& os::XML Node::getDataList( ) const [inline]
returns dataList Returns the dataLust of a node.
Returns
```

const std::vector<std::string>&

```
std::vector<std::string>& os::XML_Node::getDataList( ) [inline]
returns dataList Returns the dataLust of a node.
Returns
     std::vector<std::string>&
const std::string& os::XML_Node::getID ( ) const [inline]
gets identifier Returns the identifier of a node.
Returns
     const std::string&
void os::XML_Node::setData ( std::string str ) [inline]
sets data Sets the data element to a given string.
24.35.4 Member Data Documentation
smartXMLNodeList os::XML Node::children [private]
children of node The children of this node, as this system is structured as a tree.
std::string os::XML_Node::data [private]
Holds datum Holds one piece of data, assuming this node holds only one piece of data.
std::vector<std::string> os::XML_Node::dataList [private]
Holds data Holds a list of data, assuming we have more than one piece of data to store in this node.
std::string os::XML Node::ID [private]
```

node identifier Identifies the node with a specific name.

Part V CryptoGateway Library

Chapter 25

Introduction

The CryptoGateway library contains classes which handle cryptography. CryptoGateway is designed as an open source library, so much of the cryptography within the library is relatively simple. Crypto-Gateway is not meant to define cryptography to be used widely, rather, it is meant to provide a series of generalized hooks and interfaces which can be extended to various cryptographic algorithms.

25.1 Namespace

CryptoGateway uses the crypto namespace. The crypto namespace is designed for class, functions and constants related to cryptography. CrytpoGateway depends on many of the tools defined in the os namespace. Additionally, the crypto namespace contains a series of nested namespaces which help to disambiguate constants.

Chapter 26

File Index

26.1 File List

Here is a list of all files with brief descriptions:	
binaryEncryption.cpp	
Implementation of binary encryption files	344
binaryEncryption.h	
Definition of binary encryption files	344
c_BaseTen.c	
Implementation of base-10 algorithms	345
c_BaseTen.h	
Base-10 number functions	345
c_cryptoTesting.cpp	
Implementation for C file testing	349
c_cryptoTesting.h	
Header for C file testing	349
c_numberDefinitions.c	
Implementation of basic number	350
c_numberDefinitions.h	
Basic number declarations	350
cryptoCConstants.h	
Extern declarations of C constants	354
cryptoCHeaders.h	
Collected headers for C source code	355
cryptoConstants.cpp	
Implementation of CryptoGateway constants	356
cryptoConstants.h	
Extern definitions of CryptoGateway constants	356
cryptoCSource.cpp	
Implementation of all C code	356
cryptoError.cpp	
Implementation of error sender and listener	357
cryptoError.h	
Declaration of cryptographic errors	357

cryptoFileTest.cpp	
Implementation for cryptographic file testing	359
cryptoFileTest.h	
Header for cryptographic file testing	359
CryptoGateway.h	
Global include file	360
cryptoHash.cpp	
Implementation of crypto hashing	360
cryptoHash.h	
Declaration of crypto hashing	361
cryptoLogging.cpp	
Logging for crypto namespace, implementation	362
cryptoLogging.h	
Logging for crypto namespace	363
cryptoNumber.cpp	
Implements basic number types	363
cryptoNumber.h	
Defines basic number types	364
cryptoNumberTest.cpp	
Testing crypto::number (p. 514) and crypto::integer (p. 464)	365
cryptoPublicKey.cpp	
Generalized and RSA public key implementation	365
cryptoPublicKey.h	
Generalized and RSA public keys	365
cryptoTest.cpp	
CryptoGateway library test constructor	366
cryptoTest.h	
CryptoGateway library test header	367
gateway.cpp	
Implements the gateway	367
gateway.h	
Defines the gateway	367
gatewayTest.cpp	
Implementation for end-to-end gateway testing	368
gatewayTest.h	
Header for end-to-end gateway testing	368
hashTest.cpp	
Implementation for hash tests	369
hashTest.h	
Header for hash testing	369
hexConversion.cpp	
Hex conversion implementation	370
hexConversion.h	
Hex conversion header	370
keyBank.cpp	
Implimentation for the AVL tree based key bank	371
keyBank.h	
Header for the AVI tree based key bank	371

message.cpp	
Crypto-Gateway message implementation	372
message.h	
Crypto-Gateway message	372
publicKeyPackage.cpp	
Implementation of public key bank	373
publicKeyPackage.h	
Declaration of public key bank	373
publicKeyTest.h	
Public Key tests	374
RC4_Hash.cpp	374
RC4_Hash.h	374
staticTestKeys.cpp	
Auto-generated	375
staticTestKeys.h	
Auto-generated	375
streamCipher.cpp	375
streamCipher.h	375
streamPackage.cpp	
Implementation of streaming bank	376
streamPackage.h	
Declaration of streaming bank	376
streamTest.cpp	
Implementation for stream tests	377
streamTest.h	
Header for stream testing	377
testKeyGeneration.cpp	378
testKeyGeneration.h	
Implementation of test key binding	378
user.cpp	
Implementation of the CryptoGateway user	378
user.h	
Definition of the CryptoGateway user	379
XMLEncryption.cpp	
Implementation of RC-4	379
XMLEncryption.h	
Defines basic stream ciphers	380

Chapter 27

File Documentation

27.1 binaryEncryption.cpp File Reference

Implementation of binary encryption files.

27.1.1 Detailed Description

Implementation of binary encryption files.

Author

Jonathan Bedard

Date

4/18/2016

Bug None

Implements the binary encryption files. Consult **binaryEncryption.h** (p. 344) for details on using these classes.

27.2 binaryEncryption.h File Reference

Definition of binary encryption files.

Classes

• class crypto::binaryEncryptor

Encrypted binary file output.

• class crypto::binaryDecryptor

Encrypted binary file output.

Namespaces

• crypto

27.2.1 Detailed Description

Definition of binary encryption files.

Author

Jonathan Bedard

Date

3/7/2016

Bug None

Provides an interface to dump and retrieve data from an encrypted binary file without concern as to the encryption algorithm used.

27.3 c_BaseTen.c File Reference

Implementation of base-10 algorithms.

27.3.1 Detailed Description

Implementation of base-10 algorithms.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file implements all of the basic functionality of a base-10 integer. All integer operations, both basic and otherwise, are implemented in this file.

27.4 c_BaseTen.h File Reference

Base-10 number functions.

Functions

- struct numberType * buildBaseTenType ()
 - Construct a base-10 number.
- int **base10Addition** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

 **Base-10 addition.
- int **base10Subtraction** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

Base-10 subtraction.

• int **base10Multiplication** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

Base-10 multiplication.

- int **base10Division** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

 **Base-10 division.
- int **base10Modulo** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

 Base-10 modulo.
- int base10Exponentiation (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16
 _t length)

Base-10 exponentiation.

- int base10ModuloExponentiation (const uint32_t *src1, const uint32_t *src2, const uint32_t *src3, uint32_t *dest, uint16_t length)
- int base10GCD (const uint32 t *src1, const uint32 t *src2, uint32 t *dest, uint16 t length)
- int **base10ModInverse** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)
- int **primeTest** (const uint32_t *src1, uint16_t test_iteration, uint16_t length)

27.4.1 Detailed Description

Base-10 number functions.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Contains functions which define a base-10 integer. There functions are bound to a number type.

27.4.2 Function Documentation

int base10Addition (const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length)

Base-10 addition.

This function takes in two arrays which represent base-10 numbers, preforms src1+src2 on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	src1	Argument 1
in	src2	Argument 2
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

int base10Division (const uint32 t * src1, const uint32 t * src2, uint32 t * dest, uint16 t length)

Base-10 division.

This function takes in two arrays which represent base-10 numbers, preforms src1/src2 on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	src1	Argument 1
in	src2	Argument 2
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

int base10Exponentiation (const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length)

Base-10 exponentiation.

This function takes in two arrays which represent base-10 numbers, preforms src1+src2 on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	src1	Argument 1
in	src2	Argument 2
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

```
int\ base10GCD\ (\ const\ uint32\_t\ *\ src1,\ const\ uint32\_t\ *\ src2,\ uint32\_t\ *\ dest,\ uint16\_t\ length\ ) int\ base10ModInverse\ (\ const\ uint32\_t\ *\ src1,\ const\ uint32\_t\ *\ src2,\ uint32\_t\ *\ dest,\ uint16\_t\ length\ )
```

int base10Modulo (const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length)

Base-10 modulo.

This function takes in two arrays which represent base-10 numbers, preforms src1src2 on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	src1	Argument 1	
in	src2	Argument 2	
out	dest	Output	
in	length	Number of uint32_t in the arrays	

Returns

1 if success, 0 if failed

int base10ModuloExponentiation (const uint32_t * src1, const uint32_t * src2, const uint32_t * src3, uint32_t * dest, uint16_t length)

int base10Multiplication (const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length)

Base-10 multiplication.

This function takes in two arrays which represent base-10 numbers, preforms src1*src2 on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	src1	Argument 1
in	src2	Argument 2
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

int base10Subtraction (const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length)

Base-10 subtraction.

This function takes in two arrays which represent base-10 numbers, preforms src1-src2 on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	src1	Argument 1
in	src2	Argument 2
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

struct numberType* buildBaseTenType ()

Construct a base-10 number.

This function will return a **numberType** (p. 531) pointer defining the function pointers for a base-10 number. Note that the resulting pointer points to a structure which is static to the **c_BaseTen.c** (p. 345) file.

Returns

Pointer to numberType (p. 531) of type base-10

int primeTest (const uint32_t * src1, uint16_t test_iteration, uint16_t length)

27.5 c_cryptoTesting.cpp File Reference

Implementation for C file testing.

27.5.1 Detailed Description

Implementation for C file testing.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file implements test suites which are testing raw C code. This file currently tests the Base- \leftarrow Ten suite.

27.6 c_cryptoTesting.h File Reference

Header for C file testing.

27.6.1 Detailed Description

Header for C file testing.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This header is meant for the test suites which are testing raw C code. This header currently contains the Base-Ten suite.

27.7 c_numberDefinitions.c File Reference

Implementation of basic number.

27.7.1 Detailed Description

Implementation of basic number.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Most numerical operations must be defined by the specific number type, but a select few are generally applicable across all number types, these are implemented here.

27.8 c_numberDefinitions.h File Reference

Basic number declarations.

Classes

struct numberType

Number type function structure.

Typedefs

- typedef int(* operatorFunction) (const uint32_t *, const uint32_t *, uint32_t *, uint16_t)
 Operator function typedef.
- typedef int(* **tripleCalculation**) (const uint32_t *, const uint32_t *, const uint32_t *, uint32_t *, uint16_t)

Triple operator function typedef.

- typedef int(* shiftFunction) (const uint32_t *, uint16_t, uint32_t *, uint16_t)
 Shift operator function typedef.
- typedef int(* **compareFunction**) (const uint32_t *, const uint32_t *, uint16_t)

 Comparison function typedef.

Functions

• struct numberType * buildNullNumberType ()

Construct a NULL number.

- int **standardCompare** (const uint32_t *src1, const uint32_t *src2, uint16_t length) Standard comparision.
- int **standardRightShift** (const uint32_t *src1, uint16_t src2, uint32_t *dest, uint16_t length)

 **Right shift.
- int **standardLeftShift** (const uint32_t *src1, uint16_t src2, uint32_t *dest, uint16_t length)

 Left shift.

27.8.1 Detailed Description

Basic number declarations.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Contains function typedefs used for various number operations and defines a few nearly universal numerical functions.

27.8.2 Typedef Documentation

typedef int(* compareFunction) (const uint32_t *, const uint32_t *, uint16_t)

Comparison function typedef.

This function typedef defines a function which takes in two arrays which represent numbers and then compares them.

Parameters

in	uint32←	Argument 1
	_t*	
in	uint32⊷	Argument 2
	_ <i>t</i> *	
in	uint16⇔	size
	_t	

Returns

-1 if 1<2, 0 if 1==2, 1 if 1>2

typedef int(* operatorFunction) (const uint32_t *, const uint32_t *, uint32_t *, uint32_t *, uint16_t)

Operator function typedef.

This function typedef defines a function which takes in two arrays which represent numbers, preform some operation on the pair and then output the result to a third array.

Parameters

in	uint32← _t*	Argument 1
in	uint32← _t*	Argument 2
out	uint32← _t*	Output
in	uint16⇔ _t	size

Returns

1 if success, 0 if failed

typedef int(* shiftFunction) (const uint32_t *, uint16_t, uint32_t *, uint16_t)

Shift operator function typedef.

This function typedef defines a function which takes in an array representing a number, shifts it the provided number of bits and outputs the result into the second array.

Parameters

in	uint32⇔	Argument 1
	_ t *	
in	uint16⇔	Bits to shift
	_t	
out	uint32⊷	Output
	_ <i>t</i> *	
in	uint16⊷	size
	_t	

Returns

1 if success, 0 if failed

typedef int(* tripleCalculation) (const uint32_t *, const uint32_t *, const uint32_t *, uint32_t *, uint16_t)

Triple operator function typedef.

This function typedef defines a function which takes in three arrays which represent numbers, preform some operation on the triple and then output the result to a fourth array.

Parameters

in	uint32← _t*	Argument 1
in	uint32← _t*	Argument 2
in	uint32← _t*	Argument 3
out	uint32← _t∗	Output
in	uint16← _t	size

Returns

1 if success, 0 if failed

27.8.3 Function Documentation

struct numberType* buildNullNumberType ()

Construct a NULL number.

This function will return a **numberType** (p. 531) pointer defining the function pointers for a NULL number. Note that the resulting pointer points to a structure which is static to the **c_number** \leftarrow **Definitions.c** (p. 350) file.

Returns

Pointer to numberType (p. 531) of type NULL

int standardCompare (const uint32_t * src1, const uint32_t * src2, uint16_t length)

Standard comparision.

This function takes in two arrays which represent numbers and then compares them.

Parameters

in	src1	Argument 1
in	src2	Argument 2
in	length	Number of uint32_t in the arrays

Returns

int standardLeftShift (const uint32_t * src1, uint16_t src2, uint32_t * dest, uint16_t length) Left shift.

Shifts the bits in src1 in the left direction src2 number of bits. Output the result in dest. Note that dest and src1 should be the same size.

Parameters

in	src1	Argument 1
in	src2	Bits to shift
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

int standardRightShift (const uint32_t * src1, uint16_t src2, uint32_t * dest, uint16_t length)

Right shift.

Shifts the bits in src1 in the right direction src2 number of bits. Output the result in dest. Note that dest and src1 should be the same size.

Parameters

in	src1	Argument 1
in	src2	Bits to shift
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

27.9 cryptoCConstants.h File Reference

Extern declarations of C constants.

Variables

• const int crypto_numbertype_default

Default number ID.

• const int crypto_numbertype_base10

Base-10 number ID.

• const char * crypto_numbername_default

Default number marker.

• const char * crypto_numbername_base10

Base-10 number marker.

27.9.1 Detailed Description

Extern declarations of C constants.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Declares a number of constants needed by both the C numerical algorithms and by C++ number classes.

27.9.2 Variable Documentation

const char* crypto_numbername_base10

Base-10 number marker.

This constant is "Base 10 Type". It represents a number of type base-10, or standard integer.

const char* crypto_numbername_default

Default number marker.

This constant is "NULL Type". It represents an untyped number.

const int crypto_numbertype_base10

Base-10 number ID.

This constant is 1. It represents a number of type base-10, or standard integer.

const int crypto_numbertype_default

Default number ID.

This constant is 0. It represents an untyped number.

27.10 cryptoCHeaders.h File Reference

Collected headers for C source code.

27.10.1 Detailed Description

Collected headers for C source code.

Author

Jonathan Bedard

Date

2/20/2016

Bug None

27.11 cryptoConstants.cpp File Reference

Implementation of CryptoGateway constants.

27.11.1 Detailed Description

Implementation of CryptoGateway constants.

Author

Jonathan Bedard

Date

3/19/2016

Bug None

Binds all of the scoped constants used by CryptoGateway. The nested namespaces ensure that there is no ambiguity as to the purpose and nature of the constants.

27.12 cryptoConstants.h File Reference

Extern definitions of CryptoGateway constants.

27.12.1 Detailed Description

Extern definitions of CryptoGateway constants.

Author

Jonathan Bedard

Date

3/19/2016

Bug None

Consult **cryptoConstants.cpp** (p. 356) for details. This file merely defines extern references to the global constants in **cryptoConstants.cpp** (p. 356).

27.13 cryptoCSource.cpp File Reference

Implementation of all C code.

27.13.1 Detailed Description

Implementation of all C code.

Author

Jonathan Bedard

Date

2/13/2016

Bug No known bugs.

This file includes all of the .c files needed for this library. It allows the CMake scripts for this project to be entirely C++ while still includeing raw C code.

27.14 cryptoError.cpp File Reference

Implementation of error sender and listener.

27.14.1 Detailed Description

Implementation of error sender and listener.

Author

Jonathan Bedard

Date

4/16/2016

Bug None

Implements the error sender and listeners. These classes allow for managing the throwing of **crypto::errorPointer** (p. 389). Consult **cryptoError.h** (p. 357) for details.

27.15 cryptoError.h File Reference

Declaration of cryptographic errors.

Classes

• class crypto::error

Sortable exception.

• class crypto::passwordSmallError

Symmetric key too small.

• class crypto::passwordLargeError

Symmetric key too big.

• class crypto::bufferSmallError

Buffer too small.

• class crypto::bufferLargeError

Buffer too large.

• class crypto::insertionFailed

ADS Insertion Failed.

• class crypto::customError

Custom crypto::error (p. 418).

• class crypto::fileOpenError

File open error.

• class crypto::fileFormatError

File format error.

• class crypto::illegalAlgorithmBind

Algorithm bound failure.

• class crypto::hashCompareError

Hash mis-match.

• class crypto::hashGenerationError

Hash generation error.

• class crypto::actionOnFileError

File error.

• class crypto::actionOnFileClosed

File closed error.

• class crypto::publicKeySizeWrong

Public-key size error.

• class crypto::keyMissing

Key missing error.

class crypto::NULLPublicKey

NULL public-key error.

• class crypto::NULLDataError

NULL data error.

• class crypto::NULLMaster

NULL master error.

• class crypto::masterMismatch

Master mis-match.

• class crypto::unknownErrorType

Unknown error.

• class crypto::stringTooLarge

String size error.

• class crypto::errorListener

crypto::error (p. 418) listener

• class crypto::errorSender

Sends crypto::error (p. 418).

Namespaces

crypto

Typedefs

typedef os::smart_ptr< error > crypto::errorPointer
 Smart pointer to crypto::error (p. 418).

27.15.1 Detailed Description

Declaration of cryptographic errors.

Author

Jonathan Bedard

Date

4/1/2016

Bug None

Declares a number of errors for the CryptoGateway package. Also declares two classes to manage the sending and listening for the throwing of **crypto::errorPointer** (p. 389).

27.16 cryptoFileTest.cpp File Reference

Implementation for cryptographic file testing.

27.16.1 Detailed Description

Implementation for cryptographic file testing.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file implements a series of tests designed to confirm the stability of cryptographic save file and load file functions.

27.17 cryptoFileTest.h File Reference

Header for cryptographic file testing.

27.17.1 Detailed Description

Header for cryptographic file testing.

Author

Jonathan Bedard

Date

3/5/2016

Bug No known bugs.

This contains a number of test suites and supporting classes which are designed to test the functionality of saving and loading cryptographic files, both binary and EXML.

27.18 CryptoGateway.h File Reference

Global include file.

Namespaces

crypto

Variables

• bool crypto::global_logging

Deprecated logging flag.

27.18.1 Detailed Description

Global include file.

Author

Jonathan Bedard

Date

4/16/2016

Bug None

This file contains all of the headers in the CryptoGateway library. Project which depend on the CryptoGateway library need only include this file.

27.19 cryptoHash.cpp File Reference

Implementation of crypto hashing.

27.19.1 Detailed Description

Implementation of crypto hashing. Implementation of RC4 hash.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Implements basic hashing frameworks and the XOR hash. Note that the XOR hash is not cryptographically secure. Consult **cryptoHash.h** (p. 361) for details.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Implements the RC-4 hash algorithm. The RC-4 hashing algorithm is likely secure, but not proven secure. Consult the **RC4_Hash.h** (p. 374) for details.

27.20 cryptoHash.h File Reference

Declaration of crypto hashing.

Classes

• class crypto::hash

Base hash class.

• class crypto::xorHash

XOR hash class.

Namespaces

• crypto

Functions

- std::ostream & crypto::operator<< (std::ostream &os, const hash &num)

 Output stream operator.
- std::istream & crypto::operator>> (std::istream &is, hash &num)

Input stream operator.

template<class hashClass >

hashClass **crypto::hashData** (uint16_t hashType, const unsigned char *data, uint32_t length) Hashes data with the specified algorithm.

27.20.1 Detailed Description

Declaration of crypto hashing.

Implementation of RC4 hash.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Declares base cryptographic hashing class and functions. All hash algorithms should extend this hash class.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Declares the RC-4 hash algorithm. The RC-4 hashing algorithm is likely secure, but not proven secure.

27.21 cryptoLogging.cpp File Reference

Logging for crypto namespace, implementation.

27.21.1 Detailed Description

Logging for crypto namespace, implementation.

Jonathan Bedard

Date

2/23/2016

Bug No known bugs.

This file contains global functions and variables used for logging in the crypto namespace.

27.22 cryptoLogging.h File Reference

Logging for crypto namespace.

Namespaces

crypto

Functions

- std::ostream & crypto::cryptoout_func ()
 Standard out object for crypto namespace.
- std::ostream & crypto::cryptoerr_func ()

 Standard error object for crypto namespace.

Variables

- os::smart_ptr< std::ostream > crypto::cryptoout_ptr Standard out pointer for crypto namespace.
- os::smart_ptr< std::ostream > crypto::cryptoerr_ptr
 Standard error pointer for crypto namespace.

27.22.1 Detailed Description

Logging for crypto namespace.

Jonathan Bedard

Date

2/23/2016

Bug No known bugs.

This file contains declarations which are used for logging within the crypto namespace.

27.23 cryptoNumber.cpp File Reference

Implements basic number types.

27.23.1 Detailed Description

Implements basic number types.

Author

Jonathan Bedard

Date

4/3/2016

Bug No known bugs.

Implements basic large numbers and the more specific large integer. Consult **cryptoNumber.h** (p. 364) for details.

27.24 cryptoNumber.h File Reference

Defines basic number types.

Classes

• class crypto::number

Basic number definition.

• class crypto::integer

Integer number definition.

Namespaces

• crypto

Functions

• std::ostream & crypto::operator<< (std::ostream &os, const number &num)

Output stream operator.

• std::istream & crypto::operator>> (std::istream &is, number &num)

Input stream operator.

27.24.1 Detailed Description

Defines basic number types.

Author

Jonathan Bedard

Date

3/2/2016

Bug No known bugs.

Contains declarations of large numbers for usage inside the CryptoGateway. The two numbers defined in this file are the general structure for large numbers and a basic integer.

27.25 cryptoNumberTest.cpp File Reference

Testing crypto::number (p. 514) and crypto::integer (p. 464).

27.25.1 Detailed Description

Testing crypto::number (p. 514) and crypto::integer (p. 464).

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file has a series of tests which confirm the functionality of **crypto::integer** (p. 464) and it's base class, **crypto::number** (p. 514).

27.26 cryptoPublicKey.cpp File Reference

Generalized and RSA public key implementation.

27.26.1 Detailed Description

Generalized and RSA public key implementation.

Author

Jonathan Bedard

Date

5/5/2016

Bug No known bugs.

Contains implementation of the generalized public key and the RSA public key. Consult **crypto** ← **PublicKey.h** (p. 365) for details.

27.27 cryptoPublicKey.h File Reference

Generalized and RSA public keys.

Classes

• class crypto::keyChangeReceiver

Interface for receiving key changes.

class crypto::keyChangeSender

Interface inherited by publicKey (p. 536).

• class crypto::publicKey

Base public-key class.

• class crypto::publicRSA

RSA public-key encryption.

class crypto::RSAKeyGenerator

Helper key generation class.

Namespaces

• crypto

27.27.1 Detailed Description

Generalized and RSA public keys.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

Contains declarations of the generalized public key and the RSA public key. These classes can both encrypt and decrypt public keys.

27.28 cryptoTest.cpp File Reference

CryptoGateway library test constructor.

27.28.1 Detailed Description

CryptoGateway library test constructor.

Author

Jonathan Bedard

Date

4/7/2016

Bug No known bugs.

Binds all test suites for the test::CryptoGatewayLibraryTest. This library test is called "Crypto⊷ Gateway."

27.29 cryptoTest.h File Reference

CryptoGateway library test header.

27.29.1 Detailed Description

CryptoGateway library test header.

Author

Jonathan Bedard

Date

4/2/2016

Bug No known bugs.

Contains declarations need to bind the CryptoGateway test library to the unit test driver.

27.30 gateway.cpp File Reference

Implements the gateway.

27.30.1 Detailed Description

Implements the gateway.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

Implements the gateway defined in gateway.h (p. 367). Consult gateway.h (p. 367) for details.

27.31 gateway.h File Reference

Defines the gateway.

Classes

• class crypto::gatewaySettings

Holds settings for gateway encryption.

• class crypto::gateway

Security gateway.

crypto

27.31.1 Detailed Description

Defines the gateway.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

This file contains the declaration for the gateway and the gateway settings. This header file is the culmination of the CryptoGateway library.

Note that due to development constraints, the gatewaySettings class is being pushed out in a frame-work form and is intended to contain a large set of algorithm definitions as well as an algorithm use agreement protocol.

27.32 gatewayTest.cpp File Reference

Implementation for end-to-end gateway testing.

27.32.1 Detailed Description

Implementation for end-to-end gateway testing.

Author

Jonathan Bedard

Date

4/26/2016

Bug No known bugs.

This file contains implementation of the key bank tests and the end-to-end gateway tests. These tests are not exhaustive, they test basic functionality of both structures.

27.33 gatewayTest.h File Reference

Header for end-to-end gateway testing.

27.33.1 Detailed Description

Header for end-to-end gateway testing.

Author

Jonathan Bedard

Date

3/20/2016

Bug No known bugs.

This header contains declarations of the key bank tests and the end-to-end gateway tests. These tests are not exhaustive, they test basic functionality of both structures.

27.34 hashTest.cpp File Reference

Implementation for hash tests.

27.34.1 Detailed Description

Implementation for hash tests.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains algorithm-specific cryptographic hash testing. These tests confirm that the respective hash algorithms are outputting their expected value.

27.35 hashTest.h File Reference

Header for hash testing.

27.35.1 Detailed Description

Header for hash testing.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains a number of template classes used to confirm the functionality of cryptographic hash algorithms.

27.36 hexConversion.cpp File Reference

Hex conversion implementation.

27.36.1 Detailed Description

Hex conversion implementation.

Author

Jonathan Bedard

Date

3/16/2016

Bug No known bugs.

Implements the set of hex conversion functions. Consult hexConversion.h (p. 370) for details.

27.37 hexConversion.h File Reference

Hex conversion header.

Namespaces

• crypto

Functions

• bool crypto::isHexCharacter (char c)

Check the character type.

std::string crypto::toHex (unsigned char i)

Converts an 8 bit integer to a hex string.

• std::string crypto::toHex (uint32 t i)

Converts an 32 bit integer to a hex string.

• unsigned char crypto::fromHex8 (const std::string &str)

Converts a hex string to an 8 bit integer.

• uint32_t crypto::fromHex32 (const std::string &str)

Converts a hex string to an 32 bit integer.

27.37.1 Detailed Description

Hex conversion header.

Author

Jonathan Bedard

Date

3/16/2016

Bug No known bugs.

Contains a set of functions to convert integers and characters from a hex string and converts hex strings to integers and characters.

27.38 keyBank.cpp File Reference

Implimentation for the AVL tree based key bank.

27.38.1 Detailed Description

Implimentation for the AVL tree based key bank.

Author

Jonathan Bedard

Date

4/19/2016

Bug No known bugs.

This file contians the implimentation for the **crypto::avlKeyBank** (p. 396) and supporting classes. Consult **keyBank.h** (p. 371) for details.

27.39 keyBank.h File Reference

Header for the AVL tree based key bank.

Classes

• class crypto::nodeGroup

Node group.

• class crypto::nodeNameReference

Name storage node.

• class crypto::nodeKeyReference

Key storage node.

• class crypto::keyBank

Key bank interface.

• class crypto::avlKeyBank

AVL key back.

• crypto

27.39.1 Detailed Description

Header for the AVL tree based key bank.

Author

Jonathan Bedard

Date

4/19/2016

Bug No known bugs.

This file contians declarations for the **crypto::avlKeyBank** (p. 396) and supporting classes. Note that the key-bank may later be implimented with more advanced datastructures.

27.40 message.cpp File Reference

Crypto-Gateway message implementation.

27.40.1 Detailed Description

Crypto-Gateway message implementation.

Author

Jonathan Bedard

Date

4/16/2016

Bug No known bugs.

Implements the message used by the crypto-gateway to pass encrypted data between machines.

27.41 message.h File Reference

Crypto-Gateway message.

Classes

• class crypto::message

Crypto-Gateway message.

• crypto

27.41.1 Detailed Description

Crypto-Gateway message.

Author

Jonathan Bedard

Date

4/16/2016

Bug No known bugs.

The message declared in this file acts as a message for the Crypto-Gateway. These messages are intended to be converted to machine-to-machine communication.

27.42 publicKeyPackage.cpp File Reference

Implementation of public key bank.

27.42.1 Detailed Description

Implementation of public key bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements a bank of public key types to be accessed at run-time. Essentially acts as a meta-object access bank.

27.43 publicKeyPackage.h File Reference

Declaration of public key bank.

Classes

- class crypto::publicKeyPackageFrame
- class crypto::publicKeyPackage< pkType >
- class crypto::publicKeyTypeBank

crypto

27.43.1 Detailed Description

Declaration of public key bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Declares a bank of public keys as well as supporting classes. Acts as a meta-object construct for public-key algorithms.

27.44 publicKeyTest.h File Reference

Public Key tests.

27.44.1 Detailed Description

Public Key tests.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

Since the public key tests are defined by very simple tests, the template testing classes contained in this file are also defined in this file. There is no .cpp file paired with this particular header.

27.45 RC4_Hash.cpp File Reference

27.46 RC4_Hash.h File Reference

Classes

• class crypto::rc4Hash

RC-4 hash class.

• crypto

27.47 staticTestKeys.cpp File Reference

Auto-generated.

27.47.1 Detailed Description

Auto-generated.

Author

None

Bug None

27.48 staticTestKeys.h File Reference

Auto-generated.

27.48.1 Detailed Description

Auto-generated.

Author

None

Bug None

27.49 streamCipher.cpp File Reference

27.50 streamCipher.h File Reference

Classes

- class crypto::streamCipher
- class crypto::RCFour
- class crypto::streamPacket
- class crypto::streamEncrypter
- class crypto::streamDecrypter

Namespaces

• crypto

Variables

• bool global_logging

27.50.1 Variable Documentation

bool global_logging

27.51 streamPackage.cpp File Reference

Implementation of streaming bank.

27.51.1 Detailed Description

Implementation of streaming bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements a a bank of stream ciphers and hash algorithms to be accessed at run-time. Essentially acts as a meta-object access bank.

27.52 streamPackage.h File Reference

Declaration of streaming bank.

Classes

- class crypto::streamPackageFrame
- class crypto::streamPackage< streamType, hashType >
- class crypto::streamPackageTypeBank

Namespaces

• crypto

27.52.1 Detailed Description

Declaration of streaming bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Declares a bank of stream ciphers and hash algorithms along with supporting classes. Acts as a meta-object construct for public-key algorithms.

27.53 streamTest.cpp File Reference

Implementation for stream tests.

27.53.1 Detailed Description

Implementation for stream tests.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains algorithm-specific cryptographic stream testing. These tests confirm that the respective stream algorithms are outputting their expected value.

27.54 streamTest.h File Reference

Header for stream testing.

27.54.1 Detailed Description

Header for stream testing.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains a number of template classes used to confirm the functionality of cryptographic stream objects.

27.55 testKeyGeneration.cpp File Reference

27.56 testKeyGeneration.h File Reference

Implementation of test key binding.

27.56.1 Detailed Description

Implementation of test key binding. Binds generated testing keys.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

Implements the binding of the static test keys to arrays in memory. Consult **testKeyGeneration.h** (p. 378) for details.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Provides access to the keys generated and stored in **staticTestKeys.h** (p. 375) and **staticTest Keys.cpp** (p. 375). These keys are always copied into a raw array of uint32_t.

27.57 user.cpp File Reference

Implementation of the CryptoGateway user.

27.57.1 Detailed Description

Implementation of the CryptoGateway user.

Author

Jonathan Bedard

Date

4/26/2016

Bug None

Provides an implementation of user which has a user-name, password and associated bank of public keys. Consult **user.h** (p. 379) for details.

27.58 user.h File Reference

Definition of the CryptoGateway user.

Classes

• class crypto::user

Primary user class.

Namespaces

• crypto

27.58.1 Detailed Description

Definition of the CryptoGateway user.

Author

Jonathan Bedard

Date

4/26/2016

Bug None

Provides a definition of user which has a user-name, password and associated bank of public keys.

27.59 XMLEncryption.cpp File Reference

Implementation of RC-4.

27.59.1 Detailed Description

Implementation of RC-4.

Implements encrypted XML functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements the RC-4 stream cipher and more generally, a framework for all stream ciphers to use.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements functions to save and load XML trees in files locked with both a password and with public keys.

27.60 XMLEncryption.h File Reference

Defines basic stream ciphers.

Namespaces

crypto

Functions

- bool crypto::EXML_Output (std::string path, os::smartXMLNode head, unsigned char *sym
 Key, unsigned int passwordLength, os::smart_ptr< streamPackageFrame > spf=NULL)
- bool crypto::EXML_Output (std::string path, os::smartXMLNode head, std::string password, os::smart_ptr< streamPackageFrame > spf=NULL)
- bool crypto::EXML_Output (std::string path, os::smartXMLNode head, os::smart_ptr< public
 Key > pbk, unsigned int lockType=file::PRIVATE_UNLOCK, os::smart_ptr< streamPackage
 Frame > spf=NULL)
- os::smartXMLNode crypto::EXML_Input (std::string path, unsigned char *symKey, unsigned int passwordLength)
- os::smartXMLNode crypto::EXML Input (std::string path, std::string password)
- os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< publicKey > pbk, os::smart_ptr< keyBank > kyBank, os::smart_ptr< nodeGroup > &author)
- os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< publicKey > pbk)
- os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< keyBank > kyBank)
- os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< keyBank > kyBank, os::smart_ptr< nodeGroup > &author)

27.60.1 Detailed Description

Defines basic stream ciphers.

Provides structure to encrypt an XML save file.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines some basic stream ciphers and stream cipher tools for basic encryption.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Provides functions to save and load XML trees in encrypted files.

Chapter 28

Class Index

28.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:	
crypto::actionOnFileClosed	0.4
	894
crypto::actionOnFileError	
	95
crypto::avlKeyBank	
,	96
crypto::binaryDecryptor	
, , , , , , , , , , , , , , , , , , ,	02
crypto::binaryEncryptor	
-)	-08
crypto::bufferLargeError	
	14
crypto::bufferSmallError	
	15
crypto::customError	
Custom crypto::error (p. 418)	16
crypto::error	
Sortable exception	18
crypto::errorListener	
Crypto::error listener	22
crypto::errorSender	
Sends crypto::error (p. 418)	23
crypto::fileFormatError	
File format error	27
crypto::fileOpenError	
File open error	28
crypto::gateway	
	29
crypto::gatewaySettings	
<i>,</i> , , , , , , , , , , , , , , , , , , ,	44

crypto::hash	
Base hash class	453
crypto::hashCompareError	
Hash mis-match	459
crypto::hashGenerationError	
Hash generation error	460
crypto::illegalAlgorithmBind	
Algorithm bound failure	461
crypto::insertionFailed	
ADS Insertion Failed	463
crypto::integer	
Integer number definition	464
crypto::keyBank	
Key bank interface	473
crypto::keyChangeReceiver	
	481
crypto::keyChangeSender	
··· · · ·	483
crypto::keyMissing	
	485
crypto::masterMismatch	
	486
crypto::message	
· · · · · · · · · · · · · · · · · · ·	487
crypto::nodeGroup	
,, , , , , , , , , , , , , , , , , , ,	493
crypto::nodeKeyReference	
	500
crypto::nodeNameReference	
	505
crypto::NULLDataError	
••	511
crypto::NULLMaster	
••	512
crypto::NULLPublicKey	
	513
crypto::number	
	514
numberType	
••	531
crypto::passwordLargeError	
	533
crypto::passwordSmallError	
	535
crypto::publicKey	
	536
,	556
	558

crypto::publickey5izewrong	
Public-key size error	561
crypto::publicKeyTypeBank	562
crypto::publicRSA	
RSA public-key encryption	563
crypto::rc4Hash	
RC-4 hash class	574
crypto::RCFour	579
crypto::RSAKeyGenerator	
Helper key generation class	580
crypto::streamCipher	582
crypto::streamDecrypter	583
crypto::streamEncrypter	583
crypto::streamPackage< streamType, hashType >	584
crypto::streamPackageFrame	586
crypto::streamPackageTypeBank	588
crypto::streamPacket	589
crypto::stringTooLarge	
String size error	590
crypto::unknownErrorType	
Unknown error	591
crypto::user	
Primary user class	592
crypto::xorHash	
XOR hash class	305

Chapter 29

Namespace Documentation

29.1 crypto Namespace Reference

Classes

• class actionOnFileClosed

File closed error.

• class actionOnFileError

File error.

• class avlKeyBank

AVL key back.

• class binaryDecryptor

Encrypted binary file output.

• class binaryEncryptor

Encrypted binary file output.

• class bufferLargeError

Buffer too large.

• class bufferSmallError

Buffer too small.

• class customError

Custom crypto::error (p. 418).

• class error

Sortable exception.

• class errorListener

crypto::error (p. 418) listener

class errorSender

Sends crypto::error (p. 418).

• class fileFormatError

File format error.

• class fileOpenError

File open error.

• class gateway

Security gateway.

• class gatewaySettings

Holds settings for gateway encryption.

• class hash

Base hash class.

• class hashCompareError

Hash mis-match.

• class hashGenerationError

Hash generation error.

• class illegalAlgorithmBind

Algorithm bound failure.

• class insertionFailed

ADS Insertion Failed.

• class integer

Integer number definition.

• class keyBank

Key bank interface.

• class keyChangeReceiver

Interface for receiving key changes.

• class keyChangeSender

Interface inherited by **publicKey** (p. 536).

• class keyMissing

Key missing error.

• class masterMismatch

Master mis-match.

• class message

Crypto-Gateway message.

• class nodeGroup

Node group.

• class nodeKeyReference

Key storage node.

• class nodeNameReference

Name storage node.

• class NULLDataError

NULL data error.

• class NULLMaster

NULL master error.

• class NULLPublicKey

NULL public-key error.

• class number

Basic number definition.

• class passwordLargeError

Symmetric key too big.

• class passwordSmallError

Symmetric key too small.

class publicKey

Base public-key class.

- class publicKeyPackage
- class publicKeyPackageFrame
- class publicKeySizeWrong

Public-key size error.

- class publicKeyTypeBank
- class publicRSA

RSA public-key encryption.

• class rc4Hash

RC-4 hash class.

- class RCFour
- class RSAKeyGenerator

Helper key generation class.

- class streamCipher
- class streamDecrypter
- class streamEncrypter
- class streamPackage
- class streamPackageFrame
- class streamPackageTypeBank
- class streamPacket
- class stringTooLarge

String size error.

• class unknownErrorType

Unknown error.

• class user

Primary user class.

• class xorHash

XOR hash class.

Typedefs

• typedef os::smart_ptr< error > errorPointer

Smart pointer to crypto::error (p. 418).

Functions

• std::ostream & operator<< (std::ostream &os, const hash &num)

Output stream operator.

• std::istream & operator>> (std::istream &is, hash &num)

Input stream operator.

template<class hashClass >

hashClass hashData (uint16 t hashType, const unsigned char *data, uint32 t length)

Hashes data with the specified algorithm.

• std::ostream & cryptoout_func ()

Standard out object for crypto namespace.

• std::ostream & cryptoerr_func ()

Standard error object for crypto namespace.

• std::ostream & operator<< (std::ostream &os, const number &num)

Output stream operator.

• std::istream & operator>> (std::istream &is, number &num)

Input stream operator.

• bool isHexCharacter (char c)

Check the character type.

• std::string toHex (unsigned char i)

Converts an 8 bit integer to a hex string.

• std::string toHex (uint32_t i)

Converts an 32 bit integer to a hex string.

unsigned char fromHex8 (const std::string &str)

Converts a hex string to an 8 bit integer.

• uint32 t fromHex32 (const std::string &str)

Converts a hex string to an 32 bit integer.

- bool **EXML_Output** (std::string path, os::smartXMLNode head, unsigned char *symKey, unsigned int passwordLength, os::smart_ptr< **streamPackageFrame** > spf=NULL)
- bool EXML_Output (std::string path, os::smartXMLNode head, std::string password, os::smart
 _ptr< streamPackageFrame > spf=NULL)
- bool EXML_Output (std::string path, os::smartXMLNode head, os::smart_ptr< publicKey > pbk, unsigned int lockType=file::PRIVATE_UNLOCK, os::smart_ptr< streamPackageFrame > spf=NULL)
- bool EXML_Output (std::string path, os::smartXMLNode head, os::smart_ptr< number > public →
 Key, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame > spf=N →
 ULL)
- os::smartXMLNode **EXML Input** (std::string path, std::string password)
- os::smartXMLNode EXML_Input (std::string path, os::smart_ptr< publicKey > pbk, os::smart←
 _ptr< keyBank > kyBank, os::smart_ptr< nodeGroup > &author)
- os::smartXMLNode **EXML_Input** (std::string path, os::smart_ptr< **publicKey** > pbk)
- os::smartXMLNode **EXML_Input** (std::string path, os::smart_ptr< **keyBank** > kyBank)
- os::smartXMLNode EXML_Input (std::string path, os::smart_ptr< keyBank > kyBank, os
 ::smart ptr< nodeGroup > &author)

Variables

• bool global_logging

Deprecated logging flag.

- os::smart_ptr< std::ostream > cryptoout_ptr Standard out pointer for crypto namespace.
- os::smart_ptr< std::ostream > cryptoerr_ptr
 Standard error pointer for crypto namespace.

29.1.1 Typedef Documentation

typedef os::smart_ptr<error> crypto::errorPointer

Smart pointer to **crypto::error** (p. 418).

29.1.2 Function Documentation

```
std::ostream& crypto::cryptoerr_func ( )
```

Standard error object for crypto namespace.

#define statements allow the user to call this function with "crypto::cryptoerr." Logging is achieved by using "crypto::cryptoerr" as one would use "std::cerr."

```
std::ostream& crypto::cryptoout_func ( )
```

Standard out object for crypto namespace.

#define statements allow the user to call this function with "crypto::cryptoout." Logging is achieved by using "crypto::cryptoout" as one would use "std::cout."

os::smartXMLNode crypto::EXML_Input (std::string path, unsigned char * symKey, unsigned int passwordLength)

```
os::smartXMLNode crypto::EXML Input ( std::string path, std::string password )
```

 $os::smartXMLNode\ crypto::EXML_Input\ (\ std::string\ path,\ os::smart_ptr< \textbf{publicKey} > pbk, \\ os::smart_ptr< \textbf{keyBank} > kyBank,\ os::smart_ptr< \textbf{nodeGroup} > \&\ author\)$

os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< publicKey > pbk)

os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< keyBank > kyBank)

os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< keyBank > kyBank, os::smart ptr< nodeGroup > & author)

bool crypto::EXML_Output (std::string path, os::smartXMLNode head, unsigned char * symKey, unsigned int passwordLength, os::smart_ptr< streamPackageFrame > spf = NULL)

bool crypto::EXML_Output (std::string path, os::smartXMLNode head, std::string password, os::smart ptr< streamPackageFrame > spf = NULL)

bool crypto::EXML_Output (std::string path, os::smartXMLNode head, os::smart_ptr< publicKey > pbk, unsigned int lockType = file::PRIVATE_UNLOCK, os::smart_ptr< streamPackageFrame > spf = NULL)

bool crypto::EXML_Output (std::string path, os::smartXMLNode head, os::smart_ptr< number > publicKey, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame > spf = NULL)

uint32 t crypto::fromHex32 (const std::string & str)

Converts a hex string to an 32 bit integer.

Parameters

in str	Hex string to convert
--------	-----------------------

Returns

str converted to integer

unsigned char crypto::fromHex8 (const std::string & str)

Converts a hex string to an 8 bit integer.

Parameters

	in	str	Hex string to convert
--	----	-----	-----------------------

Returns

str converted to integer

template<class hashClass > hashClass crypto::hashData (uint16_t hashType, const unsigned char * data, uint32_t length)

Hashes data with the specified algorithm.

Hashes the provided data array returning a hash of the specified algorithm. This is a template function, which calls the static hash function for the specified algorithm.

Parameters

in	hashType	Size of hash
in data		Data array to be hashed
in length		Length of data to be hashed

Returns

Hash for data array

bool crypto::isHexCharacter (char c)

Check the character type.

Checks if the character is a valid hex character. That is, 0-9 and A-F.

Parameters

	_	01
l in	C	Character to test

Returns

true if a hex character, else, false

std::ostream& crypto::operator<< (std::ostream & os, const number & num)

Output stream operator.

Parameters

	[in/out]	os Output stream
in	num	Number to be output

Returns

reference to std::ostream& os

std::ostream& crypto::operator<< (std::ostream & os, const hash & num)

Output stream operator.

Outputs a hex version of the hash to the provided output stream. This output will look identical for two hashes which are equal but have different algorithms.

Parameters

[in/out] os Output stream		os Output stream
in num Hash to be printed return Reference to		Hash to be printed return Reference to output stream

std::istream& crypto::operator>> (std::istream & is, number & num)

Input stream operator.

Parameters

	[in/out]	is Input stream
in	num	Number to set with the string

Returns

reference to std::istream& is

std::istream& crypto::operator>> (std::istream & is, hash & num)

Input stream operator.

Inputs a hex version of the hash from the provided output stream. This function must receive a constructed hash, although it will rebuild the provided hash with the stream data.

Parameters

		[in/out]	is Input stream	
in num Hash to be created return Reference to input		Hash to be created return Reference to input stream		

std::string crypto::toHex (unsigned char i)

Converts an 8 bit integer to a hex string.

Parameters

in	i	Integer to convert
----	---	--------------------

Returns

i converted to hex string

std::string crypto::toHex (uint32_t i)

Converts an 32 bit integer to a hex string.

Parameters

in	i	Integer to convert
----	---	--------------------

Returns

i converted to hex string

29.1.3 Variable Documentation

os::smart_ptr<std::ostream> crypto::cryptoerr_ptr

Standard error pointer for crypto namespace.

This std::ostream is used as standard error for the crypto namespace. This pointer can be swapped out to programmatically redirect standard error for the crypto namespace.

os::smart_ptr<std::ostream> crypto::cryptoout_ptr

Standard out pointer for crypto namespace.

This std::ostream is used as standard out for the crypto namespace. This pointer can be swapped out to programmatically redirect standard out for the crypto namespace.

bool crypto::global_logging

Deprecated logging flag.

Old logging flag. Deprecated in the new CryptoGateway files. This has been replaced by the logging system outlined in this file.


Chapter 30

Class Documentation

30.1 crypto::actionOnFileClosed Class Reference

File closed error.

Inheritance diagram for crypto::actionOnFileClosed:

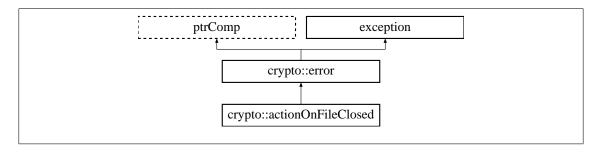

Public Member Functions

• virtual ~actionOnFileClosed () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Action on File Closed".

• std::string errorDescription () const

Long error descriptor Returns "Cannot preform action on a file in the closed state".

30.1.1 Detailed Description

File closed error.

Thrown when an action is attempted on a file which is already closed.

30.1.2 Constructor & Destructor Documentation

virtual crypto::actionOnFileClosed::~actionOnFileClosed() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.1.3 Member Function Documentation

std::string crypto::actionOnFileClosed::errorDescription() const [inline], [virtual]

Long error descriptor Returns "Cannot preform action on a file in the closed state".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::actionOnFileClosed::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Action on File Closed".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.2 crypto::actionOnFileError Class Reference

File error.

Inheritance diagram for crypto::actionOnFileError:

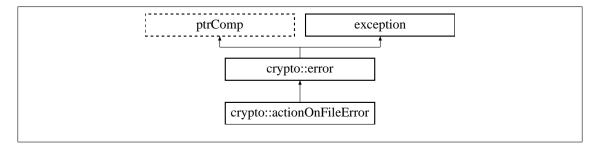

Public Member Functions

• virtual ~actionOnFileError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Action on File Error".

• std::string errorDescription () const

Long error descriptor Returns "Cannot preform action on a file in the error state".

30.2.1 Detailed Description

File error.

Thrown when an action is attempted on a file in the error state.

30.2.2 Constructor & Destructor Documentation

```
virtual crypto::actionOnFileError::~actionOnFileError( ) throw ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.2.3 Member Function Documentation

```
std::string crypto::actionOnFileError::errorDescription() const [inline], [virtual]
```

Long error descriptor Returns "Cannot preform action on a file in the error state".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::actionOnFileError::errorTitle () const [inline], [virtual]

Short error descriptor Returns "Action on File Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.3 crypto::avlKeyBank Class Reference

AVL key back.

Inheritance diagram for crypto::avlKeyBank:

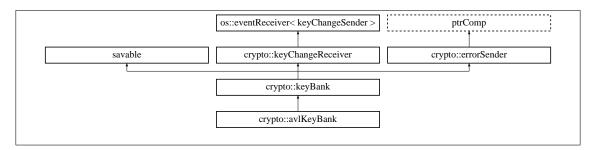

Public Member Functions

• avlKeyBank (std::string savePath="", const unsigned char *key=NULL, unsigned int key ← Len=0, os::smart_ptr< streamPackageFrame > strmPck=NULL)

Construct with save path.

avlKeyBank (std::string savePath, os::smart_ptr< publicKey > pubKey, os::smart_ptr< stream →
 PackageFrame > strmPck=NULL)

Construct with save path and public key.

• virtual ~avlKeyBank ()

Virtual destructor.

• void save ()

Saves bank to file.

os::smart_ptr< nodeGroup > addPair (std::string groupName, std::string name, os::smart_
 ptr< number > key, uint16_t algoID, uint16_t keySize)

Adds authenticated node to bank.

• os::smart_ptr< nodeGroup > find (os::smart_ptr< nodeNameReference > name)

Find by group name reference.

• os::smart_ptr< nodeGroup > find (os::smart_ptr< nodeKeyReference > key)

Find by group key reference.

• os::smart_ptr< **nodeGroup** > **find** (std::string groupName, std::string name)

Find by group name and name.

os::smart_ptr< nodeGroup > find (os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize)

Find by key information.

Protected Member Functions

void pushNewNode (os::smart_ptr< nodeNameReference > name)

Add name node.

• void **pushNewNode** (os::smart ptr< **nodeKeyReference** > key)

Add key node.

• void load ()

Loads bank from file.

Private Attributes

• os::asyncAVLTree< nodeNameReference > nameTree

List of all names associated with this node.

• os::asyncAVLTree< nodeKeyReference > keyTree

List of all keys associated with this node.

• os::asyncAVLTree< nodeGroup > nodeBank

List of all node groups.

Additional Inherited Members

30.3.1 Detailed Description

AVL key back.

The AVL key bank stores keys in a series of AVL trees. All keys in the bank are loaded into memory when the file is loaded, meaning that there is a limited number of keys that can be practically managed through an AVL key bank.

30.3.2 Constructor & Destructor Documentation

 $\label{eq:crypto::avlKeyBank::avlKeyBank} crypto::avlKeyBank::avlKeyBank (std::string savePath = "", const unsigned char * key = NULL, unsigned int keyLen = 0, os::smart_ptr< streamPackageFrame > strmPck = NULL)$

Construct with save path.

Intializes the key bank and loads the the bank from a file.

Parameters

in	savePath	Path to save file, empty by default
in	key	Symetric key
in	keyLen	Length of symetric key
in	strmPck	Definition of algorithms used

crypto::avlKeyBank::avlKeyBank (std::string savePath, os::smart_ptr< publicKey > pubKey, os::smart_ptr< streamPackageFrame > strmPck = NULL)

Construct with save path and public key.

Intializes the key bank and loads the the bank from a file.

Parameters

in	savePath	Path to save file
in	pubKey	Public key
in	strmPck	Definition of algorithms used

virtual crypto::avlKeyBank::~avlKeyBank() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.3.3 Member Function Documentation

os::smart_ptr<**nodeGroup**> crypto::avlKeyBank::addPair (std::string groupName, std::string name, os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize) [virtual]

Adds authenticated node to bank.

Note that if a node has not be authenticated, adding it to the bank will cause a potential security vulnerability. Nodes should be authenticated before being added to the bank.

Parameters

in	groupName	Name of the node's group
in	name	Name of the node
in	key	Key of node to be added
in	algoID	ID of algorithm for key
in	keySize	Length of key of the node

Returns

Return reference to the new node group

Implements crypto::keyBank (p. 476).

 $os::smart_ptr < \textbf{nodeGroup} > crypto::avlKeyBank::find (os::smart_ptr < \textbf{nodeNameReference} > name) [virtual]$

Find by group name reference.

Parameters

in	name	Name reference to be searched
----	------	-------------------------------

Returns

Node group found by arguments

Implements crypto::keyBank (p. 477).

 $os::smart_ptr < \textbf{nodeGroup} > crypto::avlKeyBank::find (os::smart_ptr < \textbf{nodeKeyReference} > key) \\ [virtual]$

Find by group key reference.

Parameters

in	key	Key reference to be searched
----	-----	------------------------------

Returns

Node group found by arguments

Implements crypto::keyBank (p. 477).

 $os::smart_ptr < \textbf{nodeGroup} > crypto::avlKeyBank::find (std::string groupName, std::string name) \\ [inline], [virtual]$

Find by group name and name.

Parameters

in	groupName	Name of the node's group
in	name	Name of the node

Returns

Node group found by arguments

Reimplemented from crypto::keyBank (p. 477).

os::smart_ptr<**nodeGroup**> crypto::avlKeyBank::find (os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize) [inline], [virtual]

Find by key information.

Parameters

in	key	Key of node to be added
in	algoID	ID of algorithm for key
in	keySize	Length of key of the node

Returns

Node group found by arguments

Reimplemented from crypto::keyBank (p. 478).

void crypto::avlKeyBank::load() [protected], [virtual]

Loads bank from file.

Returns

void

Implements crypto::keyBank (p. 478).

 $\label{lem:condensate} void\ crypto::avlKeyBank::pushNewNode\ (\ os::smart_ptr<\ \textbf{nodeNameReference}>name\)\ [protected],\ [virtual]$

Add name node.

Inserts a name node into the bank. The name node has a reference to a node group.

Parameters

Returns

void

Implements crypto::keyBank (p. 478).

void crypto::avlKeyBank::pushNewNode (os::smart_ptr< nodeKeyReference > key)
[protected], [virtual]

Add key node.

Inserts a key node into the bank. The key node has a reference to a node group.

Parameters

	in	key	Key node to be added
--	----	-----	----------------------

Returns

void

Implements crypto::keyBank (p. 479).

void crypto::avlKeyBank::save () [virtual]

Saves bank to file.

Returns

void

Implements crypto::keyBank (p. 479).

30.3.4 Member Data Documentation

os::asyncAVLTree<nodeKeyReference> crypto::avlKeyBank::keyTree [private] List of all keys associated with this node.


os::asyncAVLTree<nodeNameReference> crypto::avlKeyBank::nameTree [private] List of all names associated with this node.

os::asyncAVLTree<nodeGroup> crypto::avlKeyBank::nodeBank [private] List of all node groups.

30.4 crypto::binaryDecryptor Class Reference

Encrypted binary file output.

Inheritance diagram for crypto::binaryDecryptor:

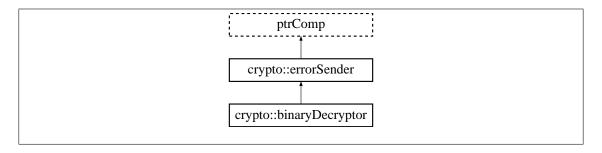

Public Member Functions

- binaryDecryptor (std::string file_name, os::smart_ptr< keyBank > kBank)

 Construct with public key.
- **binaryDecryptor** (std::string file_name, os::smart_ptr< **publicKey** > publicKeyLock)

 Construct with public key.
- binaryDecryptor (std::string file_name, std::string password)

Construct with password.

• binaryDecryptor (std::string file_name, unsigned char *key, unsigned int keyLen)

Construct with symmetric key.

• unsigned char read ()

Attempts to read a single character.

• unsigned int read (unsigned char *data, unsigned int dataLen)

Attempts to read a block of data.

• void close ()

Closes the output file.

• const std::string & fileName () const

Returns the name of target file.

• const os::smart_ptr< streamPackageFrame > streamAlgorithm () const

Returns the stream algorithm definition.

• bool good () const

Returns the current file state.

• bool finished () const

Returns if the file has finished writing.

unsigned long bytesLeft () const

Returns the number of bytes left in the file.

• os::smart_ptr< nodeGroup > author ()

Pointer to the user which signed this file.

• virtual ~binaryDecryptor ()

Virtual destructor.

Private Member Functions

• void **build** (unsigned char *key=NULL, unsigned int keyLen=0)

Central constructor function.

Private Attributes

• os::smart_ptr< publicKey > _publicKeyLock

Pointer to the optional public key.

• os::smart_ptr< keyBank > _keyBank

Pointer to the key bank (to confirm public keys)

• os::smart_ptr< nodeGroup > _author

Pointer to the user which signed this file.

os::smart_ptr< streamPackageFrame > _streamAlgorithm

Pointer to the mandatory stream algorithm definition.

• os::smart_ptr< streamCipher > currentCipher

Pointer to the current stream cipher.

• bool _state

State of the output file.

• bool_finished

Has the file been closed.

• std::string _fileName

Name of the file being read from.

• std::ifstream input

Binary input file.

• unsigned long _bytesLeft

Number of bytes left in the file.

Additional Inherited Members

30.4.1 Detailed Description

Encrypted binary file output.

The user defines an encryption algorithm and key, then places data into the file. This data is automatically encrypted with the specified algorithm and key.

30.4.2 Constructor & Destructor Documentation

crypto::binaryDecryptor::binaryDecryptor (std::string file_name, os::smart_ptr< **keyBank** > kBank)

Construct with public key.

Constructs the file reader with a public key.

Parameters

in	file_name	Name of input file
in	kBank	Record of public keys

crypto::binaryDecryptor::binaryDecryptor (std::string file_name, os::smart_ptr< publicKey > publicKeyLock)

Construct with public key.

Constructs the file reader with a public key.

Parameters

in	file_name	Name of input file
in	publicKeyLock	Public key to decrypt data

crypto::binaryDecryptor::binaryDecryptor (std::string file_name, std::string password)

Construct with password.

Constructs the file reader with a password.

Parameters

in	file_name	Name of input file
in	password	Password to decrypt data

 $\label{lem:crypto::binaryDecryptor::binaryDecryptor(std::string file_name, unsigned char*key, unsigned int keyLen)$

Construct with symmetric key.

Constructs the file reader with a symmetric key.

Parameters

in	file_name	Name of input file
in	key	Symmetric key byte array
in	keyLen	Size of the symmetric key

virtual crypto::binaryDecryptor::~binaryDecryptor() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Also closes the input file.

30.4.3 Member Function Documentation

```
os::smart_ptr<nodeGroup> crypto::binaryDecryptor::author ( )
```

Pointer to the user which signed this file.

Returns

```
crypto::binaryDecryptor::_author (p. 407)
```

```
void crypto::binaryDecryptor::build ( unsigned char * key = NULL, unsigned int keyLen = 0 ) [private]
```

Central constructor function.

This function reads the header of the encrypted binary file and attempts to initialize a stream cipher for decryption. Note that there is no guarantee that this can be done with the information given to the class. In this event, the class logs the error and sets it's state to false.

Parameters

in	key	Symmetric key, NULL by default
in	keyLen	Length of symmetric key, 0 by default

Returns

void

unsigned long crypto::binaryDecryptor::bytesLeft () const [inline]

Returns the number of bytes left in the file.

Returns

crypto::binaryDecryptor:: bytesLeft (p. 407)

```
void crypto::binaryDecryptor::close ( )
```

Closes the output file.

Returns

void

const std::string& crypto::binaryDecryptor::fileName () const [inline]

Returns the name of target file.

Returns

crypto::binaryDecryptor::_fileName (p. 407)

bool crypto::binaryDecryptor::finished() const [inline]

Returns if the file has finished writing.

Returns

crypto::binaryDecryptor:: finished (p. 407)

bool crypto::binaryDecryptor::good () const [inline]

Returns the current file state.

Returns

crypto::binaryDecryptor::_state (p. 407)

unsigned char crypto::binaryDecryptor::read ()

Attempts to read a single character.

Note that if the reader is in a "good" state, then this function will read and decrypt a single byte of the file.

Returns

Character read, 0 if failed

unsigned int crypto::binaryDecryptor::read (unsigned char * data, unsigned int dataLen)

Attempts to read a block of data.

Note that if the reader is in a "good" state, then this function will read and decrypt the entire block of data requested.

Parameters

out	data	Array to place read data into
in	dataLen	Number of bytes attempting to read

Returns

Number of bytes read

const os::smart_ptr<streamPackageFrame> crypto::binaryDecryptor::streamAlgorithm () const
[inline]

Returns the stream algorithm definition.

Returns

crypto::binaryDecryptor::_streamAlgorithm (p. 407)

30.4.4 Member Data Documentation

os::smart_ptr<nodeGroup> crypto::binaryDecryptor::_author [private]

Pointer to the user which signed this file.

This is only populated if a key-bank is bound to the class.

unsigned long crypto::binaryDecryptor::_bytesLeft [private]

Number of bytes left in the file.

std::string crypto::binaryDecryptor::_fileName [private]

Name of the file being read from.

bool crypto::binaryDecryptor:: finished [private]

Has the file been closed.

If true, the file is closed. Else, the file is open and may be read from.

os::smart_ptr<keyBank> crypto::binaryDecryptor::_keyBank [private]

Pointer to the key bank (to confirm public keys)

os::smart_ptr<**publicKey**> crypto::binaryDecryptor::_publicKeyLock [private]

Pointer to the optional public key.

bool crypto::binaryDecryptor::_state [private]

State of the output file.

This state is either "good" or "bad." A bad file is not merely defined by crypto::binaryEncryptor

::input, but also by any cryptographic abnormalities that are detected.

os::smart_ptr<streamPackageFrame> crypto::binaryDecryptor::_streamAlgorithm [private]

Pointer to the mandatory stream algorithm definition.

os::smart_ptr<**streamCipher**> crypto::binaryDecryptor::currentCipher [private]

Pointer to the current stream cipher.

The current cipher will be of the type defined in the algorithm definition. It will be initialized with either the provided public key or the provided password.


std::ifstream crypto::binaryDecryptor::input [private]

Binary input file.

30.5 crypto::binaryEncryptor Class Reference

Encrypted binary file output.

Inheritance diagram for crypto::binaryEncryptor:

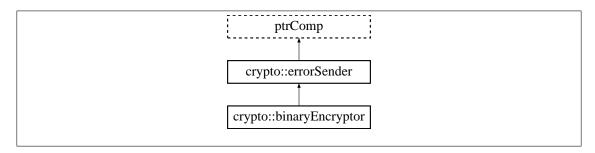

Public Member Functions

binaryEncryptor (std::string file_name, os::smart_ptr< publicKey > publicKeyLock, unsigned int lockType=file::PRIVATE_UNLOCK, os::smart_ptr< streamPackageFrame > stream_algo=N ← ULL)

Construct with public key.

- binaryEncryptor (std::string file_name, os::smart_ptr< number > publicKey, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame > stream_algo=NULL)
 Construct with number and public key algorithm.
- binaryEncryptor (std::string file_name, std::string password, os::smart_ptr< streamPackage ← Frame > stream_algo=NULL)

Construct with password.

binaryEncryptor (std::string file_name, unsigned char *key, unsigned int keyLen, os::smart
 _ptr< streamPackageFrame > stream_algo=NULL)

Construct with symmetric key.

• void write (unsigned char data)

Write a single character.

• void write (const unsigned char *data, unsigned int dataLen)

Write an array of bytes.

• void close ()

Closes the output file.

• const std::string & fileName () const

Returns the name of target file.

• const os::smart_ptr< streamPackageFrame > streamAlgorithm () const

Returns the stream algorithm definition.

• bool good () const

Returns the current file state.

· bool finished () const

Returns if the file has finished writing.

• virtual ~binaryEncryptor ()

Virtual destructor.

Private Member Functions

• void **build** (unsigned char *key, unsigned int keyLen)

Construct class with password.

void build (os::smart_ptr< publicKey > publicKeyLock)

Construct class with public key.

• void **build** (os::smart ptr< **number** > pubKey, unsigned int pkAlgo, unsigned int pkSize)

Construct class with number and algorithm.

Private Attributes

unsigned int publicLockType

Defines method of locking the file.

os::smart_ptr< streamPackageFrame > _streamAlgorithm

Pointer to the mandatory stream algorithm definition.

• os::smart ptr< streamCipher > currentCipher

Pointer to the current stream cipher.

• bool _state

State of the output file.

• bool finished

Has the file been closed.

• std::string _fileName

Name of the file being written to.

• std::ofstream output

Binary output file.

Additional Inherited Members

30.5.1 Detailed Description

Encrypted binary file output.

The user defines an encryption algorithm and key, then places data into the file. This data is automatically encrypted with the specified algorithm and key.

30.5.2 Constructor & Destructor Documentation

crypto::binaryEncryptor::binaryEncryptor (std::string file_name, os::smart_ptr< publicKey
> publicKeyLock, unsigned int lockType = file::PRIVATE_UNLOCK, os::smart_ptr<
streamPackageFrame > stream algo = NULL)

Construct with public key.

Constructs the file writer with a public key and an optional stream algorithm definition

Parameters

in	file_name	Name of output file
in	publicKeyLock	Public key to encrypt data

in	lockType	Defines method of locking with public key
in	stream_algo	Optional stream algorithm definition

crypto::binaryEncryptor::binaryEncryptor (std::string file_name, os::smart_ptr< number > publicKey, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame > stream_algo = NULL)

Construct with number and public key algorithm.

Constructs the file writer with a public key and an optional stream algorithm definition

Parameters

in	file_name	Name of output file
in	publicKey (p. 536)	Number to encrypt data
in	pkAlgo	Defines public key algorithm
in	pkSize	Defines size of public key
in	stream_algo	Optional stream algorithm definition

crypto::binaryEncryptor::binaryEncryptor (std::string file_name, std::string password, os::smart_ptr< streamPackageFrame > stream_algo = NULL)

Construct with password.

Constructs the file writer with a password and an optional stream algorithm definition

Parameters

in	file_name	Name of output file
in	password	String to encrypt data with
in	stream_algo	Optional stream algorithm definition

 $\label{lem:crypto::binaryEncryptor::binaryEncryptor(std::string file_name, unsigned char*key, unsigned int keyLen, os::smart_ptr< streamPackageFrame > stream_algo = NULL)$

Construct with symmetric key.

Constructs the file writer with a symmetric key and an optional stream algorithm definition

Parameters

in	file_name	Name of output file
in	key	Array of characters defining the symmetric key
in	keyLen	Length of symmetric key

in	stream_algo	Optional stream algorithm definition	
----	-------------	--------------------------------------	--

virtual crypto::binaryEncryptor::~binaryEncryptor() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Also closes the output file.

30.5.3 Member Function Documentation

void crypto::binaryEncryptor::build (unsigned char * key, unsigned int keyLen) [private]

Construct class with password.

This function acts as a constructor. It is only called by "true" constructors and exists to allow multiple data formats to be converted into the key.

Parameters

in	key	Array of characters defining the symmetric key	
in	keyLen	Length of symmetric key	

Returns

void

void crypto::binaryEncryptor::build (os::smart_ptr< publicKey > publicKeyLock) [private]

Construct class with public key.

This function acts as a constructor. It is only called by "true" constructors and exists to allow multiple types of data to be converted to a public key.

Parameters

in publicKeyLock Public key pair to encrypt data
--

Returns

void

 $\label{lem:condition} \begin{tabular}{ll} void crypto::binaryEncryptor::build (os::smart_ptr< {\bf number} > pubKey, unsigned int pkAlgo, unsigned int pkSize) [private] \end{tabular}$

Construct class with number and algorithm.

This function acts as a constructor. It is only called by "true" constructors and exists to allow multiple types of data to be converted to a public key.

Write a single character.

in	pubKey	Public key to encrypt data
in	pkAlgo	Algorithm ID
in	pkSize	Size of public key

```
Returns
     void
void crypto::binaryEncryptor::close ( )
Closes the output file.
Returns
     void
const std::string& crypto::binaryEncryptor::fileName ( ) const [inline]
Returns the name of target file.
Returns
     crypto::binaryEncryptor::_fileName (p. 413)
bool crypto::binaryEncryptor::finished( ) const [inline]
Returns if the file has finished writing.
Returns
     crypto::binaryEncryptor::_finished (p. 413)
bool crypto::binaryEncryptor::good ( ) const [inline]
Returns the current file state.
Returns
     crypto::binaryEncryptor::_state (p. 413)
const\ os :: smart\_ptr < \textbf{streamPackageFrame} > crypto :: binaryEncryptor :: streamAlgorithm\ (\quad)\ const
[inline]
Returns the stream algorithm definition.
Returns
     crypto::binaryEncryptor::_streamAlgorithm (p. 413)
void crypto::binaryEncryptor::write ( unsigned char data )
```

data Character to write	in data
-------------------------	---------

Returns

void

void crypto::binaryEncryptor::write (const unsigned char * data, unsigned int dataLen)

Write an array of bytes.

Parameters

in	data	Data array to write
in	dataLen	Length of data array

Returns

void

30.5.4 Member Data Documentation

std::string crypto::binaryEncryptor::_fileName [private]

Name of the file being written to.

bool crypto::binaryEncryptor::_finished [private]

Has the file been closed.

If true, the file is closed. Else, the file is open and may be written to.

unsigned int crypto::binaryEncryptor::_publicLockType [private]

Defines method of locking the file.

bool crypto::binaryEncryptor::_state [private]

State of the output file.

This state is either "good" or "bad." A bad file is not merely defined by **crypto::binaryEncryptor** → **::output** (p. 414), but also by any cryptographic abnormalities that are detected.

os::smart_ptr<**streamPackageFrame**> crypto::binaryEncryptor::_streamAlgorithm [private]

Pointer to the mandatory stream algorithm definition.

os::smart_ptr<streamCipher> crypto::binaryEncryptor::currentCipher [private]

Pointer to the current stream cipher.

The current cipher will be of the type defined in the algorithm definition. It will be initialized with either the provided public key or the provided password.


std::ofstream crypto::binaryEncryptor::output [private]

Binary output file.

30.6 crypto::bufferLargeError Class Reference

Buffer too large.

Inheritance diagram for crypto::bufferLargeError:

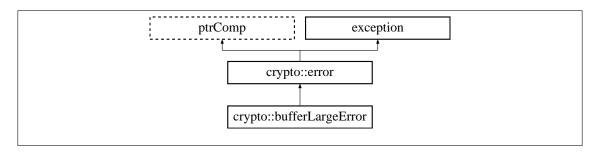

Public Member Functions

• virtual ~bufferLargeError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Buffer Size Error".

• std::string errorDescription () const

Long error descriptor Returns "Buffer too large".

30.6.1 Detailed Description

Buffer too large.

Thrown when the buffer provided to some cryptographic function is too large.

30.6.2 Constructor & Destructor Documentation

virtual crypto::bufferLargeError::~bufferLargeError() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.6.3 Member Function Documentation

std::string crypto::bufferLargeError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Buffer too large".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::bufferLargeError::errorTitle () const [inline], [virtual]

Short error descriptor Returns "Buffer Size Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.7 crypto::bufferSmallError Class Reference

Buffer too small.

Inheritance diagram for crypto::bufferSmallError:

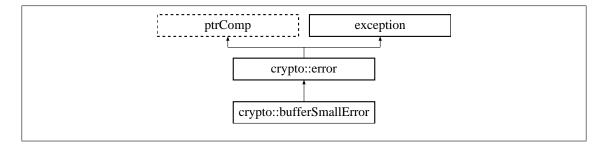

Public Member Functions

• virtual ~bufferSmallError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Buffer Size Error".

• std::string errorDescription () const

Long error descriptor Returns "Buffer too small".

30.7.1 Detailed Description

Buffer too small.

Thrown when the buffer provided to some cryptographic function is too small.

30.7.2 Constructor & Destructor Documentation

virtual crypto::bufferSmallError::~bufferSmallError() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.7.3 Member Function Documentation

std::string crypto::bufferSmallError::errorDescription() const [inline], [virtual]

Long error descriptor Returns "Buffer too small".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::bufferSmallError::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Buffer Size Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.8 crypto::customError Class Reference

Custom crypto::error (p. 418).

Inheritance diagram for crypto::customError:

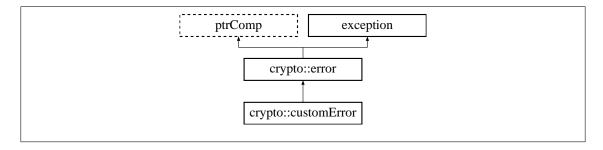

Public Member Functions

• customError (std::string name, std::string description)

Custom error constructor.

• virtual ~customError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "<name>" (crypto::customError::_name (p. 418))

• std::string errorDescription () const

Long error descriptor Returns "<description>" (crypto::customError::_description (p. 418))

Private Attributes

- std::string _name
- std::string description

30.8.1 Detailed Description

Custom crypto::error (p. 418).

Allows the programmer to define an error unique to a specific situation.

30.8.2 Constructor & Destructor Documentation

crypto::customError::customError (std::string name, std::string description) [inline]

Custom error constructor.

Parameters

in	name	Short error tag
in	description	Long error description

virtual crypto::customError::~customError() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.8.3 Member Function Documentation

```
std::string crypto::customError::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "<description>" (crypto::customError::_description (p. 418))

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

```
std::string crypto::customError::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "<name>" (crypto::customError::_name (p. 418))

Returns

Error title std::string

Reimplemented from crypto::error (p. 421).

30.8.4 Member Data Documentation

std::string crypto::customError::_description [private]

@ Long error descriptor


std::string crypto::customError::_name [private]

@ Short error descriptor

30.9 crypto::error Class Reference

Sortable exception.

Inheritance diagram for crypto::error:

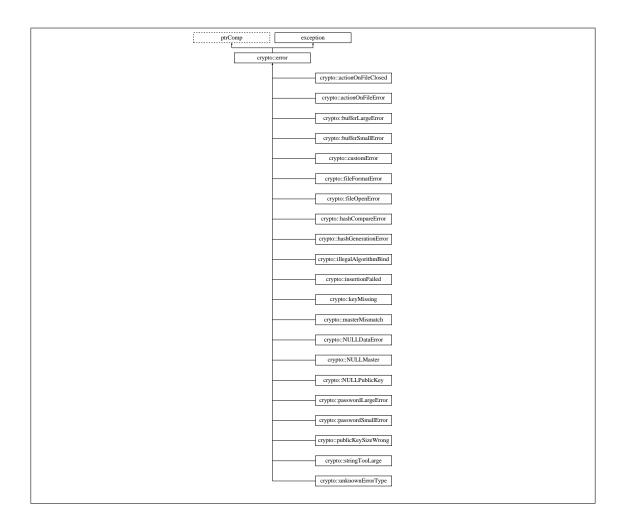

Public Member Functions

• error ()

Error constructor.

• virtual ~error () throw ()

Virtual destructor.

• virtual std::string errorTitle () const

Short error descriptor Returns "Error".

• virtual std::string errorDescription () const

Long error descriptor Returns "No description".

• std::string timestampString () const

Timestamp converted to string Returns the timestamp in a human readable string.

• void log () const

Logs error to crypto::cryptoerr Logs the error title, time created and error description on the Crypto⇔ Gateway error log.

• uint64_t timestamp () const

Time created.

• const char * what () const throw ()

Concatenated error data Returns a C string of the error title, time constructed and error description.

Private Attributes

• uint64 t timestamp

Time the error was created.

• std::string whatString

Full error output.

30.9.1 Detailed Description

Sortable exception.

This class allows for more sophisticated logging of errors. It contains the time which the error occurred and can be thrown.

30.9.2 Constructor & Destructor Documentation

```
crypto::error::error( ) [inline]
```

Error constructor.

Constructs an error by setting the timestamp to the current time.

```
virtual crypto::error::~error( ) throw) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.9.3 Member Function Documentation

```
virtual std::string crypto::error::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "No description".

Returns

Error description std::string

Reimplemented in crypto::stringTooLarge (p. 590), crypto::unknownErrorType (p. 592), crypto::masterMismatch (p. 487), crypto::NULLMaster (p. 513), crypto::NULLDataError (p. 511), crypto-::NULLPublicKey (p. 514), crypto::keyMissing (p. 486), crypto::publicKeySizeWrong (p. 562), crypto::actionOnFileClosed (p. 395), crypto::actionOnFileError (p. 396), crypto::hashGeneration-Error (p. 461), crypto::hashCompareError (p. 459), crypto::illegalAlgorithmBind (p. 462), crypto-::fileFormatError (p. 428), crypto::fileOpenError (p. 429), crypto::customError (p. 417), crypto-::insertionFailed (p. 463), crypto::bufferLargeError (p. 415), crypto::bufferSmallError (p. 416), crypto::passwordLargeError (p. 534), and crypto::passwordSmallError (p. 535).

```
virtual std::string crypto::error::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "Error".

Returns

Error title std::string

Reimplemented in crypto::stringTooLarge (p. 591), crypto::unknownErrorType (p. 592), crypto \leftarrow ::masterMismatch (p. 487), crypto::NULLMaster (p. 513), crypto::NULLDataError (p. 512), crypto \leftarrow ::NULLPublicKey (p. 514), crypto::keyMissing (p. 486), crypto::publicKeySizeWrong (p. 562), crypto::actionOnFileClosed (p. 395), crypto::actionOnFileError (p. 396), crypto::hashGeneration \leftarrow Error (p. 461), crypto::hashCompareError (p. 460), crypto::illegalAlgorithmBind (p. 462), crypto \leftarrow ::fileFormatError (p. 428), crypto::bufferLargeError (p. 429), crypto::bufferSmallError (p. 416), crypto::passwordLargeError (p. 534), and crypto::passwordSmallError (p. 536).

```
void crypto::error::log ( ) const [inline]
```

Logs error to crypto::cryptoerr Logs the error title, time created and error description on the Crypto

Gateway error log.

Returns

void

uint64_t crypto::error::timestamp () const [inline]

Time created.

Returns

```
crypto::error::_timestamp (p. 421)
```

```
std::string crypto::error::timestampString ( ) const [inline]
```

Timestamp converted to string Returns the timestamp in a human readable string.

Returns

Time error was created

```
const char* crypto::error::what ( ) const throw ) [inline]
```

Concatenated error data Returns a C string of the error title, time constructed and error description.

Returns

Character pointer to error data

```
30.9.4 Member Data Documentation
```

```
uint64_t crypto::error::_timestamp [private]
```

Time the error was created.

std::string crypto::error::whatString [private]


Full error output.

The **crypto::error::what()** (p. 421) function must return a C string. This string is the position in memory that function returns. **crypto::error::what()** (p. 421) also constructs this string.

30.10 crypto::errorListener Class Reference

crypto::error (p. 418) listener

Inheritance diagram for crypto::errorListener:



Public Member Functions

• virtual ~errorListener ()

Virtual destructor.

• virtual void receiveError (errorPointer elm, os::smart_ptr< errorSender > source)

Receive error event.

Private Attributes

• os::spinLock mtx

Set protection mutex.

• os::smartSet< errorSender > senders

Set of senders.

Friends

• class errorSender

Friendship with crypto::errorSender (p. 423).

30.10.1 Detailed Description

crypto::error (p. 418) listener

Defines a class which is notified when another class throws a crypto::error (p. 418).

30.10.2 Constructor & Destructor Documentation

virtual crypto::errorListener::~errorListener() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.10.3 Member Function Documentation

virtual void crypto::errorListener::receiveError (errorPointer elm, os::smart_ptr< errorSender > source) [inline], [virtual]

Receive error event.

Receives error from one of the senders this listener is registered to.

Parameters

i	n	elm	Error sent
i	n	source	Sender which sent error

Returns

void

30.10.4 Friends And Related Function Documentation

friend class errorSender [friend]

Friendship with crypto::errorSender (p. 423).

The error sender must be able to add and remove itself from the listener's set.

30.10.5 Member Data Documentation

os::spinLock crypto::errorListener::mtx [private]

Set protection mutex.

Protects access to the set of senders, allows for multi-threading.

os::smartSet<errorSender> crypto::errorListener::senders [private]


Set of senders.

All of the senders this listener is registered to.

30.11 crypto::errorSender Class Reference

Sends crypto::error (p. 418).

Inheritance diagram for crypto::errorSender:

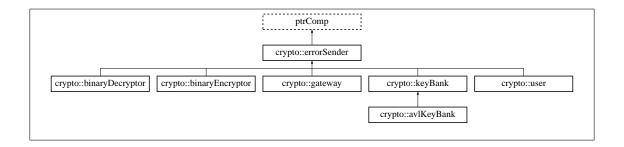

Public Member Functions

• errorSender ()

Error sender constructor.

• virtual ~errorSender ()

Virtual destructor.

• void **pushErrorListener** (os::smart_ptr< **errorListener** > listener)

Register listener.

void removeErrrorListener (os::smart_ptr< errorListener > listener)

Un-register listener.

• errorPointer popError ()

Removes error from log.

• void **setLogLength** (unsigned int **logLength**)

Set length of log.

• unsigned int logLength () const

Return length of log.

• unsigned int numberErrors () const

Return number of errors in log.

Protected Member Functions

• virtual void logError (errorPointer elm)

Logs an error Dispatches an event to all listeners and stores the error in the log.

Private Attributes

os::spinLock listenerLock

Set protection mutex.

• os::smartSet< errorListener > errorListen

Set of listeners.

• os::unsortedList< error > errorLog

List of current errors.

• unsigned int _logLength

Number of errors kept.

Friends

• class errorListener

Friendship with crypto::errorListener (p. 422).

30.11.1 Detailed Description

Sends crypto::error (p. 418).

Sends and logs crypto:error pointers. Does not catch the errors, simply logs ones which have already been created and caught.

30.11.2 Constructor & Destructor Documentation

crypto::errorSender::errorSender() [inline]

Error sender constructor.

Sets the length of the log to 20. Initializes with no errors and no listeners

virtual crypto::errorSender::~errorSender() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.11.3 Member Function Documentation

virtual void crypto::errorSender::logError (errorPointer elm) [protected], [virtual]

Logs an error Dispatches an event to all listeners and stores the error in the log.

Parameters

in	elm	Error to be logged

Returns

void

Reimplemented in crypto::gateway (p. 437).

unsigned int crypto::errorSender::logLength () const [inline]

Return length of log.

Returns

crypto::errorSender::_logLength (p. 427)

unsigned int crypto::errorSender::numberErrors () const [inline]

Return number of errors in log.

Returns crypto::errorSender::errorLog.size() errorPointer crypto::errorSender::popError () Removes error from log. Returns Oldest recorded error void crypto::errorSender::pushErrorListener (os::smart_ptr< errorListener > listener) Register listener. **Parameters** [in/out] listener Listener to register Returns void void crypto::errorSender::removeErrrorListener (os::smart_ptr< errorListener > listener) Un-register listener. **Parameters** listener Listener to un-register Returns void void crypto::errorSender::setLogLength (unsigned int logLength) Set length of log.

Returns

Parameters

void

logLength

30.11.4 Friends And Related Function Documentation

Target length of log

friend class errorListener [friend]

Friendship with crypto::errorListener (p. 422).

The error listener must be able to add and remove itself from the sender's set.

30.11.5 Member Data Documentation

unsigned int crypto::errorSender::_logLength [private]

Number of errors kept.

Allows for old errors to expire in the event a sender logs a lot of errors.

os::smartSet<errorListener> crypto::errorSender::errorListen [private]

Set of listeners.

All of the listeners registered to this sender.

os::unsortedList<error> crypto::errorSender::errorLog [private]

List of current errors.

os::spinLock crypto::errorSender::listenerLock [private]


Set protection mutex.

Protects access to the set of listeners, allows for multi-threading.

30.12 crypto::fileFormatError Class Reference

File format error.

Inheritance diagram for crypto::fileFormatError:

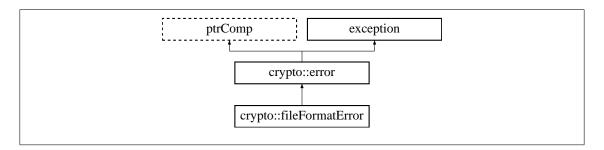

Public Member Functions

• virtual ~fileFormatError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "File Format Error".

• std::string errorDescription () const

Long error descriptor Returns "The file is not of the specified format, and an error resulted".

30.12.1 Detailed Description

File format error.

Thrown when a file is parsed but an error occurs while parsing.

30.12.2 Constructor & Destructor Documentation

```
virtual crypto::fileFormatError::~fileFormatError( ) throw ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.12.3 Member Function Documentation

```
std::string crypto::fileFormatError::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "The file is not of the specified format, and an error resulted".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::fileFormatError::errorTitle() const [inline], [virtual]

Short error descriptor Returns "File Format Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.13 crypto::fileOpenError Class Reference

File open error.

Inheritance diagram for crypto::fileOpenError:

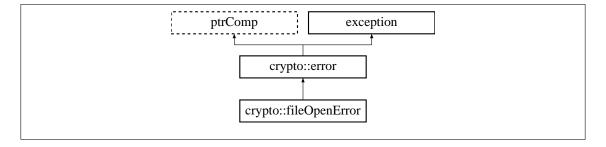

Public Member Functions

• virtual ~fileOpenError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "File Open Error".

• std::string errorDescription () const

Long error descriptor Returns "Cannot open the specified file".

30.13.1 Detailed Description

File open error.

Thrown when a file cannot be found in the specified location.

30.13.2 Constructor & Destructor Documentation

```
virtual crypto::fileOpenError::~fileOpenError( ) throw ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.13.3 Member Function Documentation

```
std::string crypto::fileOpenError::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "Cannot open the specified file".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

```
std::string crypto::fileOpenError::errorTitle( ) const [inline], [virtual]
```

Short error descriptor Returns "File Open Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.14 crypto::gateway Class Reference

Security gateway.

Inheritance diagram for crypto::gateway:

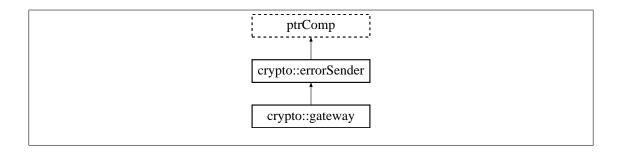

Public Member Functions

• gateway (os::smart_ptr< user > usr, std::string groupID="default")

Gateway constructor.

• virtual ~gateway ()

Virtual destructor.

os::smart_ptr< nodeGroup > brotherNode ()

Return the node group of the brother.

• os::smart_ptr< message > getMessage ()

Returns next message from the gateway.

• os::smart_ptr< message > send (os::smart_ptr< message > msg)

Send message through the gateway.

• os::smart_ptr< message > ping ()

Ping message.

• os::smart_ptr< message > processMessage (os::smart_ptr< message > msg)

Process incoming message.

• void processTimestamps ()

Cycle time-stamp data.

• os::smart_ptr< gatewaySettings > getBrotherSettings ()

Access brother settings.

• os::smart_ptr< gatewaySettings > getSelfSettings ()

Access self settings.

• uint8_t currentState () const

This gateway's status.

• uint8_t brotherState () const

Brother gateway status.

• bool secure () const

Gateway security established.

• uint64_t timeout () const

Current receiver-side timeout value.

• uint64_t safeTimeout () const

Current sender-side timeout value.

• uint64_t errorTimeout () const

Current error timeout value.

• uint64_t timeMessageReceived () const

Time-stamp of the last received message.

• uint64_t timeMessageSent () const

Time-stamp of the last sent message.

• uint64_t timeLastError () const

Time-stamp of the last error.

Static Public Attributes

• static const uint64_t **DEFAULT_TIMEOUT** =60

Default timeout in seconds.

• static const uint64_t **DEFAULT_ERROR_TIMEOUT** =10

Default error timeout in seconds.

• static const uint8 t UNKNOWN STATE =0

Unknown state value.

• static const uint8 t UNKNOWN BROTHER =1

Unknown brother state.

• static const uint8_t **SETTINGS_EXCHANGED** =2

Settings exchanged state.

• static const uint8_t ESTABLISHING_STREAM =3

Establishing stream state.

• static const uint8 t STREAM ESTABLISHED =4

Stream established state.

• static const uint8_t **SIGNING_STATE** =5

Signing state.

• static const uint8 t CONFIRM OLD =6

Confirm old key state.

• static const uint8_t **ESTABLISHED** =7

Stream established state.

static const uint8_t CONFIRM_ERROR_STATE = 252

Confirm brother error state.

• static const uint8_t BASIC_ERROR_STATE =253

Basic error state.

• static const uint8 t TIMEOUT ERROR STATE = 254

Timeout error state.

• static const uint8_t **PERMENANT_ERROR_STATE** =255

Permanent error state.

Protected Member Functions

• void **logError** (**errorPointer** elm, uint8_t errType)

Logs an error, with an error type.

• void logError (errorPointer elm)

Logs an error, with type basic.

Private Member Functions

• void clearStream ()

Resets stream tracking.

• void buildStream ()

Builds the output stream.

- os::smart_ptr< message > encrypt (os::smart_ptr< message > msg)
 Encrypt a message.
- os::smart_ptr< message > decrypt (os::smart_ptr< message > msg)

Decrypt a message.

• os::smart_ptr< message > currentError ()

Build current error message.

• void purgeLastError ()

Reset error.

Private Attributes

• os::smart_ptr< gatewaySettings > selfSettings

Settings of this gateway.

• os::smart_ptr< gatewaySettings > brotherSettings

Settings of the reciprocal gateway.

• os::spinLock lock

Mutex protected gateway states.

• os::spinLock stampLock

Mutex protecting timestamps.

• uint8_t _currentState

Current state of this gateway.

• uint8_t _brotherState

State of the reciprocal gateway.

• errorPointer _lastError

Hold the most recent error.

• uint8_t _lastErrorLevel

Holds the level of the last error.

• uint64_t _errorTimestamp

Time-stamp of the last error.

• uint64_t **_timeout**

Number of seconds till timeout.

• uint64_t _safeTimeout

Number of seconds till partial timeout.

• uint64 t errorTimeout

Number of seconds for error timeout.

• uint64_t _messageReceived

Time-stamp of last message received.

• uint64_t _messageSent

Time-stamp of last message sent.

• os::smart ptr< streamPackageFrame > selfStream

Stream algorithm for this gateway.

• os::smart_ptr< publicKeyPackageFrame > selfPKFrame

Public key algorithm for this gateway.

os::smart_ptr< publicKey > selfPublicKey

Public/private key pair.

• os::smart ptr< number > selfPreciseKey

Public key for this gateway.

• os::smart_ptr< streamPackageFrame > brotherStream

Stream algorithm for brother gateway.

• os::smart_ptr< publicKeyPackageFrame > brotherPKFrame

Public key algorithm for bro.

• os::smart_ptr< number > brotherPublicKey

Public key for brother gateway.

• os::smart_ptr< message > streamMessageIn

Stream defining message: in.

• os::smart ptr< streamDecrypter > inputStream

Stream for incoming messages.

• uint64 t streamEstTimestamp

Time the output stream was defined.

• os::smart_ptr< message > streamMessageOut

Stream defining message: out.

• os::smart ptr< streamEncrypter > outputStream

Stream for outgoing messages.

• os::smart_ptr< uint8_t > outputHashArray

Data for outgoing hashes.

uint16_t outputHashLength

Length of outgoing hash array.

• os::smart_ptr< hash > selfPrimarySignatureHash

Hash for primary signature.

• os::smart_ptr< hash > selfSecondarySignatureHash

Hash for historical signature.

 $\bullet \ \, \text{os::smart_ptr} < \textbf{message} > \textbf{selfSigningMessage} \\$

Signing message: out.

os::unsortedList< hash > eligibleKeys

List of eligible public keys.

os::smart_ptr< uint8_t > inputHashArray

Data for incoming hashes.

• uint16_t inputHashLength

Length of incoming hash array.

• os::smart_ptr< hash > brotherPrimarySignatureHash

Hash of brother's primary signature.

• os::smart_ptr< hash > brotherSecondarySignatureHash

Hash of brother's historical signature.

30.14.1 Detailed Description

Security gateway.

This gateway establishes a secured connection between two users. The connection uses the preferred algorithms as defined by the user.

30.14.2 Constructor & Destructor Documentation

```
crypto::gateway::gateway ( os::smart_ptr< user > usr, std::string groupID = "default" )
```

Gateway constructor.

Constructs a gateway from a user and a group ID. This initializes all gateway variables and binds the user settings to this gateway.

Parameters

in	usr	User sending information through this gateway
in	groupID	Defines group ID, "default" by default

```
virtual crypto::gateway::~gateway( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.14.3 Member Function Documentation

```
os::smart_ptr<nodeGroup> crypto::gateway::brotherNode ( )
```

Return the node group of the brother.

Uses the current key bank to find the node associated with this brother.

Returns

brother node

```
uint8_t crypto::gateway::brotherState ( ) const [inline]
```

Brother gateway status.

Returns

gateway::_brotherState (p. 439)

```
void crypto::gateway::buildStream ( ) [private]
```

Builds the output stream.

Returns

void

```
void crypto::gateway::clearStream( ) [private]
```

Resets stream tracking.

Resets all pointers defined while establishing a secure stream.

Returns

void

os::smart_ptr<**message**> crypto::gateway::currentError() [private]

Build current error message.

Returns

Message

uint8_t crypto::gateway::currentState () const [inline]

This gateway's status.

Returns

gateway::_currentState (p. 439)

os::smart_ptr<**message**> crypto::gateway::decrypt (os::smart_ptr< **message** > msg) [private]

Decrypt a message.

Uses the established input stream to decrypt the provided message and return it as a new message.

Parameters

in	msg	Message to be decrypted
----	-----	-------------------------

Returns

Decrypted message

os::smart_ptr<**message**> crypto::gateway::encrypt (os::smart_ptr< **message** > msg) [private]

Encrypt a message.

Uses the established output stream to encrypt the provided message and return it as a new message.

Parameters

in	msg	Message to be encrypted
----	-----	-------------------------

Returns

Encrypted message

uint64 t crypto::gateway::errorTimeout() const [inline]

Current error timeout value.

Returns

gateway::_errorTimeout (p. 439)

os::smart_ptr<**gatewaySettings**> crypto::gateway::getBrotherSettings() [inline]

Access brother settings.

Returns

Pointer to brother settings

os::smart_ptr<**message**> crypto::gateway::getMessage ()

Returns next message from the gateway.

The function only returns the next message from the gateway's perspective. Gateway management messages are returned by this function.

Returns

Next management message

os::smart_ptr<gatewaySettings> crypto::gateway::getSelfSettings() [inline]

Access self settings.

Returns

Pointer to self settings

void crypto::gateway::logError (errorPointer elm, uint8_t errType) [protected]

Logs an error, with an error type.

Wraps the "logError" funciton as defined by the **crypto::errorSender** (p. 423) class, also sets this particular gateway into some error state.

Parameters

in	elm	Error description
in	errType	Error level to determine timeout

Returns

void

void crypto::gateway::logError (errorPointer elm) [inline], [protected], [virtual]

Logs an error, with type basic.

Sets this particular gateway into a default error state by calling "logError" with a type.

Parameters

in <i>elm</i>	Eror description
---------------	------------------

Returns

void

Reimplemented from crypto::errorSender (p. 425).

```
os::smart_ptr<message> crypto::gateway::ping ( )
```

Ping message.

Returns the ping message as defined by the gatewaySettings (p. 444) in this gateway.

Returns

Ping message for this user

 $os::smart_ptr < \textbf{message} > crypto::gateway::processMessage \ (\ os::smart_ptr < \textbf{message} > msg \)$

Process incoming message.

Decrypts and processes an incoming message. Note that messages must be coming from the brother gateway of this gateway.

Parameters

in	msg	Message to be processed
----	-----	-------------------------

Returns

Decrypted message

void crypto::gateway::processTimestamps ()

Cycle time-stamp data.

Compares registered time-stamps with the current time to determine if any state changes need to be made.

Returns

void

```
void crypto::gateway::purgeLastError( ) [private]
```

Reset error.

Resets all error variables and returns the gateway to its unconnected state.

Returns

void

uint64_t crypto::gateway::safeTimeout () const [inline]

Current sender-side timeout value.

Returns

```
gateway:: safeTimeout (p. 440)
```

bool crypto::gateway::secure () const [inline]

Gateway security established.

Returns

true if established, else, false

```
os::smart_ptr<message> crypto::gateway::send ( os::smart_ptr< message > msg )
```

Send message through the gateway.

Takes a message and encrypts it with the gateway, assuming the secure stream has been established. Returns an encrypted version of the message sent through the gateway.

Parameters

in	msg	Message to be encrypted

Returns

Encrypted message

```
uint64_t crypto::gateway::timeLastError( ) const [inline]
```

Time-stamp of the last error.

Returns

```
gateway::_errorTimestamp (p. 439)
```

```
uint64_t crypto::gateway::timeMessageReceived ( ) const [inline]
```

Time-stamp of the last received message.

Returns

gateway::_messageReceived (p. 439)

```
uint64_t crypto::gateway::timeMessageSent( ) const [inline]
```

Time-stamp of the last sent message.

Returns

```
gateway:: messageSent (p. 440)
```

```
uint64 t crypto::gateway::timeout ( ) const [inline]
```

Current receiver-side timeout value.

Returns

```
gateway:: timeout (p. 440)
```

```
30.14.4 Member Data Documentation
```

```
uint8_t crypto::gateway::_brotherState [private]
```

State of the reciprocal gateway.

```
uint8 t crypto::gateway:: currentState [private]
```

Current state of this gateway.

```
uint64_t crypto::gateway::_errorTimeout [private]
```

Number of seconds for error timeout.

When dealing with a timeout error, this defines how many seconds to wait before allowing a connection again.

```
uint64_t crypto::gateway::_errorTimestamp [private]
```

Time-stamp of the last error.

```
errorPointer crypto::gateway::_lastError [private]
```

Hold the most recent error.

This holds logging information for the most recent serious error. If an error is thrown while in an error state, the more serious error is kept in this variable.

```
uint8_t crypto::gateway::_lastErrorLevel [private]
```

Holds the level of the last error.

Either Basic, timeout or permanent. These are 253, 254 and 255 respectively.

```
uint64 t crypto::gateway:: messageReceived [private]
```

Time-stamp of last message received.

```
uint64_t crypto::gateway::_messageSent [private]
```

Time-stamp of last message sent.

```
uint64_t crypto::gateway::_safeTimeout [private]
```

Number of seconds till partial timeout.

This value is used as the timeout value when sending messages and is less than the timeout value so that receiving is more permissive than sending.

```
uint64_t crypto::gateway::_timeout [private]
```

Number of seconds till timeout.

This value is used when calculating timeout for receiving messages.

```
const uint8_t crypto::gateway::BASIC_ERROR_STATE =253 [static]
```

Basic error state.

A gateway has logged a low-level error. The connection must be re-set and re-established.

```
os::smart_ptr<publicKeyPackageFrame> crypto::gateway::brotherPKFrame [private]
```

Public key algorithm for bro.

```
os::smart ptr<hash> crypto::gateway::brotherPrimarySignatureHash [private]
```

Hash of brother's primary signature.

If this hash is defined, then this gateway's brother has properly signed with the public key it declared.

```
os::smart_ptr<number> crypto::gateway::brotherPublicKey [private]
```

Public key for brother gateway.

```
os::smart ptr<hash> crypto::gateway::brotherSecondarySignatureHash [private]
```

Hash of brother's historical signature.

When this hash is defined, this gateway's brother has properly signed with a historical public key.

```
os::smart_ptr<gatewaySettings> crypto::gateway::brotherSettings [private]
```

Settings of the reciprocal gateway.

Defined by the ping message which is received by this gateway's brother gateway.

```
os::smart_ptr<streamPackageFrame> crypto::gateway::brotherStream [private]
```

Stream algorithm for brother gateway.

```
const uint8_t crypto::gateway::CONFIRM_ERROR_STATE =252 [static]
```

Confirm brother error state.

In this state, a gateway is acknowledging to it's brother that the error notification sent by the brother was received and logged.

```
const uint8_t crypto::gateway::CONFIRM_OLD =6 [static]
```

Confirm old key state.

This indicates that a gateway has authenticated the identity of it's brother but has not been notified that its identity has been authenticated.

```
const uint64 t crypto::gateway::DEFAULT ERROR TIMEOUT =10 [static]
```

Default error timeout in seconds.

```
const uint64_t crypto::gateway::DEFAULT_TIMEOUT =60 [static]
```

Default timeout in seconds.

```
os::unsortedList<hash> crypto::gateway::eligibleKeys [private]
```

List of eligible public keys.

This list of hashes comes from the brother of this gateway. It is a list of the hashes of public keys associated with this node.

```
const uint8_t crypto::gateway::ESTABLISHED =7 [static]
```

Stream established state.

A secure and authentic stream has been established. Messages can be passed securely through the gateway.

```
const uint8 t crypto::gateway::ESTABLISHING STREAM =3 [static]
```

Establishing stream state.

In this state, a gateway sends a symmetric stream key encrypted with the public key of the brother gateway.

```
os::smart_ptr<uint8_t> crypto::gateway::inputHashArray [private]
```

Data for incoming hashes.

```
uint16_t crypto::gateway::inputHashLength [private]
```

Length of incoming hash array.

```
os::smart_ptr<streamDecrypter> crypto::gateway::inputStream [private]
```

Stream for incoming messages.

```
os::spinLock crypto::gateway::lock [private]
Mutex protected gateway states.
os::smart_ptr<uint8_t> crypto::gateway::outputHashArray [private]
Data for outgoing hashes.
uint16_t crypto::gateway::outputHashLength [private]
Length of outgoing hash array.
os::smart_ptr<streamEncrypter> crypto::gateway::outputStream [private]
Stream for outgoing messages.
const uint8_t crypto::gateway::PERMENANT_ERROR_STATE =255 [static]
Permanent error state.
   When gateways are in this state, a catastrophic error has occurred and the gateway refuses to
reconnect.
os::smart_ptr<publicKeyPackageFrame> crypto::gateway::selfPKFrame [private]
Public key algorithm for this gateway.
os::smart_ptr<number> crypto::gateway::selfPreciseKey [private]
Public key for this gateway.
os::smart_ptr<hash> crypto::gateway::selfPrimarySignatureHash [private]
Hash for primary signature.
os::smart_ptr<publicKey> crypto::gateway::selfPublicKey [private]
Public/private key pair.
os::smart_ptr<hash> crypto::gateway::selfSecondarySignatureHash [private]
Hash for historical signature.
```

442

os::smart_ptr<gatewaySettings> crypto::gateway::selfSettings [private]

Defined by the user which constructed this gateway.

Settings of this gateway.

os::smart_ptr<**message**> crypto::gateway::selfSigningMessage [private]

Signing message: out.

This is a record of the message which was used to sign the current and historical public keys by this gateway in order to minimize the number of public key operations preformed.

os::smart_ptr<streamPackageFrame> crypto::gateway::selfStream [private]

Stream algorithm for this gateway.

const uint8_t crypto::gateway::SETTINGS_EXCHANGED =2 [static]

Settings exchanged state.

Indicates that a gateway has received a ping message from its reciprocal gateway, but has not received notification that the reciprocal gateway has received the ping message from this gateway.

const uint8 t crypto::gateway::SIGNING STATE =5 [static]

Signing state.

Gateways in this state have established a secure stream with their brother node and now need to prove they have access to their declared public key. The signing message also contains hashes of keys associated with the particular node.

os::spinLock crypto::gateway::stampLock [private]

Mutex protecting timestamps.

const uint8_t crypto::gateway::STREAM_ESTABLISHED =4 [static]

Stream established state.

Gateways in this state continue to send the symmetric stream key, but also indicates to the brother gateway that the stream key sent by it has been received.

uint64 t crypto::gateway::streamEstTimestamp [private]

Time the output stream was defined.

Allows for redefinition of the output stream if the definition becomes stale.

os::smart_ptr<**message**> crypto::gateway::streamMessageIn [private]

Stream defining message: in.

This is a record of the message which defined the incoming stream in-order to minimize public key cryptography performed.

os::smart_ptr<message> crypto::gateway::streamMessageOut [private]

Stream defining message: out.

This is a record of the message which defined the outgoing stream in-order to minimize public key cryptography performed.

const uint8_t crypto::gateway::TIMEOUT_ERROR_STATE =254 [static]

Timeout error state.

Gateways are placed in this state when an error occurs while authenticating the connection. Because an error in this state is usually both expensive and indicative of unauthorized access, when errors occur, this state forces a certain amount of time in the error state before allowing reconnection.

const uint8_t crypto::gateway::UNKNOWN_BROTHER =1 [static]

Unknown brother state.

A gateway is in this state when it is unaware of the gateway settings of its reciprocal, or brother, gateway. In short, a gateway which does not know its brother has not received a ping.

const uint8_t crypto::gateway::UNKNOWN_STATE =0 [static]


Unknown state value.

This state is used by a gateway when the it is not aware of the current state of its reciprocal gateway. A gateway should never be in this state itself.

30.15 crypto::gatewaySettings Class Reference

Holds settings for gateway encryption.

Inheritance diagram for crypto::gatewaySettings:

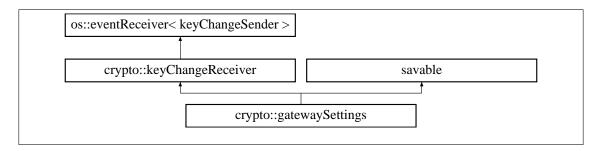

Public Member Functions

- gatewaySettings (os::smart_ptr< user > usr, std::string groupID, std::string filePath="")
 User constructor.
- gatewaySettings (const message &msg)

Ping message constructor.

• virtual ~gatewaySettings ()

Virtual destructor.

• os::smartXMLNode generateSaveTree ()

Generate XML save stream.

• void update ()

Ensure preferred algorithms are defined.

• void save ()

Saves the class to a file Saves the settings to an XML file, if the file path is defined.

• void load ()

Loads the class from a file Loads the settings from an XML file, if the file path is defined.

• const std::string & filePath () const

Return reference to the file path.

• const std::string & groupID () const

Return reference to the group ID.

• const std::string & nodeName () const

Return reference to the node name.

• os::smart_ptr< user > getUser ()

Return user, if it is defined.

os::smart_ptr< publicKey > getPrivateKey ()

Return public/private key pair, if it is defined.

os::smart_ptr< number > getPublicKey ()

Return public key.

• uint16_t prefferedPublicKeyAlgo () const

Return public key algorithm ID.

• uint16_t prefferedPublicKeySize () const

Return public key algorithm size.

• uint16 t prefferedHashAlgo () const

Return hash algorithm ID.

• uint16_t prefferedHashSize () const

Return hash size.

• uint16_t prefferedStreamAlgo () const

Return stream algorithm ID.

• os::smart_ptr< message > ping ()

Construct a ping message.

bool operator== (const gatewaySettings &cmp) const

Equality comparison operator.

• bool **operator!=** (const **gatewaySettings** &cmp) const

Not-equals comparison operator.

• bool operator< (const gatewaySettings &cmp) const

Less-than comparison operator.

• bool operator> (const gatewaySettings &cmp) const

Greater-than comparison operator.

• bool operator<= (const gatewaySettings &cmp) const

Less-than/Equals-to comparison operator.

• bool operator>= (const gatewaySettings &cmp) const

Greater-than/Equals-to comparison operator.

Public Attributes

os::multiLock lock

Read/write mutex.

Protected Member Functions

• void publicKeyChanged (os::smart_ptr< publicKey > pbk)

Triggered when the public key is changed.

Private Attributes

• std::string groupID

Group ID of the node, unique to this settings class.

• std::string nodeName

Name of the node, defined by the user.

std::string _filePath

Save file path.

os::smart_ptr< user > _user

Pointer to the user class.

• os::smart_ptr< publicKey > _privateKey

Pointer to public/private key pair.

• os::smart_ptr< number > _publicKey

Pointer to the public key.

• uint16_t _prefferedPublicKeyAlgo

Public key algorithm ID.

• uint16 t prefferedPublicKeySize

Public key size (uint32 t size)

• uint16_t _prefferedHashAlgo

Hash algorithm ID.

• uint16_t _prefferedHashSize

Hash size (in bytes)

• uint16_t _prefferedStreamAlgo

Stream algorithm ID.

30.15.1 Detailed Description

Holds settings for gateway encryption.

Contains all of the information needed to define how the gateway functions. This includes which algorithms are white-listed, which are black- listed and which are preferred. Note that this settings class can define the settings for a node whose private key is known or for a node whose private key is unknown.

30.15.2 Constructor & Destructor Documentation

 $\label{lem:crypto::gatewaySettings::ga$

User constructor.

Constructs the class from a user. While this constructor can be called outside the user class, it is suggested to use the interface provided in **crypto::user** (p. 592) to create new gateway settings.

Parameters

in	usr	User defining the settings
in	groupID	Group ID of the settings
in	filePath	Save file location (optional)

crypto::gatewaySettings::gatewaySettings (const message & msg)

Ping message constructor.

Constructs the gateway settings from a ping message. This is usually used by the gateway to parse ping messages it receives.

Parameters

in <i>msg</i>	Ping message
---------------	--------------

virtual crypto::gatewaySettings::~gatewaySettings() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.15.3 Member Function Documentation

const std::string& crypto::gatewaySettings::filePath () const [inline]

Return reference to the file path.

Returns

```
gatewaySettings::_filePath (p. 451)
```

os::smartXMLNode crypto::gatewaySettings::generateSaveTree ()

Generate XML save stream.

Returns

XML save tree

os::smart_ptr<**publicKey**> crypto::gatewaySettings::getPrivateKey () [inline]

Return public/private key pair, if it is defined.

Returns

gatewaySettings::_privateKey (p. 452)

```
os::smart_ptr<number> crypto::gatewaySettings::getPublicKey( ) [inline]
Return public key.
Returns
     gatewaySettings::_publicKey (p. 452)
os::smart_ptr<user> crypto::gatewaySettings::getUser( ) [inline]
Return user, if it is defined.
Returns
     gatewaySettings::_user (p. 452)
const std::string& crypto::gatewaySettings::groupID ( ) const [inline]
Return reference to the group ID.
Returns
     gatewaySettings::_groupID (p. 452)
void crypto::gatewaySettings::load ( )
Loads the class from a file Loads the settings from an XML file, if the file path is defined.
Returns
     void
const std::string& crypto::gatewaySettings::nodeName ( ) const [inline]
Return reference to the node name.
Returns
     gatewaySettings::_nodeName (p. 452)
bool crypto::gatewaySettings::operator!= ( const gatewaySettings & cmp ) const [inline]
Not-equals comparison operator.
   Uses the group ID to gateway settings.
Parameters
             Object to compare against
 in
      стр
Returns
```

this->_groupID != cmp._groupID

bool crypto::gatewaySettings::operator< (const gatewaySettings & cmp) const [inline]

Less-than comparison operator.

Uses the group ID to gateway settings.

Parameters

in	стр	Object to compare against

Returns

 $this->_groupID < cmp._groupID$

bool crypto::gatewaySettings::operator<= (const gatewaySettings & cmp) const [inline]

Less-than/Equals-to comparison operator.

Uses the group ID to gateway settings.

Parameters

	in	стр	Object to compare against
--	----	-----	---------------------------

Returns

this->_groupID <= cmp._groupID

bool crypto::gatewaySettings::operator== (const gatewaySettings & cmp) const [inline]

Equality comparison operator.

Uses the group ID to gateway settings.

Parameters

in	стр	Object to compare against
----	-----	---------------------------

Returns

this->_groupID == cmp._groupID

bool crypto::gatewaySettings::operator> (const gatewaySettings & cmp) const [inline]

Greater-than comparison operator.

Uses the group ID to gateway settings.

in	стр	Object to compare against
----	-----	---------------------------

```
Returns
```

```
this->_groupID > cmp._groupID
```

bool crypto::gatewaySettings::operator>= (const gatewaySettings & cmp) const [inline]

Greater-than/Equals-to comparison operator.

Uses the group ID to gateway settings.

Parameters

	in	стр	Object to compare against
--	----	-----	---------------------------

Returns

```
this->_groupID >= cmp._groupID
```

os::smart ptr<message> crypto::gatewaySettings::ping ()

Construct a ping message.

Returns

New ping message

uint16_t crypto::gatewaySettings::prefferedHashAlgo() const [inline]

Return hash algorithm ID.

Returns

gatewaySettings::_prefferedHashAlgo (p. 452)

uint16_t crypto::gatewaySettings::prefferedHashSize () const [inline]

Return hash size.

Returns

gatewaySettings::_prefferedHashSize (p. 452)

uint16_t crypto::gatewaySettings::prefferedPublicKeyAlgo () const [inline]

Return public key algorithm ID.

Returns

gatewaySettings::_prefferedPublicKeyAlgo (p. 452)

 $uint 16_t\ crypto:: gateway Settings:: preffered Public Key Size\ (\quad)\ const\quad \texttt{[inline]}$

Return public key algorithm size.

Returns

gatewaySettings:: prefferedPublicKeySize (p. 452)

```
uint16_t crypto::gatewaySettings::prefferedStreamAlgo() const [inline]
```

Return stream algorithm ID.

Returns

```
gatewaySettings:: prefferedStreamAlgo (p. 452)
```

```
void crypto::gatewaySettings::publicKeyChanged ( os::smart_ptr< publicKey > pbk )
[protected], [virtual]
```

Triggered when the public key is changed.

Updates the gateway settings when the user indicates a public key has been updated.

Parameters

|--|

Returns

void

Reimplemented from crypto::keyChangeReceiver (p. 482).

```
void crypto::gatewaySettings::save ( )
```

Saves the class to a file Saves the settings to an XML file, if the file path is defined.

Returns

void

 $void\ crypto:: gateway Settings:: update\ (\quad)$

Ensure preferred algorithms are defined.

Uses current information in the class to determine if known algorithms define the preferred algorithms in this class. If the preferred algorithms are not defined, they are changed to defined algorithms.

Returns

void

30.15.4 Member Data Documentation

std::string crypto::gatewaySettings::_filePath [private]

Save file path.

If the setting was defined by the user and not a "ping" message, it will often have a save file location.

```
std::string crypto::gatewaySettings::_groupID [private]
Group ID of the node, unique to this settings class.
std::string crypto::gatewaySettings::_nodeName [private]
Name of the node, defined by the user.
uint16_t crypto::gatewaySettings::_prefferedHashAlgo [private]
Hash algorithm ID.
uint16_t crypto::gatewaySettings::_prefferedHashSize [private]
Hash size (in bytes)
uint16_t crypto::gatewaySettings::_prefferedPublicKeyAlgo [private]
Public key algorithm ID.
uint16 t crypto::gatewaySettings:: prefferedPublicKeySize [private]
Public key size (uint32_t size)
uint16 t crypto::gatewaySettings:: prefferedStreamAlgo [private]
Stream algorithm ID.
os::smart_ptr<publicKey> crypto::gatewaySettings::_privateKey [private]
Pointer to public/private key pair.
os::smart_ptr<number> crypto::gatewaySettings::_publicKey [private]
Pointer to the public key.
os::smart_ptr<user> crypto::gatewaySettings::_user [private]
```

os::multiLock crypto::gatewaySettings::lock

Read/write mutex.


Pointer to the user class.

When this class is defined by a user, it is possible for the user to change the gateway settings during runtime. Because of this, a read/write lock is required.

30.16 crypto::hash Class Reference

Base hash class.

Inheritance diagram for crypto::hash:



Public Member Functions

• hash (const hash &cpy)

Hash copy constructor.

• hash & operator= (const hash &cpy)

Equality constructor.

• virtual ~hash ()

Virtual destructor.

• int compare (const hash *_comp) const

Comparison function.

• virtual void **preformHash** (unsigned char *data, uint32_t dLen)

Binds a data-set.

• virtual std::string algorithmName () const

Algorithm name string access.

• uint16_t algorithm () const

Current algorithm ID.

• uint16_t size () const

Current hash size.

• uint32_t numBits () const

Current hash size, bits.

• unsigned char * data ()

Modifiable data access.

• const unsigned char * data () const

Constant data access.

• unsigned char **operator[]** (uint16_t pos) const

Modifiable data access.

• unsigned char & **operator[]** (uint16_t pos)

Constant data access.

• std::string toString () const

Converts hash to string.

void fromString (const std::string &str)

Converts from string.

- bool operator== (const hash &comp) const
- bool operator!= (const hash &comp) const
- bool operator> (const hash &comp) const
- bool operator>= (const hash &comp) const
- bool operator< (const hash &comp) const
- bool operator<= (const hash &comp) const

Static Public Member Functions

• static std::string staticAlgorithmName ()

Algorithm name string access.

• static uint16_t staticAlgorithm ()

Algorithm ID number access.

Protected Member Functions

• hash (uint16_t algorithm=algo::hashNULL, uint16_t size=size::defaultHash)

Default hash constructor.

Protected Attributes

• uint16 t size

Number of bytes in the hash.

unsigned char * data

Raw hash data.

Private Attributes

• uint16 t algorithm

Hash algorithm ID.

30.16.1 Detailed Description

Base hash class.

This class manages the raw data of all hashes. Subsequent hashes define different algorithms to populate the hashes.

30.16.2 Constructor & Destructor Documentation

crypto::hash::hash (uint16_t algorithm = algo::hashNULL, uint16_t size = size::defaultHash)
[protected]

Default hash constructor.

Constructs a hash with the given size and algorithm ID, initializing the entire hash itself to 0.

Parameters

in	algorithm	Algorithm ID, NULL by default
in	size	Size of hash, crypto::size::defaultHash by default

crypto::hash::hash (const hash & cpy)

Hash copy constructor.

Constructs a hash with a hash. This copy constructor re-initializes the data array for the new hash.

Parameters

	in	сру	Hash to copy
--	----	-----	--------------

virtual crypto::hash::~hash() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.16.3 Member Function Documentation

uint16_t crypto::hash::algorithm () const [inline]

Current algorithm ID.

Returns the algorithm ID bound to this hash.

Returns

crypto::hash::_algorithm (p. 458)

virtual std::string crypto::hash::algorithmName() const [inline], [virtual]

Algorithm name string access.

Returns the name of the current algorithm string. This function is virtual, so changes for each hash algorithm

Returns

"NULL"

Reimplemented in crypto::xorHash (p. 607), and crypto::rc4Hash (p. 576).

int crypto::hash::compare (const hash * comp) const

Comparison function.

Takes into consideration the algorithm, size of the data and content of the hash. Used for all of the equality operators.

```
Returns
```

0 if equal, 1 if greater than, -1 if less than

unsigned char* crypto::hash::data() [inline]

Modifiable data access.

Provides mutable data-access to the raw hash data.

Returns

crypto::hash::_data (p. 458)

const unsigned char* crypto::hash::data () const [inline]

Constant data access.

Provides immutable data-access to the raw hash data.

Returns

crypto::hash::_data (p. 458)

void crypto::hash::fromString (const std::string & str)

Converts from string.

Rebuilds the hash from a hex string.

Parameters

Returns

String representation of the hash

```
uint32_t crypto::hash::numBits ( ) const [inline]
```

Current hash size, bits.

Return the hash size bound to this hash in bits.

Returns

crypto::hash::_size (p. 458)*8

```
bool crypto::hash::operator!= ( const hash & comp ) const [inline]
bool crypto::hash::operator< ( const hash & comp ) const [inline]
bool crypto::hash::operator<= ( const hash & comp ) const [inline]
```

hash& crypto::hash::operator= (const hash & cpy)

Equality constructor.

Rebuild this hash with the data from another hash.

Parameters

in <i>cpy</i>	Hash to copy
---------------	--------------

Returns

Reference to this

bool crypto::hash::operator== (const **hash** & comp) const [inline] bool crypto::hash::operator> (const **hash** & comp) const [inline] bool crypto::hash::operator>= (const **hash** & comp) const [inline] unsigned char crypto::hash::operator[](uint16_t pos) const

Modifiable data access.

Provides mutable data-access to the raw hash data.

Parameters

in	pos	Data index
----	-----	------------

Returns

crypto::hash::_data (p. 458)[pos]

unsigned char& crypto::hash::operator[] (uint16_t pos)

Constant data access.

Provides immutable data-access to the raw hash data.

Parameters

in	pos	Data index

Returns

crypto::hash::_data (p. 458)[pos]

virtual void crypto::hash::preformHash (unsigned char * data, uint32_t dLen) [inline],
[virtual]

Binds a data-set.

Preforms the hash algorithm on the set of data provided and binds the result to this hash.

in	data	Data array to be hashed
in	dLen	Length of data array

```
uint16_t crypto::hash::size ( ) const [inline]
```

Current hash size.

Returns the hash size bound to this hash in bytes.

Returns

```
crypto::hash::_size (p. 458)
```

```
static uint16 t crypto::hash::staticAlgorithm( ) [inline], [static]
```

Algorithm ID number access.

Returns the ID of the current algorithm. This function is static and can be accessed without instantiating the class.

Returns

```
crypto::algo::hashNULL
```

```
static std::string crypto::hash::staticAlgorithmName( ) [inline], [static]
```

Algorithm name string access.

Returns the name of the current algorithm string. This function is static and can be accessed without instantiating the class.

Returns

"NULL"

```
std::string crypto::hash::toString ( ) const
```

Converts hash to string.

Converts the hash to a hex string.

Returns

String representation of the hash

```
30.16.4 Member Data Documentation
```

```
uint16_t crypto::hash::_algorithm [private]
```

Hash algorithm ID.

```
unsigned char* crypto::hash::_data [protected]
```

Raw hash data.


```
uint16_t crypto::hash::_size [protected]
```

Number of bytes in the hash.

30.17 crypto::hashCompareError Class Reference

Hash mis-match.

Inheritance diagram for crypto::hashCompareError:

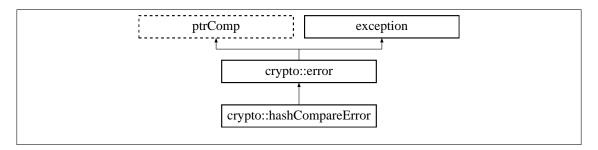

Public Member Functions

• virtual ~hashCompareError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Hash Compare".

• std::string errorDescription () const

Long error descriptor Returns "Provided and calculated hashes do not match".

30.17.1 Detailed Description

Hash mis-match.

Thrown when two hashes do not match. This error can be indicative of larger security issues, as it most commonly occurs during a failed authentication.

30.17.2 Constructor & Destructor Documentation

virtual crypto::hashCompareError::~hashCompareError() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.17.3 Member Function Documentation

std::string crypto::hashCompareError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Provided and calculated hashes do not match".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::hashCompareError::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Hash Compare".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.18 crypto::hashGenerationError Class Reference

Hash generation error.

Inheritance diagram for crypto::hashGenerationError:

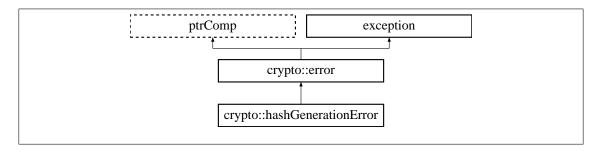

Public Member Functions

• virtual ~hashGenerationError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Hash Generation".

• std::string errorDescription () const

Long error descriptor Returns "Could not generate a hash with the given arguments".

30.18.1 Detailed Description

Hash generation error.

Thrown when a hash encounters an error while being created.

30.18.2 Constructor & Destructor Documentation

virtual crypto::hashGenerationError::~hashGenerationError() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.18.3 Member Function Documentation

std::string crypto::hashGenerationError::errorDescription() const [inline], [virtual]

Long error descriptor Returns "Could not generate a hash with the given arguments".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::hashGenerationError::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Hash Generation".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.19 crypto::illegalAlgorithmBind Class Reference

Algorithm bound failure.

Inheritance diagram for crypto::illegalAlgorithmBind:

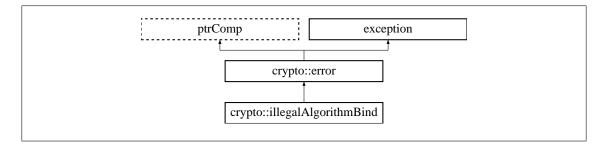

Public Member Functions

• illegalAlgorithmBind (std::string algoName)

Illegal algorithm error.

• virtual ~illegalAlgorithmBind () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Illegal Algorithm Bind".

• std::string errorDescription () const

Long error descriptor Returns "Cannot bind algorithm of type: <algorithmName>".

Private Attributes

• std::string algorithmName

Name of algorithm.

30.19.1 Detailed Description

Algorithm bound failure.

Thrown when an algorithm cannot be found or used. Usually indicates the specified algorithm is not defined by the active version.

30.19.2 Constructor & Destructor Documentation

crypto::illegalAlgorithmBind::illegalAlgorithmBind (std::string algoName) [inline] Illegal algorithm error.

Parameters

in	algoName	Name of illegal algorithm
----	----------	---------------------------

virtual crypto::illegalAlgorithmBind::~illegalAlgorithmBind() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.19.3 Member Function Documentation

std::string crypto::illegalAlgorithmBind::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Cannot bind algorithm of type: <algorithmName>".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::illegalAlgorithmBind::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Illegal Algorithm Bind".

Returns

Error title std::string

Reimplemented from crypto::error (p. 421).

30.19.4 Member Data Documentation


std::string crypto::illegalAlgorithmBind::algorithmName [private]

Name of algorithm.

30.20 crypto::insertionFailed Class Reference

ADS Insertion Failed.

Inheritance diagram for crypto::insertionFailed:

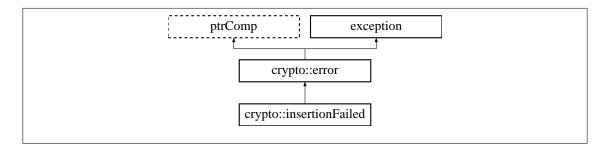

Public Member Functions

• virtual ~insertionFailed () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Insertion Failed".

• std::string errorDescription () const

Long error descriptor Returns "Insertion into an abstract data-structure unexpectedly failed".

30.20.1 Detailed Description

ADS Insertion Failed.

Thrown when insertion to an os::ads structure unexpectedly fails.

30.20.2 Constructor & Destructor Documentation

virtual crypto::insertionFailed::~insertionFailed() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.20.3 Member Function Documentation

std::string crypto::insertionFailed::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Insertion into an abstract data-structure unexpectedly failed".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::insertionFailed::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Insertion Failed".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.21 crypto::integer Class Reference

Integer number definition.

Inheritance diagram for crypto::integer:

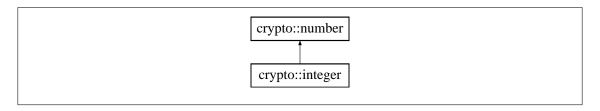

Public Member Functions

• integer ()

Default integer constructor.

• integer (uint16_t size)

Construct integer with size.

• integer (const uint32_t *d, uint16_t size)

Construct integer with data array.

• integer (const integer &num)

Copy constructor.

• virtual ∼integer ()

Virtual destructor.

• bool checkType () const

Check if the number is valid.

• operator number () const

Allows integer to be cast as a number.

• integer operator+ (const integer &n) const

Integer addition operator.

• integer & operator+= (const integer &n)

Integer addition equals operator.

• integer & operator++ ()

Increment operator.

• integer operator++ (int dummy)

Increment operator.

• integer operator- (const integer &n) const

Integer subtraction operator.

• integer & operator-= (const integer &n)

Integer subtraction equals operator.

• integer & operator-- ()

Decrement operator.

• integer operator-- (int dummy)

Decrement operator.

• integer operator>> (uint16_t n) const

Right shift operator.

• integer operator<< (uint16 t n) const

Left shift operator.

• integer operator* (const integer &n) const

Integer multiplication operator.

• integer & operator*= (const integer &n)

Integer multiplication equals operator.

• integer operator/ (const integer &n) const

Integer division operator.

• integer & operator/= (const integer &n)

Integer division equals operator.

• integer operator% (const integer &n) const

Integer modulo operator.

• integer & operator%= (const integer &n)

Integer modulo equals operator.

• integer exponentiation (const integer &n) const

Integer exponentiation function.

• integer & exponentiationEquals (const integer &n)

Integer exponentiation equals function.

• integer moduloExponentiation (const integer &n, const integer &mod) const

Integer modulo-exponentiation function.

• integer & moduloExponentiationEquals (const integer &n, const integer &mod)

Integer modulo-exponentiation equals function.

• integer gcd (const integer &n) const

Integer GCD function.

• integer & gcdEquals (const integer &n)

Integer GCD equals function.

• integer modInverse (const integer &m) const

Integer modular inverse function.

• integer & modInverseEquals (const integer &n)

Integer modular inverse equals function.

• bool **prime** (uint16_t testVal=algo::primeTestCycle) const Test if this integer is prime.

Static Public Member Functions

• static integer zero ()

Constructs a '0' integer.

• static integer one ()

Constructs a '1' integer.

• static integer two ()

Constructs a '2' integer.

Additional Inherited Members

30.21.1 Detailed Description

Integer number definition.

A traditional numerical definition which can be of arbitrary size.

30.21.2 Constructor & Destructor Documentation

crypto::integer::integer()

Default integer constructor.

crypto::integer::integer (uint16_t size)

Construct integer with size.

Parameters

in	size	Size integer is initialized with

crypto::integer::integer (const uint32_t * d, uint16_t size)

Construct integer with data array.

in	d	Data array to be bound
in	size	Size of array

crypto::integer::integer (const integer & num)

Copy constructor.

Parameters

in	num	Integer used to construct this
----	-----	--------------------------------

virtual crypto::integer::~integer() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.21.3 Member Function Documentation

bool crypto::integer::checkType() const [virtual]

Check if the number is valid.

Checks to ensure that the number definition for this object is the Base-10 type. Ensure that all basic mathematical operators are defined.

Returns

true if valid type, else, false

Reimplemented from crypto::number (p. 519).

integer crypto::integer::exponentiation (const integer & n) const

Integer exponentiation function.

Parameters

in	n	Integer to be raised to
----	---	-------------------------

Returns

this^n

integer & crypto::integer::exponentiation Equals (const integer & n)

Integer exponentiation equals function.

in n	Integer to be raised to
------	-------------------------

Returns

this = this $^{\land}$ n

 $\label{linear} \textbf{integer} \ \text{crypto::integer::gcd} \ (\ \ \text{const} \ \textbf{integer} \ \& \ n \ \) \ \text{const}$ $\ \ \textbf{Integer} \ \ \textbf{GCD} \ \ \textbf{function}.$

Parameters

in	n	Integer to be compared against

Returns

GCD of this and n

integer& crypto::integer::gcdEquals (const integer & n)
Integer GCD equals function.

Parameters

in	n	Integer to be compared against
----	---	--------------------------------

Returns

this = GCD of this and n

integer crypto::integer::modInverse (const integer & m) const Integer modular inverse function.

Parameters

in	n	Integer representing modulo space
----	---	-----------------------------------

Returns

(this^-1) % n

integer & crypto::integer::modInverseEquals (const integer & n)
Integer modular inverse equals function.

in n Integer representing	modulo space
---------------------------	--------------

Returns

this =
$$(this^{-1}) \% n$$

integer crypto::integer::moduloExponentiation (const **integer** & n, const **integer** & mod) const Integer modulo-exponentiation function.

Parameters

in	n	Integer to be raised to	
in	mod	Integer representing modulo space	

Returns

this^n % mod

integer& crypto::integer::moduloExponentiationEquals (const **integer** & n, const **integer** & mod) Integer modulo-exponentiation equals function.

Parameters

in	n	Integer to be raised to	
in	mod	Integer representing modulo space	

Returns

this = this^n % mod

static integer crypto::integer::one () [static]

Constructs a '1' integer.

Returns

1

crypto::integer::operator number () const [inline]

Allows integer to be cast as a number.

Returns

number(*this)

integer crypto::integer::operator% (const integer & n) const

Integer modulo operator.

Parameters

in	n	Integer defining modulo space this % n
----	---	--

integer& crypto::integer::operator%= (const integer & n)
Integer modulo equals operator.

Parameters

in	n	Integer defining modulo space this = this % n
----	---	---

integer crypto::integer::operator* (const integer & n) const
Integer multiplication operator.

Parameters

in n Integer to be mu	Itiplied this * n
-----------------------	-------------------

integer& crypto::integer::operator*= (const integer & n)
Integer multiplication equals operator.

Parameters

in	n	Integer to be multiplied this = this * n

 $\label{lem:const} \textbf{integer} \ \text{crypto::integer::operator+ (const \ \textbf{integer} \ \& \ n \) const}$ $\ \textbf{Integer} \ \ \textbf{addition operator.}$

Parameters

in	n	Integer to be added this + n

integer& crypto::integer::operator++ ()

Increment operator.

```
Returns
```

this++

integer crypto::integer::operator++ (int dummy)

Increment operator.

Returns

++this

 $\textbf{integer} \& \ \text{crypto} :: \text{integer} :: \text{operator} += \left(\ \text{const} \ \textbf{integer} \ \& \ \text{n} \ \right)$

Integer addition equals operator.

Parameters

in	n	Integer to be added this = this + n
----	---	-------------------------------------

integer crypto::integer::operator- (const integer & n) const Integer subtraction operator.

Parameters

i	n	n	Integer to be subtracted this - n
---	---	---	-----------------------------------

integer& crypto::integer::operator-- ()

Decrement operator.

Returns

this-

integer crypto::integer::operator-- (int dummy)

Decrement operator.

Returns

-this

integer& crypto::integer::operator-= (const integer & n)

Integer subtraction equals operator.

Parameters

in n Integer to be subtracte	ed this = this - n
------------------------------	--------------------

integer crypto::integer::operator/ (const integer & n) const
Integer division operator.

Parameters

	in	n	Integer to be divided by this / n
--	----	---	-----------------------------------

integer& crypto::integer::operator/= (const integer & n)
Integer division equals operator.

Parameters

i	n	n	Integer to be divided by this = this / n
---	---	---	--

integer crypto::integer::operator<< (uint16_t n) const Left shift operator.

Parameters

in n Number of bits to shi

Returns

this << n

integer crypto::integer::operator>> (uint16_t n) const Right shift operator.

Parameters

in	n	Number of bits to shift

Returns

this >> n

bool crypto::integer::prime (uint16_t testVal = algo::primeTestCycle) const

Test if this integer is prime.

Preforms a probabilistic prime test on this number. This operation can be quite expensive, especially for large numbers.

Parameters

in	testVal	Number of test cycles, crytpo::algo::primeTestCycle by default
----	---------	--

Returns

true if prime, else, false

static integer crypto::integer::two () [static]

Constructs a '2' integer.

Returns

2

static integer crypto::integer::zero () [inline], [static]

Constructs a '0' integer.


Returns

0

30.22 crypto::keyBank Class Reference

Key bank interface.

Inheritance diagram for crypto::keyBank:

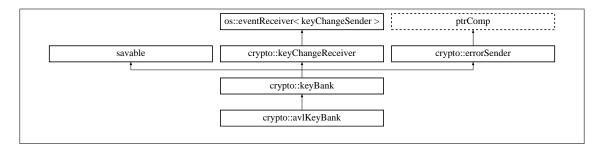

Public Member Functions

• virtual ~keyBank ()

Virtual destructor.

• virtual os::smart_ptr< **nodeGroup** > **addPair** (std::string groupName, std::string name, os ::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize)=0

Adds authenticated node to bank.

• virtual void **save** ()=0

Saves bank to file.

• const std::string & savePath () const

Get save path.

- virtual os::smart_ptr< nodeGroup > find (os::smart_ptr< nodeNameReference > name)=0 Find by group name reference.
- virtual os::smart_ptr< nodeGroup > find (os::smart_ptr< nodeKeyReference > key)=0
 Find by group key reference.
- virtual os::smart_ptr< **nodeGroup** > **find** (std::string groupName, std::string name) *Find by group name and name.*
- virtual os::smart_ptr< nodeGroup > find (os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize)

Find by key information.

- $\bullet \ \ \text{void } \textbf{setPassword} \ \ (\text{const unsigned char} \ * \text{key=NULL}, \ \text{unsigned int keyLen=0})$
 - Set password
- void setStreamPackage (os::smart_ptr< streamPackageFrame > strmPack)

Set stream package.

void setPublicKey (os::smart_ptr< publicKey > pubKey)

Set public key.

Protected Member Functions

- virtual void **pushNewNode** (os::smart_ptr< **nodeNameReference** > name)=0 Add name node.
- $\bullet \ \ \text{virtual void } \textbf{pushNewNode} \ (\text{os::smart_ptr} < \textbf{nodeKeyReference} > \text{key}) = 0 \\$

Add key node.

• virtual void load ()=0

Loads bank from file.

• void publicKeyChanged (os::smart ptr< publicKey > pbk)

Triggers on key change.

• os::smart_ptr< nodeGroup > fileLoadHelper (os::smartXMLNode xmlTree)

Construct node with XML tree.

• **keyBank** (std::string **savePath**, const unsigned char *key=NULL, unsigned int keyLen=0, os ::smart ptr< **streamPackageFrame** > strmPck=NULL)

Construct with save path and key.

keyBank (std::string savePath, os::smart_ptr< publicKey > pubKey, os::smart_ptr< stream → PackageFrame > strmPck=NULL)

Construct with save path and public key.

Protected Attributes

• os::smart_ptr< streamPackageFrame > _streamPackage

Stream package.

• unsigned char * _symKey

Primary symmetric key.

• unsigned int _keyLen

Length of symmetric key.

os::smart_ptr< publicKey > _pubKey

Public key group to encrypt file.

Private Attributes

• std::string _savePath

Path to save file.

Friends

• class nodeGroup

Friendship with node grouping.

30.22.1 Detailed Description

Key bank interface.

Acts as an interface for classes which allow for the storing, saving and searching of cyptographic keys. These banks act, in essense, as data-bases.

30.22.2 Constructor & Destructor Documentation

crypto::keyBank::keyBank (std::string savePath, const unsigned char * key = NULL, unsigned int keyLen = 0, os::smart_ptr< streamPackageFrame > strmPck = NULL) [protected]

Construct with save path and key.

Parameters

in	savePath	Path to save file
in	key	Symetric key
in	keyLen	Length of symetric key
in	strmPck	Definition of algorithms used

 $\label{lem:crypto::keyBank::keyBank} crypto::keyBank::keyBank (std::string savePath, os::smart_ptr< \verb"publicKey"> publicKey > publicKey$

Construct with save path and public key.

in	savePath	Path to save file
in	pubKey	Public key
in	strmPck	Definition of algorithms used

virtual crypto::keyBank::~keyBank() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.22.3 Member Function Documentation

virtual os::smart_ptr<**nodeGroup**> crypto::keyBank::addPair (std::string groupName, std::string name, os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize) [pure virtual]

Adds authenticated node to bank.

Note that if a node has not be authenticated, adding it to the bank will cause a potential security vulnerability. Nodes should be authenticated before being added to the bank.

Parameters

in	groupName	Name of the node's group
in	name	Name of the node
in	key	Key of node to be added
in	algoID	ID of algorithm for key
in	keySize	Length of key of the node

Returns

Return reference to the new node group

Implemented in crypto::avlKeyBank (p. 399).

os::smart_ptr<**nodeGroup**> crypto::keyBank::fileLoadHelper (os::smartXMLNode xmlTree) [inline], [protected]

Construct node with XML tree.

Parameters

in	xmlTree	XML tree from file

Returns

Node group constructed with tree

virtual os::smart_ptr<nodeGroup> crypto::keyBank::find (os::smart_ptr< nodeNameReference >
name) [pure virtual]

Find by group name reference.

Parameters

in name Name reference to be search	ed
-------------------------------------	----

Returns

Node group found by arguments

Implemented in crypto::avlKeyBank (p. 399).

virtual os::smart_ptr<nodeGroup> crypto::keyBank::find (os::smart_ptr< nodeKeyReference >
key) [pure virtual]

Find by group key reference.

Parameters

	in	key	Key reference to be searched	1
--	----	-----	------------------------------	---

Returns

Node group found by arguments

Implemented in crypto::avlKeyBank (p. 399).

virtual os::smart_ptr<nodeGroup> crypto::keyBank::find (std::string groupName, std::string name
) [inline], [virtual]

Find by group name and name.

Parameters

in	groupName	Name of the node's group
in	name	Name of the node

Returns

Node group found by arguments

Reimplemented in crypto::avlKeyBank (p. 400).

 $\label{lem:continuous} virtual \ os::smart_ptr < \textbf{nodeGroup} > crypto::keyBank::find (\ os::smart_ptr < \textbf{number} > key, \ uint16_t \ algoID, \ uint16_t \ keySize) \ [inline], [virtual]$

Find by key information.

Parameters

in	key	Key of node to be added
in	algoID	ID of algorithm for key
in	keySize	Length of key of the node

Returns

Node group found by arguments

Reimplemented in crypto::avlKeyBank (p. 400).

virtual void crypto::keyBank::load() [protected], [pure virtual]

Loads bank from file.

Returns

void

Implemented in crypto::avlKeyBank (p. 400).

 $\label{lem:condition} \mbox{void crypto::keyBank::publicKeyChanged (os::smart_ptr<\mbox{{\bf publicKey}}>pbk) [protected], [virtual]$

Triggers on key change.

Marks this class for re-saving when the public key has been re-generated.

Parameters

in	pbk	Public key which was changed

Returns

void

Reimplemented from crypto::keyChangeReceiver (p. 482).

 $\label{lem:condition} \mbox{virtual void crypto::keyBank::pushNewNode (os::smart_ptr< \mbox{\bf nodeNameReference} > \mbox{name)} \\ [protected], [pure virtual]$

Add name node.

Inserts a name node into the bank. The name node has a reference to a node group.

	in	name	Name node to be added	
--	----	------	-----------------------	--

Returns

void

Implemented in crypto::avlKeyBank (p. 401).

virtual void crypto::keyBank::pushNewNode (os::smart_ptr< nodeKeyReference > key)
[protected], [pure virtual]

Add key node.

Inserts a key node into the bank. The key node has a reference to a node group.

Parameters

in <i>key</i>	Key node to be added
---------------	----------------------

Returns

void

Implemented in crypto::avlKeyBank (p. 401).

virtual void crypto::keyBank::save () [pure virtual]

Saves bank to file.

Returns

void

Implemented in crypto::avlKeyBank (p. 401).

const std::string& crypto::keyBank::savePath () const [inline]

Get save path.

Returns

crypto::keyBank::_savePath (p. 480)

void crypto::keyBank::setPassword (const unsigned char * key = NULL, unsigned int keyLen = 0)

Set password.

Sets symetric key used to securely save user data.

Parameters

in	key	Symetric key
in	keyLen	Length of symetric key

Returns

void

void crypto::keyBank::setPublicKey (os::smart ptr< publicKey > pubKey)

Set public key.

Binds a new public key to this. Calls for saving of this user.

Parameters

Returns

void

void crypto::keyBank::setStreamPackage (os::smart_ptr< streamPackageFrame > strmPack)

Set stream package.

Binds a new stream package. Calls for saving of this user.

Parameters

in	strmPack	Stream package
----	----------	----------------

Returns

void

30.22.4 Friends And Related Function Documentation

friend class nodeGroup [friend]

Friendship with node grouping.

Node groups must be able to push name and key nodes onto the key bank.

30.22.5 Member Data Documentation

unsigned int crypto::keyBank::_keyLen [protected]

Length of symmetric key.

os::smart_ptr<publicKey> crypto::keyBank::_pubKey [protected]

Public key group to encrypt file.

std::string crypto::keyBank::_savePath [private]

Path to save file.

os::smart_ptr<**streamPackageFrame**> crypto::keyBank::_streamPackage [protected]

Stream package.

Used for the saving of the key bank. This defines the algorithms used for encrypting the saved bank, if it is encrypted.


unsigned char* crypto::keyBank::_symKey [protected]

Primary symmetric key.

30.23 crypto::keyChangeReceiver Class Reference

Interface for receiving key changes.

Inheritance diagram for crypto::keyChangeReceiver:

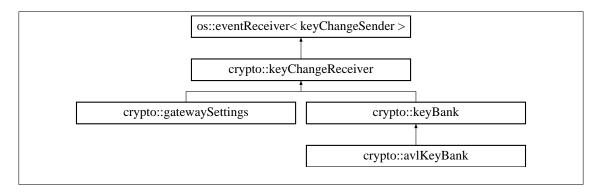

Public Member Functions

• virtual ~keyChangeReceiver ()

Virtual destructor.

- virtual bool **operator==** (const **keyChangeReceiver** &I) const Equality test.
- virtual bool **operator**> (const **keyChangeReceiver** &I) const *Greater than test.*
- virtual bool operator< (const keyChangeReceiver &I) const Less than test.
- virtual bool **operator**>= (const **keyChangeReceiver** &I) const *Greater than/equal to test.*
- virtual bool **operator**<= (const **keyChangeReceiver** &I) const Less than/equal to test.

Protected Member Functions

virtual void publicKeyChanged (os::smart_ptr< publicKey > pbk)
 Triggers on key change.

Friends

• class keyChangeSender

Allows access to crypto::keyChangeReceiver::publicKeyChanged (p. 482).

30.23.1 Detailed Description

Interface for receiving key changes.

A class which is alerted by public keys when the public key is updated.

30.23.2 Constructor & Destructor Documentation

virtual crypto::keyChangeReceiver::~keyChangeReceiver() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.23.3 Member Function Documentation

virtual bool crypto::keyChangeReceiver::operator< (const keyChangeReceiver & I) const [inline], [virtual]

Less than test.

virtual bool crypto::keyChangeReceiver::operator<= (const keyChangeReceiver & I) const
[inline], [virtual]</pre>

Less than/equal to test.

virtual bool crypto::keyChangeReceiver::operator== (const keyChangeReceiver & I) const
[inline], [virtual]

Equality test.

virtual bool crypto::keyChangeReceiver::operator> (const keyChangeReceiver & I) const [inline], [virtual]

Greater than test.

virtual bool crypto::keyChangeReceiver::operator>= (const keyChangeReceiver & I) const [inline], [virtual]

Greater than/equal to test.

virtual void crypto::keyChangeReceiver::publicKeyChanged (os::smart_ptr< publicKey > pbk)
[inline], [protected], [virtual]

Triggers on key change.

Is triggered by **crypto::publicKey** (p. 536) whenever the public key is updated.

in	pbk	Public key which was changed
----	-----	------------------------------

Returns

void

Reimplemented in crypto::keyBank (p. 478), and crypto::gatewaySettings (p. 451).

30.23.4 Friends And Related Function Documentation


friend class keyChangeSender [friend]

Allows access to crypto::keyChangeReceiver::publicKeyChanged (p. 482).

30.24 crypto::keyChangeSender Class Reference

Interface inherited by **publicKey** (p. 536).

Inheritance diagram for crypto::keyChangeSender:

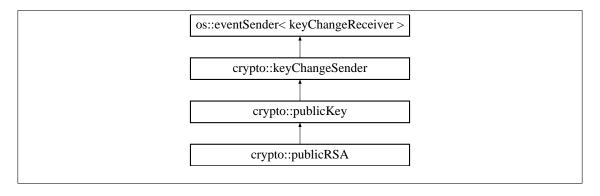

Public Member Functions

• virtual ~keyChangeSender ()

Virtual destructor.

- virtual bool **operator==** (const **keyChangeSender** &I) const *Equality test.*
- virtual bool **operator**> (const **keyChangeSender** &I) const *Greater than test.*
- virtual bool **operator**< (const **keyChangeSender** &I) const Less than test.
- virtual bool **operator**>= (const **keyChangeSender** &I) const *Greater than/equal to test.*
- virtual bool **operator**<= (const **keyChangeSender** &I) const Less than/equal to test.

Protected Member Functions

void sendEvent (os::smart_ptr< keyChangeReceiver > ptr)

Sends key change event to listeners.

30.24.1 Detailed Description

Interface inherited by publicKey (p. 536).

This class is meaningless outside of **crypto::publicKey** (p. 536) and is only designed to be inherited by **publicKey** (p. 536) to interface with **crypto::keyChangeReceiver** (p. 481).

30.24.2 Constructor & Destructor Documentation

virtual crypto::keyChangeSender::~keyChangeSender() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.24.3 Member Function Documentation

virtual bool crypto::keyChangeSender::operator< (const **keyChangeSender** & I) const [inline], [virtual]

Less than test.

virtual bool crypto::keyChangeSender::operator<= (const keyChangeSender & I) const
[inline], [virtual]</pre>

Less than/equal to test.

virtual bool crypto::keyChangeSender::operator== (const keyChangeSender & I) const
[inline], [virtual]

Equality test.

virtual bool crypto::keyChangeSender::operator> (const keyChangeSender & I) const [inline], [virtual]

Greater than test.

virtual bool crypto::keyChangeSender::operator>= (const keyChangeSender & I) const
[inline], [virtual]

Greater than/equal to test.

void crypto::keyChangeSender::sendEvent (os::smart_ptr< keyChangeReceiver > ptr)
[inline], [protected]

Sends key change event to listeners.

Useing the interface provided by the os::eventSender class, alert any classes listening for a public key change that one has occured.

Parameters

	in	ptr	Receiver to alert
--	----	-----	-------------------


Returns

void

30.25 crypto::keyMissing Class Reference

Key missing error.

Inheritance diagram for crypto::keyMissing:

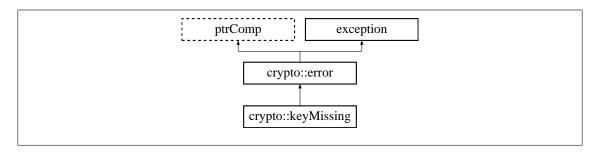

Public Member Functions

• virtual ~keyMissing () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Key missing".

• std::string errorDescription () const

Long error descriptor Returns "Cannot decrypt the data stream, the key is missing!".

30.25.1 Detailed Description

Key missing error.

Thrown when a key cannot be found to decrypt the incoming data stream

30.25.2 Constructor & Destructor Documentation

virtual crypto::keyMissing::~keyMissing() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.25.3 Member Function Documentation

std::string crypto::keyMissing::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Cannot decrypt the data stream, the key is missing!".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::keyMissing::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Key missing".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.26 crypto::masterMismatch Class Reference

Master mis-match.

Inheritance diagram for crypto::masterMismatch:

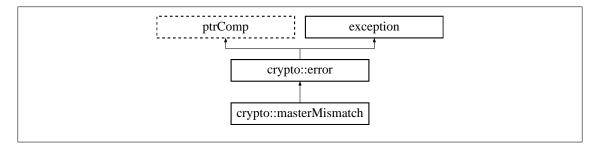

Public Member Functions

• virtual ~masterMismatch () throw ()

Virtual destructor.

• std::string **errorTitle** () const

Short error descriptor Returns "Master Comparison Mis-match".

• std::string errorDescription () const

Long error descriptor Returns "Two nodes which are interacting have different masters!".

30.26.1 Detailed Description

Master mis-match.

Thrown when two elements attempt an interaction but have different masters.

30.26.2 Constructor & Destructor Documentation

virtual crypto::masterMismatch::~masterMismatch() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.26.3 Member Function Documentation

std::string crypto::masterMismatch::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Two nodes which are interacting have different masters!".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::masterMismatch::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Master Comparison Mis-match".

Returns

Error title std::string

Reimplemented from crypto::error (p. 421).

30.27 crypto::message Class Reference

Crypto-Gateway message.

Public Member Functions

• message (uint16 t sz)

Constructs message with a size.

• message (const message &msg)

Copy constructor.

• virtual ~message ()

Virtual destructor.

• uint16 t messageSize () const

Return message size.

• uint16_t size () const

Return message packet size.

• uint16_t encryptionDepth () const

Return level of message encryption.

• uint8 t * data ()

Modifiable data pointer.

• const uint8_t * data () const

Immutable data pointer.

• bool encrypted () const

Is the message encrypted.

• bool pushString (std::string s)

Add string to this message.

• std::string popString ()

Remove string from this message.

Static Public Member Functions

• static message encryptedMessage (uint8_t *rawData, uint16_t sz)

Constructs an encrypted message.

• static message decryptedMessage (uint8_t *rawData, uint16_t sz)

Constructs an decrypted message.

Static Public Attributes

• static const uint8 t BLOCKED =0

Blocked message tag.

• static const uint8 t PING =1

Ping message tag.

• static const uint8_t FORWARD =2

Forward message tag.

• static const uint8_t STREAM_KEY =3

Stream key message tag.

• static const uint8_t **SIGNING_MESSAGE** =4

Signing message tag.

• static const uint8_t **SECURE_DATA_EXCHANGE** =5

Secure data exchange message tag.

• static const uint8_t **CONFIRM_ERROR** =252

Confirm error message tag.

• static const uint8_t BASIC_ERROR =253

Basic error message tag.

• static const uint8_t TIMEOUT_ERROR =254

Timeout error message tag.

static const uint8_t PERMENANT_ERROR =255

Permenant error message tag.

Private Attributes

• uint16_t _messageSize

Size of message.

• uint16_t _size

Size of the message packet.

• uint16_t _encryptionDepth

Depth of encryption.

• uint8_t * _data

Data in the message packet.

Friends

• class gatewaySettings

Friendship with settings.

• class gateway

Friendship with gateway.

30.27.1 Detailed Description

Crypto-Gateway message.

This message is meant to be passed between machines. The gateway either encrypts or decrypts the message. This message allows for nested encryption.

30.27.2 Constructor & Destructor Documentation

crypto::message::message (uint16_t sz)

Constructs message with a size.

Parameters

in	SZ	Size of message
----	----	-----------------

crypto::message::message (const message & msg)

Copy constructor.

Parameters

in	msg	Message to be copied
----	-----	----------------------

virtual crypto::message::~message() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.27.3 Member Function Documentation

uint8_t* crypto::message::data() [inline]

Modifiable data pointer.

Returns

message::_data (p. 492)

const uint8_t* crypto::message::data () const [inline]

Immutable data pointer.

Returns

message::_data (p. 492)

static message crypto::message::decryptedMessage (uint8_t * rawData, uint16_t sz) [static]

Constructs an decrypted message.

Parses an array of data assuming that the data in question has been generated outside of a gateway

Parameters

in	rawData	Incoming data array	
in	SZ	Size of incoming data	

Returns

New message

bool crypto::message::encrypted() const [inline]

Is the message encrypted.

Returns

True if encrypted, else, false

static message crypto::message::encryptedMessage (uint8_t * rawData, uint16_t sz) [static]

Constructs an encrypted message.

Parses an array of data assuming that the data in question has come out of another gateway.

in	rawData	Incoming data array
in	SZ	Size of incoming data

Returns

New message

```
uint16_t crypto::message::encryptionDepth ( ) const [inline]
```

Return level of message encryption.

Returns

```
message::_encryptionDepth (p. 492)
```

```
uint16_t crypto::message::messageSize ( ) const [inline]
```

Return message size.

Returns

```
message::_messageSize (p. 492)
```

```
std::string crypto::message::popString ( )
```

Remove string from this message.

Returns

Next string to remove

```
bool crypto::message::pushString ( std::string s )
```

Add string to this message.

Returns

True if successful

```
uint16_t crypto::message::size ( ) const [inline]
```

Return message packet size.

Returns

message::_size (p. 492)

30.27.4 Friends And Related Function Documentation

friend class **gateway** [friend]

Friendship with gateway.

The **crypto::gateway** (p. 429) class encrypts and decrypts messages, so it must be able to access the intrisics of the message.

friend class gatewaySettings [friend]

Friendship with settings.

The **crypto::gatewaySettings** (p. 444) class must be able to access the intrinsics of this class inorder to create and parse a ping message.

30.27.5 Member Data Documentation

```
uint8_t* crypto::message::_data [private]
```

Data in the message packet.

```
uint16_t crypto::message::_encryptionDepth [private]
```

Depth of encryption.

Holds how many times this particular message has been encrypted.

```
uint16_t crypto::message::_messageSize [private]
```

Size of message.

This size refers to the size of the non-header and non-checksum bytes in the message. This value remains constant as messages are encrypted and decrypted.

```
uint16 t crypto::message:: size [private]
```

Size of the message packet.

This size includes all support data along with the meaningful message.

```
const uint8 t crypto::message::BASIC ERROR =253 [static]
```

Basic error message tag.

Sent by a gateway when a basic error occurs.

```
const uint8_t crypto::message::BLOCKED =0 [static]
```

Blocked message tag.

Indicates that the node sending the particular message has blocked the node receiving the particular message.

```
const uint8_t crypto::message::CONFIRM_ERROR =252 [static]
```

Confirm error message tag.

Messages of this type are sent to allow the receiving gateway to know that the sending gateway has acknowledged its error.

```
const uint8_t crypto::message::FORWARD =2 [static]
```

Forward message tag.

Indicates a message is being sent through this gateway to another gateway for final decryption.

const uint8_t crypto::message::PERMENANT_ERROR =255 [static]

Permenant error message tag.

Sent by a gateway when a permenant error has occurred. Permenant errors never expire, and a gateway will never reconnect once a permenant error has occurred.

const uint8_t crypto::message::PING =1 [static]

Ping message tag.

Message type sent by gateways when exchanging names and public keys.

const uint8 t crypto::message::SECURE DATA EXCHANGE =5 [static]

Secure data exchange message tag.

Message passed between two gateways when secure. Used by the gateways to notify connected gateways when keys and algorithms change after a connection has been secured.

const uint8_t crypto::message::SIGNING_MESSAGE =4 [static]

Signing message tag.

Indicates a message is cryptographically establishing the identity of a node.

const uint8_t crypto::message::STREAM_KEY =3 [static]

Stream key message tag.

Indicates a message is exchanging stream cipher keys through the defined public key algorithm.

const uint8_t crypto::message::TIMEOUT_ERROR =254 [static]


Timeout error message tag.

Sent by a gateway when a timeout error occurs. Timeout errors are more serious and take a certain amount of time to expire.

30.28 crypto::nodeGroup Class Reference

Node group.

Inheritance diagram for crypto::nodeGroup:

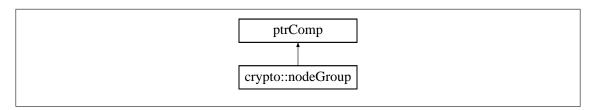

Public Member Functions

nodeGroup (keyBank *master, std::string groupName, std::string name, os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize)

Node group constructor.

• virtual ~nodeGroup ()

Virtual destructor.

• void **getName** (std::string &groupName, std::string &name)

Allows access to the most recent name.

• std::string name ()

Concatenated name.

• os::smart_ptr< os::adnode< nodeNameReference > > getFirstName ()

Returns first name in the list.

• os::smart_ptr< os::adnode< nodeKeyReference > > getFirstKey ()

Returns first key in the list.

• void merge (nodeGroup &source)

Merge a node group into this.

• void addAlias (std::string groupName, std::string name, uint64_t timestamp=os::getTimestamp())

Add new alias for group.

Add new key for group.

• unsigned int numberOfNames () const

Returns the number of names.

• unsigned int numberOfKeys () const

Returns the number of keys.

• os::smart_ptr< os::smart_ptr< nodeNameReference > > namesByTimestamp (unsigned int &size)

Returns names sorted by timestamp.

• os::smart ptr< os::smart ptr< nodeKeyReference > > keysByTimestamp (unsigned int &size)

Returns keys sorted by timestamp.

• os::smartXMLNode buildXML ()

Build XML tree.

Private Member Functions

• void sortKeys ()

Sorts keys by timestamp.

• void sortNames ()

Sorts names by timestamp.

• nodeGroup (keyBank *master, os::smartXMLNode fileNode)

Node group constructor.

Private Attributes

• keyBank * _master

Pointer to key bank.

• os::asyncAVLTree< nodeNameReference > nameList

List of all names associated with this node.

os::asyncAVLTree< nodeKeyReference > keyList

List of all keys associated with this node.

• std::mutex sortingLock

Lock used for sorting.

• os::smart_ptr< os::smart_ptr< nodeNameReference > > sortedNames

Array of names sorted by timestamp.

os::smart_ptr< os::smart_ptr< nodeKeyReference > > sortedKeys

Array of keys sorted by timestamp.

Friends

class keyBank

Only keyBank (p. 473) can load a node group.

30.28.1 Detailed Description

Node group.

A list of all names and keys which are associated with a single node. This must exist because nodes can change their name during operation.

30.28.2 Constructor & Destructor Documentation

crypto::nodeGroup::nodeGroup (keyBank * master, os::smartXMLNode fileNode) [private]

Node group constructor.

Constructs a node group with an XML tree. This constructor throws exceptions if errors occur.

Parameters

	[in/out]	master Reference to the 'master' group holder
in	fileNode	XML root which defines the group

crypto::nodeGroup::nodeGroup (keyBank * master, std::string groupName, std::string name,
os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize)

Node group constructor.

Parameters

[in/out]	master Reference to the 'master' group holder

in	groupName	Group name of the node being registered
in	name	Name of the node being registered
in	key	The public key of a given node
in	algoID	The algorithm identifier
in	keySize	Size of the key provided

virtual crypto::nodeGroup::~nodeGroup () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.28.3 Member Function Documentation

void crypto::nodeGroup::addAlias (std::string groupName, std::string name, uint64_t timestamp =
os::getTimestamp())

Add new alias for group.

Parameters

in	groupName	Group name of the node being registered
in	name	Name of the node being registered
	timestamp	The time this node was created, 'now' by defult

Returns

void

void crypto::nodeGroup::addKey (os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize, uint64_t timestamp = os::getTimestamp())

Add new key for group.

Parameters

in	key	The public key of a given node
in	algoID	The algorithm identifier
in	keySize	Size of the key provided
	timestamp	The time this node was created, 'now' by defult

Returns

void

os::smartXMLNode crypto::nodeGroup::buildXML ()

Build XML tree.

Builds an XML tree from this node group. This tree is designed to be saved by the key bank.

Returns

Root of tree to be saved

os::smart_ptr<os::adnode<**nodeKeyReference**>> crypto::nodeGroup::getFirstKey () [inline]

Returns first key in the list.

This function returns an alphabetical order. Note that it is often the case that a user needs to sort by timestamp. This functionality is also provided.

Returns

crypto::nodeGroup::keyList.getFirst()

 $os::smart_ptr < os::adnode < \textbf{nodeNameReference} > > crypto::nodeGroup::getFirstName (\) \\ [inline]$

Returns first name in the list.

This function returns an alphabetical order. Note that it is often the case that a user needs to sort by timestamp. This functionality is also provided.

Returns

crypto::nodeGroup::nameList.getFirst()

void crypto::nodeGroup::getName (std::string & groupName, std::string & name)

Allows access to the most recent name.

Parameters

out	groupName	crypto::nodeGroup::sortedNames (p. 499)[0]->groupName()
out	name	crypto::nodeGroup::sortedNames (p. 499)[0]->name() (p. 498)

Returns

void

os::smart_ptr<os::smart_ptr<**nodeKeyReference**> > crypto::nodeGroup::keysByTimestamp (unsigned int & size)

Returns keys sorted by timestamp.

	out	size	Size of array to be returned
--	-----	------	------------------------------

Returns

crypto::nodeGroup::sortedKeys (p. 499)

void crypto::nodeGroup::merge (nodeGroup & source)

Merge a node group into this.

Acheives merge entirely by reference. It is assumed that the node being merged into this node will shortly be deleted.

Parameters

in	source	Node group to merge
----	--------	---------------------

Returns

void

std::string crypto::nodeGroup::name ()

Concatenated name.

Concatenated the groupName and name and then returns the combination. return groupName+":"+name

 $os::smart_ptr < os::smart_ptr < nodeNameReference > > crypto::nodeGroup::namesByTimestamp \ (unsigned int \& size \)$

Returns names sorted by timestamp.

Parameters

out	size	Size of array to be returned

Returns

crypto::nodeGroup::sortedNames (p. 499)

unsigned int crypto::nodeGroup::numberOfKeys () const [inline]

Returns the number of keys.

Returns

crypto::nodeGroup::keyList.size()

```
unsigned int crypto::nodeGroup::numberOfNames ( ) const [inline]
Returns the number of names.
Returns
    crypto::nodeGroup::nameList.size()
void crypto::nodeGroup::sortKeys( ) [private]
Sorts keys by timestamp.
void crypto::nodeGroup::sortNames( ) [private]
Sorts names by timestamp.
30.28.4 Friends And Related Function Documentation
friend class keyBank [friend]
Only keyBank (p. 473) can load a node group.
30.28.5 Member Data Documentation
keyBank* crypto::nodeGroup::_master [private]
Pointer to key bank.
os::asyncAVLTree<nodeKeyReference> crypto::nodeGroup::keyList [private]
List of all keys associated with this node.
os::asyncAVLTree<nodeNameReference> crypto::nodeGroup::nameList [private]
List of all names associated with this node.
os::smart_ptr<os::smart_ptr<nodeKeyReference>> crypto::nodeGroup::sortedKeys [private]
Array of keys sorted by timestamp.
os::smart_ptr<os::smart_ptr<nodeNameReference>> crypto::nodeGroup::sortedNames
[private]
Array of names sorted by timestamp.
std::mutex crypto::nodeGroup::sortingLock [private]
Lock used for sorting.
```

30.29 crypto::nodeKeyReference Class Reference

Key storage node.

Public Member Functions

• virtual ~nodeKeyReference ()

Virtual destructor.

• nodeGroup * master ()

Returns a pointer to its master.

• os::smart_ptr< number > key () const

Returns the key.

• uint16_t algoID () const

Returns the algorithm key.

• uint16_t keySize () const

Returns the key size.

• uint64_t timestamp () const

Returns the timestamp.

• int compare (const nodeKeyReference &comp) const

Compare crypto::nodeKeyReference (p. 500).

• bool **operator==** (const **nodeKeyReference** &comp) const

Equality operator.

• bool operator!= (const nodeKeyReference &comp) const

Not-equals operator.

• bool operator> (const nodeKeyReference &comp) const

Greater-than operator.

• bool operator>= (const nodeKeyReference &comp) const

Greater-than/equals to operator.

• bool operator< (const nodeKeyReference &comp) const

Less-than operator.

• bool operator<= (const nodeKeyReference &comp) const

Less-than/equals to operator.

Private Member Functions

• nodeKeyReference (nodeGroup *master, os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize, uint64_t timestamp=os::getTimestamp())

Key reference node constructor.

• nodeKeyReference (os::smart ptr< number > key, uint16 t algoID, uint16 t keySize)

Key reference node constructor for searching.

Private Attributes

• nodeGroup * _master

Pointer to node group.

os::smart_ptr< number > _key

Shared pointer to public key.

• uint16_t_algoID

ID of public key algorithm.

• uint16_t _keySize

Size of public key.

• uint64_t _timestamp

Timestamp key created.

Friends

• class nodeGroup

Friendship with crypto::nodeGroup (p. 493).

class keyBank

Friendship with crypto::keyBank (p. 473).

30.29.1 Detailed Description

Key storage node.

Allows for storage and sorting of a node group by its key. This node holds a reference to the larger group node.

30.29.2 Constructor & Destructor Documentation

crypto::nodeKeyReference::nodeKeyReference (nodeGroup * master, os::smart_ptr< number >
key, uint16_t algoID, uint16_t keySize, uint64_t timestamp = os::getTimestamp()) [private]

Key reference node constructor.

Parameters

	[in/out]	master Reference to the 'master' group
in	key	The public key of a given node
in	algoID	The algorithm identifier
in	keySize	Size of the key provided
	timestamp	The time this node was created, 'now' by defult

 $\label{lem:crypto::nodeKeyReference} crypto::nodeKeyReference (os::smart_ptr < \textbf{number} > key, uint16_t algoID, uint16_t keySize) [private]$

Key reference node constructor for searching.

in	key	The public key of a given node
in	algoID	The algorithm identifier
in	keySize	Size of the key provided

virtual crypto::nodeKeyReference::~nodeKeyReference() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.29.3 Member Function Documentation

uint16_t crypto::nodeKeyReference::algoID () const [inline]

Returns the algorithm key.

Returns

crypto::nodeKeyReference::_algoID (p. 505)

int crypto::nodeKeyReference::compare (const nodeKeyReference & comp) const

Compare crypto::nodeKeyReference (p. 500).

Compares two node key references by their public key, returning the result in the form of a 1,0 or -1.

Parameters

in	comp	Key reference to compare against

Returns

1, 0, -1 (Greater than, equal to, less than)

os::smart_ptr<number> crypto::nodeKeyReference::key () const [inline]

Returns the key.

Returns

crypto::nodeKeyReference::_key (p. 505)

uint16_t crypto::nodeKeyReference::keySize () const [inline]

Returns the key size.

Returns

crypto::nodeKeyReference::_keySize (p. 505)

nodeGroup* crypto::nodeKeyReference::master() [inline]

Returns a pointer to its master.

Returns

crypto::~nodeKeyReference::_master

 $bool\ crypto::nodeKeyReference::operator!= (\ const\ \textbf{nodeKeyReference}\ \&\ comp\)\ const\ [inline]$

Not-equals operator.

Parameters

in	comp	Key reference to compare against
----	------	----------------------------------

Returns

true if not equal, else, false

bool crypto::nodeKeyReference::operator< (const **nodeKeyReference** & comp) const [inline] Less-than operator.

Parameters

in comp	Key reference to compare against
---------	----------------------------------

Returns

true if less than, else, false

 $bool\ crypto::nodeKeyReference::operator <= (\ const\ \textbf{nodeKeyReference}\ \&\ comp\)\ const\ [inline]$

Less-than/equals to operator.

Parameters

in	comp	Key reference to compare against
----	------	----------------------------------

Returns

true if less than or equal to, else, false

 $\label{local_problem} bool\ crypto::nodeKeyReference::operator == (\ const\ \textbf{nodeKeyReference}\ \&\ comp\)\ const\ [inline]$

Equality operator.

Parameters

in	comp	Key reference to compare against
----	------	----------------------------------

Returns

true if equal, else, false

bool crypto::nodeKeyReference::operator> (const nodeKeyReference & comp) const [inline]

Greater-than operator.

Parameters

	in	comp	Key reference to compare against
--	----	------	----------------------------------

Returns

true if greater than, else, false

 $\label{local_problem} bool\ crypto::nodeKeyReference::operator>= (\ const\ \textbf{nodeKeyReference}\ \&\ comp\)\ const\ [inline]$

Greater-than/equals to operator.

Parameters

in	comp	Key reference to compare against
----	------	----------------------------------

Returns

true if greater than or equal to, else, false

uint64_t crypto::nodeKeyReference::timestamp () const [inline]

Returns the timestamp.

Returns

crypto::nodeKeyReference::_timestamp (p. 505)

30.29.4 Friends And Related Function Documentation

friend class keyBank [friend]

Friendship with crypto::keyBank (p. 473).

The key bank must be able to create a node key to search by key

friend class nodeGroup [friend]

Friendship with crypto::nodeGroup (p. 493).

Only node groupings can meaningfully create this class, so the constructor is private and only accessable by **crypto::nodeGroup** (p. 493).

30.29.5 Member Data Documentation

uint16_t crypto::nodeKeyReference::_algoID [private]

ID of public key algorithm.

os::smart_ptr<number> crypto::nodeKeyReference::_key [private]

Shared pointer to public key.

uint16_t crypto::nodeKeyReference::_keySize [private]

Size of public key.

nodeGroup* crypto::nodeKeyReference::_master [private]

Pointer to node group.

uint64_t crypto::nodeKeyReference::_timestamp [private]

Timestamp key created.

30.30 crypto::nodeNameReference Class Reference

Name storage node.

Public Member Functions

• virtual ~nodeNameReference ()

Virtual destructor.

• nodeGroup * master ()

Returns a pointer to its master.

• std::string **groupName** () const

Returns the group name.

• std::string **name** () const

Returns the name.

• uint64_t timestamp () const

Returns the timestamp.

• int compare (const nodeNameReference &comp) const

Compare crypto::nodeNameReference (p. 505).

• bool **operator==** (const **nodeNameReference** &comp) const Equality operator.

• bool operator!= (const nodeNameReference &comp) const

Not-equals operator.

• bool operator> (const nodeNameReference &comp) const

Greater-than operator.

• bool operator>= (const nodeNameReference &comp) const

Greater-than/equals to operator.

• bool operator< (const nodeNameReference &comp) const

Less-than operator.

bool operator<= (const nodeNameReference &comp) const

Less-than/equals to operator.

Private Member Functions

nodeNameReference (nodeGroup *master, std::string groupName, std::string name, uint64←
 _t timestamp=os::getTimestamp())

Name reference node constructor.

• nodeNameReference (std::string groupName, std::string name)

Name reference node constructor for searching.

Private Attributes

• nodeGroup * _master

Pointer to node group.

• std::string _groupName

Name of the group this name is from.

• std::string _name

Name of the node.

• uint64_t _timestamp

Timestamp key created.

Friends

• class nodeGroup

Friendship with crypto::nodeGroup (p. 493).

• class keyBank

Friendship with crypto::keyBank (p. 473).

30.30.1 Detailed Description

Name storage node.

Allows for storage and sorting of a node group by its name. This node holds a reference to the larger group node.

30.30.2 Constructor & Destructor Documentation

crypto::nodeNameReference::nodeNameReference (nodeGroup * master, std::string
groupName, std::string name, uint64_t timestamp = os::getTimestamp()) [private]

Name reference node constructor.

Parameters

	[in/out]	master Reference to the 'master' group
in	groupName	Group name of the node being registered
in	name	Name of the node being registered
	timestamp	The time this node was created, 'now' by defult

crypto::nodeNameReference::nodeNameReference(std::string groupName, std::string name)
[private]

Name reference node constructor for searching.

Parameters

in	groupName	Group name of the node being registered
in	name	Name of the node being registered

virtual crypto::nodeNameReference::~nodeNameReference() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.30.3 Member Function Documentation

int crypto::nodeNameReference::compare (const nodeNameReference & comp) const

Compare crypto::nodeNameReference (p. 505).

Compares two node name references by their group and name, returning the result in the form of a 1,0 or -1.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

std::string crypto::nodeNameReference::groupName() const [inline]

Returns the group name.

Returns

crypto::nodeNameReference::_groupName (p. 510)

nodeGroup* crypto::nodeNameReference::master() [inline]

Returns a pointer to its master.

Returns

crypto::nodeNameReference::_master (p. 510)

std::string crypto::nodeNameReference::name () const [inline]

Returns the name.

Returns

crypto::nodeNameReference::_name (p. 510)

 $bool\ crypto::nodeNameReference::operator!=(\ const\ \textbf{nodeNameReference}\ \&\ comp\)\ const\ [inline]$

Not-equals operator.

Parameters

in	comp	Name reference to compare against
		The state of the

Returns

true if not equal, else, false

 $\verb|bool crypto::nodeNameReference::operator<(const \verb|nodeNameReference| \& comp |) const \\ [inline]$

Less-than operator.

Parameters

in comp Name reference to compare against

Returns

true if less than, else, false

bool crypto::nodeNameReference::operator<= (const nodeNameReference & comp) const
[inline]</pre>

Less-than/equals to operator.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

true if less than or equal to, else, false

 $bool\ crypto::nodeNameReference::operator == (\ const\ \textbf{nodeNameReference}\ \&\ comp\)\ const\ [inline]$

Equality operator.

Parameters

	in comp	Name reference to compare against
--	---------	-----------------------------------

Returns

true if equal, else, false

 ${\tt bool\ crypto::nodeNameReference::operator>(\ const\ \textbf{nodeNameReference}\ \&\ comp\)\ const}$ $[\verb|inline|]$

Greater-than operator.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

true if greater than, else, false

 $bool\ crypto::nodeNameReference::operator>= (\ const\ \textbf{nodeNameReference}\ \&\ comp\)\ const\ [inline]$

Greater-than/equals to operator.

iı	ı	comp	Name reference to compare against
----	---	------	-----------------------------------

Returns

true if greater than or equal to, else, false

uint64_t crypto::nodeNameReference::timestamp() const [inline]

Returns the timestamp.

Returns

crypto::nodeNameReference::_timestamp (p. 510)

30.30.4 Friends And Related Function Documentation

friend class keyBank [friend]

Friendship with crypto::keyBank (p. 473).

The key bank must be able to create a node name to search by name

friend class nodeGroup [friend]

Friendship with crypto::nodeGroup (p. 493).

Only node groupings can meaningfully create this class, so the constructor is private and only accessable by **crypto::nodeGroup** (p. 493).

30.30.5 Member Data Documentation

std::string crypto::nodeNameReference::_groupName [private]

Name of the group this name is from.

nodeGroup* crypto::nodeNameReference::_master [private]

Pointer to node group.

 $std::string\ crypto::nodeNameReference::_name\quad [\verb"private"]"$

Name of the node.


uint64_t crypto::nodeNameReference::_timestamp [private]

Timestamp key created.

30.31 crypto::NULLDataError Class Reference

NULL data error.

Inheritance diagram for crypto::NULLDataError:

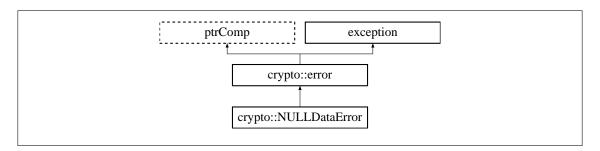

Public Member Functions

• virtual ~NULLDataError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "NULL Data".

• std::string errorDescription () const

Long error descriptor Returns "A function was passed NULL data where this is illegal".

30.31.1 Detailed Description

NULL data error.

Thrown when NULL data is passed to a function or class.

30.31.2 Constructor & Destructor Documentation

virtual crypto::NULLDataError::~NULLDataError() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.31.3 Member Function Documentation

std::string crypto::NULLDataError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "A function was passed NULL data where this is illegal".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::NULLDataError::errorTitle () const [inline], [virtual]

Short error descriptor Returns "NULL Data".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.32 crypto::NULLMaster Class Reference

NULL master error.

Inheritance diagram for crypto::NULLMaster:

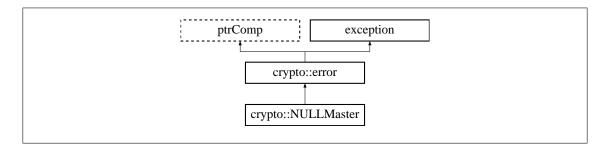

Public Member Functions

• virtual ~NULLMaster () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "NULL Master pointer".

• std::string errorDescription () const

Long error descriptor Returns "A class received a NULL master pointer, this is illegal".

30.32.1 Detailed Description

NULL master error.

Thrown when a class is passed a NULL master where such a class must have a defined master.

30.32.2 Constructor & Destructor Documentation

virtual crypto::NULLMaster::~NULLMaster() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.32.3 Member Function Documentation

std::string crypto::NULLMaster::errorDescription() const [inline], [virtual]

Long error descriptor Returns "A class received a NULL master pointer, this is illegal".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::NULLMaster::errorTitle () const [inline], [virtual]

Short error descriptor Returns "NULL Master pointer".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.33 crypto::NULLPublicKey Class Reference

NULL public-key error.

Inheritance diagram for crypto::NULLPublicKey:

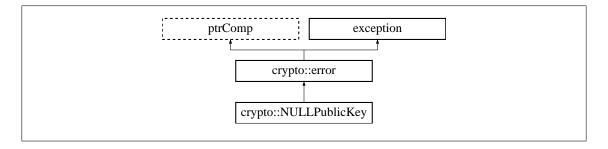

Public Member Functions

• virtual ~NULLPublicKey () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Public Key NULL".

• std::string errorDescription () const

Long error descriptor Returns "Attempted to bind a public key of illegal type NULL".

30.33.1 Detailed Description

NULL public-key error.

Thrown when a NULL public-key or public-key of undefined type is used.

30.33.2 Constructor & Destructor Documentation

virtual crypto::NULLPublicKey::~NULLPublicKey() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.33.3 Member Function Documentation

std::string crypto::NULLPublicKey::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Attempted to bind a public key of illegal type NULL".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 420).

std::string crypto::NULLPublicKey::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Public Key NULL".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.34 crypto::number Class Reference

Basic number definition.

Inheritance diagram for crypto::number:



Public Member Functions

- number (struct numberType *numDef=buildNullNumberType())
 - Construct with number definition.
- number (uint16_t size, struct numberType *numDef=buildNullNumberType())
 Construct with size.

Construct with data array.

• number (const number &num)

Copy constructor.

• number & operator= (const number &num)

Equality constructor.

• virtual ~number ()

Virtual destructor.

• void reduce ()

Eliminate high-order zeros.

• void **expand** (uint16_t **size**)

Expand number size.

• os::smart_ptr< unsigned char > **getCharData** (unsigned int &arr_len) const Build byte array.

 os::smart_ptr< unsigned char > getCompCharData (unsigned int &arr_len) const Build compatibility byte array.

• std::string toString () const

Build hex string from number.

• void **fromString** (const std::string &str)

Re-builds number from provided string.

• uint32_t operator[] (uint16_t pos) const

Read-only data access.

• uint32_t & operator[] (uint16_t pos)

Read/write data access.

• const bool operator== (const number &comp) const

'==' comparison operator

• const bool operator!= (const number &comp) const

'!=' comparison operator

• const bool operator<= (const number &comp) const

'<=' comparison operator

• const bool **operator**>= (const **number** &comp) const

'>=' comparison operator

• const bool **operator**< (const **number** &comp) const

'<' comparison operator

• const bool operator> (const number &comp) const

'>' comparison operator

• int compare (const number *n2) const

Compares two numbers.

• void addition (const number *n2, number *result) const

Addition function.

• void subtraction (const number *n2, number *result) const

Subtraction function.

• void **rightShift** (uint16_t n2, **number** *result) const

Right shift function.

• void leftShift (uint16_t n2, number *result) const

Left shift function.

• void multiplication (const number *n2, number *result) const

Multiplication function.

• void division (const number *n2, number *result) const

Division function.

• void **modulo** (const **number** *n2, **number** *result) const

Modulo function.

• void exponentiation (const number *n2, number *result) const

Exponentiation function.

• void **moduloExponentiation** (const **number** *n2, const **number** *n3, **number** *result) const *Modular exponentiation.*

• void gcd (const number *n2, number *result) const

Greatest-common-denominator function.

• void modInverse (const number *n2, number *result) const

Modular-inverse function.

• number operator| (const number &op) const

Or operator.

• number & operator|= (const number &op)

Or-equals operator.

• number operator& (const number &op) const

And operator.

• number & operator&= (const number &op)

And-equals operator.

• number operator^ (const number &op) const

X-Or operator.

• number & operator^= (const number &op)

X-Or-equals operator.

• number operator~ () const

Negate operator.

• virtual bool checkType () const

Check if the number is valid.

• bool hasCompare () const

Check for the 'compare' function.

• bool hasAddition () const

Check for the 'addition' function.

• bool hasSubtraction () const

Check for the 'subtraction' function.

• bool hasRightShift () const

Check for the 'rightShift' function.

• bool hasLeftShift () const

Check for the 'leftShift' function.

• bool hasMultiplication () const

Check for the 'multiplication' function.

• bool hasDivision () const

Check for the 'division' function.

• bool hasModulo () const

Check for the 'modulo' function.

• bool hasExponentiation () const

Check for the 'exponentiation' function.

bool hasModuloExponentiation () const

Check for the 'moduloExponentiation' function.

• bool hasGCD () const

Check for the 'gcd' function.

• bool hasModInverse () const

Check for the 'modInverse' function.

• uint16 t size () const

Access data size.

• uint32_t * data ()

Data access.

• const uint32_t * data () const

Constant data access.

• const struct numberType * numberDefinition () const

Access number definition.

• int typeID () const

Access number ID.

• std::string name () const

Access number name.

Protected Member Functions

• int _compare (const number &n2) const

Compares two numbers.

Protected Attributes

• struct numberType * _numDef

Definition of number algorithms.

• uint16_t _size

Size of the data array.

uint32_t * _data

Data array.

30.34.1 Detailed Description

Basic number definition.

This class defines the basics of all large number classes. Operators are specifically defined in each class which inherits from number.

30.34.2 Constructor & Destructor Documentation

crypto::number::number (struct numberType * numDef = buildNullNumberType())

Construct with number definition.

Parameters

in	numDef	Definition of number, by default buildNullNumberType() (p. 353)
----	--------	--

crypto::number::number (uint16_t size, struct numberType * numDef = buildNullNumberType()
)

Construct with size.

Parameters

in	size	Size of the number to be constructed
in	numDef	Definition of number, by default buildNullNumberType() (p. 353)

crypto::number::number (const uint32_t * d, uint16_t size, struct **numberType** * numDef = **buildNullNumberType**())

Construct with data array.

Parameters

in	d	Data array to bind to this number	
in	size	Size of the number to be constructed	
in	numDef	Definition of number, by default buildNullNumberType() (p. 353)	

crypto::number::number (const number & num)

Copy constructor.

Parameters

in	num	Number used to construct this

virtual crypto::number::~number() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.34.3 Member Function Documentation

int crypto::number::_compare (const number & n2) const [protected]

Compares two numbers.

Parameters

in	n2	Number to be compared against
----	----	-------------------------------

Returns

0 if equal, 1 if greater than, -1 if less than

void crypto::number::addition (const number * n2, number * result) const

Addition function.

Preforms this+n2=result. Note that this function will only preform the addition if the number definition defines an addition function.

Parameters

in	n2	Number to be added
out	result	Result of addition

Returns

void

virtual bool crypto::number::checkType () const [inline], [virtual]

Check if the number is valid.

By default, this function returns false. Numbers which inherit this class are expected to use this function to check if the number definition matches the class definition.

Returns

true if valid type, else, false

Reimplemented in crypto::integer (p. 467).

int crypto::number::compare (const number * n2) const

Compares two numbers.

	in	n2	Number to be compared against
--	----	----	-------------------------------

0 if equal, 1 if greater than, -1 if less than

uint32 t* crypto::number::data() [inline]

Data access.

Returns

crypto::number::_data (p. 531)

const uint32_t* crypto::number::data () const [inline]

Constant data access.

Returns

crypto::number::_data (p. 531)

void crypto::number::division (const number * n2, number * result) const

Division function.

Preforms this/n2=result. Note that this function will only preform the division if the number definition defines an division function.

Parameters

in	n2	Number to be divided by
out	result	Result of division

Returns

void

void crypto::number::expand (uint16_t size)

Expand number size.

Parameters

in	size	Size of the number to be constructed
----	------	--------------------------------------

Returns

void

void crypto::number::exponentiation (const number * n2, number * result) const

Exponentiation function.

Preforms this ^n2=result. Note that this function will only preform the exponentiation if the number definition defines an exponentiation function.

Parameters

in	n2	Number to be raised to
out	result	Result of exponentiation

Returns

void

void crypto::number::fromString (const std::string & str)

Re-builds number from provided string.

Parameters

in	str	Hex string representing number
----	-----	--------------------------------

Returns

void

void crypto::number::gcd (const number * n2, number * result) const

Greatest-common-denominator function.

Preforms GCD of this and n2=result. Note that this function will only preform the greatest-common-denominator if the number definition defines an greatest-common-denominator function.

Parameters

in	n2	GCD target
out	result	Result of greatest-common-denominator

Returns

void

os::smart_ptr<unsigned char> crypto::number::getCharData (unsigned int & arr_len) const

Build byte array.

Constructs a byte array based on the data array of this number. Useful for binary saving and packet-izing.

01	ut	arr_len	return Byte array

 $os::smart_ptr < unsigned\ char > crypto::number::getCompCharData\ (\ unsigned\ int\ \&\ arr_len\)\ const$

Build compatibility byte array.

Constructs a byte array based on the data array of this number. First eliminates endian differences of operating systems.

Parameters

out arr_len return Byte array

bool crypto::number::hasAddition () const [inline]

Check for the 'addition' function.

Returns

crypto::number::_numDef (p. 531)->addition

bool crypto::number::hasCompare () const [inline]

Check for the 'compare' function.

Returns

crypto::number::_numDef (p. 531)->compare

bool crypto::number::hasDivision () const [inline]

Check for the 'division' function.

Returns

crypto::number::_numDef (p. 531)->division

bool crypto::number::hasExponentiation () const [inline]

Check for the 'exponentiation' function.

Returns

crypto::number::_numDef (p. 531)->exponentiation

bool crypto::number::hasGCD () const [inline]

Check for the 'gcd' function.

Returns

crypto::number::_numDef (p. 531)->gcd

```
bool crypto::number::hasLeftShift( ) const [inline]
Check for the 'leftShift' function.
Returns
     crypto::number::_numDef (p. 531)->leftShift
bool crypto::number::hasModInverse ( ) const [inline]
Check for the 'modInverse' function.
Returns
     crypto::number::_numDef (p. 531)->modInverse
bool crypto::number::hasModulo ( ) const [inline]
Check for the 'modulo' function.
Returns
     crypto::number::_numDef (p. 531)->modulo
bool crypto::number::hasModuloExponentiation ( ) const [inline]
Check for the 'moduloExponentiation' function.
Returns
     crypto::number::_numDef (p. 531)->moduloExponentiation
bool crypto::number::hasMultiplication ( ) const [inline]
Check for the 'multiplication' function.
Returns
     crypto::number::_numDef (p. 531)->multiplication
bool crypto::number::hasRightShift( ) const [inline]
Check for the 'rightShift' function.
Returns
     crypto::number:: numDef (p. 531)->rightShift
bool crypto::number::hasSubtraction ( ) const [inline]
Check for the 'subtraction' function.
```

crypto::number::_numDef (p. 531)->subtraction

Returns

void crypto::number::leftShift (uint16_t n2, number * result) const

Left shift function.

Preforms this << n2=result. Note that this function will only preform the shift if the number definition defines an leftShift function.

Parameters

in	n2	Bits to be shifted by	
out	result	Result of shift	

Returns

void

void crypto::number::modInverse (const number * n2, number * result) const

Modular-inverse function.

Preforms (this^-1)n2=result. Note that this function will only preform the modular-inverse if the number definition defines an modular-inverse function.

Parameters

in	n2	Number which defines the modulo space
out	result	Result of modular-inverse

Returns

void

void crypto::number::modulo (const number * n2, number * result) const

Modulo function.

Preforms thisn2=result. Note that this function will only preform the modulo if the number definition defines an modulo function.

Parameters

in	n2	Number to be moded by
out	result	Result of modulo

Returns

void

void crypto::number::moduloExponentiation (const number * n2, const number * n3, number * result) const

Modular exponentiation.

Preforms this^n2 n3=result. Note that this function will only preform the modular exponentiation if the number definition defines an modular exponentiation function.

Parameters

in	n2	Number to be raised to
in	n3	Number defines modulo space
out	result	Result of exponentiation

Returns

void

void crypto::number::multiplication (const number * n2, number * result) const

Multiplication function.

Preforms this*n2=result. Note that this function will only preform the multiplication if the number definition defines an multiplication function.

Parameters

in	n2	Number to be multiplied
out	result	Result of multiplication

Returns

void

std::string crypto::number::name () const [inline]

Access number name.

Returns

crypto::number::_numDef (p. 531)->name

const struct numberType* crypto::number::numberDefinition () const [inline]

Access number definition.

Returns

crypto::number::_numDef (p. 531)

const bool crypto::number::operator!= (const number & comp) const

'!=' comparison operator

Parameters

in	comp	Number to be compared against
----	------	-------------------------------

Returns

this != comp

number crypto::number::operator& (const number & op) const

And operator.

Preforms bitwise and on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	ор	Number preforming bitwise operation
----	----	-------------------------------------

Returns

this & op

number& crypto::number::operator&= (const number & op)

And-equals operator.

Preforms bitwise and-equals on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

	in	ор	Number preforming bitwise operation
--	----	----	-------------------------------------

Returns

this = this & op

const bool crypto::number::operator< (const number & comp) const

'<' comparison operator

in comp Number to be compared against

this < comp

const bool crypto::number::operator<= (const number & comp) const</pre>

'<=' comparison operator

Parameters

in	comp	Number to be compared against

Returns

this <= comp

number& crypto::number::operator= (const number & num)

Equality constructor.

Parameters

ir	num	Number used to re-build this
----	-----	------------------------------

Returns

Reference to this

const bool crypto::number::operator== (const number & comp) const '==' comparison operator

Parameters

in	comp	Number to be compared against

Returns

this == comp

const bool crypto::number::operator> (const **number** & comp) const

'>' comparison operator

in comp Number to be compared aga	inst
-----------------------------------	------

this > comp

const bool crypto::number::operator>= (const number & comp) const

'>=' comparison operator

Parameters

in	comp	Number to be compared against

Returns

this >= comp

uint32_t crypto::number::operator[] (uint16_t pos) const

Read-only data access.

Parameters

in pos	Index to access
--------	-----------------

Returns

crypto::number::_data (p. 531)[pos]

uint32_t& crypto::number::operator[] (uint16_t pos)

Read/write data access.

Parameters

4			
	in	pos	Index to access
		,	

Returns

crypto::number::_data (p. 531)[pos]

number crypto::number::operator^ (const **number** & op) const

X-Or operator.

Preforms bitwise exclusive-or on the number. Note that all numbers can preform bit-wise operations on all other numbers

in	ор	Number preforming bitwise operation
----	----	-------------------------------------

this ^ op

number& crypto::number::operator^= (const **number** & op)

X-Or-equals operator.

Preforms bitwise exclusive-or-equals on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

	in	ор	Number preforming bitwise operation
--	----	----	-------------------------------------

Returns

this=this ^ op

number crypto::number::operator| (const number & op) const

Or operator.

Preforms bitwise or on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	ор	Number preforming bitwise operation
----	----	-------------------------------------

Returns

this | op

number& crypto::number::operator|= (const number & op)

Or-equals operator.

Preforms bitwise or-equals on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	ор	Number preforming bitwise operation
----	----	-------------------------------------

Returns

this = this | op

number crypto::number::operator~ () const

Negate operator.

Flips all bits in the number, returning a new number.

Returns

 \sim this

void crypto::number::reduce ()

Eliminate high-order zeros.

Returns

void

void crypto::number::rightShift (uint16_t n2, number * result) const

Right shift function.

Preforms this>>n2=result. Note that this function will only preform the shift if the number definition defines an rightShift function.

Parameters

in	n2	Bits to be shifted by
out	result	Result of shift

Returns

void

uint16_t crypto::number::size () const [inline]

Access data size.

Returns

crypto::number::_size (p. 531)

void crypto::number::subtraction (const number * n2, number * result) const

Subtraction function.

Preforms this-n2=result. Note that this function will only preform the subtraction if the number definition defines an subtraction function.

in	n2	Number to be subtracted
out	result	Result of subtraction

void

std::string crypto::number::toString () const

Build hex string from number.

Returns

Hex string

int crypto::number::typeID () const [inline]

Access number ID.

Returns

crypto::number::_numDef (p. 531)->typeID

30.34.4 Member Data Documentation

uint32_t* crypto::number::_data [protected]

Data array.

struct numberType* crypto::number::_numDef [protected]

Definition of number algorithms.

uint16_t crypto::number::_size [protected]

Size of the data array.

30.35 numberType Struct Reference

Number type function structure.

Public Attributes

• int typeID

ID integer of the number type.

• const char * name

Name of the number type.

• compareFunction compare

Pointer to comparison function.

operatorFunction addition

Pointer to addition function.

• operatorFunction subtraction

Pointer to subtraction function.

• shiftFunction rightShift

Pointer to right-shift function.

shiftFunction leftShift

Pointer to left-shift function.

• operatorFunction multiplication

Pointer to multiplication function.

• operatorFunction division

Pointer to division function.

• operatorFunction modulo

Pointer to modulo function.

• operatorFunction exponentiation

Pointer to exponentiation function.

• tripleCalculation moduloExponentiation

Pointer to modulo exponentiation function.

operatorFunction gcd

Pointer to greatest common denominator function.

operatorFunction modInverse

Pointer to modulo inverse function.

30.35.1 Detailed Description

Number type function structure.

This structure contains a series of meaningful function pointers which define functions required to meaningfully define a numerical system.

30.35.2 Member Data Documentation

operatorFunction numberType::addition

Pointer to addition function.

compareFunction numberType::compare

Pointer to comparison function.

operatorFunction numberType::division

Pointer to division function.

operatorFunction numberType::exponentiation

Pointer to exponentiation function.

operatorFunction numberType::gcd

Pointer to greatest common denominator function.

shiftFunction numberType::leftShift

Pointer to left-shift function.

operatorFunction numberType::modInverse

Pointer to modulo inverse function.

operatorFunction numberType::modulo

Pointer to modulo function.

tripleCalculation numberType::moduloExponentiation

Pointer to modulo exponentiation function.

operatorFunction numberType::multiplication

Pointer to multiplication function.

const char* numberType::name

Name of the number type.

shiftFunction numberType::rightShift

Pointer to right-shift function.

operatorFunction numberType::subtraction

Pointer to subtraction function.


int numberType::typeID

ID integer of the number type.

30.36 crypto::passwordLargeError Class Reference

Symmetric key too big.

Inheritance diagram for crypto::passwordLargeError:

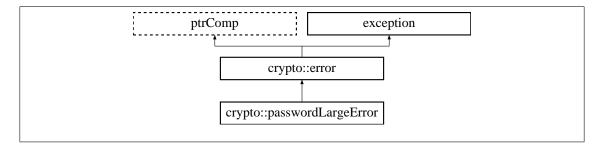

Public Member Functions

• virtual ~passwordLargeError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Password Size Error".

• std::string errorDescription () const

Long error descriptor Returns "Password too large".

30.36.1 Detailed Description

Symmetric key too big.

Thrown when a symmetric key is provided which is bigger than the maximum for the specific algorithm.

30.36.2 Constructor & Destructor Documentation

```
virtual crypto::passwordLargeError::~passwordLargeError() throw) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.36.3 Member Function Documentation

```
std::string crypto::passwordLargeError::errorDescription( ) const [inline], [virtual]
```

Long error descriptor Returns "Password too large".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

```
std::string crypto::passwordLargeError::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "Password Size Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.37 crypto::passwordSmallError Class Reference

Symmetric key too small.

Inheritance diagram for crypto::passwordSmallError:

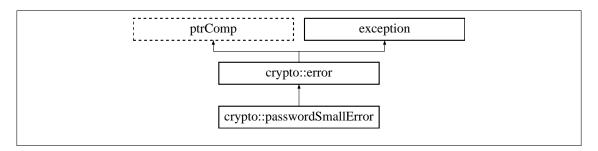

Public Member Functions

• virtual ~passwordSmallError () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Password Size Error".

• std::string errorDescription () const

Long error descriptor Returns "Password too small".

30.37.1 Detailed Description

Symmetric key too small.

Thrown when a symmetric key is provided which is smaller than the minimum for the specific algorithm.

30.37.2 Constructor & Destructor Documentation

virtual crypto::passwordSmallError::~passwordSmallError() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.37.3 Member Function Documentation

std::string crypto::passwordSmallError::errorDescription() const [inline], [virtual]

Long error descriptor Returns "Password too small".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::passwordSmallError::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Password Size Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.38 crypto::publicKey Class Reference

Base public-key class.

Inheritance diagram for crypto::publicKey:

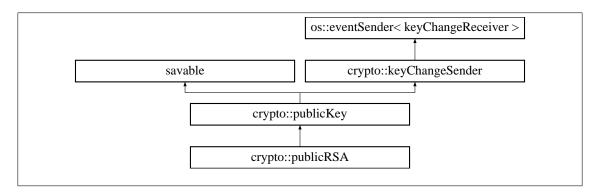

Public Member Functions

• void readLock ()

Increments the read-lock.

• void readUnlock ()

Decrements the read-lock.

• virtual ~publicKey ()

Virtual destructor.

• bool searchKey (hash hsh, unsigned int &hist, bool &type)

Searches for key by hash.

• bool **searchKey** (os::smart_ptr< **number** > key, unsigned int &hist, bool &type)

Searches for key.

- virtual os::smart_ptr< number > copyConvert (const os::smart_ptr< number > num) const Converts number to correct type.
- virtual os::smart_ptr< number > copyConvert (const uint32_t *arr, uint16_t len) const Converts array to correct number type.
- virtual os::smart_ptr< number > copyConvert (const unsigned char *arr, unsigned int len)
 const

Converts byte array to correct number type.

• os::smart_ptr< number > getN () const

Public key access.

• os::smart ptr< number > getD () const

Private key access.

• uint64_t timestamp () const

Time-stamp access.

• os::smart ptr< number > getOldN (unsigned int history=0)

Access old public keys.

• os::smart ptr< number > getOldD (unsigned int history=0)

Access old private keys.

• uint64_t **getOldTimestamp** (unsigned int **history**=0)

Access old time-stamps.

• virtual void generateNewKeys ()

Key generation function.

virtual bool generating ()

Tests if the keys are in the process of generating.

• uint16_t algorithm () const

Access algorithm ID.

• virtual std::string algorithmName () const

Access algorithm name.

• uint16_t size () const

Access key size.

• void setHistory (uint16_t hist)

Sets history size.

- uint16_t **history** () const
- void save ()

Re-save the entire structure.

• void loadFile ()

Loads the structure from a file.

void setFileName (std::string fileName)

Set the save file name.

• void **setPassword** (unsigned char *key, unsigned int keyLen)

Binds a new symmetric key.

- void **setPassword** (std::string password)
- void setEncryptionAlgorithm (os::smart_ptr< streamPackageFrame > stream_algo)

Sets the symmetric encryption algorithm.

• const std::string & fileName () const

Return the save file path.

void addKeyPair (os::smart_ptr< number > _n, os::smart_ptr< number > _d, uint64_t tms=os
 ::getTimestamp())

Add key pair.

virtual os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN=NULL) const

Number encode.

• virtual void **encode** (unsigned char *code, unsigned int codeLength, os::smart_ptr< **number** > publicN=NULL) const

Data encode against number.

• virtual void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const

Data encode.

• virtual os::smart_ptr< number > decode (os::smart_ptr< number > code) const Number decode.

virtual os::smart_ptr< number > decode (os::smart_ptr< number > code, unsigned int hist)
 Number decode, old key.

• void **decode** (unsigned char *code, unsigned int codeLength) const Data decode.

• void **decode** (unsigned char *code, unsigned int codeLength, unsigned int hist)

Data decode, old key.

• bool operator== (const publicKey &cmp) const

Compares equality by size and algorithm.

• bool operator!= (const publicKey &cmp) const

Compares equality by size and algorithm.

• bool operator< (const publicKey &cmp) const

Compares equality by size and algorithm.

• bool operator> (const publicKey &cmp) const

Compares equality by size and algorithm.

• bool operator<= (const publicKey &cmp) const

Compares equality by size and algorithm.

• bool operator>= (const publicKey &cmp) const

Compares equality by size and algorithm.

Static Public Member Functions

static os::smart_ptr< number > copyConvert (const os::smart_ptr< number > num, uint16_t size)

Converts number to correct type, statically.

- static os::smart_ptr< number > copyConvert (const uint32_t *arr, uint16_t len, uint16_t size)

 Converts array to correct number type, statically.
- static os::smart_ptr< number > copyConvert (const unsigned char *arr, unsigned int len, uint16_t size)

Converts byte array to correct number type, statically.

• static uint16_t staticAlgorithm ()

Access algorithm ID.

• static std::string staticAlgorithmName ()

Access algorithm name.

static os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN, uint16_t size)

Static number encode.

static void encode (unsigned char *code, unsigned int codeLength, os::smart_ptr< number > publicN, uint16_t size)

Hybrid data encode against number.

• static void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength, uint16_t **size**)

Static data encode.

Static Public Attributes

• static const unsigned int **CURRENT INDEX** = ~0

Current key index Allows the current key to be accessed as historical index '-1'.

• static const bool PUBLIC =true

Public boolean marker.

• static const bool PRIVATE =false

Private boolean marker.

static const bool N_MARKER =true

N (public) boolean marker.

• static const bool **D_MARKER** =false

D (private) boolean marker.

Protected Member Functions

• publicKey (uint16_t algo, uint16_t sz=size::public512)

No key constructor.

• publicKey (const publicKey &ky)

Copy constructor.

publicKey (os::smart_ptr< number > _n, os::smart_ptr< number > _d, uint16_t algo, uint16

_t sz=size::public512, uint64_t tms=os::getTimestamp())

Construct with keys.

publicKey (uint16_t algo, std::string fileName, std::string password="", os::smart_ptr< stream ← PackageFrame > stream algo=NULL)

Construct with path to file and password.

• publicKey (uint16_t algo, std::string fileName, unsigned char *key, unsigned int keyLen, os
∴:smart_ptr< streamPackageFrame > stream_algo=NULL)

Construct with path to file and password.

• void writeLock ()

Locks the write lock.

• void writeUnlock ()

Unlocks the write lock.

• int compare (const publicKey &cmp) const

Compare this with another public key.

• void **pushOldKeys** (os::smart_ptr< **number** > **n**, os::smart_ptr< **number** > **d**, uint64_t ts)

Bind old keys to history.

Protected Attributes

- os::smart_ptr< number > n
- os::smart_ptr< number > d
- uint64_t _timestamp
- os::unsortedList< number > oldN
- os::unsortedList< number > oldD
- os::unsortedList< uint64_t > _timestamps

Private Attributes

- uint16_t _size
- uint16_t _algorithm
- uint16_t _history
- unsigned char * _key

Symmetric key for encryption.

• unsigned int _keyLen

Length of symmetric key.

- os::smart ptr< streamPackageFrame > fePackage
- std::string _fileName
- os::multiLock keyLock

30.38.1 Detailed Description

Base public-key class.

Class which defines the general structure of a public-private key pair. The class does not define the specifics of the algorithm.

30.38.2 Constructor & Destructor Documentation

crypto::publicKey::publicKey (uint16_t algo, uint16_t sz = size::public512) [protected]

No key constructor.

Parameters

algo	Algorithm ID
SZ	Size of key, size::public512 by default

crypto::publicKey::publicKey (const publicKey & ky) [protected]

Copy constructor.

ky	Public key to be copied
----	-------------------------

```
crypto::publicKey::publicKey ( os::smart_ptr< number > _n, os::smart_ptr< number > _d,
uint16_t algo, uint16_t sz = size::public512, uint64_t tms = os::getTimestamp() )
[protected]
```

Construct with keys.

Parameters

_n	Smart pointer to public key	
_d	Smart pointer to private key	
algo	Algorithm ID	
SZ	Size of key, size::public512 by default	
tms	Time-stamp of the current keys, now by default	

crypto::publicKey::publicKey (uint16_t algo, std::string fileName, std::string password = "",
os::smart_ptr< streamPackageFrame > stream_algo = NULL) [protected]

Construct with path to file and password.

Parameters

algo	Algorithm ID
fileName	Name of file to find keys
password	String representing symmetric key, "" by default
stream_algo	Symmetric key encryption algorithm, NULL by default

crypto::publicKey::publicKey (uint16_t algo, std::string fileName, unsigned char * key, unsigned
int keyLen, os::smart_ptr< streamPackageFrame > stream_algo = NULL) [protected]

Construct with path to file and password.

Parameters

algo	Algorithm ID	
fileName	Name of file to find keys	
key	Symmetric key	
keyLen	Length of symmetric key	
stream_algo	Symmetric key encryption algorithm, NULL by default	

virtual crypto::publicKey::~publicKey() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.38.3 Member Function Documentation

 $\label{lem:condition} \mbox{void crypto::publicKey::addKeyPair (os::smart_ptr< \mbox{number} > _n, os::smart_ptr< \mbox{number} > _d, \\ \mbox{uint64_t tms} = \mbox{os::getTimestamp())} \label{lem:condition}$

Add key pair.

Adds a key-pair and binds the current keys to the history;.

Parameters

_n	Smart pointer to public key
_d	Smart pointer to private key
tms	Time-stamp of the current keys, now by default

Returns

void

uint16_t crypto::publicKey::algorithm () const [inline]

Access algorithm ID.

Returns

crypto::publicKey::_algorithm (p. 554)

virtual std::string crypto::publicKey::algorithmName () const [inline], [virtual]

Access algorithm name.

Returns

 $\textbf{crypto::publicKey::staticAlgorithmName()} \ (p.\ 554)$

Reimplemented in crypto::publicRSA (p. 568).

int crypto::publicKey::compare (const publicKey & cmp) const [protected]

Compare this with another public key.

Compares based on the algorithm ID and size of the key. Note that this will return 0 if two public keys have the same algorithm ID and size even if they have different keys.

in	стр	Public key to compare against
----	-----	-------------------------------

0 if equal, 1 if greater than, -1 if less than

virtual os::smart_ptr<number> crypto::publicKey::copyConvert (const os::smart_ptr< number >
num) const [virtual]

Converts number to correct type.

Parameters

in	num	Number to be converted

Returns

Converted number

Reimplemented in crypto::publicRSA (p. 568).

 $\label{lem:const} \begin{tabular}{ll} virtual os::smart_ptr < number > crypto::publicKey::copyConvert (const uint32_t * arr, uint16_t len) const [virtual] \end{tabular}$

Converts array to correct number type.

Parameters

in	arr	Array to be converted
in	len	Length of array to be converted

Returns

Converted number

Reimplemented in crypto::publicRSA (p. 568).

 $\label{lem:construction} virtual \ os::smart_ptr < \textbf{number} > crypto::publicKey::copyConvert \ (\ const \ unsigned \ char * arr, unsigned \ int \ len \) \ const \ \ [virtual]$

Converts byte array to correct number type.

Parameters

in	arr	Byte array to be converted
in	len	Length of array to be converted

Returns

Converted number

Reimplemented in crypto::publicRSA (p. 569).

static os::smart_ptr<number> crypto::publicKey::copyConvert (const os::smart_ptr< number >
num, uint16_t size) [static]

Converts number to correct type, statically.

Parameters

in	num	Number to be converted

Returns

Converted number

static os::smart_ptr<number> crypto::publicKey::copyConvert (const uint32_t * arr, uint16_t len, uint16_t size) [static]

Converts array to correct number type, statically.

Parameters

in	arr	Array to be converted
in	len	Length of array to be converted

Returns

Converted number

static os::smart_ptr<**number**> crypto::publicKey::copyConvert (const unsigned char * arr, unsigned int len, uint16 t size) [static]

Converts byte array to correct number type, statically.

Parameters

ir	arr	Byte array to be converted
ir	len	Length of array to be converted

Returns

Converted number

 $\label{lem:code} virtual \ os::smart_ptr < \textbf{number} > crypto::publicKey::decode \ (\ os::smart_ptr < \textbf{number} > code \) \ const \ [virtual]$

Number decode.

Uses the private key to decode a set of data. Re-implemented by algorithm definitions which inherit from this class.

Parameters

in code	Data to be decoded
---------	--------------------

Returns

Decoded number

Reimplemented in crypto::publicRSA (p. 570).

 $\label{lem:code} virtual \ os::smart_ptr < \textbf{number} > crypto::publicKey::decode \ (\ os::smart_ptr < \textbf{number} > code, \\ unsigned \ int \ hist \) \ \ [virtual]$

Number decode, old key.

Uses the private key to decode a set of data. Re-implemented by algorithm definitions which inherit from this class.

Parameters

ir	ı	code	Data to be decoded
ir	ı	hist	Index of historical key

Returns

Decoded number

Reimplemented in crypto::publicRSA (p. 570).

void crypto::publicKey::decode (unsigned char * code, unsigned int codeLength) const

Data decode.

Uses the private key to decode a set of data.

Parameters

	[in/out]	code Data to be decoded
in	codeLength	Length of code to be decoded

Returns

void

void crypto::publicKey::decode (unsigned char * code, unsigned int codeLength, unsigned int hist)

Data decode, old key.

Uses the private key to decode a set of data.

Parameters

	[in/out]	code Data to be decoded
in	codeLength	Length of code to be decoded
in	hist	Index of historical key

Returns

void

static os::smart_ptr<number> crypto::publicKey::encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN, uint16_t size) [static]

Static number encode.

This function is expected to be re-implemented for each public-key type. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

in	code	Data to be encoded
in	publicN	Public key to be encoded against
in	size	Size of key used

Returns

Encoded number

static void crypto::publicKey::encode (unsigned char * code, unsigned int codeLength, os::smart_ptr< number > publicN, uint16_t size) [static]

Hybrid data encode against number.

This function is expected to be re-implemented for each public-key type. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	[in/out]	code Data to be encoded
in	codeLength	Length of code array
in	publicN	Public key to be encoded against, NULL by default

Returns

void

static void crypto::publicKey::encode (unsigned char * code, unsigned int codeLength, unsigned const char * publicN, unsigned int nLength, uint16_t size) [static]

Static data encode.

This function is expected to be re-implemented for each public-key type. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	[in/out]	code Data to be encoded
in	codeLength	Length of code array
in	publicN	Public key to be encoded against
in	nLength	Length of key array
in	size	Size of key used

Returns

void

virtual os::smart_ptr<number> crypto::publicKey::encode (os::smart_ptr< number > code,
os::smart_ptr< number > publicN = NULL) const [virtual]

Number encode.

Parameters

		Data to be encoded
in	publicN	Public key to be encoded against, NULL by default

Returns

Encoded number

Reimplemented in crypto::publicRSA (p. 572).

virtual void crypto::publicKey::encode (unsigned char * code, unsigned int codeLength,
os::smart_ptr< number > publicN = NULL) const [virtual]

Data encode against number.

Parameters

	[in/out]	code Data to be encoded
in	codeLength	Length of code array
in	publicN	Public key to be encoded against, NULL by default

Returns

void

Reimplemented in crypto::publicRSA (p. 572).

virtual void crypto::publicKey::encode (unsigned char * code, unsigned int codeLength, unsigned const char * publicN, unsigned int nLength) const [virtual]

Data encode.

Parameters

	[in/out]	code Data to be encoded
in	codeLength	Length of code array
in	publicN	Public key to be encoded against
in	nLength	Length of key array

Returns

void

Reimplemented in crypto::publicRSA (p. 572).

const std::string& crypto::publicKey::fileName () const [inline]

Return the save file path.

Returns

crypto::publicKey::_fileName (p. 555)

virtual void crypto::publicKey::generateNewKeys() [virtual]

Key generation function.

Generates new keys for the specific algorithm. This is re-implemented by every algorithm.

Returns

void

Reimplemented in crypto::publicRSA (p. 573).

virtual bool crypto::publicKey::generating() [inline], [virtual]

Tests if the keys are in the process of generating.

Returns

True if generating new keys

Reimplemented in crypto::publicRSA (p. 573).

os::smart_ptr<**number**> crypto::publicKey::getD () const

Private key access.

Returns

crypto::publicKey::d (p. 555)

os::smart_ptr<number> crypto::publicKey::getN () const

Public key access.

Returns

crypto::publicKey::n (p. 556)

 $os::smart_ptr < \textbf{number} > crypto::publicKey::getOldD (unsigned int history = \emptyset)$

Access old private keys.

Parameters

Returns

Private key at given index

Parameters

	history	Historical index, 0 by default
--	---------	--------------------------------

Returns

Public key at given index

uint64_t crypto::publicKey::getOldTimestamp (unsigned int history = 0)

Access old time-stamps.

Parameters

history | Historical index, 0 by default

```
Returns
     Time-stamp at given index
uint16_t crypto::publicKey::history ( ) const [inline]
Access history size
Returns
     crypto::publicKey::_history (p. 555)
void crypto::publicKey::loadFile ( )
Loads the structure from a file.
Returns
     void
bool crypto::publicKey::operator!= ( const publicKey & cmp ) const [inline]
Compares equality by size and algorithm.
Returns
     boolean '!='
bool crypto::publicKey::operator< ( const publicKey & cmp ) const [inline]</pre>
Compares equality by size and algorithm.
Returns
     boolean '<'
bool crypto::publicKey::operator<= ( const publicKey & cmp ) const [inline]</pre>
Compares equality by size and algorithm.
Returns
     boolean '<='
bool crypto::publicKey::operator== ( const publicKey & cmp ) const [inline]
Compares equality by size and algorithm.
Returns
```

boolean '=='

```
bool crypto::publicKey::operator> ( const publicKey & cmp ) const [inline]
```

Compares equality by size and algorithm.

Returns

boolean '>'

bool crypto::publicKey::operator>= (const publicKey & cmp) const [inline]

Compares equality by size and algorithm.

Returns

boolean '>='

 $\label{local_point} void\ crypto::publicKey::pushOldKeys\ (\ os::smart_ptr< \textbf{number} > n,\ os::smart_ptr< \textbf{number} > d, \\ uint64_t\ ts\)\ [protected]$

Bind old keys to history.

Parameters

in	n	Old public key
in	d	Old private key
in	ts	Old time-stamp

Returns

void

void crypto::publicKey::readLock() [inline]

Increments the read-lock.

Returns

void

void crypto::publicKey::readUnlock() [inline]

Decrements the read-lock.

Returns

void

void crypto::publicKey::save ()

Re-save the entire structure.

Returns

void

bool crypto::publicKey::searchKey (hash hsh, unsigned int & hist, bool & type)

Searches for key by hash.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	hsh	Hash of the key to be searched for
out	hist	History value the key was found
out	type	Type (public or private)

Returns

True if the key was found, else, false

bool crypto::publicKey::searchKey (os::smart_ptr< number > key, unsigned int & hist, bool & type)

Searches for key.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	num	Key to search for
out	hist	History value the key was found
out	type	Type (public or private)

Returns

True if the key was found, else, false

void crypto::publicKey::setEncryptionAlgorithm (os::smart_ptr< streamPackageFrame >
stream_algo)

Sets the symmetric encryption algorithm.

Parameters

in	stream_algo	Symmetric key algorithm
----	-------------	-------------------------

Returns

void

void crypto::publicKey::setFileName (std::string fileName)

Set the save file name.

Parameters

in fileName	Path of save file
-------------	-------------------

Returns

void

void crypto::publicKey::setHistory (uint16_t hist)

Sets history size.

Determines the number of historical keys to keep recorded. Note that keys are sorted by the order they were received into this structure, not their time-stamp.

Parameters

in	hist	History size to be bound

Returns

void

void crypto::publicKey::setPassword (unsigned char * key, unsigned int keyLen)

Binds a new symmetric key.

Re-binding of the symmetric key will result in a re-save event through the savable class.

Parameters

in	key	Symmetric key
in	keyLen	Length of symmetric key

Returns

void

void crypto::publicKey::setPassword (std::string password)

Binds a new symmetric key

Parameters

in	password	String representing the symmetric key
----	----------	---------------------------------------

```
Returns
     void
uint16_t crypto::publicKey::size ( ) const [inline]
Access key size.
Returns
     crypto::publicKey::_size (p. 555)
static uint16_t crypto::publicKey::staticAlgorithm( ) [inline], [static]
Access algorithm ID.
Returns
     crypto::algo::publicNULL
static std::string crypto::publicKey::staticAlgorithmName( ) [inline], [static]
Access algorithm name.
Returns
     "NULL Public Key"
uint64 t crypto::publicKey::timestamp( ) const [inline]
Time-stamp access.
Returns
     crypto::publicKey::_timestamp (p. 555)
void crypto::publicKey::writeLock( ) [inline], [protected]
Locks the write lock.
Returns
     void
void crypto::publicKey::writeUnlock( ) [inline], [protected]
Unlocks the write lock.
Returns
     void
30.38.4 Member Data Documentation
uint16_t crypto::publicKey::_algorithm [private]
@ brief ID of algorithm used
```

```
std::string crypto::publicKey::_fileName [private]
@ brief Name of file this key is saved to
uint16_t crypto::publicKey::_history [private]
@ brief Number of historical keys to keep
unsigned char* crypto::publicKey::_key [private]
Symmetric key for encryption.
unsigned int crypto::publicKey::_keyLen [private]
Length of symmetric key.
uint16_t crypto::publicKey::_size [private]
@ brief Size of the keys used
uint64 t crypto::publicKey:: timestamp [protected]
@ brief Date/time keys created
os::unsortedList<uint64 t> crypto::publicKey:: timestamps [protected]
@ brief List of time-stamps for old pairs
const unsigned int crypto::publicKey::CURRENT_INDEX = \sim0 [static]
Current key index Allows the current key to be accessed as historical index '-1'.
os::smart_ptr<number> crypto::publicKey::d [protected]
@ brief Private key
const bool crypto::publicKey::D_MARKER =false [static]
D (private) boolean marker.
os::smart_ptr<streamPackageFrame> crypto::publicKey::fePackage [private]
@ brief Algorithm used for encryption
os::multiLock crypto::publicKey::keyLock [private]
@ brief Mutex for replacing the keys
```

os::smart_ptr<number> crypto::publicKey::n [protected]

@ brief Public key

const bool crypto::publicKey::N_MARKER =true [static]

N (public) boolean marker.

os::unsortedList<number> crypto::publicKey::oldD [protected]

@ brief List of old private keys

os::unsortedList<number> crypto::publicKey::oldN [protected]

@ brief List of old public keys

const bool crypto::publicKey::PRIVATE =false [static]


Private boolean marker.

const bool crypto::publicKey::PUBLIC =true [static]

Public boolean marker.

30.39 crypto::publicKeyPackage< pkType > Class Template Reference

Inheritance diagram for crypto::publicKeyPackage< pkType >:



Public Member Functions

- publicKeyPackage (uint16_t publicSize=size::public512)
- virtual ~publicKeyPackage ()
- os::smart_ptr< publicKeyPackageFrame > getCopy () const
- os::smart ptr< number > convert (uint32 t *arr, uint16 t len) const
- os::smart_ptr< number > convert (const unsigned char *arr, unsigned int len) const
- os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN) const
- void encode (unsigned char *code, unsigned int codeLength, os::smart_ptr< number > publicN) const

- void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const
- os::smart_ptr< publicKey > generate () const
- os::smart_ptr< publicKey > bindKeys (os::smart_ptr< integer > _n, os::smart_ptr< integer > _d) const
- os::smart_ptr< publicKey > bindKeys (uint32_t *_n, uint32_t *_d) const
- os::smart_ptr< publicKey > openFile (std::string fileName, std::string password) const
- os::smart_ptr< publicKey > openFile (std::string fileName, unsigned char *key, unsigned int keyLen) const
- std::string algorithmName () const
- uint16_t algorithm () const

Additional Inherited Members

30.39.1 Constructor & Destructor Documentation

template<class pkType > crypto::publicKeyPackage< pkType >::publicKeyPackage (uint16_t publicSize = size::public512) [inline]

template < class pkType > virtual crypto::publicKeyPackage < pkType >::~publicKeyPackage () [inline], [virtual]

30.39.2 Member Function Documentation

template < class pkType > uint16_t crypto::publicKeyPackage < pkType >::algorithm () const
[inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 559).

template<class pkType > std::string crypto::publicKeyPackage< pkType >::algorithmName () const [inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template < class pkType > os::smart_ptr < publicKey > crypto::publicKeyPackage < pkType
>::bindKeys (os::smart_ptr < integer > _n, os::smart_ptr < integer > _d) const [inline],
[virtual]

Reimplemented from **crypto::publicKeyPackageFrame** (p. 560).

template < class pkType > os::smart_ptr < publicKey > crypto::publicKeyPackage < pkType > ::bindKeys (uint32_t * _n, uint32_t * _d) const [inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template<class pkType > os::smart_ptr<**number**> **crypto::publicKeyPackage**< pkType >::convert (uint32_t * arr, uint16_t len) const [inline], [virtual]

Reimplemented from **crypto::publicKeyPackageFrame** (p. 560).

template < class pkType > os::smart_ptr < number > crypto::publicKeyPackage < pkType >::convert (const unsigned char * arr, unsigned int len) const [inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template<class pkType > os::smart_ptr<number> crypto::publicKeyPackage< pkType >::encode
(os::smart_ptr< number > code, os::smart_ptr< number > publicN) const [inline],
[virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template < class pkType > void crypto::publicKeyPackage < pkType > ::encode (unsigned char * code, unsigned int codeLength, os::smart_ptr < number > publicN) const [inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template < class pkType > void crypto::publicKeyPackage < pkType >::encode (unsigned char * code, unsigned int codeLength, unsigned const char * publicN, unsigned int nLength) const [inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template<class pkType > os::smart_ptr<publicKey> crypto::publicKeyPackage< pkType
>::generate () const [inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template<class pkType > os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyPackage<
pkType >::getCopy () const [inline], [virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 560).

template < class pkType > os::smart_ptr < publicKey > crypto::publicKeyPackage < pkType >::openFile (std::string fileName, std::string password) const [inline], [virtual]


Reimplemented from crypto::publicKeyPackageFrame (p. 561).

template<class pkType > os::smart_ptr<publicKey> crypto::publicKeyPackage< pkType
>::openFile (std::string fileName, unsigned char * key, unsigned int keyLen) const [inline],
[virtual]

Reimplemented from crypto::publicKeyPackageFrame (p. 561).

30.40 crypto::publicKeyPackageFrame Class Reference

Inheritance diagram for crypto::publicKeyPackageFrame:



Public Member Functions

- **publicKeyPackageFrame** (uint16_t publicSize=size::public512)
- virtual ~publicKeyPackageFrame ()
- virtual os::smart ptr< publicKeyPackageFrame > getCopy () const
- virtual os::smart ptr< number > convert (uint32 t *arr, uint16 t len) const
- virtual os::smart ptr< number > convert (const unsigned char *arr, unsigned int len) const
- virtual os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN) const
- virtual void **encode** (unsigned char *code, unsigned int codeLength, os::smart_ptr< **number** > publicN) const
- virtual void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const
- virtual os::smart ptr< publicKey > generate () const
- virtual os::smart_ptr< publicKey > bindKeys (os::smart_ptr< integer > _n, os::smart_ptr< integer > _d) const
- virtual os::smart ptr< publicKey > bindKeys (uint32 t * n, uint32 t * d) const
- virtual os::smart ptr< publicKey > openFile (std::string fileName, std::string password) const
- virtual os::smart_ptr< publicKey > openFile (std::string fileName, unsigned char *key, unsigned int keyLen) const
- virtual std::string algorithmName () const
- virtual uint16_t algorithm () const
- void setKeySize (uint16_t publicSize)
- uint16_t keySize () const

Protected Attributes

• uint16_t _publicSize

30.40.1 Constructor & Destructor Documentation

```
crypto::publicKeyPackageFrame::publicKeyPackageFrame ( uint16_t publicSize =
size::public512 ) [inline]
```

virtual crypto::publicKeyPackageFrame::~publicKeyPackageFrame() [inline], [virtual]

30.40.2 Member Function Documentation

virtual uint16_t crypto::publicKeyPackageFrame::algorithm () const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 557).

virtual std::string crypto::publicKeyPackageFrame::algorithmName () const [inline],
[virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 557).

virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::bindKeys (os::smart_ptr<
integer > _n, os::smart_ptr< integer > _d) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage< pkType > (p. 557).

virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::bindKeys (uint32_t * _n, uint32_t * _d) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 557).

virtual os::smart_ptr<number> crypto::publicKeyPackageFrame::convert (uint32_t * arr, uint16_t len) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 557).

virtual os::smart_ptr<number> crypto::publicKeyPackageFrame::convert (const unsigned char *
arr, unsigned int len) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 558).

virtual os::smart_ptr<number> crypto::publicKeyPackageFrame::encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 558).

 $\label{lem:code} virtual\ void\ crypto::publicKeyPackageFrame::encode\ (\ unsigned\ char*code,\ unsigned\ int\ codeLength,\ os::smart_ptr<\\ \textbf{number}>publicN\)\ const\ \ [inline],\ [virtual]$

Reimplemented in **crypto::publicKeyPackage**< **pkType** > (p. 558).

virtual void crypto::publicKeyPackageFrame::encode (unsigned char * code, unsigned int codeLength, unsigned const char * publicN, unsigned int nLength) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 558).

virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::generate () const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 558).

virtual os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyPackageFrame::getCopy ()
const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage < pkType > (p. 558).

uint16_t crypto::publicKeyPackageFrame::keySize () const [inline]

virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::openFile (std::string fileName, std::string password) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage< pkType > (p. 558).

virtual os::smart_ptr<**publicKey**> crypto::publicKeyPackageFrame::openFile (std::string fileName, unsigned char * key, unsigned int keyLen) const [inline], [virtual]

Reimplemented in crypto::publicKeyPackage< pkType > (p. 558).

void crypto::publicKeyPackageFrame::setKeySize (uint16_t publicSize) [inline]


30.40.3 Member Data Documentation

uint16 t crypto::publicKeyPackageFrame:: publicSize [protected]

30.41 crypto::publicKeySizeWrong Class Reference

Public-key size error.

Inheritance diagram for crypto::publicKeySizeWrong:

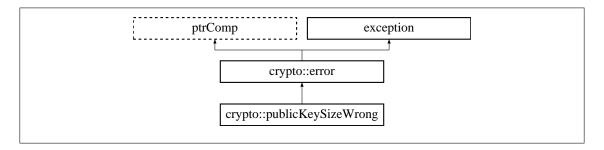

Public Member Functions

• virtual ~publicKeySizeWrong () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Public Key Size Wrong".

• std::string errorDescription () const

Long error descriptor Returns "Attempted to use a code or n of improper size".

30.41.1 Detailed Description

Public-key size error.

Thrown when a public key or public key interaction detects a size mis-match or illegal size.

30.41.2 Constructor & Destructor Documentation

virtual crypto::publicKeySizeWrong::~publicKeySizeWrong() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.41.3 Member Function Documentation

std::string crypto::publicKeySizeWrong::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Attempted to use a code or n of improper size".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::publicKeySizeWrong::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Public Key Size Wrong".

Returns

Error title std::string

Reimplemented from crypto::error (p. 421).

30.42 crypto::publicKeyTypeBank Class Reference

Public Member Functions

- virtual ~publicKeyTypeBank ()
- void setDefaultPackage (os::smart_ptr< publicKeyPackageFrame > package)
- const os::smart_ptr< publicKeyPackageFrame > defaultPackage () const
- void **pushPackage** (os::smart_ptr< **publicKeyPackageFrame** > package)
- const os::smart_ptr< publicKeyPackageFrame > findPublicKey (uint16_t pkID) const
- const os::smart_ptr< publicKeyPackageFrame > findPublicKey (const std::string &pkName) const

Static Public Member Functions

• static os::smart_ptr< publicKeyTypeBank > singleton ()

Private Member Functions

• publicKeyTypeBank ()

Private Attributes

- os::smart_ptr< publicKeyPackageFrame > _defaultPackage
- std::vector< os::smart_ptr< publicKeyPackageFrame > > packageVector

30.42.1 Constructor & Destructor Documentation

crypto::publicKeyTypeBank::publicKeyTypeBank() [private]
virtual crypto::publicKeyTypeBank(:~publicKeyTypeBank() [inline], [virtual]

30.42.2 Member Function Documentation

const os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyTypeBank::defaultPackage ()
const [inline]

const os::smart_ptr<**publicKeyPackageFrame**> crypto::publicKeyTypeBank::findPublicKey (uint16 t pkID) const

const os::smart_ptr<**publicKeyPackageFrame**> crypto::publicKeyTypeBank::findPublicKey (const std::string & pkName) const

void crypto::publicKeyTypeBank::pushPackage (os::smart_ptr< publicKeyPackageFrame > package)

 $void\ crypto::publicKeyTypeBank::setDefaultPackage\ (\ os::smart_ptr< \textbf{publicKeyPackageFrame} > package\)$

static os::smart ptr<publicKeyTypeBank> crypto::publicKeyTypeBank::singleton() [static]


30.42.3 Member Data Documentation

 $os::smart_ptr < \textbf{publicKeyPackageFrame} > crypto::publicKeyTypeBank::_defaultPackage \\ [private]$

30.43 crypto::publicRSA Class Reference

RSA public-key encryption.

Inheritance diagram for crypto::publicRSA:

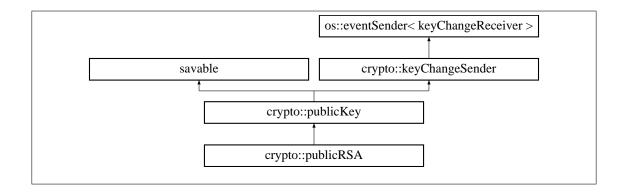

Public Member Functions

• **publicRSA** (uint16_t sz=size::public256)

Default RSA constructor.

• publicRSA (publicRSA &ky)

Copy Constructor.

• publicRSA (os::smart_ptr< integer > _n, os::smart_ptr< integer > _d, uint16_t sz=size → ::public512, uint64_t tms=os::getTimestamp())

Construct with keys.

publicRSA (uint32_t *_n, uint32_t *_d, uint16_t sz=size::public512, uint64_t tms=os::get
 — Timestamp())

Construct with key arrays.

publicRSA (std::string fileName, std::string password="", os::smart_ptr< streamPackage←
 Frame > stream_algo=NULL)

Construct with path to file and password.

publicRSA (std::string fileName, unsigned char *key, unsigned int keyLen, os::smart_ptr<
 streamPackageFrame > stream algo=NULL)

Construct with path to file and password.

virtual ~publicRSA ()

Virtual destructor.

- os::smart_ptr< number > copyConvert (const os::smart_ptr< number > num) const Converts number to integer.
- os::smart_ptr< number > copyConvert (const uint32_t *arr, uint16_t len) const Converts array to integer.
- os::smart_ptr< number > copyConvert (const unsigned char *arr, unsigned int len) const
 Converts byte array to integer.
- std::string algorithmName () const

Access algorithm name.

• bool generating ()

Tests if the keys are in the process of generating.

void generateNewKeys ()

Key generation function.

os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN=NULL) const

Number encode.

 void encode (unsigned char *code, unsigned int codeLength, os::smart_ptr< number > publicN=N← ULL) const

Hybrid data encode against number.

 void encode (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const

Data encode against number.

 os::smart_ptr< number > decode (os::smart_ptr< number > code) const Number decode.

os::smart_ptr< number > decode (os::smart_ptr< number > code, unsigned int hist)
 Old number decode.

Static Public Member Functions

static os::smart_ptr< number > copyConvert (const os::smart_ptr< number > num, uint16_t size)

Converts number to integer, statically.

- static os::smart_ptr< number > copyConvert (const uint32_t *arr, uint16_t len, uint16_t size)

 Converts array to integer, statically.
- static os::smart_ptr< number > copyConvert (const unsigned char *arr, unsigned int len, uint16_t size)

Converts byte array to integer, statically.

static uint16_t staticAlgorithm ()

Access algorithm ID.

• static std::string staticAlgorithmName ()

Access algorithm name.

static os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN, uint16_t size)

Static number encode.

static void encode (unsigned char *code, unsigned int codeLength, os::smart_ptr< number > publicN, uint16_t size)

Static data encode.

• static void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength, uint16_t **size**)

Static data encode.

Private Member Functions

• void initE ()

Subroutine initializing crypto::publicRSA::e (p. 574).

Private Attributes

• integer e

Used in intermediate calculation.

• os::smart_ptr< RSAKeyGenerator > keyGen

Key generation class.

Friends

• class RSAKeyGenerator

Friendship with key generation.

Additional Inherited Members

30.43.1 Detailed Description

RSA public-key encryption.

This class defines an RSA algorithm for public-key cryptography.

30.43.2 Constructor & Destructor Documentation

```
crypto::publicRSA::publicRSA ( uint16_t sz = size::public256 )
```

Default RSA constructor.

Initializes and generates keys for a new pair of RSA keys. This serves as the default constructor for RSA keys.

Parameters

in	SZ	Size of keys, crypto::size::public256 by default

crypto::publicRSA::publicRSA (publicRSA & ky)

Copy Constructor.

Copies the keys in one RSA pair into another. This copying includes all historical records as well.

Parameters

in	ky	Key pair to be copied

Construct with keys.

Parameters

_n	_n Smart pointer to public key _d Smart pointer to private key sz Size of key, size::public512 by default tms Time-stamp of the current keys, now by default	
_d		
SZ		
tms		

 $\label{eq:crypto::publicRSA::publicRSA::publicRSA::publicRSA::publicS12, uint64_t tms = os::getTimestamp())$

Construct with key arrays.

Parameters

_n	Array of public key	
_d	Array of private key	
SZ	Size of key, size::public512 by default	
tms	Time-stamp of the current keys, now by default	

 $\label{linear_crypto:publicRSA:pub$

Construct with path to file and password.

Parameters

fileName	Name of file to find keys
password	String representing symmetric key, "" by default
stream_algo	Symmetric key encryption algorithm, NULL by default

 $\label{eq:crypto::publicRSA::pu$

Construct with path to file and password.

Parameters

fileName	Name of file to find keys
key	Symmetric key
keyLen	Length of symmetric key
stream_algo	Symmetric key encryption algorithm, NULL by default

virtual crypto::publicRSA::~publicRSA() [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.43.3 Member Function Documentation

std::string crypto::publicRSA::algorithmName() const [inline], [virtual]

Access algorithm name.

Returns

crypto::publicRSA::staticAlgorithmName() (p. 573)

Reimplemented from crypto::publicKey (p. 542).

os::smart_ptr<number> crypto::publicRSA::copyConvert (const os::smart_ptr< number > num) const [virtual]

Converts number to integer.

Parameters

in	num	Number to be converted
----	-----	------------------------

Returns

Converted number

Reimplemented from crypto::publicKey (p. 543).

os::smart_ptr<number> crypto::publicRSA::copyConvert (const uint32_t * arr, uint16_t len) const [virtual]

Converts array to integer.

Parameters

in	arr	Array to be converted
in	len	Length of array to be converted

Returns

Converted number

Reimplemented from crypto::publicKey (p. 543).

os::smart_ptr<number> crypto::publicRSA::copyConvert (const unsigned char * arr, unsigned int len) const [virtual]

Converts byte array to integer.

Parameters

in	arr	Byte array to be converted
in	len	Length of array to be converted

Returns

Converted number

Reimplemented from crypto::publicKey (p. 543).

static os::smart_ptr<number> crypto::publicRSA::copyConvert (const os::smart_ptr< number > num, uint16_t size) [static]

Converts number to integer, statically.

Parameters

in	num	Number to be converted
----	-----	------------------------

Returns

Converted number

static os::smart_ptr<number> crypto::publicRSA::copyConvert (const uint32_t * arr, uint16_t len, uint16_t size) [static]

Converts array to integer, statically.

Parameters

i	n	arr	Array to be converted
i	n	len	Length of array to be converted

Returns

Converted number

 $static\ os::smart_ptr < \textbf{number} > crypto::publicRSA::copyConvert\ (\ const \ unsigned\ char\ * \ arr, \ unsigned\ int\ len,\ uint16_t\ size\)\ [static]$

Converts byte array to integer, statically.

Parameters

in	arr	Byte array to be converted
in	len	Length of array to be converted

Returns

Converted number

 $os::smart_ptr < \textbf{number} > crypto::publicRSA::decode (os::smart_ptr < \textbf{number} > code) const [virtual] \\$

Number decode.

Uses the private key to decode a set of data based on the RSA algorithm.

Parameters

Returns

Decoded number

Reimplemented from crypto::publicKey (p. 544).

 $os::smart_ptr < \textbf{number} > crypto::publicRSA::decode (os::smart_ptr < \textbf{number} > code, unsigned int hist) [virtual]$

Old number decode.

Uses old private keys to decode a set of data based on the RSA algorithm.

Parameters

ir	ì	code	Data to be decoded
ir	ı	hist	Index of historical key

Returns

Decoded number

Reimplemented from crypto::publicKey (p. 545).

static os::smart_ptr<number> crypto::publicRSA::encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN, uint16_t size) [static]

Static number encode.

Encodes based on the RSA algorithm. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

in	code	Data to be encoded
in	publicN	Public key to be encoded against
in	size	Size of key used

Returns

Encoded number

static void crypto::publicRSA::encode (unsigned char * code, unsigned int codeLength, os::smart_ptr< number > publicN, uint16_t size) [static]

Static data encode.

Encodes based on the RSA algorithm. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	[in/out]	code Data to be encoded
in	codeLength	Length of code array
in	publicN	Public key to be encoded against
in	size	Size of key used

Returns

void

static void crypto::publicRSA::encode (unsigned char * code, unsigned int codeLength, unsigned const char * publicN, unsigned int nLength, uint16_t size) [static]

Static data encode.

Encodes based on the RSA algorithm. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	[in/out]	code Data to be encoded
in	codeLength	Length of code array
in	publicN	Public key to be encoded against
in	nLength	Length of key array
in	size	Size of key used

Returns

void

os::smart_ptr<number> crypto::publicRSA::encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN = NULL) const [virtual]

Number encode.

Parameters

in	code	Data to be encoded
in	publicN	Public key to be encoded against, NULL by default

Returns

Encoded number

Reimplemented from crypto::publicKey (p. 547).

 $\label{local_void_crypto::publicRSA::encode} \begin{tabular}{ll} void crypto::publicRSA::encode (unsigned char * code, unsigned int codeLength, os::smart_ptr< number > publicN = NULL) const [virtual] \end{tabular}$

Hybrid data encode against number.

Parameters

	[in/out]	code Data to be encoded
in	codeLength	Length of code array
in	publicN	Public key to be encoded against, NULL by default

Returns

void

Reimplemented from crypto::publicKey (p. 547).

void crypto::publicRSA::encode (unsigned char * code, unsigned int codeLength, unsigned const char * publicN, unsigned int nLength) const [virtual]

Data encode against number.

Parameters

	[in/out] code Data to be encoded	
in	codeLength	Length of code array
in	publicN	Public key to be encoded against, NULL by default

```
Returns
     void
   Reimplemented from crypto::publicKey (p. 548).
void crypto::publicRSA::generateNewKeys( ) [virtual]
Key generation function.
   Generates new keys for the specific algorithm. This is re-implemented by every algorithm.
Returns
     void
   Reimplemented from crypto::publicKey (p. 548).
bool crypto::publicRSA::generating( ) [virtual]
Tests if the keys are in the process of generating.
Returns
     True if generating new keys
   Reimplemented from crypto::publicKey (p. 548).
void crypto::publicRSA::initE( ) [private]
Subroutine initializing crypto::publicRSA::e (p. 574).
static uint16 t crypto::publicRSA::staticAlgorithm( ) [inline], [static]
Access algorithm ID.
Returns
     crypto::algo::publicRSA
static std::string crypto::publicRSA::staticAlgorithmName( ) [inline], [static]
Access algorithm name.
Returns
     "RSA"
30.43.4 Friends And Related Function Documentation
```

friend class RSAKeyGenerator [friend]

Friendship with key generation.

The crypto::RSAKeyGenerator (p. 580) must be able to access the private members of the RSA public key class to bind newly generated keys.

30.43.5 Member Data Documentation

integer crypto::publicRSA::e [private]

Used in intermediate calculation.

os::smart_ptr<**RSAKeyGenerator**> crypto::publicRSA::keyGen [private]


Key generation class.

This pointer will be NULL unless a key is currently being generated/

30.44 crypto::rc4Hash Class Reference

RC-4 hash class.

Inheritance diagram for crypto::rc4Hash:



Public Member Functions

• rc4Hash ()

Default RC-4 hash constructor.

• rc4Hash (const unsigned char *data, uint16_t size)

Raw data copy.

• rc4Hash (const rc4Hash &cpy)

RC-4 copy constructor.

• void preformHash (const unsigned char *data, uint32 t dLen)

Binds a data-set.

• std::string algorithmName () const

Algorithm name string access.

Static Public Member Functions

• static std::string staticAlgorithmName ()

Algorithm name string access.

• static uint16_t staticAlgorithm ()

Algorithm ID number access.

• static **rc4Hash hash64Bit** (const unsigned char *data, uint32_t length)

Static 64 bit hash.

• static rc4Hash hash128Bit (const unsigned char *data, uint32_t length)

Static 128 bit hash.

• static rc4Hash hash256Bit (const unsigned char *data, uint32_t length)

Static 256 bit hash.

• static rc4Hash hash512Bit (const unsigned char *data, uint32_t length)

Static 512 bit hash.

Private Member Functions

• rc4Hash (const unsigned char *data, uint32_t length, uint16_t size)

RC-4 hash constructor.

Additional Inherited Members

30.44.1 Detailed Description

RC-4 hash class.

This class defines an RC-4 based hash. Note that this hash is likely cryptographically secure, but not proven cryptographically secure.

30.44.2 Constructor & Destructor Documentation

crypto::rc4Hash::rc4Hash (const unsigned char * data, uint32_t length, uint16_t size)
[private]

RC-4 hash constructor.

Constructs a hash with the data to be hashed, the length of the array and the size of the hash to be constructed.

Parameters

in	data	Data array
in	length	Length of data array
in	size	Size of hash

crypto::rc4Hash::rc4Hash() [inline]

Default RC-4 hash constructor.

Constructs an empty RC-4 hash class.

crypto::rc4Hash::rc4Hash (const unsigned char * data, uint16_t size)

Raw data copy.

Initializes the RC-4 hash with a data array. This data array is not hashed but assumed to represent hashed data.

Parameters

in	data	Hashed data array
in	size	Size of hash array

crypto::rc4Hash::rc4Hash (const rc4Hash & cpy) [inline]

RC-4 copy constructor.

Constructs an RC-4 hash with another RC-4 hash.

Parameters

in <i>cpy</i>	Hash to be copied
---------------	-------------------

30.44.3 Member Function Documentation

std::string crypto::rc4Hash::algorithmName() const [inline], [virtual]

Algorithm name string access.

Returns the name of the current algorithm string. This function requires an instantiated RC-4 hash.

Returns

"RC-4"

Reimplemented from crypto::hash (p. 455).

static **rc4Hash** crypto::rc4Hash::hash128Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 128 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 128 bit RC-4 hash.

Parameters

data	Data array to be hashed
length	Length of data array to be hashed

Returns

New xorHash (p. 605)

static ${\bf rc4Hash}$ crypto::rc4Hash::hash256Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 256 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 256 bit RC-4 hash.

Parameters

data	Data array to be hashed
length	Length of data array to be hashed

Returns

New xorHash (p. 605)

static **rc4Hash** crypto::rc4Hash::hash512Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 512 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 512 bit RC-4 hash.

Parameters

data	Data array to be hashed
length	Length of data array to be hashed

Returns

New xorHash (p. 605)

static **rc4Hash** crypto::rc4Hash::hash64Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 64 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 64 bit RC-4 hash.

Parameters

data	Data array to be hashed	
length	Length of data array to be hashed	

Returns

New xorHash (p. 605)

void crypto::rc4Hash::preformHash (const unsigned char * data, uint32_t dLen)

Binds a data-set

Preforms the hash algorithm on the set of data provided and binds the result to this hash.

Parameters

iı	ı	data	Data array to be hashed
iı	ı	dLen	Length of data array

static uint16_t crypto::rc4Hash::staticAlgorithm() [inline], [static]

Algorithm ID number access.

Returns the ID of the current algorithm. This function is static and can be accessed without instantiating the class.

Returns

crypto::algo::hashRC4

static std::string crypto::rc4Hash::staticAlgorithmName() [inline], [static]

Algorithm name string access.


Returns the name of the current algorithm string. This function is static and can be accessed without instantiating the class.

Returns

"RC-4"

30.45 crypto::RCFour Class Reference

Inheritance diagram for crypto::RCFour:



Public Member Functions

- RCFour (uint8_t *arr, int len)
- virtual ~RCFour ()
- uint8_t getNext ()
- uint16_t algorithm () const
- const std::string algorithmName () const

Static Public Member Functions

- static uint16_t staticAlgorithm ()
- static std::string staticAlgorithmName ()

Private Attributes

- uint8_t * SArray
- int i
- int **i**
- int u

30.45.1 Constructor & Destructor Documentation

```
crypto::RCFour::RCFour( uint8_t * arr, int len )
virtual crypto::RCFour::~RCFour( ) [virtual]
```

30.45.2 Member Function Documentation

```
uint16_t crypto::RCFour::algorithm( ) const [inline], [virtual]
```

Reimplemented from crypto::streamCipher (p. 582).

```
const std::string crypto::RCFour::algorithmName( ) const [inline], [virtual]
```

Reimplemented from crypto::streamCipher (p. 583).

```
uint8_t crypto::RCFour::getNext( ) [virtual]
```

Reimplemented from crypto::streamCipher (p. 583).

```
static uint16_t crypto::RCFour::staticAlgorithm( ) [inline], [static]
static std::string crypto::RCFour::staticAlgorithmName( ) [inline], [static]
```

30.45.3 Member Data Documentation

```
int crypto::RCFour::i [private]
int crypto::RCFour::j [private]
```

uint8_t* crypto::RCFour::SArray [private]

int crypto::RCFour::u [private]

30.46 crypto::RSAKeyGenerator Class Reference

Helper key generation class.

Public Member Functions

• RSAKeyGenerator (publicRSA &m)

Constructs a generator with an RSA key.

• virtual ~RSAKeyGenerator ()

Virtual destructor.

• integer generatePrime ()

Generates a prime number.

• void pushValues ()

Bind generated keys to master.

Public Attributes

• integer p

Intermediate prime.

• integer q

Intermediate prime.

Private Attributes

• publicRSA * master

Pointer to keys.

30.46.1 Detailed Description

Helper key generation class.

This class helps to generate RSA keys. Once keys are generated, this class is destroyed.

30.46.2 Constructor & Destructor Documentation

crypto::RSAKeyGenerator::RSAKeyGenerator (publicRSA & m)

Constructs a generator with an RSA key.

This class is meaningless without a a reference to an RSA key to bind newly created keys to.

```
virtual crypto::RSAKeyGenerator::~RSAKeyGenerator( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.46.3 Member Function Documentation

integer crypto::RSAKeyGenerator::generatePrime ()

Generates a prime number.

Returns

Prime integer

void crypto::RSAKeyGenerator::pushValues ()

Bind generated keys to master.

Returns

void

30.46.4 Member Data Documentation

publicRSA* crypto::RSAKeyGenerator::master [private]

Pointer to keys.

Points to the RSA keys this generator will be placing its generated keys into.

integer crypto::RSAKeyGenerator::p


Intermediate prime.

integer crypto::RSAKeyGenerator::q

Intermediate prime.

30.47 crypto::streamCipher Class Reference

Inheritance diagram for crypto::streamCipher:

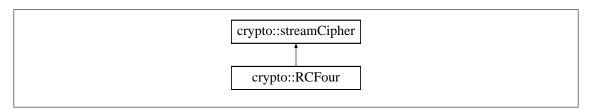

Public Member Functions

- virtual ~streamCipher ()
- virtual uint8_t getNext ()
- virtual uint16 t algorithm () const
- virtual const std::string algorithmName () const

Static Public Member Functions

- static uint16_t staticAlgorithm ()
- static std::string staticAlgorithmName ()

30.47.1 Constructor & Destructor Documentation

virtual crypto::streamCipher::~streamCipher() [inline], [virtual]

30.47.2 Member Function Documentation

virtual uint16_t crypto::streamCipher::algorithm () const [inline], [virtual]

Reimplemented in crypto::RCFour (p. 580).

```
virtual const std::string crypto::streamCipher::algorithmName ( ) const [inline], [virtual] Reimplemented in crypto::RCFour (p. 580).

virtual uint8_t crypto::streamCipher::getNext ( ) [inline], [virtual]

Reimplemented in crypto::RCFour (p. 580).

static uint16_t crypto::streamCipher::staticAlgorithm ( ) [inline], [static]

static std::string crypto::streamCipher::staticAlgorithmName ( ) [inline], [static]
```

30.48 crypto::streamDecrypter Class Reference

Public Member Functions

- streamDecrypter (os::smart_ptr< streamCipher > c)
- virtual ~streamDecrypter ()
- uint8 t * recieveData (uint8 t *array, unsigned int len, uint16 t flag)

Private Attributes

- os::smart ptr< streamCipher > cipher
- streamPacket ** packetArray
- unsigned int last_value
- unsigned int mid_value

30.48.1 Constructor & Destructor Documentation

```
crypto::streamDecrypter::streamDecrypter(os::smart_ptr< streamCipher > c)
virtual crypto::streamDecrypter::~streamDecrypter() [virtual]
30.48.2 Member Function Documentation
```

 $uint8_t*\ crypto::streamDecrypter::recieveData\ (\ uint8_t*\ array,\ unsigned\ int\ len,\ uint16_t\ flag\)$

30.48.3 Member Data Documentation

```
os::smart_ptr<streamCipher> crypto::streamDecrypter::cipher [private] unsigned int crypto::streamDecrypter::last_value [private] unsigned int crypto::streamDecrypter::mid_value [private] streamPacket** crypto::streamDecrypter::packetArray [private]
```

30.49 crypto::streamEncrypter Class Reference

Public Member Functions

• streamEncrypter (os::smart ptr< streamCipher > c)

- virtual ~streamEncrypter ()
- uint8_t * sendData (uint8_t *array, unsigned int len, uint16_t &flag)

Private Attributes

- os::smart_ptr< streamCipher > cipher
- unsigned int last_loc
- uint16_t * ID_check

30.49.1 Constructor & Destructor Documentation

```
\label{lem:crypto::streamEncrypter::streamEncrypter(os::smart\_ptr< \textbf{streamCipher} > \texttt{c})
```

 $virtual\ crypto::stream Encrypter:: \sim stream Encrypter\ (\quad) \quad [virtual]$

30.49.2 Member Function Documentation

uint8_t* crypto::streamEncrypter::sendData (uint8_t * array, unsigned int len, uint16_t & flag)

30.49.3 Member Data Documentation


```
os::smart\_ptr < \textbf{streamCipher} > crypto::streamEncrypter::cipher \quad [\texttt{private}]
```

uint16_t* crypto::streamEncrypter::ID_check [private]

unsigned int crypto::streamEncrypter::last_loc [private]

30.50 crypto::streamPackage< streamType, hashType > Class Template Reference

Inheritance diagram for crypto::streamPackage< streamType, hashType >:

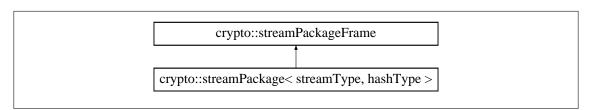

Public Member Functions

- streamPackage (uint16_t hashSize=size::hash256)
- virtual ~streamPackage ()
- os::smart_ptr< streamPackageFrame > getCopy () const
- hash hashEmpty () const
- hash hashData (unsigned char *data, uint32_t len) const
- hash hashCopy (unsigned char *data) const
- os::smart_ptr< streamCipher > buildStream (unsigned char *data, uint32_t len) const
- std::string streamAlgorithmName () const

- uint16 t streamAlgorithm () const
- std::string hashAlgorithmName () const
- uint16 t hashAlgorithm () const

Additional Inherited Members

30.50.1 Constructor & Destructor Documentation

template<class streamType , class hashType > crypto::streamPackage< streamType, hashType
>::streamPackage (uint16 t hashSize = size::hash256) [inline]

template < class streamType , class hashType > virtual crypto::streamPackage < streamType, hashType >::~streamPackage () [inline], [virtual]

30.50.2 Member Function Documentation

template<class streamType , class hashType > os::smart_ptr<streamCipher>
crypto::streamPackage< streamType, hashType >::buildStream (unsigned char * data, uint32_t
len) const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 587).

template<class streamType , class hashType > os::smart_ptr<streamPackageFrame>
crypto::streamPackage< streamType, hashType >::getCopy () const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 587).

template < class streamType , class hashType > uint16_t crypto::streamPackage < streamType, hashType >::hashAlgorithm () const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 587).

template < class stream Type, class hash Type > std::string crypto::stream Package < stream Type, hash Type >::hash Algorithm Name () const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 587).

template<class streamType , class hashType > hash crypto::streamPackage< streamType, hashType >::hashCopy (unsigned char * data) const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 587).

template < class stream Type, class hash Type > hash crypto::stream Package < stream Type, hash Type >::hash Data (unsigned char * data, uint 32 t len) const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 587).

template < class streamType , class hashType > hash crypto::streamPackage < streamType, hashType >::hashEmpty () const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 587).

template<class streamType , class hashType > uint16_t crypto::streamPackage< streamType, hashType >::streamAlgorithm () const [inline], [virtual]


Reimplemented from crypto::streamPackageFrame (p. 587).

template < class streamType, class hashType > std::string crypto::streamPackage < streamType, hashType >::streamAlgorithmName () const [inline], [virtual]

Reimplemented from crypto::streamPackageFrame (p. 588).

30.51 crypto::streamPackageFrame Class Reference

Inheritance diagram for crypto::streamPackageFrame:



Public Member Functions

- streamPackageFrame (uint16_t hashSize=size::hash256)
- virtual ~streamPackageFrame ()
- virtual os::smart_ptr< streamPackageFrame > getCopy () const
- virtual hash hashEmpty () const
- virtual hash hashData (unsigned char *data, uint32 t len) const
- virtual **hash hashCopy** (unsigned char *data) const
- virtual os::smart_ptr< streamCipher > buildStream (unsigned char *data, uint32_t len) const
- virtual std::string streamAlgorithmName () const
- virtual uint16_t streamAlgorithm () const
- virtual std::string hashAlgorithmName () const
- virtual uint16_t hashAlgorithm () const
- void **setHashSize** (uint16_t **hashSize**)
- uint16_t hashSize () const

Protected Attributes

• uint16_t _hashSize

```
30.51.1 Constructor & Destructor Documentation
crypto::streamPackageFrame::streamPackageFrame( uint16 t hashSize = size::hash256 )
[inline]
virtual crypto::streamPackageFrame::~streamPackageFrame( ) [inline], [virtual]
30.51.2 Member Function Documentation
virtual os::smart_ptr<streamCipher> crypto::streamPackageFrame::buildStream(_unsigned char *
data, uint32_t len ) const [inline], [virtual]
Reimplemented in crypto::streamPackage< streamType, hashType > (p. 585).
virtual os::smart_ptr<streamPackageFrame> crypto::streamPackageFrame::getCopy( ) const
[inline], [virtual]
Reimplemented in crypto::streamPackage< streamType, hashType > (p. 585).
virtual uint16 t crypto::streamPackageFrame::hashAlgorithm( ) const [inline], [virtual]
Reimplemented in crypto::streamPackage< streamType, hashType > (p. 585).
virtual std::string crypto::streamPackageFrame::hashAlgorithmName ( ) const [inline],
[virtual]
Reimplemented in crypto::streamPackage< streamType, hashType > (p. 585).
virtual hash crypto::streamPackageFrame::hashCopy (unsigned char * data ) const [inline],
[virtual]
Reimplemented in crypto::streamPackage< streamType, hashType > (p. 585).
virtual hash crypto::streamPackageFrame::hashData (unsigned char * data, uint32_t len ) const
[inline], [virtual]
Reimplemented in crypto::streamPackage< streamType, hashType > (p. 585).
```

virtual hash crypto::streamPackageFrame::hashEmpty () const [inline], [virtual]

Reimplemented in crypto::streamPackage< streamType, hashType > (p. 585).

```
uint16_t crypto::streamPackageFrame::hashSize() const [inline]
void crypto::streamPackageFrame::setHashSize(uint16_t hashSize) [inline]
virtual uint16_t crypto::streamPackageFrame::streamAlgorithm() const [inline], [virtual]
```

Reimplemented in crypto::streamPackage< streamType, hashType > (p. 586).

virtual std::string crypto::streamPackageFrame::streamAlgorithmName () const [inline],
[virtual]

Reimplemented in crypto::streamPackage< streamType, hashType > (p. 586).

30.51.3 Member Data Documentation

uint16_t crypto::streamPackageFrame::_hashSize [protected]

30.52 crypto::streamPackageTypeBank Class Reference

Public Member Functions

- virtual ~streamPackageTypeBank ()
- void setDefaultPackage (os::smart_ptr< streamPackageFrame > package)
- const os::smart_ptr< streamPackageFrame > defaultPackage () const
- void pushPackage (os::smart_ptr< streamPackageFrame > package)
- const os::smart_ptr< streamPackageFrame > findStream (uint16_t streamID, uint16_t hash⇔ ID) const
- const os::smart_ptr< **streamPackageFrame** > **findStream** (const std::string &streamName, const std::string &hashName) const

Static Public Member Functions

static os::smart_ptr< streamPackageTypeBank > singleton ()

Private Member Functions

• streamPackageTypeBank ()

Private Attributes

- os::smart_ptr< streamPackageFrame > _defaultPackage
- std::vector< os::smart_ptr< std::vector< os::smart_ptr< streamPackageFrame > > > package ←
 Vector

30.52.1 Constructor & Destructor Documentation

```
crypto::streamPackageTypeBank::streamPackageTypeBank( ) [private]
virtual crypto::streamPackageTypeBank( ) [inline], [virtual]
```

30.52.2 Member Function Documentation

const os::smart_ptr<streamPackageFrame> crypto::streamPackageTypeBank::defaultPackage (
) const [inline]

const os::smart_ptr<**streamPackageFrame**> crypto::streamPackageTypeBank::findStream (uint16_t streamID, uint16_t hashID) const

const os::smart_ptr<**streamPackageFrame**> crypto::streamPackageTypeBank::findStream (const std::string & streamName, const std::string & hashName) const

void crypto::streamPackageTypeBank::pushPackage (os::smart_ptr< **streamPackageFrame** > package)

void crypto::streamPackageTypeBank::setDefaultPackage (os::smart_ptr< streamPackageFrame > package)

static os::smart_ptr<**streamPackageTypeBank**> crypto::streamPackageTypeBank::singleton () [static]

30.52.3 Member Data Documentation

os::smart_ptr<**streamPackageFrame**> crypto::streamPackageTypeBank::_defaultPackage [private]

std::vector<os::smart_ptr<std::vector<os::smart_ptr<**streamPackageFrame**>>>> crypto::streamPackageTypeBank::packageVector [private]

30.53 crypto::streamPacket Class Reference

Public Member Functions

- streamPacket (os::smart_ptr< streamCipher > source, unsigned int s)
- virtual ~streamPacket ()
- uint16 t getIdentifier () const
- const uint8 t * getPacket () const
- uint8_t * encrypt (uint8_t *pt, unsigned int len, bool surpress=true) const

Private Attributes

- uint8_t * packetArray
- uint16_t identifier
- unsigned int size

30.53.1 Constructor & Destructor Documentation

```
crypto::streamPacket::streamPacket ( os::smart_ptr< streamCipher > source, unsigned int s )
virtual crypto::streamPacket::~streamPacket ( ) [virtual]
```

30.53.2 Member Function Documentation

```
uint16_t crypto::streamPacket::getIdentifier ( ) const
```

const uint8 t* crypto::streamPacket::getPacket () const


30.53.3 Member Data Documentation

```
uint16_t crypto::streamPacket::identifier [private]
uint8_t* crypto::streamPacket::packetArray [private]
unsigned int crypto::streamPacket::size [private]
```

30.54 crypto::stringTooLarge Class Reference

String size error.

Inheritance diagram for crypto::stringTooLarge:

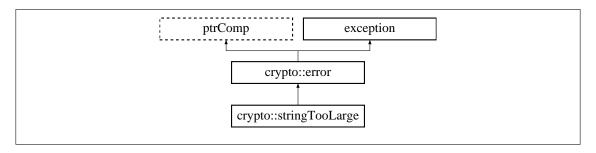

Public Member Functions

• virtual ~stringTooLarge () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Group ID/Name Size Error".

• std::string errorDescription () const

Long error descriptor Returns "Group ID or Name was larger than the maximum size. Please user a smaller string".

30.54.1 Detailed Description

String size error.

Thrown when either the username or group ID are too large.

30.54.2 Constructor & Destructor Documentation

```
virtual crypto::stringTooLarge::~stringTooLarge( ) throw ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.54.3 Member Function Documentation

```
std::string crypto::stringTooLarge::errorDescription() const [inline], [virtual]
```

Long error descriptor Returns "Group ID or Name was larger than the maximum size. Please user a smaller string".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::stringTooLarge::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Group ID/Name Size Error".

Returns


Error title std::string

Reimplemented from crypto::error (p. 421).

30.55 crypto::unknownErrorType Class Reference

Unknown error.

Inheritance diagram for crypto::unknownErrorType:

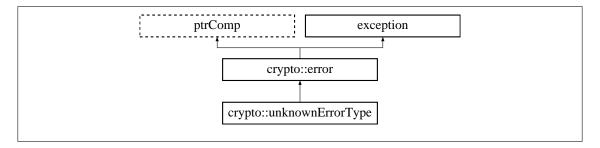

Public Member Functions

• virtual ~unknownErrorType () throw ()

Virtual destructor.

• std::string errorTitle () const

Short error descriptor Returns "Unknown Error Type".

• std::string errorDescription () const

Long error descriptor Returns "Caught some exception, but the type is unknown".

30.55.1 Detailed Description

Unknown error.

Thrown when an error of undefined type occurs. Used as a catch-all exception.

30.55.2 Constructor & Destructor Documentation

virtual crypto::unknownErrorType::~unknownErrorType() throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.55.3 Member Function Documentation

std::string crypto::unknownErrorType::errorDescription() const [inline], [virtual]

Long error descriptor Returns "Caught some exception, but the type is unknown".

Returns

Error description std::string

Reimplemented from crypto::error (p. 420).

std::string crypto::unknownErrorType::errorTitle() const [inline], [virtual]

Short error descriptor Returns "Unknown Error Type".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 421).

30.56 crypto::user Class Reference

Primary user class.

Inheritance diagram for crypto::user:

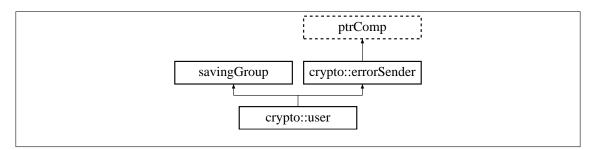

Public Member Functions

• bool wasConstructed () const

Returns the construction state of the user.

• **user** (std::string **username**, std::string saveDir="", const unsigned char *key=NULL, unsigned int keyLen=0)

Constructs the user from scratch or directory.

• virtual ~user ()

Virtual destructor.

• void save ()

Saves all dependencies.

• void **setPassword** (const unsigned char *key=NULL, unsigned int keyLen=0)

Set password.

• void **setStreamPackage** (os::smart_ptr< **streamPackageFrame** > strmPack)

Set stream package.

bool setDefaultPublicKey (os::smart_ptr< publicKey > key)

Sets the default public key.

bool addPublicKey (os::smart_ptr< publicKey > key)

Attempt to add new public key.

os::smart_ptr< publicKey > findPublicKey (os::smart_ptr< publicKeyPackageFrame > pk-frm)

Find public key by information.

unsigned char * unsignedIDMessage (unsigned int &len, std::string groupID="default", std
 ::string nodeName="")

Produces an unsigned ID message.

• bool **processIDMessage** (unsigned char *mess, unsigned int len)

Process ID message.

• unsigned char * **encryptMessage** (unsigned int &finishedLen, const unsigned char *mess, unsigned int len, std::string groupID, std::string nodeName)

Encrypt an out-going message.

• unsigned char * **decryptMessage** (unsigned int &finishedLen, const unsigned char *mess, unsigned int len, std::string groupID, std::string nodeName)

Decrypt a message.

• const std::string & username () const

Access name of user.

• const unsigned char * password () const

Access raw password.

• unsigned int passwordLength () const

Access password length.

• std::string directory () const

Access save directory.

• os::smart ptr< streamPackageFrame > streamPackage () const

Access streaming package.

os::smart_ptr< keyBank > getKeyBank ()

Access key bank.

• os::smart_ptr< publicKey > getDefaultPublicKey ()

Returns the default public key.

os::smart_ptr< os::adnode< publicKey >> getFirstPublicKey ()

Returns the first public key group.

• os::smart_ptr< os::adnode< publicKey >> getLastPublicKey ()

Returns the last public key group.

• os::smart_ptr< gatewaySettings > findSettings (std::string group="default")

Find gateway settings.

• os::smart ptr< gatewaySettings > insertSettings (std::string group)

Insert gateway settings.

• os::smart_ptr< os::adnode< gatewaySettings >> getFirstSettings ()

Returns the first gateway settings group.

os::smart ptr< os::adnode< gatewaySettings >> getLastSettings ()

Returns the last gateway settings group.

• os::smart ptr< publicKey > searchKey (hash hsh, unsigned int &hist, bool &type)

Searches for key by hash.

 os::smart_ptr< publicKey > searchKey (os::smart_ptr< number > key, unsigned int &hist, bool &type)

Searches for key.

os::smart ptr< publicKey > searchKey (hash hsh)

Searches for key.

os::smart_ptr< publicKey > searchKey (os::smart_ptr< number > key)

Searches for key.

Static Public Member Functions

static bool isIDMessage (unsigned char m)

Check if a message is an ID message.

• static bool isDataMessage (unsigned char m)

Check if a message is a data message.

static bool isEncrypted (unsigned char m)

Check if a message is encrypted.

Protected Member Functions

os::smartXMLNode generateSaveTree ()

Creates meta-data XML file.

Protected Attributes

- bool wasConstructed
- std::string _username

Name of user.

• unsigned char * password

Primary symmetric key.

• unsigned int _passwordLength

Length of symmetric key.

• std::string _saveDir

Save directory for user.

• os::smart ptr< streamPackageFrame > streamPackage

Default stream package.

os::smart_ptr< keyBank > _keyBank

Key bank.

• os::asyncAVLTree< publicKey > publicKeys

Public keys.

• os::smart_ptr< publicKey > _defaultKey

Default public key.

os::asyncAVLTree< gatewaySettings > _settings

List of gateway settings.

30.56.1 Detailed Description

Primary user class.

The user class defines a set of keys associated with a local user. This class notifies a set of listeners when various passwords and keys are changed, as this class allows for the encryption of a group of files with the provided keys

30.56.2 Constructor & Destructor Documentation

crypto::user::user (std::string username, std::string saveDir = "", const unsigned char * key = NULL, unsigned int keyLen = 0)

Constructs the user from scratch or directory.

Constructs a user from a directory or from scratch. If the specified directory does not exists, this class creates the directory and begins to populate it. If no key is specified, all files are un-encrypted. If a key is specified, all files are encrypted with this key.

Parameters

in	username	Name of user to be saved
in	saveDir	Directory to save users in
in	key	Symetric key
in	keyLen	Length of symetric key

virtual crypto::user::~user() [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.56.3 Member Function Documentation

bool crypto::user::addPublicKey (os::smart_ptr< publicKey > key)

Attempt to add new public key.

Attempts to add a public key to the public key bank. If successful, and if the default key is NULL, the added key becomes the default key.

Parameters

in k	key	Public key to be added
------	-----	------------------------

Returns

True if successfully added, else, false

unsigned char* crypto::user::decryptMessage (unsigned int & finishedLen, const unsigned char * mess, unsigned int len, std::string groupID, std::string nodeName)

Decrypt a message.

Takes an array of data representing an encrypted message targeted for this user. The message is decrypted and returned.

Parameters

out	finishedLen	Length of the finished message
in	mess	Message to be decrypted
in	len	Length of the message to be decrypted
in	groupID	Group ID of message source
in	nodeName	Name of message source

Returns

Decrypted message

std::string crypto::user::directory () const [inline]

Access save directory.

Returns

crypto::user::_saveDir (p. 604) + username

 $unsigned\ char*\ crypto::user::encryptMessage\ (\ unsigned\ int\ \&\ finishedLen,\ const\ unsigned\ char*\ mess,\ unsigned\ int\ len,\ std::string\ groupID,\ std::string\ nodeName\)$

Encrypt an out-going message.

Takes an array of data and encrypts it with the default public-key of the target user. Takes a group ID and node name to target the message.

Parameters

out	finishedLen	Length of the finished message
in	mess	Message to be encrypted
in	len	Length of message to be encrypted
in	groupID	String of the target group
in	nodeName	String of the name of the target node

Returns

Encrypted message pointer

os::smart_ptr<**publicKey**> crypto::user::findPublicKey (os::smart_ptr< **publicKeyPackageFrame** > pkfrm)

Find public key by information.

Searches for a public key with the given' characteristics. Keys are searched by algorithm and size.

Parameters

i	n	pkfrm	Public key information to match
---	---	-------	---------------------------------

Returns

Public key matching intrinsics

os::smart_ptr<**gatewaySettings**> crypto::user::findSettings (std::string group = "default")

Find gateway settings.

Parameters

in	group	Name of group of the settings

Returns

Pointer to the found gateway settings

os::smartXMLNode crypto::user::generateSaveTree() [protected]

Creates meta-data XML file.

Constructs and returns the XML tree for this class. The XML tree may or may not be encrypted.

Returns

XML tree for saving

```
os::smart_ptr<publicKey> crypto::user::getDefaultPublicKey ( ) [inline]
Returns the default public key.
Returns
     crypto::user::_defaultKey (p. 604)
os::smart_ptr<os::adnode<publicKey> > crypto::user::getFirstPublicKey( ) [inline]
Returns the first public key group.
   Allows programs to list off the available key groups bound to this user
Returns
     crypto::user:: publicKeys.getFirst()
os::smart_ptr<os::adnode<gatewaySettings>> crypto::user::getFirstSettings( ) [inline]
Returns the first gateway settings group.
   Allows programs to list off the available gateway settings bound to this user
Returns
     crypto::user::_settings.getFirst()
os::smart_ptr<keyBank> crypto::user::getKeyBank( ) [inline]
Access key bank.
Returns
     crypto::user::_keyBank (p. 604)
os::smart_ptr<os::adnode<publicKey> > crypto::user::getLastPublicKey( ) [inline]
Returns the last public key group.
   Allows programs to list off the available key groups bound to this user
Returns
     crypto::user::_publicKeys.getFirst()
os::smart_ptr<os::adnode<gatewaySettings>> crypto::user::getLastSettings( ) [inline]
Returns the last gateway settings group.
   Allows programs to list off the available gateway settings bound to this user
Returns
     crypto::user::_settings.getLast()
os::smart_ptr<gatewaySettings> crypto::user::insertSettings ( std::string group )
Insert gateway settings.
```

Parameters

in	group	Name of group of the settings
----	-------	-------------------------------

Returns

Point to the inserted gateway settings

static bool crypto::user::isDataMessage (unsigned char m) [inline], [static]

Check if a message is a data message.

Checks the first byte of a message to see if it is a data message.

Returns

True if a data message, else, false

static bool crypto::user::isEncrypted (unsigned char m) [inline], [static]

Check if a message is encrypted.

Checks the first byte of a message to see if it is encrypted

Returns

True if encrypted, else, false

static bool crypto::user::isIDMessage (unsigned char m) [inline], [static]

Check if a message is an ID message.

Checks the first byte of a message to see if it is an ID message.

Returns

True if an ID message, else, false

const unsigned char* crypto::user::password () const [inline]

Access raw password.

Returns

crypto::user::_password (p. 604)

unsigned int crypto::user::passwordLength () const [inline]

Access password length.

Returns

crypto::user::_passwordLength (p. 604)

bool crypto::user::processIDMessage (unsigned char * mess, unsigned int len)

Process ID message.

Processes any ID message. Note that this function can process both targeted and non-targeted ID messages.

Parameters

in	mess	Incoming message	
in	len	Length of incoming message	

Returns

True if valid ID message, else, false

void crypto::user::save ()

Saves all dependencies.

This function saves all dependencies based on the save queue.

Returns

void

os::smart_ptr<**publicKey**> crypto::user::searchKey (**hash** hsh, unsigned int & hist, bool & type)

Searches for key by hash.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	hsh	Hash of the key to be searched for	
out	hist	History value the key was found	
out	type	Type (public or private)	

Returns

Key pair conatining the searched key

os::smart_ptr<publicKey> crypto::user::searchKey (os::smart_ptr< number > key, unsigned int & hist, bool & type)

Searches for key.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	num	Key to search for History value the key was found Type (public or private)	
out	hist		
out	type		

Returns

Key pair conatining the searched key

os::smart ptr<publicKey> crypto::user::searchKey (hash hsh) [inline]

Searches for key.

Parameters

in	num	Key to search for

Returns

Key pair conatining the searched key

 $os::smart_ptr < \textbf{publicKey} > crypto::user::searchKey (os::smart_ptr < \textbf{number} > key) \quad [inline] \\ Searches for key.$

Parameters

in <i>num</i> Ke	y to search for
------------------	-----------------

Returns

Key pair conatining the searched key

bool crypto::user::setDefaultPublicKey (os::smart_ptr< publicKey > key)

Sets the default public key.

Attempts to bind a public key as the default public key. First checks if the key in question exists and binds the key with the characteristics of the provided key as the default key.

Parameters

in	key	Public key to be bound as the default key
	,	. abile hely to be bearing as the delicant hely

Returns

True if default key bound, else, false

void crypto::user::setPassword (const unsigned char * key = NULL, unsigned int keyLen = 0)

Set password.

Sets symetric key used to securely save user data.

Parameters

in	key	Symetric key
in	keyLen	Length of symetric key

Returns

void

void crypto::user::setStreamPackage (os::smart_ptr< streamPackageFrame > strmPack)

Set stream package.

Binds a new stream package. Calls for saving of this user.

Parameters

in	strmPack	Stream package
----	----------	----------------

Returns

void

 $os::smart_ptr < \textbf{streamPackageFrame} > crypto::user::streamPackage (\) const \ [inline]$

Access streaming package.

Returns

crypto::user::_streamPackage (p. 604)

unsigned char* crypto::user::unsignedIDMessage (unsigned int & len, std::string groupID = "default", std::string nodeName = "")

Produces an unsigned ID message.

Generates an identification message to be sent to a node. If the target node is specified, this function will encrypt the target message for that target node.

Parameters

out	len	Length of returned array
in	groupID	Group this user is part of
in	nodeName	Name of target node

Returns

Unsigned ID message

```
const std::string& crypto::user::username ( ) const [inline]
Access name of user.
Returns
     crypto::user::_username (p. 605)
bool crypto::user::wasConstructed( ) const [inline]
Returns the construction state of the user.
Returns
     crypto::bool::_wasConstructed
30.56.4 Member Data Documentation
os::smart ptr<publicKey> crypto::user:: defaultKey [protected]
Default public key.
   Sets the default public key definition. Note that a default public key will be defined the moment
any public key is bound to a user.
os::smart_ptr<keyBank> crypto::user::_keyBank [protected]
Key bank.
   This key bank defines all of the public keys which are known by this user
unsigned char* crypto::user::_password [protected]
Primary symmetric key.
unsigned int crypto::user::_passwordLength [protected]
Length of symmetric key.
os::asyncAVLTree<publicKey> crypto::user::_publicKeys [protected]
Public keys.
   This stores all public keys accociated with this specific user.
std::string crypto::user::_saveDir [protected]
Save directory for user.
os::asyncAVLTree<gatewaySettings> crypto::user:: settings [protected]
List of gateway settings.
```

os::smart_ptr<streamPackageFrame> crypto::user::_streamPackage [protected]

Default stream package.

std::string crypto::user::_username [protected]

Name of user.


bool crypto::user::_wasConstructed [protected]

Stores if the user was constructed

30.57 crypto::xorHash Class Reference

XOR hash class.

Inheritance diagram for crypto::xorHash:

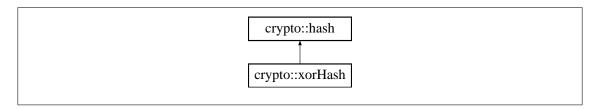

Public Member Functions

• xorHash ()

Default XOR hash constructor.

• xorHash (const unsigned char *data, uint16_t size)

Raw data copy.

• xorHash (const xorHash &cpy)

XOR copy constructor.

• void preformHash (const unsigned char *data, uint32_t dLen)

Binds a data-set.

• std::string algorithmName () const

Algorithm name string access.

Static Public Member Functions

• static std::string staticAlgorithmName ()

Algorithm name string access.

• static uint16_t staticAlgorithm ()

Algorithm ID number access.

static xorHash hash64Bit (const unsigned char *data, uint32_t length)

Static 64 bit hash.

• static **xorHash hash128Bit** (const unsigned char ***data**, uint32_t length)

Static 128 bit hash.

• static **xorHash hash256Bit** (const unsigned char *data, uint32_t length)

Static 256 bit hash.

• static **xorHash hash512Bit** (const unsigned char *data, uint32_t length)

Static 512 bit hash.

Private Member Functions

• xorHash (const unsigned char *data, uint32_t length, uint16_t size)

XOR hash constructor.

Additional Inherited Members

30.57.1 Detailed Description

XOR hash class.

This class defines an XOR based hash. Note that this hash is not cryptographically secure and essentially just acts as a checksum.

30.57.2 Constructor & Destructor Documentation

crypto::xorHash::xorHash (const unsigned char * data, uint32_t length, uint16_t size)
[private]

XOR hash constructor.

Constructs a hash with the data to be hashed, the length of the array and the size of the hash to be constructed.

Parameters

in	data	Data array
in	length	Length of data array
in	size	Size of hash

crypto::xorHash::xorHash() [inline]

Default XOR hash constructor.

Constructs an empty XOR hash class.

crypto::xorHash::xorHash (const unsigned char * data, uint16 t size)

Raw data copy.

Initializes the XOR hash with a data array. This data array is not hashed but assumed to represent hashed data.

Parameters

in	data	Hashed data array
in	size	Size of hash array

crypto::xorHash::xorHash (const xorHash & cpy) [inline]

XOR copy constructor.

Constructs an XOR hash with another XOR hash.

Parameters

in	сру	Hash to be copied

30.57.3 Member Function Documentation

std::string crypto::xorHash::algorithmName() const [inline], [virtual]

Algorithm name string access.

Returns the name of the current algorithm string. This function requires an instantiated XOR hash.

Returns

"XOR"

Reimplemented from crypto::hash (p. 455).

static **xorHash** crypto::xorHash::hash128Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 128 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 128 bit XOR hash.

Parameters

data	Data array to be hashed
length	Length of data array to be hashed

Returns

New xorHash (p. 605)

static **xorHash** crypto::xorHash::hash256Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 256 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 256 bit XOR hash.

Parameters

data	Data array to be hashed
length	Length of data array to be hashed

Returns

New xorHash (p. 605)

static **xorHash** crypto::xorHash::hash512Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 512 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 512 bit XOR hash.

Parameters

data	Data array to be hashed
length	Length of data array to be hashed

Returns

New xorHash (p. 605)

static **xorHash** crypto::xorHash::hash64Bit (const unsigned char * data, uint32_t length) [inline], [static]

Static 64 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 64 bit XOR hash.

Parameters

data	Data array to be hashed
length	Length of data array to be hashed

Returns

New xorHash (p. 605)

void crypto::xorHash::preformHash (const unsigned char * data, uint32_t dLen)

Binds a data-set.

Preforms the hash algorithm on the set of data provided and binds the result to this hash.

Parameters

in	data	Data array to be hashed
in	dLen	Length of data array

static uint16_t crypto::xorHash::staticAlgorithm() [inline], [static]

Algorithm ID number access.

Returns the ID of the current algorithm. This function is static and can be accessed without instantiating the class.

Returns

crypto::algo::hashXOR

static std::string crypto::xorHash::staticAlgorithmName() [inline], [static]

Algorithm name string access.

Returns the name of the current algorithm string. This function is static and can be accessed without instantiating the class.

Returns

"XOR"

Part VI glGraphics Library

Chapter 31

Introduction

The glGraphics library contains cross-platform graphics tools. glGraphics visualizes through openGL, allowing graphics to appear consistent across all systems. Furthermore, glGraphics provides an interface to preform unit tests on the interfaces constructed through the library.

31.1 Namespace

glGraphics uses the gl namespace. The gl namespace is designed for class, functions and constants related to visualization through openGL. glGraphics depends on many of the tools defined in the os namespace.

Chapter 32

File Index

32.1 File List

Here is a list of all files with brief descriptions:	
freeglut.h	
Implements the UI testing framework	615
freeglut_ext.h	
Implements the UI testing framework	615
freeglut_std.h	
Implements the UI testing framework	616
glCheckbox.cpp	
Implements a checkbox and checkboxGroup	616
glCheckbox.h	
Defines a checkbox and checkboxGroup	616
glColors.cpp	
Implements the color list	617
glColors.h	
Defines a number of colors	617
glContainers.cpp	
Implements various graphics containers	618
glContainers.h	
Defines a number graphics containers	619
glForm.cpp	
Implements various forms and drivers	620
glForm.h	
Defines forms and UI drivers	620
glFrame.cpp	
Implements the graphics element and frame	621
glFrame.h	
Defines the graphics element and frame	621
gllnput.cpp	
Implements the graphics input classes	622
gllnput.h	
Defines a number of input classes	623

glLabel.cpp	
Implements text visualization tools	624
glLabel.h	
Defines text visualization classes	625
glLibrary.h	
Unified graphics library header	626
glLogging.cpp	
Logging for gl namespace, implementation	626
glLogging.h	
Logging for gl namespace	627
glOSFunctions.cpp	
Includes the correct glOSFuncitons cpp file	627
glOSFunctions.h	
Includes the correct glOSFuncitons header	628
glPopUp.cpp	
Implements a checkbox and checkboxGroup	628
glPopUp.h	
Defines a number of form types	629
glTest.cpp	
Defines glGraphics test suite	629
glTest.h	
Testing suite for the glGraphics library	630
glTestingFrame.cpp	
Implements the UI testing framework	630
glTestingFrame.h	
Defines the UI testing framework	630
glTextbox.cpp	
Implements a text-box	632
glTextbox.h	
Defines a text-box	632
glut.h	
Windows glut header	633
image_DXT.cpp	
Simple DXT compression / decompression code	633
image_DXT.h	
Simple DXT compression / decompression code	634
image_helper.cpp	
Image helper functions	634
image_helper.h	
Image helper functions	634
osGraphics.h	
OS specific openGL functions	635
SOIL.cpp	
Simple OpenGL Image Library	635
SOIL.h	000
Simple OpenGL Image Library	636
stb_image_aug.cpp IPEG/PNG reader implementation	636
IPPIS/PINIS 103001 IMDIAMANISION	nxh

stb_image_aug.h	
JPEG/PNG reader header	637
stbi_DDS_aug.h	
DDS loading support	637
stbi_DDS_aug_c.h	638
textureManager.cpp	
Implements the texture manager	638
textureManager.h	
Defines a texture-manager	638
unix_glOSFunctions.cpp	
Unix specific graphics functions	639
unix_glOSFunctions.h	
Unix specific graphics functions	639
unix_osGraphics.h	
Unix specific openGL functions	640
win_freeglut.h	
Windows freeglut header	641
win_freeglut_ext.h	
Windows freeglut_ext header	641
win_freeglut_std.h	
Windows freeglut_std header	642
win_glOSFunctions.cpp	
Windows specific graphics functions	642
win_glOSFunctions.h	
Windows specific graphics functions	643
win_osGraphics.h	
Windows specific openGL functions	643

Chapter 33

File Documentation

33.1 freeglut.h File Reference

Implements the UI testing framework.

33.1.1 Detailed Description

Implements the UI testing framework.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Conditional freeglut include for Windows machines.

33.2 freeglut_ext.h File Reference

Implements the UI testing framework.

33.2.1 Detailed Description

Implements the UI testing framework.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Conditional freeglut_ext include for Windows machines.

33.3 freeglut_std.h File Reference

Implements the UI testing framework.

33.3.1 Detailed Description

Implements the UI testing framework.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Conditional freeglut_std include for Windows machines.

33.4 glCheckbox.cpp File Reference

Implements a checkbox and checkboxGroup.

33.4.1 Detailed Description

Implements a checkbox and checkboxGroup.

Author

Jonathan Bedard

Date

5/23/2016

Bug None

Consult **glCheckbox.h** (p. 616) for details. Note that the graphics class implemented here all require a frame in their constructor.

33.5 glCheckbox.h File Reference

Defines a checkbox and checkboxGroup.

Classes

- class gl::checkbox
- class gl::checkboxGroup

Namespaces

• gl

Enumerations

• enum gl::checkboxGroupType { gl::checkbox_noRestriction =0, gl::checkbox_single, gl
::checkbox_chooseOne, gl::checkbox_chooseSome }

33.5.1 Detailed Description

Defines a checkbox and checkboxGroup.

Author

Jonathan Bedard

Date

5/23/2016

Bug None

This file defines a checkbox and a checkboxGroup. Both these classes are meant to be visualized.

33.6 glColors.cpp File Reference

Implements the color list.

33.6.1 Detailed Description

Implements the color list.

Author

Jonathan Bedard

Date

5/23/2016

Bug None

Consult **glColors.h** (p. 617) for details. Implements each of the defined colors.

33.7 glColors.h File Reference

Defines a number of colors.

Namespaces

- gl
- gl::col

Variables

- const color gl::col::red
- const color gl::col::yellow
- const color gl::col::green
- const color gl::col::blue
- const color gl::col::black
- const color gl::col::brown
- const color gl::col::white
- const color gl::col::clear
- const color gl::col::clickedBlue
- const color gl::col::textboxBlue
- const color gl::col::darkGray
- const color gl::col::gray
- const color gl::col::inactiveGray
- const color gl::col::lightGray
- const color gl::col::overlayGray
- const color gl::col::overlayBlack
- const color gl::col::darkGreen

33.7.1 Detailed Description

Defines a number of colors.

Author

Jonathan Bedard

Date

5/23/2016

Bug None

Each of the colors defined in this file is held in a doubly nested namespace. The colors defined in this file are immutable.

33.8 glContainers.cpp File Reference

Implements various graphics containers.

33.8.1 Detailed Description

Implements various graphics containers.

Author

Jonathan Bedard

Date

5/23/2016

Bug None

Consult **glContainers.h** (p. 619) for details. The containers defined include, most notably, a box, drop-down menu and scroll area.

33.9 glContainers.h File Reference

Defines a number graphics containers.

Classes

- class gl::box
- class gl::wrappableBox
- class gl::fileBar
- class gl::barGroup
- class gl::scrollbar
- class gl::scrollArea
- class gl::entireFormScroll

Namespaces

• gl

Enumerations

• enum gl::scrollbarDir { gl::scrollbar_vertical =0, gl::scrollbar_horizontal }

33.9.1 Detailed Description

Defines a number graphics containers.

Author

Jonathan Bedard

Date

5/23/2016

Bug None

The classes defined in this file extend the **gl::frame** (p. 713). Each of these containers has certain unique qualities.

33.10 glForm.cpp File Reference

Implements various forms and drivers.

33.10.1 Detailed Description

Implements various forms and drivers.

Author

Jonathan Bedard

Date

5/24/2016

Bug None

Consult **glForm.h** (p. 620) for details. Note that each driver only draws a single form, but these forms are defined in a tree hierarchy.

33.11 glForm.h File Reference

Defines forms and UI drivers.

Classes

- class gl::form
- class gl::form3d
- class gl::baseUIDriver
- class gl::UIDriver
- class gl::testingDriver

Namespaces

• gl

Enumerations

```
    enum gl::resizePolicyEnum {
    gl::resize_none =0, gl::resize_master, gl::resize_minimum, gl::resize_maximum,
    gl::resize_bounded, gl::resize_lock, gl::resize_custom }
```

Variables

- const int gl::form_width_minimum =116
- const int gl::form height minimum =0

33.11.1 Detailed Description

Defines forms and UI drivers.

Author

Jonathan Bedard

Date

5/24/2016

Bug None

Defines both a 3-d and 2-d form, as well as standard and testing drivers for displaying and testing form hierarchies.

33.12 glFrame.cpp File Reference

Implements the graphics element and frame.

33.12.1 Detailed Description

Implements the graphics element and frame.

Author

Jonathan Bedard

Date

5/24/2016

Bug None

Consult **glFrame.h** (p. 621) for details. Many of the functions defined here are extended in the many classes which inherit from these base classes.

33.13 glFrame.h File Reference

Defines the graphics element and frame.

Classes

- struct gl::color
- class gl::clickedListener
- class gl::pressedListener
- class gl::depressedListener
- class gl::enterListener
- class gl::resizedListener

- class gl::clickedFunction
- class gl::clickedFunctionVoid
- class gl::pressedFunction
- class gl::pressedFunctionVoid
- class gl::depressedFunction
- class gl::depressedFunctionVoid
- class gl::enterFunction
- class gl::enterFunctionVoid
- class gl::resizeFunction
- class gl::resizeFunctionVoid
- class gl::element
- class gl::frame

Namespaces

• gl

Typedefs

- typedef void(* gl::elementHandler) (os::smart_ptr< element > elm)
- typedef void(* gl::elementHandler_void) (os::smart_ptr< element > elm, void *vptr)

33.13.1 Detailed Description

Defines the graphics element and frame.

Author

Jonathan Bedard

Date

5/24/2016

Bug None

The classes defined in this header are the basic classes all of the graphics library builds off of. These include a basic event framework, the base element class and the frame class, which defines an element which holds other elements.

33.14 gllnput.cpp File Reference

Implements the graphics input classes.

33.14.1 Detailed Description

Implements the graphics input classes.

Author

Jonathan Bedard

Date

5/24/2016

Bug None

Consult **glinput.h** (p. 623) for details. Along with class definitions, a number of global constants are implemented in this file.

33.15 gllnput.h File Reference

Defines a number of input classes.

Classes

- class gl::key
- class gl::mouseListener
- class gl::keyboardListener
- class gl::globalMouseListener
- class gl::globalKeyboardListener
- class gl::mouse
- class gl::keyboard

Namespaces

• gl

Enumerations

- enum gl::elementDepth { gl::defaultDepth =0, gl::bottomDepth, gl::middleDepth, gl::top
 Depth }
- enum gl::keyType { gl::key_standard =0, gl::key_special =1 }

Variables

- const key gl::ESCAPE
- const key gl::ENTER
- const key gl::DELETE_KEY
- const key gl::BACKSPACE
- const key gl::TAB
- const key gl::SPACE

- const key gl::ARROWUP
- const key gl::ARROWDOWN
- const key gl::ARROWLEFT
- const key gl::ARROWRIGHT
- const int gl::MOUSE_DOWN =0
- const int gl::MOUSE_UP =1
- const int gl::MOUSE_RIGHT_BUTTON =2
- const int gl::MOUSE_SCROLLBUTTON =1
- const int gl::MOUSE_LEFT_BUTTON =0
- const int **gl::MOUSE_SCROLLUP** =3
- const int gl::MOUSE_SCROLLDOWN =4

33.15.1 Detailed Description

Defines a number of input classes.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

The classes and objects defined in this file are used for gathering user input, either from the mouse or keyboard.

33.16 glLabel.cpp File Reference

Implements text visualization tools.

33.16.1 Detailed Description

Implements text visualization tools.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

Consult **glLabel.h** (p. 625) for details. Because of the limitations of openGL, there are only a few fonts available.

33.17 glLabel.h File Reference

Defines text visualization classes.

Classes

- class gl::font
- class gl::TimesRomanStroke
- class gl::TimesMonoRomanStroke
- class gl::TimesRoman
- class gl::Helvetica
- class gl::label
- class gl::button
- class gl::arrowButton
- class gl::activeDisplayButton
- class gl::activeDisplayArrowButton

Namespaces

• gl

Enumerations

- enum gl::lateralTextLayout { gl::layout_right =0, gl::layout_center, gl::layout_left }
- enum gl::verticalTextLayout { gl::layout_top =0, gl::layout_middle, gl::layout_bottom }
- enum gl::arrowType { gl::arrow_up =0, gl::arrow_right, gl::arrow_down, gl::arrow_left }

Functions

- os::smart ptr< std::string > q1::displayAssembleString (std::string str, int &length)
- void gl::drawText (double x, double y, std::string str, const color &c, const font *_font, lateral
 — TextLayout layout=layout_left)
- void gl::drawText (double x, double y, const char *str, const color &c, const font *_font, lateral
 — TextLayout layout=layout left)
- void **gl::drawText** (double x, double y, os::smart_ptr< std::string > strArr, int length, const color &c, const font *_font, lateralTextLayout layout)
- double **gl::textHeight** (os::smart_ptr< std::string > strArr, int length, const font *_font)
- double **gl::textHeight** (std::string str, const font *_font)
- double gl::textWidth (os::smart_ptr< std::string > strArr, int length, const font *_font)
- double gl::textWidth (std::string str, const font *_font)
- std::string gl::textChop (std::string str, double length_bound, const font *_font)

33.17.1 Detailed Description

Defines text visualization classes.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

The classes and functions defined in this file allow for rendering text in a form. This file also defines a number of basic buttons.

33.18 glLibrary.h File Reference

Unified graphics library header.

33.18.1 Detailed Description

Unified graphics library header.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

Includes all of the required graphics files for the glGraphics library.

33.19 glLogging.cpp File Reference

Logging for gl namespace, implementation.

33.19.1 Detailed Description

Logging for gl namespace, implementation. Jonathan Bedard

Date

2/15/2016

Bug No known bugs.

This file contains global functions and variables used for logging in the gl namespace.

33.20 glLogging.h File Reference

Logging for gl namespace.

Namespaces

• gl

Functions

Variables

- std::ostream & gl::glout_func ()std::ostream & gl::glerr_func ()
- - os::smart_ptr< std::ostream > gl::glout_ptr
 - os::smart_ptr< std::ostream > gl::glerr_ptr

33.20.1 Detailed Description

Logging for gl namespace.
Jonathan Bedard

Date

1/30/2016

Bug No known bugs.

This file contains declarations which are used for logging within the gl namespace.

33.21 glOSFunctions.cpp File Reference

Includes the correct glOSFuncitons cpp file.

33.21.1 Detailed Description

Includes the correct glOSFuncitons cpp file.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

33.22 glOSFunctions.h File Reference

Includes the correct gIOSFuncitons header.

Namespaces

• gl

Variables

- const double gl::Pl =3.14159265
- const double gl::DEG_RAD =(PI/180)
- const double gl::RAD_DEG =(180/PI)

33.22.1 Detailed Description

Includes the correct glOSFuncitons header.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

33.23 glPopUp.cpp File Reference

Implements a checkbox and checkboxGroup.

33.23.1 Detailed Description

Implements a checkbox and checkboxGroup.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

Consult **glPopUp.h** (p. 629) for details. This file also implements a basic navigation form, which allows for users to go "back" to a previous form.

33.24 glPopUp.h File Reference

Defines a number of form types.

Classes

- class gl::popUp
- class gl::singleButtonPopUp
- class gl::navForm

Namespaces

• gl

33.24.1 Detailed Description

Defines a number of form types.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

The classes defined here extend the form class. Most notably, this file defines a "pop-up" class which allows for a temporary form on-top of the primary form.

33.25 glTest.cpp File Reference

Defines glGraphics test suite.

33.25.1 Detailed Description

Defines glGraphics test suite.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines the test suite for the glGraphics library.

33.26 glTest.h File Reference

Testing suite for the glGraphics library.

33.26.1 Detailed Description

Testing suite for the glGraphics library.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Declares the test suite for the glGraphics library. This suite can be added to the test battery for an application

33.27 glTestingFrame.cpp File Reference

Implements the UI testing framework.

33.27.1 Detailed Description

Implements the UI testing framework.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements tools used to preform unit tests on the graphics framework.

33.28 glTestingFrame.h File Reference

Defines the UI testing framework.

Classes

- class test::singleUITest
- class test::singleUIFunctionTest
- class test::UITestSuite
- class test::resizedTestListener
- class test::clickedTestListener
- class test::pressedTestListener
- class test::depressedTestListener
- class test::enterTestListener
- class test::testForm
- class test::textboxForm
- class test::checkboxForm

Namespaces

- test
- test::macro

Functions

- void test::setUpGraphicsTest ()
- void test::teardownGraphicsTest ()
- os::smart ptr< gl::testingDriver > test::getTestDriver () throw (os::smart ptr<std::exception>)
- void test::macro::moveMouseTo (int xPos, int yPos)
- void test::macro::moveMouseTo (const gl::element &elm)
- void test::macro::moveMouseTo (std::string str)
- void test::macro::mousePress ()
- void test::macro::mouseRelease ()
- void test::macro::mouseClick ()
- void test::macro::mouseClick (gl::element &elm)
- void test::macro::mouseClick (std::string str)
- void test::macro::keyboardClick (const gl::key & key)
- void test::macro::keyboardDown (const gl::key &_key)
- void test::macro::keyboardUp (const gl::key &_key)
- void **test::macro::keyboardType** (const std::string &str)
- void test::macro::clickFileBar (os::smart_ptr< gl::barGroup > target)
- os::smart_ptr< os::unsortedList< gl::element >> test::macro::searchUIBy (std::string str)

33.28.1 Detailed Description

Defines the UI testing framework.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines tools used to preform unit tests on the graphics framework.

33.29 glTextbox.cpp File Reference

Implements a text-box.

33.29.1 Detailed Description

Implements a text-box.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

Consult **glTextbox.h** (p. 632) for details. The textbox implemented here does not currently support copying and pasting.

33.30 glTextbox.h File Reference

Defines a text-box.

Classes

• class gl::textbox

Namespaces

• gl

33.30.1 Detailed Description

Defines a text-box.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

The text-box class allows a user to enter a string into the element and for this string to be accessed for some other use

33.31 glut.h File Reference

Windows glut header.

33.31.1 Detailed Description

Windows glut header.

Author

None

Date

5/20/2016

Bug None

33.32 glut_w.h File Reference

33.33 image_DXT.cpp File Reference

simple DXT compression / decompression code

33.33.1 Detailed Description

simple DXT compression / decompression code

Author

Jonathan Dummer

Date

7/31/2007

Bug None

Modified for usage in glGraphics by Jonathan Bedard.

33.34 image_DXT.h File Reference

simple DXT compression / decompression code

33.34.1 Detailed Description

simple DXT compression / decompression code

Author

Jonathan Dummer

Date

7/31/2007

Bug None

Modified for usage in glGraphics by Jonathan Bedard.

33.35 image_helper.cpp File Reference

Image helper functions.

33.35.1 Detailed Description

Image helper functions.

Author

Jonathan Dummer

Date

7/31/2007

Bug None

Modified for usage in glGraphics by Jonathan Bedard.

33.36 image_helper.h File Reference

Image helper functions.

33.36.1 Detailed Description

Image helper functions.

Author

Jonathan Dummer

Date

7/31/2007

Bug None

Modified for usage in glGraphics by Jonathan Bedard.

33.37 osGraphics.h File Reference

OS specific openGL functions.

33.37.1 Detailed Description

OS specific openGL functions.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Includes a the correct osGraphics header for a specific operating system.

33.38 SOIL.cpp File Reference

Simple OpenGL Image Library.

33.38.1 Detailed Description

Simple OpenGL Image Library.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Public Domain using Sean Barret's stb_image as a base

Thanks to:

Sean Barret - for the awesome stb_image
Dan Venkitachalam - for finding some non-compliant DDS files, and patching some explicit casts
everybody at gamedev.net

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.39 SOIL.h File Reference

Simple OpenGL Image Library.

33.39.1 Detailed Description

Simple OpenGL Image Library.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

A tiny c library for uploading images as textures into OpenGL. Also saving and loading of images is supported.

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.40 stb_image_aug.cpp File Reference

JPEG/PNG reader implementation.

33.40.1 Detailed Description

JPEG/PNG reader implementation.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.41 stb_image_aug.h File Reference

JPEG/PNG reader header.

33.41.1 Detailed Description

JPEG/PNG reader header.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.42 stbi_DDS_aug.h File Reference

DDS loading support.

33.42.1 Detailed Description

DDS loading support.

DDS file support.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.43 stbi_DDS_aug_c.h File Reference

33.44 textureManager.cpp File Reference

Implements the texture manager.

33.44.1 Detailed Description

Implements the texture manager.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

Consult **textureManager.h** (p. 638) for details. The textureManager is a singleton class, and can only be instantiated once.

33.45 textureManager.h File Reference

Defines a texture-manager.

Classes

- struct gl::texture data
- class gl::textureManager
- class gl::imageElement

Namespaces

• gl

Functions

- GLuint **gl::load_texture** (std::string file_name)
- os::smart_ptr< textureManager > gl::globalTextureManager ()
- void gl::deleteTextures ()

33.45.1 Detailed Description

Defines a texture-manager.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

The texture manager allows for global management of graphics textures used in a graphics program.

33.46 unix_glOSFunctions.cpp File Reference

Unix specific graphics functions.

33.46.1 Detailed Description

Unix specific graphics functions.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Implements a number of graphics functions uniquely for Unix.

33.47 unix_glOSFunctions.h File Reference

Unix specific graphics functions.

Namespaces

• gl

Functions

- void gl::glSetSource (char *source_string)
- std::string gl::glGetSource ()
- std::string gl::glGetExecutable ()
- int gl::glGetSourceDepth ()
- bool gl::gllsBase (std::string loc)
- void gl::glTestCreateFolder (std::string n)
- bool gl::gl is directory (std::string file)
- std::string * gl::gl_list_files (std::string directory, int *len)
- std::string gl::gl_extract_name (std::string full_path)
- void **gl::gl delete file** (std::string path)
- FILE * gl::fopen_s (FILE **f, const char *name, const char *read_type)

Variables

• const std::string gl::DEFAULT_LOC ="/home"

33.47.1 Detailed Description

Unix specific graphics functions.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Defines a number of graphics functions uniquely for Unix.

33.48 unix_osGraphics.h File Reference

Unix specific openGL functions.

Functions

- static void glutLeaveMainLoop ()
- static int **glutStrokeHeight** (const void *ptr)
- static int glutBitmapHeight (const void *ptr)

33.48.1 Detailed Description

Unix specific openGL functions.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Includes a number of headers specific to certain operating systems needed for openGL.

33.48.2 Function Documentation

```
static int glutBitmapHeight ( const void * ptr ) [static]
static void glutLeaveMainLoop ( ) [static]
static int glutStrokeHeight ( const void * ptr ) [static]
```

33.49 win_freeglut.h File Reference

Windows freeglut header.

33.49.1 Detailed Description

Windows freeglut header.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

33.50 win_freeglut_ext.h File Reference

Windows freeglut_ext header.

33.50.1 Detailed Description

Windows freeglut_ext header.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

33.51 win_freeglut_std.h File Reference

Windows freeglut_std header.

33.51.1 Detailed Description

Windows freeglut_std header.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

33.52 win_glOSFunctions.cpp File Reference

Windows specific graphics functions.

33.52.1 Detailed Description

Windows specific graphics functions.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Implements a number of graphics functions uniquely for Windows.

33.53 win_glOSFunctions.h File Reference

Windows specific graphics functions.

33.53.1 Detailed Description

Windows specific graphics functions.

Author

Jonathan Bedard

Date

5/20/2016

Bug None

Defines a number of graphics functions uniquely for Windows.

33.54 win_osGraphics.h File Reference

Windows specific openGL functions.

33.54.1 Detailed Description

Windows specific openGL functions.

Author

Jonathan Bedard

Date

5/25/2016

Bug None

Includes a number of headers specific to certain operating systems needed for openGL.

Chapter 34

Class Index

34.1 Class List

ere are the classes, structs, unions and interfaces with brief descriptions:	
gl::activeDisplayArrowButton	56
gl::activeDisplayButton	57
	59
gl::barGroup	62
gl::baseUIDriver	65
	67
gl::button	69
gl::checkbox	71
test::checkboxForm	74
gl::checkboxGroup	75
gl::clickedFunction	79
gl::clickedFunctionVoid	80
gl::clickedListener	80
test::clickedTestListener	82
gl::color	83
9	85
gl::depressedFunctionVoid	86
gl::depressedListener	87
test::depressedTestListener	88
gl::element	89
gl::enterFunction	98
gl::enterFunctionVoid	99
g	00
	01
gl::entireFormScroll	02
9	02
gl::font	05
gl::form	07
9	12
gl::frame	13
gl::globalKeyboardListener 7	18

gl::globalMouseListener															719
gl::Helvetica															720
gl::imageElement															720
gl::key															721
gl::keyboard															722
gl::keyboardListener															724
gl::label															725
gl::mouse															728
gl::mouseListener															729
gl::navForm															731
gl::popUp															732
gl::pressedFunction															735
gl::pressedFunctionVoid															736
gl::pressedListener															737
test::pressedTestListene	r														738
gl::resizedListener															738
test::resizedTestListener															739
gl::resizeFunction															740
gl::resizeFunctionVoid .															741
gl::scrollArea															742
gl::scrollbar															744
gl::singleButtonPopUp .															747
test::singleUIFunctionTes	st														748
test::singleUITest															749
test::testForm															749
gl::testingDriver															751
gl::textbox															753
test::textboxForm															757
gl::texture_data															758
gl::textureManager															759
gl::TimesMonoRomanStr	ok	е													760
gl::TimesRoman															761
gl::TimesRomanStroke .															762
gl::UIDriver															762
test::UITestSuite															764
gl::wrappableBox															764

Chapter 35

Namespace Documentation

35.1 gl Namespace Reference

Namespaces

• col

Classes

- class activeDisplayArrowButton
- class activeDisplayButton
- class arrowButton
- class barGroup
- class baseUIDriver
- class box
- class button
- class checkbox
- class checkboxGroup
- class clickedFunction
- class clickedFunctionVoid
- class clickedListener
- struct color
- class depressedFunction
- class depressedFunctionVoid
- class depressedListener
- class element
- class enterFunction
- class enterFunctionVoid
- class enterListener
- class entireFormScroll
- class fileBar
- class font
- class form

- class form3d
- class frame
- class globalKeyboardListener
- class globalMouseListener
- class Helvetica
- class imageElement
- class key
- class keyboard
- class keyboardListener
- class label
- class mouse
- class mouseListener
- class navForm
- class popUp
- class pressedFunction
- class pressedFunctionVoid
- class pressedListener
- class resizedListener
- class resizeFunction
- class resizeFunctionVoid
- class scrollArea
- class scrollbar
- class singleButtonPopUp
- class testingDriver
- class textbox
- struct texture data
- class textureManager
- class TimesMonoRomanStroke
- class TimesRoman
- class TimesRomanStroke
- class UIDriver
- class wrappableBox

Typedefs

- typedef void(* elementHandler) (os::smart_ptr< element > elm)
- typedef void(* elementHandler_void) (os::smart_ptr< element > elm, void *vptr)

Enumerations

- enum checkboxGroupType { checkbox_noRestriction =0, checkbox_single, checkbox_chooseOne, checkbox_chooseSome }
- enum scrollbarDir { scrollbar_vertical =0, scrollbar_horizontal }
- enum resizePolicyEnum {
 resize_none =0, resize_master, resize_minimum, resize_maximum, resize_bounded, resize_lock, resize_custom }

- enum elementDepth { defaultDepth =0, bottomDepth, middleDepth, topDepth }
- enum keyType { key standard =0, key special =1 }
- enum lateralTextLayout { layout_right =0, layout_center, layout_left }
- enum verticalTextLayout { layout_top =0, layout_middle, layout_bottom }
- enum arrowType { arrow up =0, arrow right, arrow down, arrow left }

Functions

- os::smart_ptr< std::string > displayAssembleString (std::string str, int &length)
- void drawText (double x, double y, std::string str, const color &c, const font *_font, lateral ←
 TextLayout layout=layout_left)
- void drawText (double x, double y, const char *str, const color &c, const font *_font, lateral ←
 TextLayout layout left)
- void drawText (double x, double y, os::smart_ptr< std::string > strArr, int length, const color
 &c, const font * font, lateralTextLayout layout)
- double textHeight (os::smart_ptr< std::string > strArr, int length, const font *_font)
- double textHeight (std::string str, const font *_font)
- double textWidth (os::smart ptr< std::string > strArr, int length, const font * font)
- double textWidth (std::string str, const font *_font)
- std::string textChop (std::string str, double length_bound, const font *_font)
- std::ostream & glout_func ()
- std::ostream & glerr_func ()
- GLuint load_texture (std::string file_name)
- os::smart ptr< textureManager > globalTextureManager ()
- void deleteTextures ()
- void glSetSource (char *source_string)
- std::string glGetSource ()
- std::string glGetExecutable ()
- int glGetSourceDepth ()
- bool **gllsBase** (std::string loc)
- void glTestCreateFolder (std::string n)
- bool gl is directory (std::string file)
- std::string * gl_list_files (std::string directory, int *len)
- std::string **gl_extract_name** (std::string full_path)
- void **gl delete file** (std::string path)
- FILE * fopen s (FILE **f, const char *name, const char *read type)

Variables

- const int form_width_minimum =116
- const int form_height_minimum =0
- const key ESCAPE
- const key ENTER
- const key DELETE_KEY
- const key BACKSPACE
- const key TAB

- const key SPACE
- const key ARROWUP
- const key ARROWDOWN
- const key ARROWLEFT
- const key ARROWRIGHT
- const int MOUSE DOWN =0
- const int MOUSE UP =1
- const int MOUSE_RIGHT_BUTTON =2
- const int MOUSE_SCROLLBUTTON =1
- const int MOUSE LEFT BUTTON =0
- const int MOUSE_SCROLLUP =3
- const int MOUSE_SCROLLDOWN =4
- os::smart_ptr< std::ostream > glout_ptr
- os::smart_ptr< std::ostream > glerr_ptr
- const double **PI** =3.14159265
- const double **DEG_RAD** =(**PI**/180)
- const double **RAD_DEG** =(180/**PI**)
- const std::string **DEFAULT LOC** ="/home"

35.1.1 Typedef Documentation

```
typedef void(* gl::elementHandler) (os::smart_ptr< element > elm)
```

typedef void(* gl::elementHandler_void) (os::smart_ptr< element > elm, void *vptr)

35.1.2 Enumeration Type Documentation

enum gl::arrowType

Enumerator

arrow_up

arrow_right

arrow_down

arrow left

enum gl::checkboxGroupType

Enumerator

checkbox_noRestriction

checkbox single

checkbox_chooseOne

checkbox_chooseSome

enum gl::elementDepth

Enumerator

defaultDepth bottomDepth middleDepth topDepth

enum gl::keyType

Enumerator

key_standard key_special

enum gl::lateralTextLayout

Enumerator

layout_right layout_center layout_left

enum gl::resizePolicyEnum

Enumerator

resize_none
resize_master
resize_minimum
resize_maximum
resize_bounded
resize_lock
resize_custom

enum gl::scrollbarDir

Enumerator

scrollbar_vertical scrollbar_horizontal

enum gl::verticalTextLayout

Enumerator

layout_top layout_middle layout_bottom

35.1.3 Function Documentation

```
void gl::deleteTextures ( )
os::smart_ptr<std::string> gl::displayAssembleString ( std::string str, int & length )
void gl::drawText ( double x, double y, std::string str, const color & c, const font * font,
lateralTextLayout layout = layout_left )
void gl::drawText ( double x, double y, const char * str, const color & c, const font * _font,
lateralTextLayout layout = layout_left ) [inline]
void gl::drawText ( double x, double y, os::smart_ptr< std::string > strArr, int length, const color &
c, const font * _font, lateralTextLayout layout )
FILE* gl::fopen_s ( FILE ** f, const char * name, const char * read_type )
void gl::gl_delete_file ( std::string path )
std::string gl::gl_extract_name ( std::string full_path )
bool gl::gl_is_directory ( std::string file )
std::string* gl::gl_list_files ( std::string directory, int * len )
std::ostream& gl::glerr func ( )
std::string gl::glGetExecutable ( )
std::string gl::glGetSource ( )
int gl::glGetSourceDepth ( )
bool gl::gllsBase ( std::string loc )
os::smart_ptr<textureManager> gl::globalTextureManager ( )
std::ostream& gl::glout_func ( )
void gl::glSetSource ( char * source_string )
void gl::glTestCreateFolder ( std::string n )
GLuint gl::load texture ( std::string file name )
std::string gl::textChop ( std::string str, double length_bound, const font * _font )
double gl::textHeight (os::smart ptr< std::string > strArr, int length, const font * font)
double gl::textHeight ( std::string str, const font * font )
double gl::textWidth ( os::smart ptr< std::string > strArr, int length, const font * font )
double gl::textWidth ( std::string str, const font * _font )
35.1.4 Variable Documentation
```

const key gl::ARROWDOWN

const key gl::ARROWLEFT

const key gl::ARROWRIGHT

const key gl::ARROWUP

const key gl::BACKSPACE

const std::string gl::DEFAULT_LOC ="/home"

const double gl::DEG_RAD =(PI/180)

const key gl::DELETE_KEY

const key gl::ENTER

const key gl::ESCAPE

const int gl::form_height_minimum =0

const int gl::form_width_minimum =116

os::smart_ptr<std::ostream> gl::glerr_ptr

os::smart_ptr<std::ostream> gl::glout_ptr

const int gl::MOUSE_DOWN =0

const int gl::MOUSE_LEFT_BUTTON =0

const int gl::MOUSE_RIGHT_BUTTON =2

const int gl::MOUSE_SCROLLBUTTON =1

const int gl::MOUSE_SCROLLDOWN =4

const int gl::MOUSE_SCROLLUP =3

const int gl::MOUSE_UP =1

const double gl::PI =3.14159265

const double gl::RAD_DEG =(180/PI)

const key gl::SPACE

const key gl::TAB

35.2 gl::col Namespace Reference

Variables

- const color red
- const color yellow
- const color green
- const color blue
- const color black
- const color brown

- const color white
- const color clear
- const color clickedBlue
- const color textboxBlue
- const color darkGray
- const color gray
- const color inactiveGray
- const color lightGray
- const color overlayGray
- const color overlayBlack
- const color darkGreen

35.2.1 Variable Documentation

const color gl::col::black

const color gl::col::blue

const color gl::col::brown

const color gl::col::clear

const color gl::col::clickedBlue

const color gl::col::darkGray

const color gl::col::darkGreen

const color gl::col::gray

const color gl::col::green

const color gl::col::inactiveGray

const color gl::col::lightGray

const color gl::col::overlayBlack

const color gl::col::overlayGray

const color gl::col::red

const color gl::col::textboxBlue

const color gl::col::white

const color gl::col::yellow

35.3 test Namespace Reference

Namespaces

• macro

Classes

- class checkboxForm
- class clickedTestListener
- class depressedTestListener
- class enterTestListener
- class pressedTestListener
- class resizedTestListener
- class singleUlFunctionTest
- class singleUITest
- class testForm
- class textboxForm
- class UITestSuite

Functions

- void setUpGraphicsTest ()
- void teardownGraphicsTest ()
- os::smart_ptr< gl::testingDriver > getTestDriver () throw (os::smart_ptr<std::exception>)

35.3.1 Function Documentation

```
os::smart_ptr<gl::testingDriver> test::getTestDriver ( ) throw os::smart_ptr< std::exception >) void test::setUpGraphicsTest ( ) void test::teardownGraphicsTest ( )
```

35.4 test::macro Namespace Reference

Functions

- void moveMouseTo (int xPos, int yPos)
- void moveMouseTo (const gl::element &elm)
- void moveMouseTo (std::string str)
- void mousePress ()
- void mouseRelease ()
- void mouseClick ()
- void mouseClick (gl::element &elm)
- void mouseClick (std::string str)
- void keyboardClick (const gl::key &_key)
- void **keyboardDown** (const **gl::key** &_key)
- void **keyboardUp** (const **gl::key** &_key)
- void keyboardType (const std::string &str)
- void clickFileBar (os::smart_ptr< gl::barGroup > target)
- os::smart_ptr< os::unsortedList< gl::element > > searchUIBy (std::string str)

35.4.1 Function Documentation


```
void test::macro::clickFileBar ( os::smart_ptr< gl::barGroup > target )
void test::macro::keyboardClick ( const gl::key & _key )
void test::macro::keyboardDown ( const gl::key & _key )
void test::macro::keyboardType ( const std::string & str )
void test::macro::keyboardUp ( const gl::key & _key )
void test::macro::mouseClick ( )
void test::macro::mouseClick ( gl::element & elm )
void test::macro::mouseClick ( std::string str )
void test::macro::mousePress ( )
void test::macro::mouseRelease ( )
void test::macro::moveMouseTo ( int xPos, int yPos )
void test::macro::moveMouseTo ( const gl::element & elm )
void test::macro::moveMouseTo ( std::string str )
os::smart_ptr<os::unsortedList<gl::element> > test::macro::searchUlBy ( std::string str )
```

Chapter 36

Class Documentation

36.1 gl::activeDisplayArrowButton Class Reference

Inheritance diagram for gl::activeDisplayArrowButton:

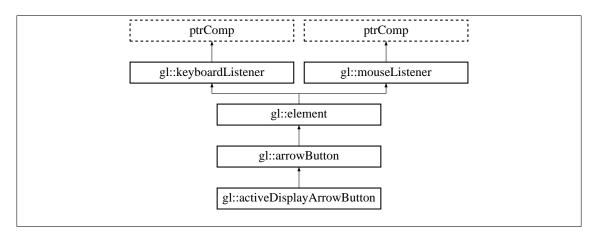

Public Member Functions

- activeDisplayArrowButton (frame *master)
- virtual ~activeDisplayArrowButton ()
- virtual void setActive (bool active)
- void setActiveColor (const color &activeColor)
- void **setActiveArrowColor** (const **color** &activeArrowColor)
- void setInactiveColor (const color &inactiveColor)
- void setInactiveArrowColor (const color &inactiveArrowColor)
- color activeColor () const
- color activeArrowtColor () const
- color inactiveColor () const
- color inactiveArrowColor () const

Protected Attributes


- color activeColor
- color activeArrowColor
- color inactiveColor
- color _inactiveArrowColor

Additional Inherited Members

Inheritance diagram for gl::activeDisplayButton:

```
36.1.1 Constructor & Destructor Documentation
gl::activeDisplayArrowButton::activeDisplayArrowButton ( frame * master )
virtual gl::activeDisplayArrowButton::~activeDisplayArrowButton( ) [inline], [virtual]
36.1.2 Member Function Documentation
color gl::activeDisplayArrowButton::activeArrowtColor ( ) const [inline]
color gl::activeDisplayArrowButton::activeColor ( ) const [inline]
color gl::activeDisplayArrowButton::inactiveArrowColor ( ) const [inline]
color gl::activeDisplayArrowButton::inactiveColor ( ) const [inline]
virtual void gl::activeDisplayArrowButton::setActive ( bool active ) [virtual]
Reimplemented from gl::arrowButton (p. 661).
void gl::activeDisplayArrowButton::setActiveArrowColor ( const color & activeArrowColor )
void gl::activeDisplayArrowButton::setActiveColor ( const color & activeColor )
void gl::activeDisplayArrowButton::setInactiveArrowColor ( const color & inactiveArrowColor )
void gl::activeDisplayArrowButton::setInactiveColor ( const color & inactiveColor )
36.1.3 Member Data Documentation
color gl::activeDisplayArrowButton::_activeArrowColor [protected]
color gl::activeDisplayArrowButton::_activeColor [protected]
color gl::activeDisplayArrowButton::_inactiveArrowColor [protected]
color gl::activeDisplayArrowButton:: inactiveColor [protected]
        gl::activeDisplayButton Class Reference
```

657

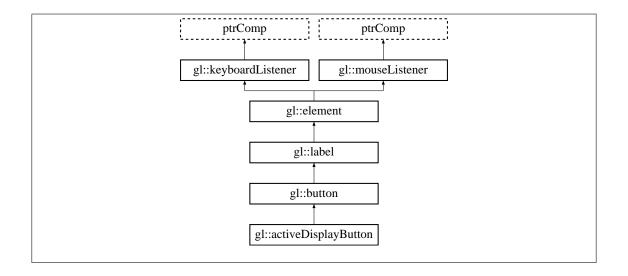

- activeDisplayButton (frame *master)
- virtual ~activeDisplayButton ()
- virtual void setActive (bool active)
- void setActiveColor (const color &activeColor)
- void setActiveTextColor (const color &activeTextColor)
- void setInactiveColor (const color &inactiveColor)
- void setInactiveTextColor (const color &inactiveTextColor)
- color activeColor () const
- color activeTextColor () const
- color inactiveColor () const
- color inactiveTextColor () const

Protected Attributes

- color _activeColor
- color _activeTextColor
- color _inactiveColor
- color _inactiveTextColor

Additional Inherited Members

36.2.1 Constructor & Destructor Documentation

gl::activeDisplayButton::activeDisplayButton (frame * master)

virtual gl::activeDisplayButton::~activeDisplayButton() [inline], [virtual]


36.2.2 Member Function Documentation

```
color gl::activeDisplayButton::activeColor() const [inline]
color gl::activeDisplayButton::inactiveTextColor() const [inline]
color gl::activeDisplayButton::inactiveTextColor() const [inline]
color gl::activeDisplayButton::inactiveTextColor() const [inline]
virtual void gl::activeDisplayButton::setActive() bool active() [virtual]
Reimplemented from gl::button (p. 671).

void gl::activeDisplayButton::setActiveColor() const color & activeColor()
void gl::activeDisplayButton::setActiveTextColor() const color & activeTextColor()
void gl::activeDisplayButton::setInactiveColor() const color & inactiveColor()
void gl::activeDisplayButton::setInactiveTextColor()
color gl::activeDisplayButton::_activeTextColor()
color gl::activeDisplayButton::_activeTextColor()
color gl::activeDisplayButton::_activeTextColor()
protected]
color gl::activeDisplayButton::_inactiveColor()
protected]
color gl::activeDisplayButton::_inactiveTextColor()
protected]
```

36.3 gl::arrowButton Class Reference

Inheritance diagram for gl::arrowButton:

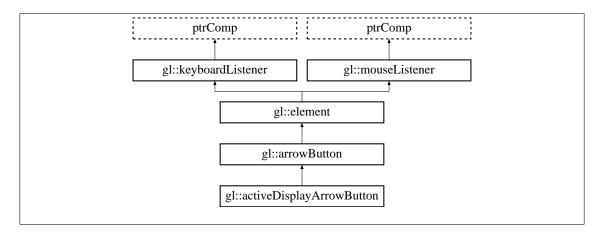

Public Member Functions

- arrowButton (frame *master)
- virtual ~arrowButton ()

- virtual void drawBackground ()
- virtual void drawMain ()
- virtual bool focusable () const
- virtual void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- virtual bool **keyPress** (const **key** & key)
- virtual bool **keyUnpress** (const **key** &_key)
- void unsetFocus ()
- bool **selectSize** () const
- void setSelectSize (int selSize)
- int arrowBoarder () const
- void setArrowBoarder (int arrowBoarder)
- virtual void **setHeight** (int **height**)
- virtual void **setWidth** (int **width**)
- color clickedColor () const
- void setClickedColor (const color &clickedCol)
- color arrowColor () const
- void **setArrowColor** (const **color** &arrowCol)
- arrowType arrow () const
- void setArrow (arrowType arrow)
- virtual void setActive (bool active)
- bool active () const

Protected Member Functions

- const bool clickedDown () const
- const bool enterDown () const
- void drawArrow () const

Protected Attributes

- color _clickedColor
- color _arrowColor
- arrowType _arrowType

Private Attributes


- int _selectSize
- int _arrowBorder
- bool _clickedDown
- bool _active
- bool enterDown

```
36.3.1 Constructor & Destructor Documentation
gl::arrowButton::arrowButton ( frame * master )
virtual gl::arrowButton::~arrowButton( ) [inline], [virtual]
36.3.2 Member Function Documentation
bool gl::arrowButton::active ( ) const [inline]
arrowType gl::arrowButton::arrow( ) const [inline]
int gl::arrowButton::arrowBoarder( ) const [inline]
color gl::arrowButton::arrowColor( ) const [inline]
virtual void gl::arrowButton::buttonClicked ( int button, int state, int mousePositionX, int
mousePositionY ) [virtual]
Reimplemented from gl::mouseListener (p. 730).
color gl::arrowButton::clickedColor ( ) const [inline]
const bool gl::arrowButton::clickedDown ( ) const [inline], [protected]
void gl::arrowButton::drawArrow ( ) const [protected]
virtual void gl::arrowButton::drawBackground( ) [virtual]
Reimplemented from gl::element (p. 693).
virtual void gl::arrowButton::drawMain( ) [virtual]
Reimplemented from gl::element (p. 693).
const bool gl::arrowButton::enterDown ( ) const [inline], [protected]
virtual bool gl::arrowButton::focusable ( ) const [inline], [virtual]
Reimplemented from gl::element (p. 693).
virtual bool gl::arrowButton::keyPress ( const key & key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
virtual bool gl::arrowButton::keyUnpress ( const key & _key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
bool gl::arrowButton::selectSize ( ) const [inline]
virtual void gl::arrowButton::setActive ( bool active ) [inline], [virtual]
Reimplemented in gl::activeDisplayArrowButton (p. 657).
```

```
void gl::arrowButton::setArrow ( arrowType arrow ) [inline]
void gl::arrowButton::setArrowBoarder ( int arrowBoarder )
void gl::arrowButton::setArrowColor ( const color & arrowCol ) [inline]
void gl::arrowButton::setClickedColor ( const color & clickedCol ) [inline]
virtual void gl::arrowButton::setHeight ( int height ) [virtual]
Reimplemented from gl::element (p. 696).
void gl::arrowButton::setSelectSize ( int selSize )
virtual void gl::arrowButton::setWidth ( int width ) [virtual]
Reimplemented from gl::element (p. 696).
void gl::arrowButton::unsetFocus( ) [virtual]
Reimplemented from gl::element (p. 697).
36.3.3 Member Data Documentation
bool gl::arrowButton::_active [private]
int gl::arrowButton::_arrowBorder [private]
color gl::arrowButton::_arrowColor [protected]
arrowType gl::arrowButton::_arrowType [protected]
color gl::arrowButton::_clickedColor [protected]
bool gl::arrowButton::_clickedDown [private]
bool gl::arrowButton::_enterDown [private]
int gl::arrowButton::_selectSize [private]
```

36.4 gl::barGroup Class Reference

Inheritance diagram for gl::barGroup:

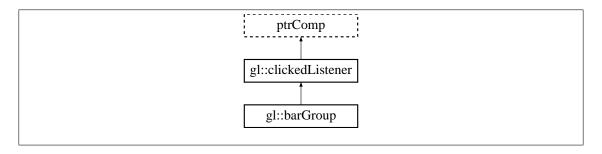

- barGroup (std::string name)
- virtual ~barGroup ()
- os::smart_ptr< barGroup > master ()
- const os::smart_ptr< barGroup > master () const
- void addChild (os::smart_ptr< barGroup > child)
- void **setChildren** (os::smart_ptr< os::unsortedList< **barGroup** > > **children**)
- void refreshChildren ()
- os::unsortedList< barGroup > & children ()
- const os::unsortedList< barGroup > & children () const
- int prefferedWidth () const
- void **setName** (std::string **name**)
- const std::string & name () const
- os::smart_ptr< button > myButton ()
- bool **inside** (int xVal, int yVal)
- bool mouseln ()
- void **mouseMove** (int mousePositionX, int mousePositionY)
- virtual void receivedClicked (os::smart_ptr< element > elm)
- void pushClickedListener (os::smart_ptr< clickedListener > clickedListen)
- void removeClickedListener (os::smart_ptr< clickedListener > clickedListen)

Private Member Functions

- void teardown ()
- os::smart_ptr< button > buildButton (os::smart_ptr< frame > mFrame)
- void setHeight (int height)
- void setTextColor (const color &col)
- void setColor (const color &col)
- void setClickedColor (const color &col)
- void **setFont** (os::smart_ptr< **font** > fon)

Private Attributes

- int prefferedWidth
- std::string _name
- os::smart_ptr< barGroup > _master
- os::smart_ptr< os::unsortedList< barGroup > > _children
- os::smartSet< clickedListener > _listeners
- os::smart_ptr< button > _myButton
- os::smart_ptr< frame > myFrame
- bool isTopLevel
- int height
- color _textColor
- color _color
- color _clickedColor
- os::smart_ptr< font > _font

Friends


• class fileBar

```
Constructor & Destructor Documentation
gl::barGroup::barGroup ( std::string name )
virtual gl::barGroup::~barGroup( ) [inline], [virtual]
36.4.2 Member Function Documentation
void gl::barGroup::addChild ( os::smart ptr< barGroup > child )
os::smart_ptr<button> gl::barGroup::buildButton ( os::smart_ptr< frame > mFrame ) [private]
os::unsortedList<barGroup>& gl::barGroup::children() [inline]
const os::unsortedList<br/>barGroup>& gl::barGroup::children ( ) const [inline]
bool gl::barGroup::inside ( int xVal, int yVal )
os::smart_ptr<barGroup> gl::barGroup::master( ) [inline]
const os::smart_ptr<barGroup> gl::barGroup::master( ) const [inline]
bool gl::barGroup::mouseIn ( )
void gl::barGroup::mouseMove ( int mousePositionX, int mousePositionY )
os::smart ptr<button> gl::barGroup::myButton ( ) [inline]
const std::string& gl::barGroup::name ( ) const [inline]
int gl::barGroup::prefferedWidth ( ) const [inline]
void gl::barGroup::pushClickedListener ( os::smart_ptr< clickedListener > clickedListen )
virtual void gl::barGroup::receivedClicked ( os::smart_ptr< element > elm ) [virtual]
Reimplemented from gl::clickedListener (p. 682).
void gl::barGroup::refreshChildren ( )
void gl::barGroup::removeClickedListener ( os::smart ptr< clickedListener > clickedListen )
void gl::barGroup::setChildren ( os::smart ptr< os::unsortedList< barGroup > > children )
void gl::barGroup::setClickedColor ( const color & col ) [private]
void gl::barGroup::setColor ( const color & col ) [private]
void gl::barGroup::setFont ( os::smart_ptr< font > fon ) [private]
void gl::barGroup::setHeight ( int height ) [private]
void gl::barGroup::setName ( std::string name )
```

```
void gl::barGroup::setTextColor ( const color & col ) [private]
void gl::barGroup::teardown( ) [private]
36.4.3 Friends And Related Function Documentation
friend class fileBar [friend]
36.4.4 Member Data Documentation
os::smart_ptr<os::unsortedList<barGroup> > gl::barGroup::_children [private]
color gl::barGroup::_clickedColor [private]
color gl::barGroup:: color [private]
os::smart_ptr<font> gl::barGroup::_font [private]
int gl::barGroup::_height [private]
os::smartSet<clickedListener> gl::barGroup::_listeners [private]
os::smart ptr<barGroup> gl::barGroup:: master [private]
os::smart_ptr<button> gl::barGroup::_myButton [private]
std::string gl::barGroup::_name [private]
int gl::barGroup::_prefferedWidth [private]
color gl::barGroup::_textColor [private]
bool gl::barGroup::isTopLevel [private]
os::smart_ptr<frame> gl::barGroup::myFrame [private]
```

36.5 gl::baseUIDriver Class Reference

Inheritance diagram for gl::baseUIDriver:



Public Member Functions

- virtual ~baseUIDriver ()
- virtual void display ()
- os::smart_ptr< form > root ()
- os::smart_ptr< form > topForm ()
- virtual bool opengl () const

- virtual void buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- void **keyPress** (const **key** &_key)
- void keyUnpress (const key &_key)
- virtual int windowWidth () const
- virtual int windowHeight () const
- virtual void setWindowDimensions (int width, int height)
- virtual void setTypingMode (bool typingMode)
- bool typingMode () const

Static Public Member Functions

static os::smart_ptr< baseUIDriver > singleton ()

Protected Member Functions

• baseUIDriver (os::smart ptr< form > root)

Protected Attributes

- os::smart_ptr< form > root_form
- bool _typingMode

Friends

• class form

```
36.5.1 Constructor & Destructor Documentation
```

```
gl::baseUIDriver::baseUIDriver ( os::smart_ptr< form > root ) [protected]
virtual gl::baseUIDriver::~baseUIDriver ( ) [inline], [virtual]
```

36.5.2 Member Function Documentation

 $\label{local_virtual_void} \mbox{ gl::baseUIDriver::buttonClicked (int button, int state, int mousePositionX, int mousePositionY) [virtual]} \\$

Reimplemented in **gl::testingDriver** (p. 752).

```
virtual void gl::baseUIDriver::display ( ) [inline], [virtual]
```

Reimplemented in gl::testingDriver (p. 752), and gl::UIDriver (p. 763).

```
void gl::baseUIDriver::keyPress ( const key & key )
```


void gl::baseUIDriver::keyUnpress (const key & _key)

virtual void gl::baseUIDriver::mouseMove (int mousePositionX, int mousePositionY) [virtual]

Reimplemented in gl::testingDriver (p. 752).

```
virtual bool gl::baseUIDriver::opengl( ) const [inline], [virtual]
Reimplemented in gl::testingDriver (p. 752), and gl::UIDriver (p. 763).
os::smart_ptr<form> gl::baseUIDriver::root( ) [inline]
virtual void gl::baseUIDriver::setTypingMode ( bool typingMode ) [inline], [virtual]
Reimplemented in gl::UIDriver (p. 763).
virtual void gl::baseUIDriver::setWindowDimensions ( int _width, int _height ) [inline],
[virtual]
Reimplemented in gl::testingDriver (p. 752), and gl::UIDriver (p. 763).
static os::smart ptr<baseUIDriver> gl::baseUIDriver::singleton( ) [static]
os::smart_ptr<form> gl::baseUIDriver::topForm ( )
bool gl::baseUIDriver::typingMode ( ) const [inline]
virtual int gl::baseUIDriver::windowHeight( ) const [inline], [virtual]
Reimplemented in gl::testingDriver (p. 752), and gl::UIDriver (p. 763).
virtual int gl::baseUIDriver::windowWidth ( ) const [inline], [virtual]
Reimplemented in gl::testingDriver (p. 753), and gl::UIDriver (p. 764).
36.5.3 Friends And Related Function Documentation
friend class form [friend]
36.5.4 Member Data Documentation
bool gl::baseUIDriver::_typingMode [protected]
os::smart_ptr<form> gl::baseUIDriver::root_form [protected]
36.6 gl::box Class Reference
```

Inheritance diagram for gl::box:

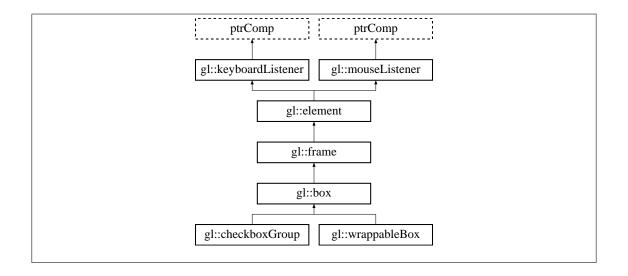

- box (frame *master, elementDepth depth=defaultDepth)
- virtual ~box ()
- virtual void drawBackground ()
- void setFrameSize (int frameSize)
- int frameSize () const
- void setFrameColor (const color &frameColor)
- color frameColor () const

Protected Attributes

color _frameColor

Private Attributes

• int _frameSize

Additional Inherited Members

36.6.1 Constructor & Destructor Documentation

```
gl::box::box ( frame * master, elementDepth depth = defaultDepth )
```

virtual gl::box::~box() [inline], [virtual]

36.6.2 Member Function Documentation


virtual void gl::box::drawBackground () [virtual]

Reimplemented from gl::frame (p. 716).

```
color gl::box::frameColor( ) const [inline]
int gl::box::frameSize( ) const [inline]
void gl::box::setFrameColor( const color & frameColor) [inline]
void gl::box::setFrameSize( int frameSize)
36.6.3 Member Data Documentation
color gl::box::_frameColor [protected]
int gl::box::_frameSize [private]
```

36.7 gl::button Class Reference

Inheritance diagram for gl::button:

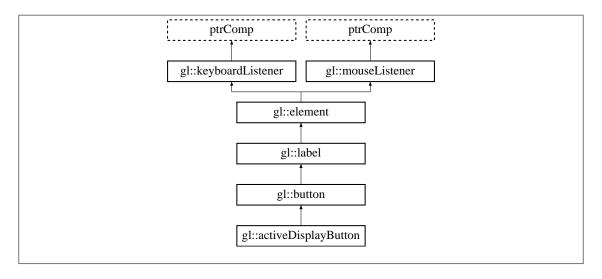

Public Member Functions

- button (frame *master)
- virtual ~button ()
- virtual void drawBackground ()
- virtual void drawMain ()
- virtual bool focusable () const
- virtual void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- virtual bool keyPress (const key & key)
- virtual bool **keyUnpress** (const **key** & key)
- void unsetFocus ()
- bool selectSize () const
- void setSelectSize (int selSize)
- virtual void setHeight (int height)
- virtual void setWidth (int width)

- color clickedColor () const
- void setClickedColor (const color &clickedCol)
- virtual void **setActive** (bool **active**)
- bool active () const

Protected Member Functions

- const bool clickedDown () const
- const bool enterDown () const

Protected Attributes

• color clickedColor

Private Attributes

- int _selectSize
- bool _clickedDown
- bool enterDown
- bool _active

36.7.1 Constructor & Destructor Documentation

```
gl::button::button( frame * master )
virtual gl::button::~button( ) [inline], [virtual]
36.7.2    Member Function Documentation
bool gl::button::active ( ) const [inline]
virtual void gl::button::buttonClicked ( int button, int state, int mousePositionX, int mousePositionY)
    [virtual]
Reimplemented from gl::mouseListener (p. 730).

color gl::button::clickedColor ( ) const [inline]
const bool gl::button::clickedDown ( ) const [inline], [protected]
virtual void gl::button::drawBackground ( ) [virtual]
```


Reimplemented from **gl::element** (p. 693).

virtual void gl::button::drawMain() [virtual]

Reimplemented from gl::label (p. 726).

```
const bool gl::button::enterDown ( ) const [inline], [protected]
virtual bool gl::button::focusable ( ) const [inline], [virtual]
Reimplemented from gl::element (p. 693).
virtual bool gl::button::keyPress ( const key & _key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
virtual bool gl::button::keyUnpress ( const key & _key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
bool gl::button::selectSize ( ) const [inline]
virtual void gl::button::setActive ( bool active ) [inline], [virtual]
Reimplemented in gl::activeDisplayButton (p. 659).
void gl::button::setClickedColor ( const color & clickedCol ) [inline]
virtual void gl::button::setHeight ( int height ) [virtual]
Reimplemented from gl::label (p. 727).
void gl::button::setSelectSize ( int selSize )
virtual void gl::button::setWidth ( int width ) [virtual]
Reimplemented from gl::label (p. 727).
void gl::button::unsetFocus( ) [virtual]
Reimplemented from gl::element (p. 697).
36.7.3 Member Data Documentation
bool gl::button::_active [private]
color gl::button:: clickedColor [protected]
bool gl::button:: clickedDown [private]
bool gl::button:: enterDown [private]
int gl::button::_selectSize [private]
        gl::checkbox Class Reference
36.8
```

Inheritance diagram for gl::checkbox:

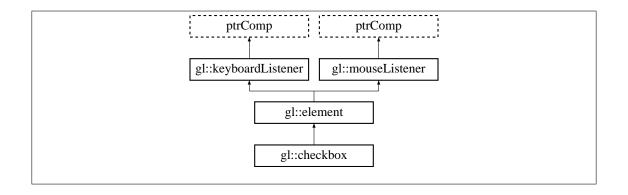

- checkbox (frame *master)
- virtual ~checkbox ()
- void setBorderSize (int borderSize)
- int borderSize () const
- void setHeight (int height)
- void setWidth (int width)
- virtual void drawBackground ()
- virtual void drawMain ()
- virtual void drawTop ()
- void buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- bool **keyPress** (const **key** &_key)
- bool **keyUnpress** (const **key** &_key)
- bool focusable () const
- void setChecked (bool checked)
- bool checked () const
- void setFrameColor (const color &frameColor)
- void setCheckColor (const color &checkColor)
- void setClickedColor (const color &clickedColor)
- const color & frameColor () const
- const color & checkColor () const
- const color & clickedColor () const

Protected Attributes

- color _frameColor
- color _checkColor
- color _clickedColor
- bool _checked

Private Attributes

- bool mouseDown
- bool keyDown
- int _borderSize

Additional Inherited Members

```
36.8.1 Constructor & Destructor Documentation
gl::checkbox::checkbox ( frame * master )
virtual gl::checkbox::~checkbox( ) [inline], [virtual]
36.8.2 Member Function Documentation
int gl::checkbox::borderSize ( ) const [inline]
void gl::checkbox::buttonClicked ( int button, int state, int mousePositionX, int mousePositionY )
[virtual]
Reimplemented from gl::mouseListener (p. 730).
const color& gl::checkbox::checkColor( ) const [inline]
bool gl::checkbox::checked ( ) const [inline]
const color& gl::checkbox::clickedColor( ) const [inline]
virtual void gl::checkbox::drawBackground( ) [virtual]
Reimplemented from gl::element (p. 693).
virtual void gl::checkbox::drawMain( ) [virtual]
Reimplemented from gl::element (p. 693).
virtual void gl::checkbox::drawTop ( ) [virtual]
Reimplemented from gl::element (p. 693).
bool gl::checkbox::focusable ( ) const [inline], [virtual]
Reimplemented from gl::element (p. 693).
const color& gl::checkbox::frameColor ( ) const [inline]
bool gl::checkbox::keyPress ( const key & _key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
bool gl::checkbox::keyUnpress ( const key & _key ) [virtual]
```

Reimplemented from gl::keyboardListener (p. 725).


```
void gl::checkbox::setBorderSize ( int borderSize )
void gl::checkbox::setCheckColor ( const color & checkColor ) [inline]
void gl::checkbox::setChecked ( bool checked ) [inline]
void gl::checkbox::setClickedColor ( const color & clickedColor ) [inline]
void gl::checkbox::setFrameColor ( const color & frameColor ) [inline]
void gl::checkbox::setHeight ( int height ) [virtual]
Reimplemented from gl::element (p. 696).
Reimplemented from gl::element (p. 696).
```

36.8.3 Member Data Documentation

```
int gl::checkbox::_borderSize [private]
color gl::checkbox::_checkColor [protected]
bool gl::checkbox::_checked [protected]
color gl::checkbox::_clickedColor [protected]
color gl::checkbox::_frameColor [protected]
bool gl::checkbox::_keyDown [private]
bool gl::checkbox::_mouseDown [private]
```

36.9 test::checkboxForm Class Reference

Inheritance diagram for test::checkboxForm:

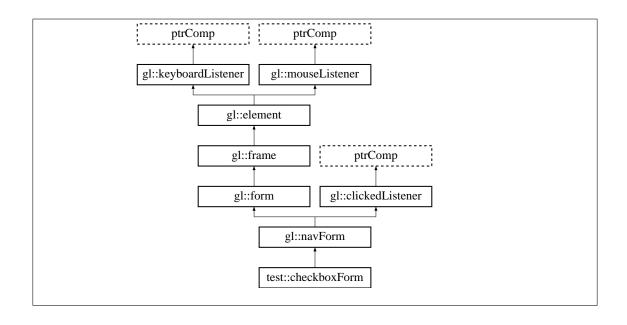

- checkboxForm (os::smart_ptr< gl::form > prev)
- virtual ~checkboxForm ()

Public Attributes

- gl::checkbox chxOne
- gl::checkbox chxTwo
- gl::checkboxGroup checkGroup

Additional Inherited Members

36.9.1 Constructor & Destructor Documentation

```
test::checkboxForm::checkboxForm ( os::smart_ptr< gl::form > prev )
virtual test::checkboxForm::~checkboxForm ( ) [inline], [virtual]
```

36.9.2 Member Data Documentation


gl::checkboxGroup test::checkboxForm::checkGroup

gl::checkbox test::checkboxForm::chxOne

gl::checkbox test::checkboxForm::chxTwo

36.10 gl::checkboxGroup Class Reference

Inheritance diagram for gl::checkboxGroup:

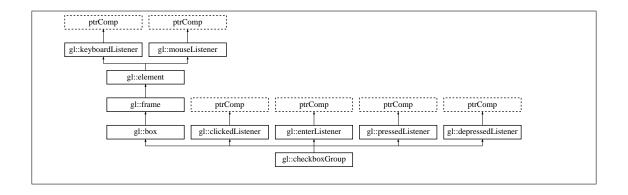

- checkboxGroup (frame *master, elementDepth depth=defaultDepth)
- virtual ~checkboxGroup ()
- void **setTitle** (std::string **title**)
- const std::string & title () const
- void addString (const std::string &str)
- void addStrings (const std::vector< std::string > &strs)
- const std::vector< std::string > & strings () const
- unsigned int numString () const
- void setChoice (checkboxGroupType singleChoice)
- checkboxGroupType choice () const
- void receivedClicked (os::smart_ptr< element > elm)
- void receivedEnter (os::smart_ptr< element > elm)
- void receivedDepressed (os::smart_ptr< element > elm)
- void receivedPressed (os::smart_ptr< element > elm)
- void setFont (os::smart_ptr< font > f)
- const os::smart_ptr< font > getFont () const
- void setTextColor (const color &textColor)
- void setCheckFrameColor (const color &checkFrameColor)
- void setCheckBackgroundColor (const color &checkBackgroundColor)
- void setClickedColor (const color &clickedColor)
- const color & textColor () const
- const color & checkFrameColor () const
- const color & checkBackgroundColor () const
- const color & clickedColor () const
- void rebindSize ()
- void setHeight (int h)
- void setWidth (int w)
- bool operator[] (int i) const
- void setCheckbox (int i, bool checked)

Protected Member Functions

• void receivedChanged (os::smart ptr< element > elm)

Private Attributes

- std::string _title
- label lblTitle
- os::smart ptr< font > font
- std::vector< std::string > _stringList
- std::vector< os::smart_ptr< checkbox> > _checkboxList
- std::vector< os::smart_ptr< label > > _labelNames
- checkboxGroupType choice
- color _textColor
- color _checkFrameColor
- color checkBackgroundColor
- color _clickedColor

Additional Inherited Members

```
36.10.1 Constructor & Destructor Documentation
```


```
gl::checkboxGroup::checkboxGroup ( frame * master, elementDepth depth = defaultDepth )
virtual gl::checkboxGroup::~checkboxGroup( ) [inline], [virtual]
36.10.2 Member Function Documentation
void gl::checkboxGroup::addString ( const std::string & str )
void gl::checkboxGroup::addStrings ( const std::vector< std::string > & strs )
const color& gl::checkboxGroup::checkBackgroundColor( ) const [inline]
const color& gl::checkboxGroup::checkFrameColor( ) const [inline]
checkboxGroupType gl::checkboxGroup::choice ( ) const [inline]
const color& gl::checkboxGroup::clickedColor( ) const [inline]
const os::smart_ptr<font> gl::checkboxGroup::getFont( ) const [inline]
unsigned int gl::checkboxGroup::numString ( ) const [inline]
bool gl::checkboxGroup::operator[] ( int i ) const
void gl::checkboxGroup::rebindSize ( )
void gl::checkboxGroup::receivedChanged ( os::smart_ptr< element > elm ) [protected]
void gl::checkboxGroup::receivedClicked ( os::smart ptr< element > elm ) [inline], [virtual]
Reimplemented from gl::clickedListener (p. 682).
void gl::checkboxGroup::receivedDepressed ( os::smart_ptr< element > elm ) [inline],
[virtual]
```

```
void gl::checkboxGroup::receivedEnter( os::smart_ptr< element > elm ) [inline], [virtual]
Reimplemented from gl::enterListener (p. 700).
void gl::checkboxGroup::receivedPressed ( os::smart_ptr< element > elm ) [inline],
[virtual]
Reimplemented from gl::pressedListener (p. 737).
void gl::checkboxGroup::setCheckBackgroundColor ( const color & checkBackgroundColor )
void gl::checkboxGroup::setCheckbox ( int i, bool checked )
void gl::checkboxGroup::setCheckFrameColor ( const color & checkFrameColor )
void gl::checkboxGroup::setChoice ( checkboxGroupType singleChoice )
void gl::checkboxGroup::setClickedColor ( const color & clickedColor )
void gl::checkboxGroup::setFont ( os::smart_ptr< font > f )
void gl::checkboxGroup::setHeight( int h ) [virtual]
Reimplemented from gl::element (p. 696).
void gl::checkboxGroup::setTextColor ( const color & textColor )
void gl::checkboxGroup::setTitle ( std::string title )
void gl::checkboxGroup::setWidth( int w ) [virtual]
Reimplemented from gl::element (p. 696).
const std::vector<std::string>& gl::checkboxGroup::strings ( ) const [inline]
const color& gl::checkboxGroup::textColor( ) const [inline]
const std::string& gl::checkboxGroup::title ( ) const [inline]
36.10.3 Member Data Documentation
color gl::checkboxGroup:: checkBackgroundColor [private]
std::vector<os::smart_ptr<checkbox> > gl::checkboxGroup::_checkboxList [private]
color gl::checkboxGroup::_checkFrameColor [private]
checkboxGroupType gl::checkboxGroup:: choice [private]
color gl::checkboxGroup:: clickedColor [private]
os::smart ptr<font> gl::checkboxGroup:: font [private]
std::vector<os::smart_ptr<label> > gl::checkboxGroup::_labelNames [private]
```

```
std::vector<std::string> gl::checkboxGroup::_stringList [private]
color gl::checkboxGroup::_textColor [private]
std::string gl::checkboxGroup::_title [private]
label gl::checkboxGroup::lblTitle [private]
```

36.11 gl::clickedFunction Class Reference

Inheritance diagram for gl::clickedFunction:

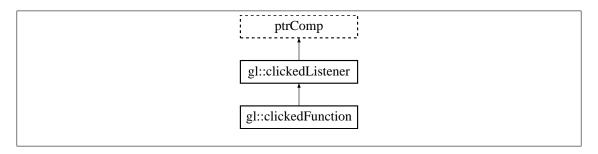

Public Member Functions

- clickedFunction (elementHandler handler)
- virtual ~clickedFunction ()
- virtual void receivedClicked (os::smart_ptr< element > elm)

Protected Attributes

• elementHandler ehan

36.11.1 Constructor & Destructor Documentation

```
gl::clickedFunction::clickedFunction ( elementHandler handler ) [inline] virtual gl::clickedFunction::~clickedFunction ( ) [inline], [virtual]
```

36.11.2 Member Function Documentation

virtual void gl::clickedFunction::receivedClicked (os::smart_ptr< element > elm) [inline],
[virtual]


Reimplemented from gl::clickedListener (p. 682).

36.11.3 Member Data Documentation

elementHandler gl::clickedFunction::ehan [protected]

36.12 gl::clickedFunctionVoid Class Reference

Inheritance diagram for gl::clickedFunctionVoid:

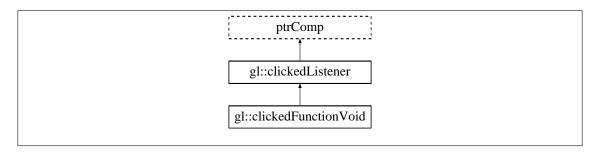

Public Member Functions

- clickedFunctionVoid (elementHandler_void handler, void *void_ptr)
- virtual ~clickedFunctionVoid ()
- virtual void receivedClicked (os::smart_ptr< element > elm)

Protected Attributes

- elementHandler_void ehan
- void * vptr

36.12.1 Constructor & Destructor Documentation

 $\verb|gl::clickedFunctionVoid::clickedFunctionVoid (| elementHandler_void | handler, | void * void_ptr |) \\ [inline] \\$

virtual gl::clickedFunctionVoid::~clickedFunctionVoid() [inline], [virtual]

36.12.2 Member Function Documentation

Reimplemented from gl::clickedListener (p. 682).


36.12.3 Member Data Documentation

elementHandler_void gl::clickedFunctionVoid::ehan [protected]

void* gl::clickedFunctionVoid::vptr [protected]

36.13 gl::clickedListener Class Reference

Inheritance diagram for gl::clickedListener:

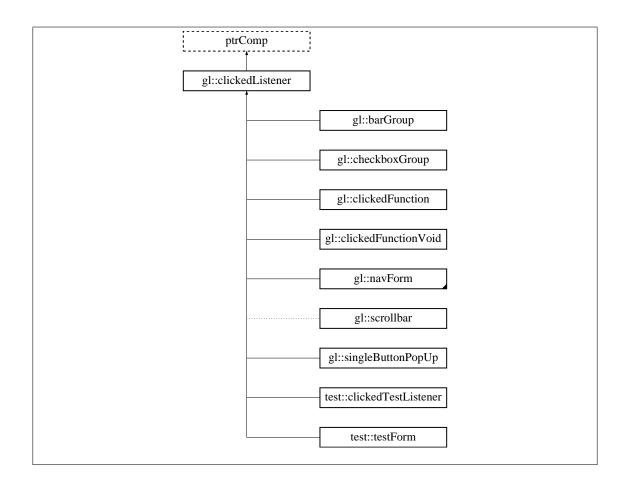

- virtual ~clickedListener ()
- virtual void receivedClicked (os::smart_ptr< element > elm)

Private Attributes

- std::mutex mtx
- os::smartSet< element > senders

Friends

• class element

36.13.1 Constructor & Destructor Documentation

virtual gl::clickedListener::~clickedListener() [virtual]

36.13.2 Member Function Documentation

virtual void gl::clickedListener::receivedClicked (os::smart_ptr< element > elm) [inline],
[virtual]

Reimplemented in gl::scrollbar (p. 746), gl::barGroup (p. 664), gl::clickedFunctionVoid (p. 680), gl::checkboxGroup (p. 677), gl::clickedFunction (p. 679), gl::navForm (p. 732), test::clicked TestListener (p. 683), and gl::singleButtonPopUp (p. 748).

36.13.3 Friends And Related Function Documentation

friend class **element** [friend]


36.13.4 Member Data Documentation

std::mutex gl::clickedListener::mtx [private]

os::smartSet<element> gl::clickedListener::senders [private]

36.14 test::clickedTestListener Class Reference

Inheritance diagram for test::clickedTestListener:

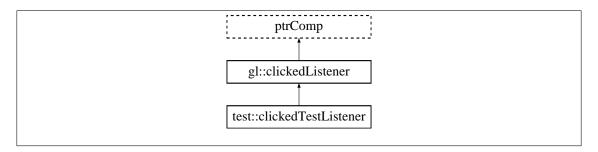

Public Member Functions

- clickedTestListener ()
- virtual ~clickedTestListener ()
- void resetFlag ()
- void receivedClicked (os::smart_ptr< gl::element > elm)
- bool flag () const

Private Attributes

• bool flag

36.14.1 Constructor & Destructor Documentation

test::clickedTestListener::clickedTestListener() [inline]

virtual test::clickedTestListener::~clickedTestListener() [inline], [virtual]

36.14.2 Member Function Documentation

```
bool test::clickedTestListener::flag ( ) const [inline]
void test::clickedTestListener::receivedClicked ( os::smart_ptr< gl::element > elm ) [inline],
[virtual]
```

Reimplemented from gl::clickedListener (p. 682).

```
void test::clickedTestListener::resetFlag ( ) [inline]
```

36.14.3 Member Data Documentation

bool test::clickedTestListener:: flag [private]

36.15 gl::color Struct Reference

Public Member Functions

- color ()
- **color** (double r, double g, double b, double a)
- color (const color &col)
- const color & operator= (const color &col)
- bool **operator==** (const **color** &col) const
- bool **operator!=** (const **color** &col) const

Public Attributes

- double red
- double green
- double **blue**
- double alpha

36.15.1 Constructor & Destructor Documentation

```
gl::color::color( )
gl::color::color( double r, double g, double b, double a )
gl::color::color( const color & col )
```

36.15.2 Member Function Documentation

```
bool gl::color::operator!= ( const color & col ) const const color & gl::color::operator= ( const color & col ) bool gl::color::operator== ( const color & col ) const
```

36.15.3 Member Data Documentation

```
double gl::color::alpha double gl::color::blue
```

36.16 gl::DDS header Struct Reference

Public Attributes

- unsigned int dwMagic
- unsigned int dwSize
- unsigned int dwFlags
- unsigned int dwHeight
- unsigned int dwWidth
- unsigned int dwPitchOrLinearSize
- unsigned int dwDepth
- unsigned int dwMipMapCount
- unsigned int dwReserved1 [11]
- struct {
 - unsigned int dwSize
 - unsigned int dwFlags
 - unsigned int dwFourCC
 - unsigned int dwRGBBitCount
 - unsigned int dwRBitMask
 - unsigned int dwGBitMask
 - unsigned int dwBBitMask
 - unsigned int dwAlphaBitMask
 - } sPixelFormat
- struct {
 - $unsigned \ int \ dw Caps 1$
 - unsigned int dwCaps2
 - unsigned int dwDDSX
 - unsigned int dwReserved
 - } sCaps
- unsigned int dwReserved2

36.16.1 Detailed Description

A bunch of DirectDraw Surface structures and flags

36.16.2 Member Data Documentation

unsigned int gl::DDS header::dwAlphaBitMask


unsigned int gl::DDS_header::dwBBitMask

unsigned int gl::DDS_header::dwCaps1

```
unsigned int gl::DDS_header::dwCaps2
unsigned int gl::DDS_header::dwDDSX
unsigned int gl::DDS_header::dwDepth
unsigned int gl::DDS_header::dwFlags
unsigned int gl::DDS header::dwFourCC
unsigned int gl::DDS header::dwGBitMask
unsigned int gl::DDS_header::dwHeight
unsigned int gl::DDS_header::dwMagic
unsigned int gl::DDS_header::dwMipMapCount
unsigned int gl::DDS header::dwPitchOrLinearSize
unsigned int gl::DDS_header::dwRBitMask
unsigned int gl::DDS_header::dwReserved
unsigned int gl::DDS_header::dwReserved1[11]
unsigned int gl::DDS_header::dwReserved2
unsigned int gl::DDS_header::dwRGBBitCount
unsigned int gl::DDS_header::dwSize
unsigned int gl::DDS_header::dwWidth
struct { ... } gl::DDS_header::sCaps
struct { ... } gl::DDS_header::sPixelFormat
```

36.17 gl::depressedFunction Class Reference

Inheritance diagram for gl::depressedFunction:

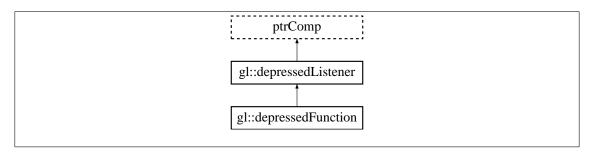

Public Member Functions

- depressedFunction (elementHandler handler)
- virtual ~depressedFunction ()

• virtual void receivedDepressed (os::smart_ptr< element > elm)

Protected Attributes

• elementHandler ehan

36.17.1 Constructor & Destructor Documentation

gl::depressedFunction::depressedFunction (elementHandler handler) [inline] virtual gl::depressedFunction::~depressedFunction () [inline], [virtual]

36.17.2 Member Function Documentation

virtual void gl::depressedFunction::receivedDepressed (os::smart_ptr< element > elm)
[inline], [virtual]


Reimplemented from gl::depressedListener (p. 688).

36.17.3 Member Data Documentation

elementHandler gl::depressedFunction::ehan [protected]

36.18 gl::depressedFunctionVoid Class Reference

Inheritance diagram for gl::depressedFunctionVoid:

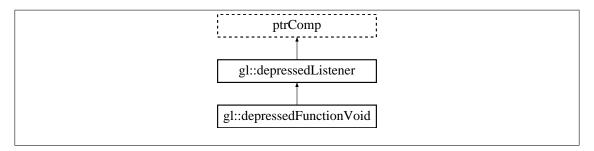

Public Member Functions

- depressedFunctionVoid (elementHandler_void handler, void *void_ptr)
- virtual ~depressedFunctionVoid ()
- virtual void receivedDepressed (os::smart_ptr< element > elm)

Protected Attributes

- elementHandler void ehan
- void * vptr

36.18.1 Constructor & Destructor Documentation

gl::depressedFunctionVoid::depressedFunctionVoid (**elementHandler_void** handler, void * void_ptr) [inline]

virtual gl::depressedFunctionVoid::~depressedFunctionVoid () [inline], [virtual]

36.18.2 Member Function Documentation

virtual void gl::depressedFunctionVoid::receivedDepressed (os::smart_ptr< element > elm)
[inline], [virtual]

Reimplemented from gl::depressedListener (p. 688).


36.18.3 Member Data Documentation

elementHandler void gl::depressedFunctionVoid::ehan [protected]

void* gl::depressedFunctionVoid::vptr [protected]

36.19 gl::depressedListener Class Reference

Inheritance diagram for gl::depressedListener:

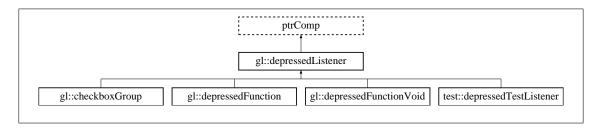

Public Member Functions

- virtual ~depressedListener ()
- virtual void receivedDepressed (os::smart_ptr< element > elm)

Private Attributes

- std::mutex mtx
- os::smartSet< element > senders

Friends

• class element

36.19.1 Constructor & Destructor Documentation

virtual gl::depressedListener::~depressedListener() [virtual]

36.19.2 Member Function Documentation

 $\label{lem:condition} \begin{tabular}{ll} virtual void gl::depressedListener::receivedDepressed (os::smart_ptr< \textbf{element} > elm) \\ [inline], [virtual] \end{tabular}$

Reimplemented in gl::depressedFunctionVoid (p. 687), gl::depressedFunction (p. 686), gl ::checkboxGroup (p. 677), and test::depressedTestListener (p. 689).

36.19.3 Friends And Related Function Documentation

friend class element [friend]


36.19.4 Member Data Documentation

std::mutex gl::depressedListener::mtx [private]

os::smartSet<**element**> gl::depressedListener::senders [private]

36.20 test::depressedTestListener Class Reference

Inheritance diagram for test::depressedTestListener:

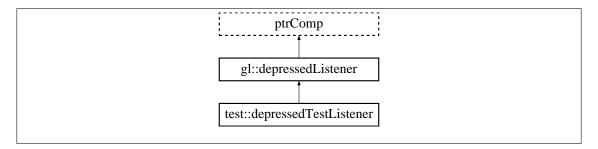

Public Member Functions

- depressedTestListener ()
- virtual ~depressedTestListener ()
- void resetFlag ()
- void receivedDepressed (os::smart_ptr< gl::element > elm)
- bool flag () const

Private Attributes

• bool _flag

36.20.1 Constructor & Destructor Documentation

test::depressedTestListener::depressedTestListener() [inline]

virtual test::depressedTestListener::~depressedTestListener() [inline], [virtual]

36.20.2 Member Function Documentation

bool test::depressedTestListener::flag () const [inline]

void test::depressedTestListener::receivedDepressed (os::smart_ptr< gl::element > elm)
[inline], [virtual]

Reimplemented from gl::depressedListener (p. 688).


void test::depressedTestListener::resetFlag () [inline]

36.20.3 Member Data Documentation

bool test::depressedTestListener::_flag [private]

36.21 gl::element Class Reference

Inheritance diagram for gl::element:

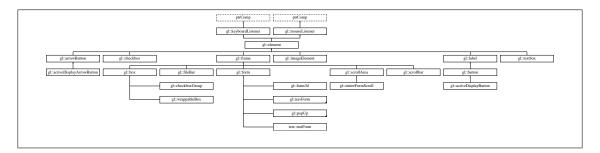

Public Member Functions

- element (frame *master, int targWidth=0, int targHeight=0, elementDepth depth=default
 Depth)
- element (const element &elm)
- virtual ~element ()
- virtual const std::string stringID () const
- virtual os::smart_ptr< os::unsortedList< gl::element > > searchUIBy (std::string str)
- os::smart_ptr< frame > master ()
- const os::smart_ptr< frame > master () const
- os::smart_ptr< element > getTopLevel ()
- os::smart_ptr< form > getTopLevelForm ()
- virtual void **setX** (int **x**)
- virtual void setY (int y)
- virtual void setHeight (int height)

- virtual void setWidth (int width)
- virtual void setColor (const color &color)
- virtual void resize ()
- void setEnabled (bool enab)
- void enable ()
- void disable ()
- int x () const
- int y () const
- int width () const
- int height () const
- int trueX () const
- int trueY () const
- void setDepth (elementDepth _dep)
- elementDepth depth () const
- color getColor () const
- bool enabled () const
- bool disabled () const
- virtual bool inside (int xVal, int yVal) const
- void testMouse ()
- virtual void mouseMove (int mousePositionX, int mousePositionY)
- bool mouseln () const
- virtual bool focusUp ()
- virtual bool focusDown ()
- virtual void draw ()
- virtual void drawBackground ()
- virtual void drawMain ()
- virtual void drawTop ()
- virtual bool childrenFocusable () const
- virtual bool focusable () const
- bool focused () const
- virtual void focus ()
- virtual void unsetFocus ()
- virtual os::smart_ptr< element > getFocused ()
- void **pushClickedListener** (os::smart_ptr< **clickedListener** > func)
- void **pushPressedListener** (os::smart_ptr< **pressedListener** > func)
- void pushDepressedListener (os::smart_ptr< depressedListener > func)
- void pushEnterListener (os::smart_ptr< enterListener > func)
- void pushResizeListener (os::smart_ptr< resizedListener > func)
- void removeClickedListener (os::smart_ptr< clickedListener > func)
- void removePressedListener (os::smart_ptr< pressedListener > func)
- void removeDepressedListener (os::smart ptr< depressedListener > func)
- void removeEnterListener (os::smart_ptr< enterListener > func)
- void removeResizeListener (os::smart ptr< resizedListener > func)
- void pushClickedListener (elementHandler han)
- void **pushPressedListener** (**elementHandler** han)
- void pushDepressedListener (elementHandler han)

- void pushEnterListener (elementHandler han)
- void pushResizeListener (elementHandler han)
- void removeClickedListener (elementHandler han)
- void removePressedListener (elementHandler han)
- void removeDepressedListener (elementHandler han)
- void removeEnterListener (elementHandler han)
- void removeResizeListener (elementHandler han)
- void pushClickedListener (elementHandler_void han, void *ptr)
- void pushPressedListener (elementHandler_void han, void *ptr)
- void pushDepressedListener (elementHandler void han, void *ptr)
- void pushEnterListener (elementHandler void han, void *ptr)
- void pushResizeListener (elementHandler void han, void *ptr)
- void removeClickedListener (elementHandler void han, void *ptr)
- void removePressedListener (elementHandler_void han, void *ptr)
- void removeDepressedListener (elementHandler void han, void *ptr)
- void removeEnterListener (elementHandler void han, void *ptr)
- void removeResizeListener (elementHandler void han, void *ptr)
- void **pushListener** (os::smart ptr< **clickedListener** > func)
- void pushListener (os::smart_ptr< pressedListener > func)
- void **pushListener** (os::smart ptr< **depressedListener** > func)
- void **pushListener** (os::smart ptr< **enterListener** > func)
- void **pushListener** (os::smart_ptr< **resizedListener** > func)
- void removeListener (os::smart_ptr< clickedListener > func)
- void removeListener (os::smart_ptr< pressedListener > func)
- void removeListener (os::smart_ptr< depressedListener > func)
- void removeListener (os::smart_ptr< enterListener > func)
- void removeListener (os::smart_ptr< resizedListener > func)

Protected Member Functions

- virtual void update ()
- virtual void click ()
- virtual void press ()
- virtual void depress ()
- virtual void enter ()

Protected Attributes

- int _x
- int _y
- color color

Private Member Functions

• element ()

Private Attributes

- std::mutex listenerMtx
- os::smartSet< clickedListener > clickedListen
- os::smartSet< pressedListener > pressedListen
- os::smartSet< depressedListener > depressedListen
- os::smartSet< enterListener > enterListen
- os::smartSet< resizedListener > resizedListen
- int trueX
- int _trueY
- elementDepth _depth
- std::recursive mutex mtx
- os::smart_ptr< frame > _master
- int _height
- int _width
- bool _mouseIn
- bool _focused
- bool _enabled

Friends

- class clickedListener
- class pressedListener
- class depressedListener
- class enterListener
- class resizedListener
- class frame
- class form
- class popUp

36.21.1 Constructor & Destructor Documentation

```
gl::element::element ( ) [private]
gl::element::element ( frame * master, int targWidth = 0, int targHeight = 0, elementDepth depth = defaultDepth )
gl::element::element ( const element & elm )
virtual gl::element::~element ( ) [virtual]
36.21.2 Member Function Documentation
virtual bool gl::element::childrenFocusable ( ) const [inline], [virtual]
Reimplemented in gl::frame (p. 715), gl::scrollbar (p. 745), and gl::fileBar (p. 704).
```

```
virtual void gl::element::click( ) [protected], [virtual]
virtual void gl::element::depress ( ) [protected], [virtual]
elementDepth gl::element::depth ( ) const [inline], [virtual]
Reimplemented from gl::mouseListener (p. 730).
void gl::element::disable ( ) [inline]
boolgl::element::disabled() const [inline], [virtual]
Reimplemented from gl::mouseListener (p. 730).
virtual void gl::element::draw ( ) [virtual]
Reimplemented in gl::scrollbar (p. 745), and gl::fileBar (p. 704).
virtual void gl::element::drawBackground( ) [virtual]
Reimplemented in gl::frame (p. 716), gl::arrowButton (p. 661), gl::button (p. 670), gl::image ←
Element (p. 721), gl::form (p. 710), gl::textbox (p. 755), gl::checkbox (p. 673), gl::popUp (p. 734),
and gl::box (p. 668).
virtual void gl::element::drawMain( ) [virtual]
Reimplemented in gl::frame (p. 716), gl::arrowButton (p. 661), gl::scrollbar (p. 745), gl::button
(p. 670), gl::label (p. 726), gl::textbox (p. 755), and gl::checkbox (p. 673).
virtual void gl::element::drawTop( ) [virtual]
Reimplemented in gl::frame (p. 716), gl::textbox (p. 755), and gl::checkbox (p. 673).
void gl::element::enable ( ) [inline]
bool gl::element::enabled ( ) const [inline], [virtual]
Reimplemented from gl::mouseListener (p. 730).
virtual void gl::element::enter( ) [protected], [virtual]
virtual void gl::element::focus ( ) [virtual]
Reimplemented in gl::textbox (p. 755).
virtual bool gl::element::focusable ( ) const [inline], [virtual]
Reimplemented in gl::arrowButton (p. 661), gl::button (p. 671), gl::textbox (p. 755), and gl ←
::checkbox (p. 673).
```

```
virtual bool gl::element::focusDown ( ) [inline], [virtual]
Reimplemented in gl::frame (p. 716).
bool gl::element::focused ( ) const [inline]
virtual bool gl::element::focusUp( ) [inline], [virtual]
Reimplemented in gl::frame (p. 716).
color gl::element::getColor ( ) const [inline]
virtual os::smart ptr<element> gl::element::getFocused( ) [inline], [virtual]
Reimplemented in gl::frame (p. 716).
os::smart_ptr<element> gl::element::getTopLevel ( )
os::smart ptr<form> gl::element::getTopLevelForm ( )
int gl::element::height( ) const [inline]
virtual bool gl::element::inside ( int xVal, int yVal ) const [virtual]
Reimplemented in gl::fileBar (p. 704).
os::smart ptr<frame> gl::element::master() [inline]
const os::smart_ptr<frame> gl::element::master( ) const [inline]
bool gl::element::mouseln ( ) const [inline], [virtual]
Reimplemented from gl::mouseListener (p. 730).
virtual void gl::element::mouseMove ( int mousePositionX, int mousePositionY ) [inline],
[virtual]
Reimplemented from gl::mouseListener (p. 731).
   Reimplemented in gl::frame (p. 716), gl::scrollbar (p. 746), gl::form (p. 710), gl::textbox
(p. 756), and gl::fileBar (p. 704).
virtual void gl::element::press ( ) [protected], [virtual]
void gl::element::pushClickedListener ( os::smart_ptr< clickedListener > func )
void gl::element::pushClickedListener ( elementHandler han ) [inline]
void gl::element::pushClickedListener ( elementHandler_void han, void * ptr ) [inline]
void gl::element::pushDepressedListener ( os::smart ptr< depressedListener > func )
void gl::element::pushDepressedListener ( elementHandler han ) [inline]
```

```
void gl::element::pushDepressedListener ( elementHandler void han, void * ptr ) [inline]
void gl::element::pushEnterListener ( os::smart ptr< enterListener > func )
void gl::element::pushEnterListener ( elementHandler han ) [inline]
void gl::element::pushEnterListener ( elementHandler void han, void * ptr ) [inline]
void gl::element::pushListener ( os::smart ptr< clickedListener > func ) [inline]
void ql::element::pushListener( os::smart ptr< pressedListener > func ) [inline]
void gl::element::pushListener ( os::smart_ptr< depressedListener > func ) [inline]
void gl::element::pushListener ( os::smart_ptr< enterListener > func ) [inline]
void gl::element::pushListener ( os::smart_ptr< resizedListener > func ) [inline]
void gl::element::pushPressedListener ( os::smart ptr< pressedListener > func )
void gl::element::pushPressedListener ( elementHandler han ) [inline]
void gl::element::pushPressedListener ( elementHandler void han, void * ptr ) [inline]
void gl::element::pushResizeListener ( os::smart ptr< resizedListener > func )
void gl::element::pushResizeListener ( elementHandler han ) [inline]
void gl::element::pushResizeListener( elementHandler void han, void * ptr ) [inline]
void gl::element::removeClickedListener ( os::smart_ptr< clickedListener > func )
void gl::element::removeClickedListener ( elementHandler han ) [inline]
void gl::element::removeClickedListener( elementHandler void han, void * ptr ) [inline]
void gl::element::removeDepressedListener ( os::smart ptr< depressedListener > func )
void gl::element::removeDepressedListener ( elementHandler han ) [inline]
void gl::element::removeDepressedListener ( elementHandler_void han, void * ptr ) [inline]
void gl::element::removeEnterListener ( os::smart_ptr< enterListener > func )
void gl::element::removeEnterListener ( elementHandler han ) [inline]
void gl::element::removeEnterListener ( elementHandler void han, void * ptr ) [inline]
void gl::element::removeListener ( os::smart_ptr< clickedListener > func ) [inline]
void gl::element::removeListener ( os::smart ptr< pressedListener > func ) [inline]
void gl::element::removeListener ( os::smart ptr< depressedListener > func ) [inline]
void gl::element::removeListener ( os::smart ptr< enterListener > func ) [inline]
void gl::element::removeListener ( os::smart_ptr< resizedListener > func ) [inline]
void gl::element::removePressedListener ( os::smart ptr< pressedListener > func )
```


```
void gl::element::removePressedListener ( elementHandler han ) [inline]
void gl::element::removePressedListener ( elementHandler void han, void * ptr ) [inline]
void gl::element::removeResizeListener ( os::smart_ptr< resizedListener > func )
void gl::element::removeResizeListener ( elementHandler han ) [inline]
void gl::element::removeResizeListener( elementHandler void han, void * ptr ) [inline]
virtual void gl::element::resize ( ) [virtual]
Reimplemented in gl::scrollArea (p. 743), gl::scrollbar (p. 746), and gl::popUp (p. 734).
virtual os::smart_ptr<os::unsortedList<gl::element> > gl::element::searchUIBy( std::string str )
[virtual]
Reimplemented in gl::frame (p. 717).
virtual void gl::element::setColor ( const color & color ) [inline], [virtual]
Reimplemented in gl::fileBar (p. 705).
void gl::element::setDepth ( elementDepth dep )
void gl::element::setEnabled ( bool enab ) [inline]
virtual void gl::element::setHeight ( int height ) [virtual]
Reimplemented in gl::arrowButton (p. 662), gl::button (p. 671), gl::label (p. 727), gl::checkbox ←
Group (p. 678), gl::form (p. 710), gl::fileBar (p. 705), gl::textbox (p. 756), and gl::checkbox
(p. 674).
virtual void gl::element::setWidth ( int width ) [virtual]
Reimplemented in gl::arrowButton (p. 662), gl::button (p. 671), gl::label (p. 727), gl::checkbox ←
Group (p. 678), gl::form (p. 711), gl::textbox (p. 756), and gl::checkbox (p. 674).
virtual void gl::element::setX ( int x ) [inline], [virtual]
Reimplemented in gl::frame (p. 717).
virtual void gl::element::setY ( int y ) [inline], [virtual]
Reimplemented in gl::frame (p. 717).
virtual const std::string gl::element::stringID ( ) const [inline], [virtual]
Reimplemented in gl::label (p. 727), and gl::textbox (p. 756).
```

```
void gl::element::testMouse( ) [inline]
int gl::element::trueX ( ) const [inline]
int gl::element::trueY ( ) const [inline]
virtual void gl::element::unsetFocus( ) [virtual]
Reimplemented in gl::frame (p. 717), gl::arrowButton (p. 662), gl::button (p. 671), and gl⊷
::textbox (p. 757).
virtual void gl::element::update( ) [inline], [protected], [virtual]
Reimplemented in gl::frame (p. 717).
int gl::element::width ( ) const [inline]
int gl::element::x ( ) const [inline]
int gl::element::y ( ) const [inline]
36.21.3 Friends And Related Function Documentation
friend class clickedListener [friend]
friend class depressedListener [friend]
friend class enterListener [friend]
friend class form [friend]
friend class frame [friend]
friend class popUp [friend]
friend class pressedListener [friend]
friend class resizedListener [friend]
36.21.4 Member Data Documentation
color gl::element::_color [protected]
elementDepth gl::element::_depth [private]
bool gl::element::_enabled [private]
bool gl::element::_focused [private]
int gl::element::_height [private]
os::smart_ptr<frame> gl::element::_master [private]
bool gl::element:: mouseln [private]
int gl::element:: trueX [private]
```

```
int gl::element::_trueY [private]
int gl::element::_width [private]
int gl::element::_x [protected]
int gl::element::_y [protected]
os::smartSet<clickedListener> gl::element::clickedListen [private]
os::smartSet<depressedListener> gl::element::depressedListen [private]
os::smartSet<enterListener> gl::element::enterListen [private]
std::mutex gl::element::listenerMtx [private]
std::recursive_mutex gl::element::mtx [private]
os::smartSetpressedListener> gl::element::pressedListen [private]
os::smartSetpressedListener> gl::element::pressedListen [private]
```

36.22 gl::enterFunction Class Reference

Inheritance diagram for gl::enterFunction:

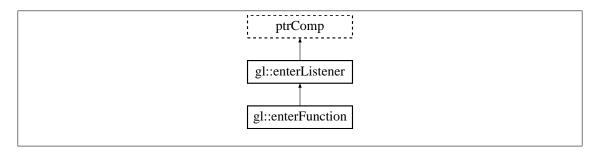

Public Member Functions

- enterFunction (elementHandler handler)
- virtual ~enterFunction ()
- virtual void receivedEnter (os::smart ptr< element > elm)

Protected Attributes

• elementHandler ehan

36.22.1 Constructor & Destructor Documentation

```
gl::enterFunction::enterFunction ( elementHandler handler ) [inline] virtual gl::enterFunction::~enterFunction ( ) [inline], [virtual]
```

36.22.2 Member Function Documentation

virtual void gl::enterFunction::receivedEnter (os::smart_ptr< element > elm) [inline],
[virtual]


Reimplemented from gl::enterListener (p. 700).

36.22.3 Member Data Documentation

elementHandler gl::enterFunction::ehan [protected]

36.23 gl::enterFunctionVoid Class Reference

Inheritance diagram for gl::enterFunctionVoid:

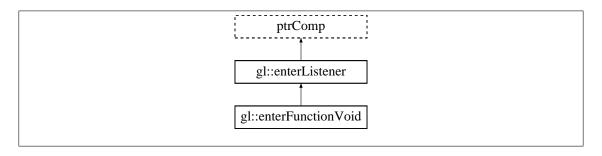

Public Member Functions

- enterFunctionVoid (elementHandler_void handler, void *void_ptr)
- virtual ~enterFunctionVoid ()
- virtual void receivedEnter (os::smart_ptr< element > elm)

Protected Attributes

- elementHandler void ehan
- void * vptr

36.23.1 Constructor & Destructor Documentation

 $\label{lem:gl::enterFunctionVoid:elementHandler_void} \mbox{ handler, void} * \mbox{void_ptr }) \\ \mbox{ [inline]}$

virtual gl::enterFunctionVoid::~enterFunctionVoid() [inline], [virtual]

36.23.2 Member Function Documentation

 $\label{lem:virtual_void_gl::enterFunctionVoid::receivedEnter(os::smart_ptr < \textbf{element} > elm) \quad [inline], \\ [virtual]$

Reimplemented from gl::enterListener (p. 700).


36.23.3 Member Data Documentation

elementHandler_void gl::enterFunctionVoid::ehan [protected]

void* gl::enterFunctionVoid::vptr [protected]

36.24 gl::enterListener Class Reference

Inheritance diagram for gl::enterListener:

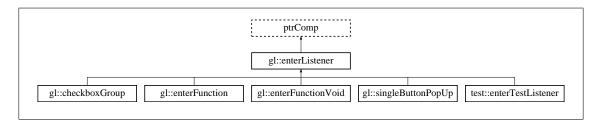

Public Member Functions

- virtual ~enterListener ()
- virtual void receivedEnter (os::smart_ptr< element > elm)

Private Attributes

- std::mutex mtx
- os::smartSet< element > senders

Friends

• class element

36.24.1 Constructor & Destructor Documentation

virtual gl::enterListener::~enterListener() [virtual]

36.24.2 Member Function Documentation

virtual void gl::enterListener::receivedEnter (os::smart_ptr< element > elm) [inline],
[virtual]

Reimplemented in gl::enterFunctionVoid (p. 699), gl::enterFunction (p. 699), gl::checkbox ← Group (p. 678), test::enterTestListener (p. 701), and gl::singleButtonPopUp (p. 748).

36.24.3 Friends And Related Function Documentation


friend class **element** [friend]

36.24.4 Member Data Documentation

std::mutex gl::enterListener::mtx [private]
os::smartSet<element> gl::enterListener::senders [private]

36.25 test::enterTestListener Class Reference

Inheritance diagram for test::enterTestListener:

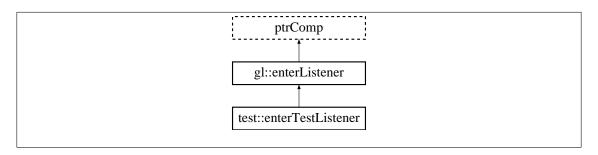

Public Member Functions

- enterTestListener ()
- virtual ~enterTestListener ()
- void resetFlag ()
- void receivedEnter (os::smart_ptr< gl::element > elm)
- bool flag () const

Private Attributes

• bool _flag

36.25.1 Constructor & Destructor Documentation

test::enterTestListener::enterTestListener() [inline]

virtual test::enterTestListener::~enterTestListener() [inline], [virtual]

36.25.2 Member Function Documentation

bool test::enterTestListener::flag () const [inline]

void test::enterTestListener::receivedEnter (os::smart_ptr< gl::element > elm) [inline],
[virtual]

Reimplemented from gl::enterListener (p. 700).


void test::enterTestListener::resetFlag () [inline]

36.25.3 Member Data Documentation

 $bool\ test::enterTestListener::_flag \ \ [private]$

36.26 gl::entireFormScroll Class Reference

Inheritance diagram for gl::entireFormScroll:

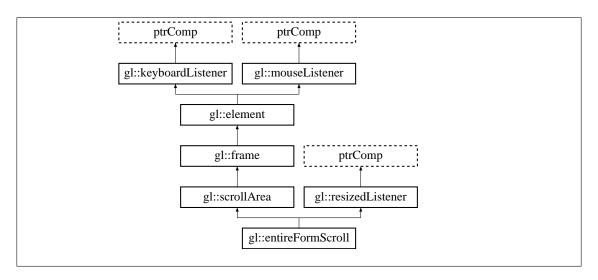

Public Member Functions

- entireFormScroll (form *master)
- virtual ~entireFormScroll ()
- virtual void receivedResize (os::smart_ptr< element > elm)

Additional Inherited Members

36.26.1 Constructor & Destructor Documentation

```
gl::entireFormScroll::entireFormScroll ( form * master )
```

virtual gl::entireFormScroll::~entireFormScroll() [inline], [virtual]


36.26.2 Member Function Documentation

virtual void gl::entireFormScroll::receivedResize (os::smart_ptr< element > elm) [virtual]

Reimplemented from gl::resizedListener (p. 739).

36.27 gl::fileBar Class Reference

Inheritance diagram for gl::fileBar:

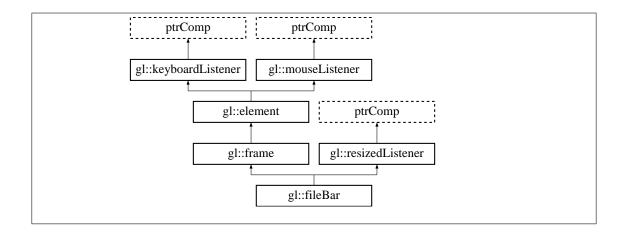

Public Member Functions

- fileBar (frame *master)
- virtual ~fileBar ()
- virtual void receivedResize (os::smart_ptr< element > elm)
- virtual elementDepth depth () const
- virtual void draw ()
- virtual bool inside (int xVal, int yVal) const
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- bool childrenFocusable () const
- void addChild (os::smart_ptr< barGroup > child)
- void setChildren (os::smart_ptr< os::unsortedList< barGroup > > children)
- void refreshChildren ()
- os::unsortedList< barGroup > & children ()
- const os::unsortedList< barGroup > & children () const
- void setButtonSize (int buttonSize)
- int buttonSize () const
- void setHideDisplay (bool hideDisplay)
- bool hideDisplay () const
- void setOverlayColor (const color &overlayColor)
- void setClickedColor (const color &clickedColor)
- virtual void **setHeight** (int hei)
- virtual void **setColor** (const **color** &**color**)
- void setFont (os::smart_ptr< font > fon)
- color overlayColor () const
- color clickedColor () const
- const os::smart ptr< font > getFont () const

Protected Attributes

- os::unsortedList< element > _dividers
- os::smart_ptr< os::unsortedList< barGroup > > _children

Private Attributes

- int buttonSize
- bool _hideDisplay
- color _overlayColor
- color _clickedColor
- os::smart_ptr< font > _font


Additional Inherited Members

```
36.27.1 Constructor & Destructor Documentation
gl::fileBar::fileBar ( frame * master )
virtual gl::fileBar::~fileBar( ) [inline], [virtual]
36.27.2 Member Function Documentation
void gl::fileBar::addChild ( os::smart_ptr< barGroup > child )
int gl::fileBar::buttonSize ( ) const [inline]
os::unsortedList<br/>barGroup>& gl::fileBar::children ( ) [inline]
const os::unsortedList<br/>barGroup>& gl::fileBar::children ( ) const [inline]
bool gl::fileBar::childrenFocusable ( ) const [inline], [virtual]
Reimplemented from gl::frame (p. 715).
color gl::fileBar::clickedColor ( ) const [inline]
virtual elementDepth gl::fileBar::depth ( ) const [inline], [virtual]
Reimplemented from gl::mouseListener (p. 730).
virtual void gl::fileBar::draw( ) [virtual]
Reimplemented from gl::element (p. 693).
const os::smart_ptr<font> gl::fileBar::getFont( ) const [inline]
bool gl::fileBar::hideDisplay ( ) const [inline]
virtual bool gl::fileBar::inside ( int xVal, int yVal ) const [virtual]
Reimplemented from gl::element (p. 694).
virtual void gl::fileBar::mouseMove ( int mousePositionX, int mousePositionY ) [virtual]
Reimplemented from gl::frame (p. 716).
```

```
color gl::fileBar::overlayColor ( ) const [inline]
virtual void gl::fileBar::receivedResize ( os::smart_ptr< element > elm ) [virtual]
Reimplemented from gl::resizedListener (p. 739).
void gl::fileBar::refreshChildren ( )
void gl::fileBar::setButtonSize ( int buttonSize )
void gl::fileBar::setChildren ( os::smart_ptr< os::unsortedList< barGroup > > children )
void gl::fileBar::setClickedColor ( const color & clickedColor )
virtual void gl::fileBar::setColor ( const color & color ) [virtual]
Reimplemented from gl::element (p. 696).
void gl::fileBar::setFont ( os::smart_ptr< font > fon )
virtual void gl::fileBar::setHeight ( int hei ) [virtual]
Reimplemented from gl::element (p. 696).
void gl::fileBar::setHideDisplay ( bool hideDisplay ) [inline]
void gl::fileBar::setOverlayColor ( const color & overlayColor )
36.27.3 Member Data Documentation
int gl::fileBar::_buttonSize [private]
os::smart_ptr<os::unsortedList<barGroup> > gl::fileBar::_children [protected]
color gl::fileBar::_clickedColor [private]
os::unsortedList<element> gl::fileBar::_dividers [protected]
os::smart_ptr<font> gl::fileBar::_font [private]
bool gl::fileBar:: hideDisplay [private]
color gl::fileBar::_overlayColor [private]
```

36.28 gl::font Class Reference

Inheritance diagram for gl::font:



Public Member Functions

- virtual ~font ()
- const void * font ptr () const
- virtual void **setSize** (unsigned int **size**)
- void setLineSpace (double lineSpace)
- unsigned int size () const
- virtual const std::string & name () const
- double lineSpace () const
- bool stroke () const
- int height () const

Protected Member Functions

• font (void *font ptr, bool isStroke)

Protected Attributes

void * _font

Private Attributes

- unsigned int _size
- double _linespace
- bool stroke_font

```
36.28.1 Constructor & Destructor Documentation
```

```
gl::font::font( void * font_ptr, bool isStroke ) [protected]
virtual gl::font::~font( ) [inline], [virtual]
36.28.2 Member Function Documentation
const void* gl::font::font_ptr( ) const [inline]
int gl::font::height( ) const
double gl::font::lineSpace( ) const [inline]
virtual const std::string& gl::font::name( ) const [inline], [virtual]
```

Reimplemented in gl::Helvetica (p. 720), gl::TimesRoman (p. 761), gl::TimesMonoRoman ← Stroke (p. 761), and gl::TimesRomanStroke (p. 762).

```
void gl::font::setLineSpace ( double lineSpace )
virtual void gl::font::setSize ( unsigned int size ) [virtual]
```

Reimplemented in gl::Helvetica (p. 720), and gl::TimesRoman (p. 761).


```
unsigned int gl::font::size ( ) const [inline]
bool gl::font::stroke ( ) const [inline]
```

36.28.3 Member Data Documentation

```
void* gl::font::_font [protected]
double gl::font::_linespace [private]
unsigned int gl::font::_size [private]
bool gl::font::stroke_font [private]
```

36.29 gl::form Class Reference

Inheritance diagram for gl::form:

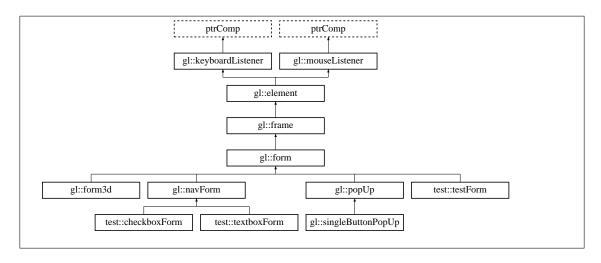

Public Member Functions

- form (int *argc, char **argv, int wid=400, int hei=400)
- form (os::smart_ptr< form > prev=NULL)
- virtual ~form ()
- bool isForm ()
- os::smart_ptr< form > prev ()
- const os::smart_ptr< form > prev () const
- os::smart_ptr< form > next ()
- $\bullet \ \, \text{const os::smart_ptr} < \textbf{form} > \textbf{next} \,\, () \,\, \text{const} \\$
- os::smart_ptr< form > topForm ()
- bool open () const
- void open (os::smart_ptr< form > next)
- void close ()
- virtual void drawBackground ()
- const std::string & title () const

- void setTitle (const std::string &str)
- void **setTitle** (const char *str)
- void setResizePolicy (resizePolicyEnum rpe)
- resizePolicyEnum resizePolicy () const
- resizePolicyEnum truePolicy () const
- virtual void customResize ()
- int minWidth () const
- int minHeight () const
- int maxWidth () const
- int maxHeight () const
- int targWidth () const
- int targHeight () const
- void setMinWidth (int minWidth)
- void setMinHeight (int minHeight)
- void setMaxWidth (int maxWidth)
- void setMaxHeight (int maxHeight)
- void setTargWidth (int targWidth)
- void setTargHeight (int targHeight)
- virtual void setHeight (int hght)
- virtual void **setWidth** (int wdth)
- virtual void buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- virtual bool keyPress (const key &_key)
- virtual bool **keyUnpress** (const **key** &_key)

Protected Member Functions

• bool wrapFocus () const

Private Member Functions

- void _refreshTitle () const
- virtual void _clear ()
- virtual void _initialize ()
- void _draw ()
- void update ()
- virtual void currentFormDraw ()
- void processResize ()

Private Attributes

- os::smart_ptr< form > _prev
- os::smart_ptr< form > _next
- bool _open
- bool _requireDisplayInit
- std::string _title

- resizePolicyEnum _resizePolicy
- int minWidth
- int _minHeight
- int _maxWidth
- int maxHeight
- int _targWidth
- int _targHeight

Friends

- class form3d
- class popUp
- class testingDriver
- class UIDriver

Additional Inherited Members

Reimplemented from **gl::frame** (p. 715).

```
36.29.1 Constructor & Destructor Documentation
gl::form::form ( int * argc, char ** argv, int wid = 400, int hei = 400 )
gl::form::form ( os::smart_ptr< form > prev = NULL )
virtual gl::form::~form ( ) [virtual]
36.29.2 Member Function Documentation
virtual void gl::form::_clear ( ) [private], [virtual]
Reimplemented in gl::form3d (p. 713), and gl::popUp (p. 734).
virtual void gl::form::_currentFormDraw ( ) [private], [virtual]
Reimplemented in gl::popUp (p. 734).
void gl::form::_draw ( ) [private]
virtual void gl::form::_initialize ( ) [private], [virtual]
void gl::form::_refreshTitle ( ) const [private]
void gl::form::_update ( ) [private]
virtual void gl::form::buttonClicked ( int button, int state, int mousePositionX, int mousePositionY )
[virtual]
```


```
void gl::form::close ( )
virtual void gl::form::customResize ( ) [inline], [virtual]
virtual void gl::form::drawBackground( ) [virtual]
Reimplemented from gl::frame (p. 716).
   Reimplemented in gl::popUp (p. 734).
bool gl::form::isForm( ) [inline], [virtual]
Reimplemented from gl::frame (p. 716).
virtual bool gl::form::keyPress ( const key & _key ) [virtual]
Reimplemented from gl::frame (p. 716).
   Reimplemented in gl::navForm (p. 732).
virtual bool gl::form::keyUnpress ( const key & key ) [virtual]
Reimplemented from gl::frame (p. 716).
   Reimplemented in gl::navForm (p. 732).
int gl::form::maxHeight( ) const [inline]
int gl::form::maxWidth ( ) const [inline]
int gl::form::minHeight( ) const [inline]
int gl::form::minWidth( ) const [inline]
virtual void gl::form::mouseMove ( int mousePositionX, int mousePositionY ) [virtual]
Reimplemented from gl::frame (p. 716).
os::smart_ptr<form> gl::form::next( ) [inline]
const os::smart_ptr<form> gl::form::next ( ) const [inline]
bool gl::form::open ( ) const [inline]
void gl::form::open ( os::smart ptr< form > next )
os::smart ptr<form> gl::form::prev() [inline]
const os::smart_ptr<form> gl::form::prev ( ) const [inline]
void gl::form::processResize( ) [private]
resizePolicyEnum gl::form::resizePolicy( ) const [inline]
virtual void gl::form::setHeight ( int hght ) [virtual]
Reimplemented from gl::element (p. 696).
```

```
void gl::form::setMaxHeight ( int maxHeight )
void gl::form::setMaxWidth ( int maxWidth )
void gl::form::setMinHeight ( int minHeight )
void gl::form::setMinWidth ( int minWidth )
void gl::form::setResizePolicy ( resizePolicyEnum rpe ) [inline]
void gl::form::setTargHeight ( int targHeight )
void gl::form::setTargWidth ( int targWidth )
void gl::form::setTitle ( const std::string & str )
void gl::form::setTitle ( const char * str ) [inline]
virtual void gl::form::setWidth ( int wdth ) [virtual]
Reimplemented from gl::element (p. 696).
int gl::form::targHeight( ) const [inline]
int gl::form::targWidth ( ) const [inline]
const std::string& gl::form::title ( ) const [inline]
os::smart_ptr<form> gl::form::topForm ( )
resizePolicyEnum gl::form::truePolicy ( ) const
bool gl::form::wrapFocus ( ) const [inline], [protected], [virtual]
Reimplemented from gl::frame (p. 717).
   Reimplemented in gl::popUp (p. 734).
36.29.3 Friends And Related Function Documentation
friend class form3d [friend]
friend class popUp [friend]
testingDriver [friend]
friend class UIDriver [friend]
36.29.4 Member Data Documentation
int gl::form::_maxHeight [private]
int gl::form::_maxWidth [private]
int gl::form:: minHeight [private]
int gl::form:: minWidth [private]
```

```
os::smart_ptr<form> gl::form::_next [private]
bool gl::form::_open [private]
os::smart_ptr<form> gl::form::_prev [private]
bool gl::form::_requireDisplayInit [private]
resizePolicyEnum gl::form::_resizePolicy [private]
int gl::form::_targHeight [private]
int gl::form::_targWidth [private]
std::string gl::form::_title [private]
```

36.30 gl::form3d Class Reference

Inheritance diagram for gl::form3d:

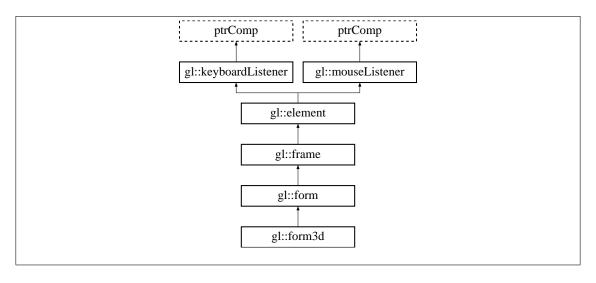

Public Member Functions

- form3d (int *argc, char **argv)
- form3d (os::smart_ptr< form > prev=NULL)
- virtual ~form3d ()
- virtual void threeDDraw ()
- void setFieldOfViewAngle (double fieldOfViewAngle)
- void setZNear (double zNear)
- void setZFar (double zFar)
- double fieldOfViewAngle () const
- double zNear () const
- double zFar () const

Private Member Functions

• void _clear ()

Private Attributes


- double fieldOfViewAngle
- double _zNear
- double zFar

Additional Inherited Members

```
36.30.1 Constructor & Destructor Documentation
gl::form3d::form3d ( int * argc, char ** argv )
gl::form3d::form3d ( os::smart_ptr< form > prev = NULL )
virtual gl::form3d::~form3d( ) [inline], [virtual]
36.30.2 Member Function Documentation
void gl::form3d::_clear( ) [private], [virtual]
Reimplemented from gl::form (p. 709).
double gl::form3d::fieldOfViewAngle ( ) const [inline]
void gl::form3d::setFieldOfViewAngle ( double fieldOfViewAngle )
void gl::form3d::setZFar ( double zFar )
void gl::form3d::setZNear ( double zNear )
virtual void gl::form3d::threeDDraw( ) [inline], [virtual]
double gl::form3d::zFar( ) const [inline]
double gl::form3d::zNear ( ) const [inline]
36.30.3 Member Data Documentation
double gl::form3d:: fieldOfViewAngle [private]
double gl::form3d::_zFar [private]
double gl::form3d::_zNear [private]
```

36.31 gl::frame Class Reference

Inheritance diagram for gl::frame:

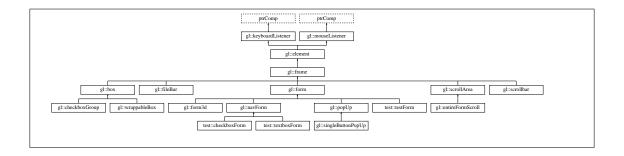

Public Member Functions

- frame (frame *master, elementDepth depth=defaultDepth)
- virtual ~frame ()
- virtual bool isForm ()
- os::smart ptr< os::unsortedList< gl::element > > searchUIBy (std::string str)
- virtual void setX (int x)
- virtual void setY (int y)
- virtual void drawBackground ()
- virtual void drawMain ()
- virtual void drawTop ()
- virtual bool childrenFocusable () const
- bool focus (os::smart_ptr< element > elm)
- void unsetFocus ()
- os::smart_ptr< element > getFocused ()
- void addMouseListener (os::smart_ptr< mouseListener > listen)
- void removeMouseListener (os::smart ptr< mouseListener > listen)
- void addKeyboardListener (os::smart_ptr< keyboardListener > listen)
- void removeKeyboardListener (os::smart_ptr< keyboardListener > listen)
- virtual void buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- virtual bool keyPress (const key &_key)
- virtual bool **keyUnpress** (const **key** &_key)
- bool focusUp ()
- bool focusDown ()
- os::smart_ptr< gl::element > firstElement ()
- os::smart ptr< gl::element > lastElement ()

Protected Member Functions

- virtual void **update** ()
- void unfocusUp ()
- virtual bool wrapFocus () const

Protected Attributes

- os::smartSet< element > backgroundList
- os::smartSet< element > middleList
- os::smartSet< element > topList
- std::recursive_mutex keyboardMutex
- os::smartSet< keyboardListener > keyboardListeners
- std::recursive_mutex mouseMutex
- os::smartSet< mouseListener > mouseListeners

Private Member Functions

- void **pushElement** (os::smart_ptr< **element** > frm)
- void removeElement (os::smart_ptr< element > frm)
- frame ()
- void mouseMoveSupport (bool &glbFlag, elementDepth dep, int xPos, int yPos)

Private Attributes

• std::recursive mutex mtx

Friends

- class element
- class form

) [virtual]

```
36.31.1 Constructor & Destructor Documentation
```

```
gl::frame::frame ( ) [private]
gl::frame::frame ( frame * master, elementDepth depth = defaultDepth )
virtual gl::frame::~frame ( ) [virtual]
36.31.2 Member Function Documentation
void gl::frame::addKeyboardListener ( os::smart_ptr< keyboardListener > listen )
void gl::frame::addMouseListener ( os::smart_ptr< mouseListener > listen )
virtual void gl::frame::buttonClicked ( int button, int state, int mousePositionX, int mousePositionY
```

Reimplemented from gl::mouseListener (p. 730).

Reimplemented in gl::scrollbar (p. 745), and gl::form (p. 709).

virtual bool gl::frame::childrenFocusable () const [inline], [virtual]

Reimplemented from gl::element (p. 692).

Reimplemented in gl::scrollbar (p. 745), and gl::fileBar (p. 704).


```
virtual void gl::frame::drawBackground( ) [virtual]
Reimplemented from gl::element (p. 693).
   Reimplemented in gl::form (p. 710), gl::popUp (p. 734), and gl::box (p. 668).
virtual void gl::frame::drawMain( ) [virtual]
Reimplemented from gl::element (p. 693).
   Reimplemented in gl::scrollbar (p. 745).
virtual void gl::frame::drawTop( ) [virtual]
Reimplemented from gl::element (p. 693).
os::smart ptr<gl::element> gl::frame::firstElement ( )
bool gl::frame::focus ( os::smart ptr< element > elm )
bool gl::frame::focusDown() [virtual]
Reimplemented from gl::element (p. 694).
bool gl::frame::focusUp( ) [virtual]
Reimplemented from gl::element (p. 694).
os::smart_ptr<element> gl::frame::getFocused( ) [virtual]
Reimplemented from gl::element (p. 694).
virtual bool gl::frame::isForm ( ) [inline], [virtual]
Reimplemented in gl::form (p. 710).
virtual bool gl::frame::keyPress ( const key & key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
   Reimplemented in gl::form (p. 710), and gl::navForm (p. 732).
virtual bool gl::frame::keyUnpress ( const key & key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
   Reimplemented in gl::form (p. 710), and gl::navForm (p. 732).
os::smart_ptr<gl::element> gl::frame::lastElement ( )
virtual void gl::frame::mouseMove ( int mousePositionX, int mousePositionY ) [virtual]
Reimplemented from gl::element (p. 694).
   Reimplemented in gl::scrollbar (p. 746), gl::form (p. 710), and gl::fileBar (p. 704).
```

```
void gl::frame::mouseMoveSupport ( bool & glbFlag, elementDepth dep, int xPos, int yPos )
[private]
void gl::frame::pushElement ( os::smart ptr< element > frm ) [private]
void gl::frame::removeElement ( os::smart_ptr< element > frm ) [private]
void gl::frame::removeKeyboardListener ( os::smart_ptr< keyboardListener > listen )
void gl::frame::removeMouseListener ( os::smart_ptr< mouseListener > listen )
os::smart_ptr<os::unsortedList<gl::element> > gl::frame::searchUIBy ( std::string str )
[virtual]
Reimplemented from gl::element (p. 696).
virtual void gl::frame::setX ( int x ) [virtual]
Reimplemented from gl::element (p. 696).
virtual void gl::frame::setY ( int y ) [virtual]
Reimplemented from gl::element (p. 696).
void gl::frame::unfocusUp( ) [protected]
void gl::frame::unsetFocus( ) [virtual]
Reimplemented from gl::element (p. 697).
virtual void gl::frame::update( ) [protected], [virtual]
Reimplemented from gl::element (p. 697).
virtual bool gl::frame::wrapFocus ( ) const [inline], [protected], [virtual]
Reimplemented in gl::form (p. 711), gl::wrappableBox (p. 765), and gl::popUp (p. 734).
36.31.3 Friends And Related Function Documentation
friend class element [friend]
friend class form [friend]
36.31.4 Member Data Documentation
os::smartSet<element> gl::frame::backgroundList [protected]
os::smartSet<keyboardListener> gl::frame::keyboardListeners [protected]
std::recursive mutex gl::frame::keyboardMutex [protected]
os::smartSet<element> gl::frame::middleList [protected]
```

```
os::smartSet<mouseListener> gl::frame::mouseListeners [protected]
std::recursive_mutex gl::frame::mouseMutex [protected]
std::recursive_mutex gl::frame::mtx [private]
os::smartSet<element> gl::frame::topList [protected]
```

36.32 gl::globalKeyboardListener Class Reference

Inheritance diagram for gl::globalKeyboardListener:

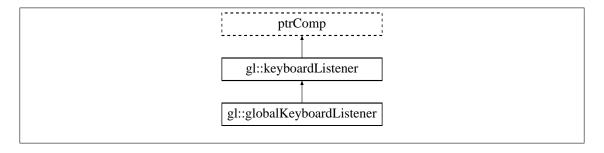

Public Member Functions

- globalKeyboardListener ()
- virtual ~globalKeyboardListener ()
- const os::smart_ptr< keyboard > getKeyboard () const
- bool keyboardListening () const

Private Attributes

• os::smart_ptr< keyboard > _keyboard

Friends

• class keyboard

36.32.1 Constructor & Destructor Documentation

```
gl::globalKeyboardListener::globalKeyboardListener()
virtual gl::globalKeyboardListener::~globalKeyboardListener() [virtual]
```

36.32.2 Member Function Documentation

```
const os::smart_ptr<keyboard> gl::globalKeyboardListener::getKeyboard( ) const [inline]
bool gl::globalKeyboardListener::keyboardListening ( ) const [inline]
```

36.32.3 Friends And Related Function Documentation


friend class keyboard [friend]

36.32.4 Member Data Documentation

os::smart_ptr<keyboard> gl::globalKeyboardListener::_keyboard [private]

36.33 gl::globalMouseListener Class Reference

Inheritance diagram for gl::globalMouseListener:

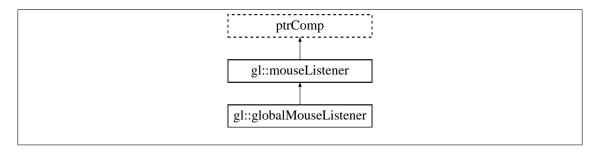

Public Member Functions

- globalMouseListener ()
- virtual ~globalMouseListener ()
- const os::smart_ptr< mouse > keyboard () const
- bool mouseListening () const

Private Attributes

• os::smart_ptr< mouse > _mouse

Friends

• class mouse

36.33.1 Constructor & Destructor Documentation

gl::globalMouseListener::globalMouseListener()
virtual gl::globalMouseListener::~globalMouseListener() [virtual]

36.33.2 Member Function Documentation

const os::smart_ptr<mouse> gl::globalMouseListener::keyboard() const [inline]
bool gl::globalMouseListener::mouseListening() const [inline], [virtual]

Reimplemented from gl::mouseListener (p. 730).

36.33.3 Friends And Related Function Documentation


friend class mouse [friend]

36.33.4 Member Data Documentation

os::smart_ptr<mouse> gl::globalMouseListener::_mouse [private]

36.34 gl::Helvetica Class Reference

Inheritance diagram for gl::Helvetica:



Public Member Functions

- Helvetica ()
- virtual ~Helvetica ()
- virtual void **setSize** (unsigned int **size**)
- virtual const std::string & name () const

Additional Inherited Members

36.34.1 Constructor & Destructor Documentation

```
gl::Helvetica::Helvetica( ) [inline]
```

virtual gl::Helvetica::~Helvetica() [inline], [virtual]

36.34.2 Member Function Documentation

virtual const std::string& gl::Helvetica::name () const [inline], [virtual]


Reimplemented from gl::font (p. 706).

virtual void gl::Helvetica::setSize (unsigned int size) [virtual]

Reimplemented from gl::font (p. 706).

36.35 gl::imageElement Class Reference

Inheritance diagram for gl::imageElement:

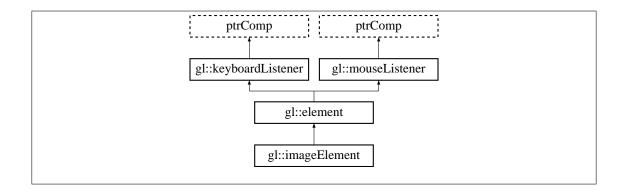

Public Member Functions

- imageElement (frame *master)
- void **setTexture** (GLuint t)
- GLuint texture () const
- virtual void drawBackground ()

Private Attributes

• GLuint texture

Additional Inherited Members

36.35.1 Constructor & Destructor Documentation

gl::imageElement::imageElement (frame * master)

36.35.2 Member Function Documentation

virtual void gl::imageElement::drawBackground() [virtual]

Reimplemented from gl::element (p. 693).

void gl::imageElement::setTexture (GLuint t)

GLuint gl::imageElement::texture () const [inline]

36.35.3 Member Data Documentation

GLuint gl::imageElement::_texture [private]

36.36 gl::key Class Reference

Public Member Functions

- **key** (**keyType** _type=**key_standard**, unsigned char _value=0)
- bool operator== (const key &k) const
- bool operator!= (const key &k) const

- bool operator< (const key &k) const
- bool operator<= (const key &k) const
- bool operator> (const key &k) const
- bool operator>= (const key &k) const

Public Attributes

- keyType type
- unsigned char value

Private Member Functions

• int compare (const key &k) const

```
36.36.1 Constructor & Destructor Documentation
```

```
gl::key::key ( keyType _type = key_standard, unsigned char _value = 0 )
```

36.36.2 Member Function Documentation

```
int gl::key::compare ( const key & k ) const [private]
```

bool gl::key::operator!= (const key & k) const [inline]

bool gl::key::operator< (const key & k) const [inline]

bool gl::key::operator<= (const key & k) const [inline]

bool gl::key::operator== (const key & k) const [inline]

bool gl::key::operator> (const key & k) const [inline]

bool gl::key::operator>= (const key & k) const [inline]

36.36.3 Member Data Documentation

keyType gl::key::type

unsigned char gl::key::value

36.37 gl::keyboard Class Reference

Public Member Functions

- virtual ~keyboard ()
- bool operator[] (unsigned int index) const
- bool **operator[]** (const **key** &index) const

Static Public Member Functions

- static os::smart_ptr< keyboard > singleton ()
- static int numberOfKeys ()

Private Member Functions

- keyboard ()
- void _keyPress (const key & key)
- void **_keyUnpress** (const **key** &_key)
- bool & operator[] (unsigned int index)
- bool & operator[] (const key &index)

Private Attributes

- bool * keyStatus
- std::recursive mutex mtx
- os::smartSet< globalKeyboardListener > listenerSet

Friends


- class baseUIDriver
- class globalKeyboardListener

```
36.37.1 Constructor & Destructor Documentation
gl::keyboard::keyboard( ) [private]
virtual gl::keyboard::~keyboard( ) [virtual]
36.37.2 Member Function Documentation
void gl::keyboard::_keyPress ( const key & _key ) [private]
void gl::keyboard:: keyUnpress ( const key & key ) [private]
static int gl::keyboard::numberOfKeys( ) [inline], [static]
bool& gl::keyboard::operator[]( unsigned int index ) [inline], [private]
bool& gl::keyboard::operator[]( const key & index ) [inline], [private]
bool gl::keyboard::operator[] ( unsigned int index ) const
bool gl::keyboard::operator[] ( const key & index ) const [inline]
static os::smart_ptr<keyboard> gl::keyboard::singleton( ) [static]
36.37.3 Friends And Related Function Documentation
friend class baseUIDriver [friend]
friend class globalKeyboardListener [friend]
36.37.4 Member Data Documentation
bool* gl::keyboard::keyStatus [private]
```

os::smartSet<**globalKeyboardListener**> gl::keyboard::listenerSet [private] std::recursive_mutex gl::keyboard::mtx [private]

36.38 gl::keyboardListener Class Reference

Inheritance diagram for gl::keyboardListener:

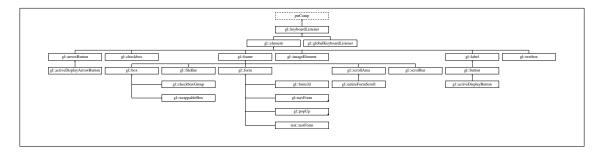

Public Member Functions

- virtual ~keyboardListener ()
- virtual bool **keyPress** (const **key** & key)
- virtual bool **keyUnpress** (const **key** &_key)
- bool keyboardListening () const
- os::smart_ptr< frame > keyboardSender ()
- virtual bool enabled () const
- virtual bool disabled () const

Private Attributes

• os::smart_ptr< frame > _keyboardSender

Friends

• class frame

36.38.1 Constructor & Destructor Documentation

virtual gl::keyboardListener::~keyboardListener() [virtual]

36.38.2 Member Function Documentation

virtual bool gl::keyboardListener::disabled () const [inline], [virtual]

Reimplemented in gl::element (p. 693).

virtual bool gl::keyboardListener::enabled () const [inline], [virtual]

Reimplemented in gl::element (p. 693).

bool gl::keyboardListener::keyboardListening () const [inline]

os::smart_ptr<frame> gl::keyboardListener::keyboardSender() [inline]

virtual bool gl::keyboardListener::keyPress (const key & _key) [inline], [virtual]

Reimplemented in gl::frame (p. 716), gl::arrowButton (p. 661), gl::button (p. 671), gl::form (p. 710), gl::textbox (p. 755), gl::navForm (p. 732), and gl::checkbox (p. 673).

virtual bool gl::keyboardListener::keyUnpress (const key & _key) [inline], [virtual]

Reimplemented in gl::frame (p. 716), gl::arrowButton (p. 661), gl::button (p. 671), gl::form (p. 710), gl::textbox (p. 756), gl::navForm (p. 732), and gl::checkbox (p. 673).

36.38.3 Friends And Related Function Documentation


friend class frame [friend]

36.38.4 Member Data Documentation

os::smart_ptr<frame> gl::keyboardListener::_keyboardSender [private]

36.39 gl::label Class Reference

Inheritance diagram for gl::label:

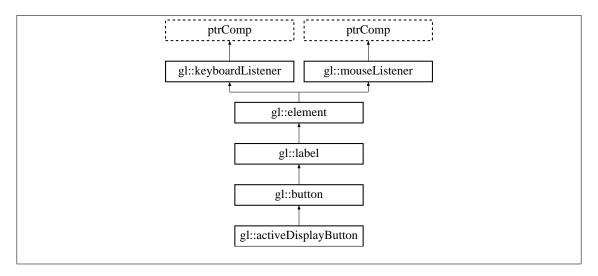

Public Member Functions

- label (frame *master, int targWidth=0, int targHeight=0)
- virtual ~label ()
- const std::string stringID () const
- virtual void drawMain ()
- const std::string & text () const

- color textColor () const
- const os::smart ptr< font > getFont () const
- void setText (const std::string &text)
- void setTextColor (const color &textColor)
- void setFont (os::smart_ptr< font > fnt)
- void **setFontSize** (int font_size)
- void **setLineSpace** (double lineSpace)
- virtual void setHeight (int height)
- virtual void **setWidth** (int **width**)
- bool bounded () const
- lateralTextLayout lateralLayout () const
- verticalTextLayout verticalLayout () const
- void setBounded (bool isBounded)
- void setLateralLayout (lateralTextLayout ltl)
- void setVerticalLayout (verticalTextLayout ltl)

Protected Member Functions

• void refreshString ()

Protected Attributes

color textColor

Private Attributes

- std::string _text
- os::smart_ptr< font > _font
- int array_length
- os::smart_ptr< std::string > parsed_strings
- double xPlus
- double yPlus
- bool _isBounded
- lateralTextLayout _lateralLayout
- verticalTextLayout _verticalLayout

36.39.1 Constructor & Destructor Documentation

```
gl::label::label ( frame * master, int targWidth = 0, int targHeight = 0 )
virtual gl::label::~label ( ) [inline], [virtual]
36.39.2 Member Function Documentation
bool gl::label::bounded ( ) const [inline]
virtual void gl::label::drawMain ( ) [virtual]
```

Reimplemented from **gl::element** (p. 693). Reimplemented in **gl::button** (p. 670).

```
const os::smart_ptr<font> gl::label::getFont( ) const [inline]
lateralTextLayout gl::label::lateralLayout ( ) const [inline]
void gl::label::refreshString ( ) [protected]
void gl::label::setBounded ( bool isBounded )
void gl::label::setFont ( os::smart ptr< font > fnt )
void gl::label::setFontSize ( int font size )
virtual void gl::label::setHeight ( int height ) [virtual]
Reimplemented from gl::element (p. 696).
   Reimplemented in gl::button (p. 671).
void gl::label::setLateralLayout ( lateralTextLayout ltl )
void gl::label::setLineSpace ( double lineSpace )
void gl::label::setText ( const std::string & text )
void gl::label::setTextColor ( const color & textColor )
void gl::label::setVerticalLayout ( verticalTextLayout ltl )
virtual void gl::label::setWidth ( int width ) [virtual]
Reimplemented from gl::element (p. 696).
   Reimplemented in gl::button (p. 671).
const std::string gl::label::stringID ( ) const [inline], [virtual]
Reimplemented from gl::element (p. 696).
const std::string& gl::label::text ( ) const [inline]
color gl::label::textColor ( ) const [inline]
verticalTextLayout gl::label::verticalLayout ( ) const [inline]
36.39.3 Member Data Documentation
os::smart ptr<font> gl::label:: font [private]
bool gl::label:: isBounded [private]
lateralTextLayout gl::label::_lateralLayout [private]
std::string gl::label::_text [private]
color gl::label::_textColor [protected]
verticalTextLayout gl::label:: verticalLayout [private]
```

```
int gl::label::array_length [private]
os::smart_ptr<std::string> gl::label::parsed_strings [private]
double gl::label::xPlus [private]
double gl::label::yPlus [private]
```

36.40 gl::mouse Class Reference

Public Member Functions

- virtual ~mouse ()
- int x () const
- int y () const
- int operator[] (unsigned int index) const

Static Public Member Functions

- static os::smart_ptr< mouse > singleton ()
- static int numberOfButtons ()

Private Member Functions

- mouse ()
- void _buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- void _mouseMove (int mousePositionX, int mousePositionY)

Private Attributes

- int **_x**
- int _y
- int * buttonStatus
- std::recursive mutex mtx
- os::smartSet< globalMouseListener > listenerSet

Friends

- class baseUIDriver
- class testingDriver
- class globalMouseListener

36.40.1 Constructor & Destructor Documentation


```
gl::mouse::mouse( ) [private]
virtual gl::mouse::~mouse( ) [virtual]
```

36.40.2 Member Function Documentation

```
void gl::mouse::_buttonClicked ( int button, int state, int mousePositionX, int mousePositionY )
[private]
void gl::mouse:: mouseMove ( int mousePositionX, int mousePositionY ) [private]
static int gl::mouse::numberOfButtons( ) [inline], [static]
int gl::mouse::operator[] ( unsigned int index ) const
static os::smart_ptr<mouse> gl::mouse::singleton( ) [static]
int gl::mouse::x ( ) const [inline]
int gl::mouse::y ( ) const [inline]
36.40.3 Friends And Related Function Documentation
friend class baseUIDriver [friend]
friend class globalMouseListener [friend]
friend class testingDriver [friend]
36.40.4 Member Data Documentation
int gl::mouse:: x [private]
int gl::mouse::_y [private]
int* gl::mouse::buttonStatus [private]
os::smartSet<globalMouseListener> gl::mouse::listenerSet [private]
std::recursive_mutex gl::mouse::mtx [private]
```

36.41 gl::mouseListener Class Reference

Inheritance diagram for gl::mouseListener:

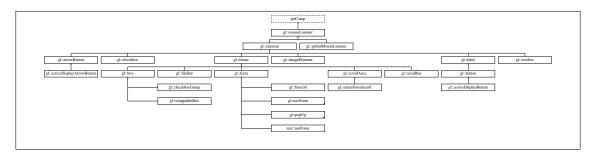

Public Member Functions

- virtual ~mouseListener ()
- virtual void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)

- virtual bool mouseListening () const
- os::smart_ptr< frame > mouseSender ()
- virtual elementDepth depth () const
- virtual bool mouseln () const
- virtual bool enabled () const
- virtual bool disabled () const

Private Attributes

• os::smart_ptr< frame > _mouseSender

Friends

• class frame

```
36.41.1 Constructor & Destructor Documentation
virtual gl::mouseListener::~mouseListener( ) [virtual]
36.41.2 Member Function Documentation
virtual void gl::mouseListener::buttonClicked ( int button, int state, int mousePositionX, int
mousePositionY ) [inline], [virtual]
Reimplemented in gl::frame (p. 715), gl::arrowButton (p. 661), gl::scrollbar (p. 745), gl::button
(p. 670), gl::form (p. 709), gl::textbox (p. 755), and gl::checkbox (p. 673).
virtual elementDepth gl::mouseListener::depth ( ) const [inline], [virtual]
Reimplemented in gl::element (p. 693), and gl::fileBar (p. 704).
virtual bool gl::mouseListener::disabled ( ) const [inline], [virtual]
Reimplemented in gl::element (p. 693).
virtual bool gl::mouseListener::enabled ( ) const [inline], [virtual]
Reimplemented in gl::element (p. 693).
virtual bool gl::mouseListener::mouseln ( ) const [inline], [virtual]
Reimplemented in gl::element (p. 694).
virtual bool gl::mouseListener::mouseListening( ) const [inline], [virtual]
Reimplemented in gl::globalMouseListener (p. 719).
```

virtual void gl::mouseListener::mouseMove (int mousePositionX, int mousePositionY)
[inline], [virtual]

Reimplemented in **gl::frame** (p. 716), **gl::element** (p. 694), **gl::scrollbar** (p. 746), **gl::form** (p. 710), **gl::textbox** (p. 756), and **gl::fileBar** (p. 704).

os::smart_ptr<frame> gl::mouseListener::mouseSender() [inline]

36.41.3 Friends And Related Function Documentation


friend class frame [friend]

36.41.4 Member Data Documentation

os::smart_ptr<frame> gl::mouseListener::_mouseSender [private]

36.42 gl::navForm Class Reference

Inheritance diagram for gl::navForm:

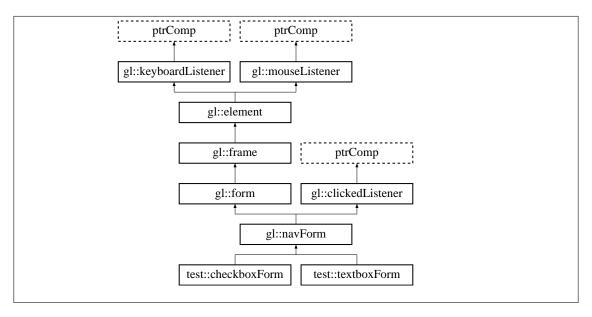

Public Member Functions

- navForm (os::smart_ptr< form > prev)
- virtual ~navForm ()
- virtual void receivedClicked (os::smart_ptr< element > elm)
- virtual bool **keyPress** (const **key** &_key)
- virtual bool **keyUnpress** (const **key** & key)
- bool backspaceNav () const
- void setBackspaceNav (bool bspn)

Public Attributes

- gl::fileBar barTop
- os::smart ptr< gl::barGroup > btnBack

Private Attributes

- bool _backspaceNav
- bool _backTrack


Additional Inherited Members

```
36.42.1 Constructor & Destructor Documentation
gl::navForm::navForm ( os::smart_ptr< form > prev )
virtual gl::navForm::~navForm( ) [inline], [virtual]
36.42.2 Member Function Documentation
bool gl::navForm::backspaceNav ( ) const [inline]
virtual bool gl::navForm::keyPress ( const key & _key ) [virtual]
Reimplemented from gl::form (p. 710).
virtual bool gl::navForm::keyUnpress ( const key & _key ) [virtual]
Reimplemented from gl::form (p. 710).
virtual void gl::navForm::receivedClicked ( os::smart_ptr< element > elm ) [virtual]
Reimplemented from gl::clickedListener (p. 682).
void gl::navForm::setBackspaceNav ( bool bspn ) [inline]
36.42.3 Member Data Documentation
bool gl::navForm:: backspaceNav [private]
bool gl::navForm::_backTrack [private]
gl::fileBar gl::navForm::barTop
os::smart_ptr<gl::barGroup> gl::navForm::btnBack
```

gl::popUp Class Reference

36.43

Inheritance diagram for gl::popUp:

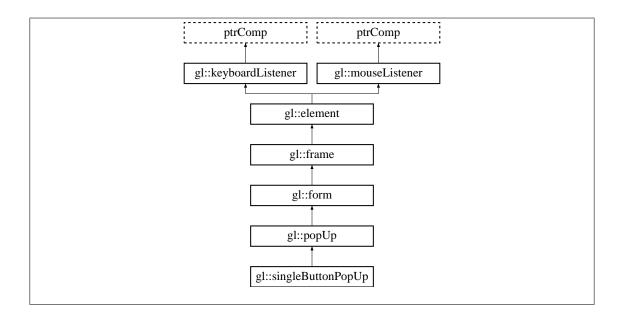

- popUp (os::smart_ptr< form > prev)
- virtual ~popUp ()
- virtual void drawBackground ()
- virtual void resize ()
- void setFrameWidth (int frameWidth)
- void setFrameHeight (int frameHeight)
- int frameWidth () const
- int frameHeight () const

Protected Member Functions

- virtual void resizeFrame ()
- box & popUpFrame ()
- bool wrapFocus () const

Private Member Functions

- void _currentFormDraw ()
- void _clear ()

Private Attributes

- element _background
- wrappableBox _popUpFrame
- int _frameWidth
- int _frameHeight

- int _targFrameWidth
- int _targFrameHeight

Additional Inherited Members

```
36.43.1 Constructor & Destructor Documentation
gl::popUp::popUp ( os::smart_ptr< form > prev )
virtual gl::popUp::~popUp( ) [inline], [virtual]
36.43.2 Member Function Documentation
void gl::popUp::_clear( ) [private], [virtual]
Reimplemented from gl::form (p. 709).
void gl::popUp::_currentFormDraw( ) [private], [virtual]
Reimplemented from gl::form (p. 709).
virtual void gl::popUp::drawBackground( ) [virtual]
Reimplemented from gl::form (p. 710).
int gl::popUp::frameHeight( ) const [inline]
int gl::popUp::frameWidth ( ) const [inline]
box& gl::popUp::popUpFrame( ) [inline], [protected]
virtual void gl::popUp::resize ( ) [virtual]
Reimplemented from gl::element (p. 696).
virtual void gl::popUp::resizeFrame ( ) [protected], [virtual]
Reimplemented in gl::singleButtonPopUp (p. 748).
void gl::popUp::setFrameHeight ( int frameHeight )
void gl::popUp::setFrameWidth ( int frameWidth )
bool gl::popUp::wrapFocus ( ) const [inline], [protected], [virtual]
Reimplemented from gl::form (p. 711).
```

36.43.3 Member Data Documentation

```
element gl::popUp::_background [private]
```

int gl::popUp::_frameHeight [private]


int gl::popUp::_frameWidth [private]

wrappableBox gl::popUp::_popUpFrame [private]

int gl::popUp::_targFrameHeight [private]
int gl::popUp::_targFrameWidth [private]

36.44 gl::pressedFunction Class Reference

Inheritance diagram for gl::pressedFunction:

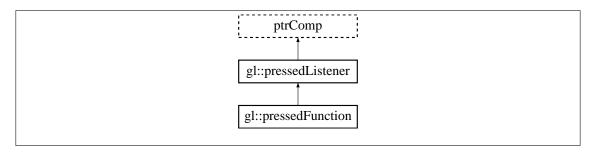

Public Member Functions

- pressedFunction (elementHandler handler)
- virtual ~pressedFunction ()
- virtual void receivedPressed (os::smart_ptr< element > elm)

Protected Attributes

• elementHandler ehan

36.44.1 Constructor & Destructor Documentation

gl::pressedFunction::pressedFunction (elementHandler handler) [inline]

virtual gl::pressedFunction::~pressedFunction() [inline], [virtual]

36.44.2 Member Function Documentation

virtual void gl::pressedFunction::receivedPressed (os::smart_ptr< element > elm) [inline],
[virtual]


Reimplemented from gl::pressedListener (p. 737).

36.44.3 Member Data Documentation

elementHandler gl::pressedFunction::ehan [protected]

36.45 gl::pressedFunctionVoid Class Reference

Inheritance diagram for gl::pressedFunctionVoid:

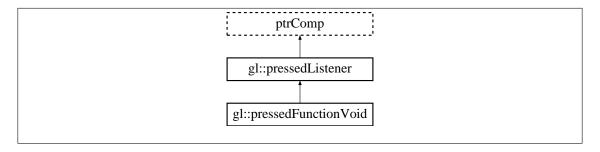

Public Member Functions

- pressedFunctionVoid (elementHandler_void handler, void *void_ptr)
- virtual ~pressedFunctionVoid ()
- virtual void receivedPressed (os::smart_ptr< element > elm)

Protected Attributes

- elementHandler_void ehan
- void * vptr

36.45.1 Constructor & Destructor Documentation

virtual gl::pressedFunctionVoid::~pressedFunctionVoid() [inline], [virtual]

36.45.2 Member Function Documentation

virtual void gl::pressedFunctionVoid::receivedPressed (os::smart_ptr< element > elm)
[inline], [virtual]

Reimplemented from gl::pressedListener (p. 737).


36.45.3 Member Data Documentation

elementHandler_void gl::pressedFunctionVoid::ehan [protected]

void* gl::pressedFunctionVoid::vptr [protected]

36.46 gl::pressedListener Class Reference

Inheritance diagram for gl::pressedListener:

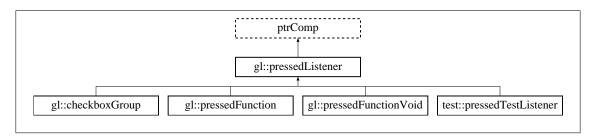

Public Member Functions

- virtual ~pressedListener ()
- virtual void receivedPressed (os::smart_ptr< element > elm)

Private Attributes

- std::mutex mtx
- os::smartSet< element > senders

Friends

• class element

36.46.1 Constructor & Destructor Documentation

virtual gl::pressedListener::~pressedListener() [virtual]

36.46.2 Member Function Documentation

virtual void gl::pressedListener::receivedPressed (os::smart_ptr< element > elm) [inline],
[virtual]

Reimplemented in gl::pressedFunctionVoid (p. 736), gl::pressedFunction (p. 735), gl::checkbox \leftarrow Group (p. 678), and test::pressedTestListener (p. 738).

36.46.3 Friends And Related Function Documentation

friend class **element** [friend]


36.46.4 Member Data Documentation

std::mutex gl::pressedListener::mtx [private]

os::smartSet<element> gl::pressedListener::senders [private]

36.47 test::pressedTestListener Class Reference

Inheritance diagram for test::pressedTestListener:

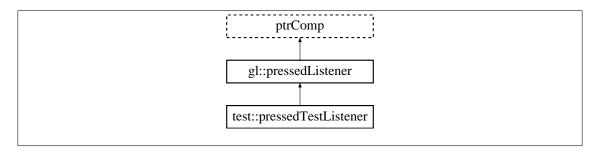

Public Member Functions

- pressedTestListener ()
- virtual ~pressedTestListener ()
- void resetFlag ()
- void receivedPressed (os::smart_ptr< gl::element > elm)
- bool flag () const

Private Attributes

• bool flag

36.47.1 Constructor & Destructor Documentation

```
test::pressedTestListener( ) [inline]
```

virtual test::pressedTestListener::~pressedTestListener() [inline], [virtual]

36.47.2 Member Function Documentation

bool test::pressedTestListener::flag () const [inline]

void test::pressedTestListener::receivedPressed (os::smart_ptr< gl::element > elm) [inline],
[virtual]

Reimplemented from **gl::pressedListener** (p. 737).


void test::pressedTestListener::resetFlag () [inline]

36.47.3 Member Data Documentation

bool test::pressedTestListener::_flag [private]

36.48 gl::resizedListener Class Reference

Inheritance diagram for gl::resizedListener:



- virtual ~resizedListener ()
- virtual void receivedResize (os::smart ptr< element > elm)

Private Attributes

- std::mutex mtx
- os::smartSet< element > senders

Friends

• class element

36.48.1 Constructor & Destructor Documentation

virtual gl::resizedListener::~resizedListener() [virtual]

36.48.2 Member Function Documentation

virtual void gl::resizedListener::receivedResize (os::smart_ptr< element > elm) [inline],
[virtual]

Reimplemented in gl::entireFormScroll (p. 702), gl::resizeFunctionVoid (p. 742), gl::resize Function (p. 741), gl::scrollbar (p. 746), gl::fileBar (p. 705), and test::resizedTestListener (p. 740).

36.48.3 Friends And Related Function Documentation

friend class **element** [friend]


36.48.4 Member Data Documentation

std::mutex gl::resizedListener::mtx [private]

os::smartSet<**element**> gl::resizedListener::senders [private]

36.49 test::resizedTestListener Class Reference

Inheritance diagram for test::resizedTestListener:

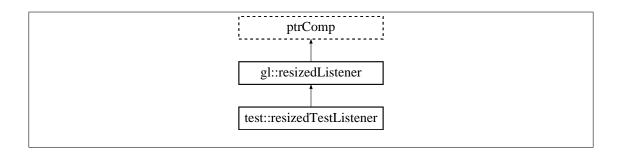

- resizedTestListener ()
- virtual ~resizedTestListener ()
- void resetFlag ()
- void receivedResize (os::smart_ptr< gl::element > elm)
- bool flag () const

Private Attributes

• bool _flag

36.49.1 Constructor & Destructor Documentation

```
test:: resized Test Listener:: resized Test Listener (\quad) \quad [\verb"inline"]
```

virtual test::resizedTestListener::~resizedTestListener() [inline], [virtual]

36.49.2 Member Function Documentation

bool test::resizedTestListener::flag () const [inline]

 $\label{lem:condition} \mbox{void test::resizedTestListener::receivedResize (os::smart_ptr<\mbox{\ensuremath{gl::element}}>\mbox{\ensuremath{elm}}) \ \ [\mbox{inline}], \ \mbox{\ensuremath{[virtual]}}$

Reimplemented from gl::resizedListener (p. 739).


void test::resizedTestListener::resetFlag () [inline]

36.49.3 Member Data Documentation

bool test::resizedTestListener::_flag [private]

36.50 gl::resizeFunction Class Reference

Inheritance diagram for gl::resizeFunction:

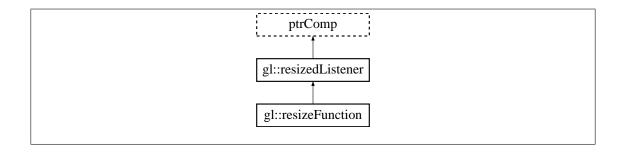

- resizeFunction (elementHandler handler)
- virtual ~resizeFunction ()
- virtual void receivedResize (os::smart_ptr< element > elm)

Protected Attributes

• elementHandler ehan

36.50.1 Constructor & Destructor Documentation

 ${\tt gl::resizeFunction::resizeFunction} \ (\ {\tt elementHandler} \ {\tt handler} \) \quad [{\tt inline}]$

virtual gl::resizeFunction::~resizeFunction() [inline], [virtual]

36.50.2 Member Function Documentation

virtual void gl::resizeFunction::receivedResize (os::smart_ptr< element > elm) [inline],
[virtual]


Reimplemented from gl::resizedListener (p. 739).

36.50.3 Member Data Documentation

elementHandler gl::resizeFunction::ehan [protected]

36.51 gl::resizeFunctionVoid Class Reference

Inheritance diagram for gl::resizeFunctionVoid:

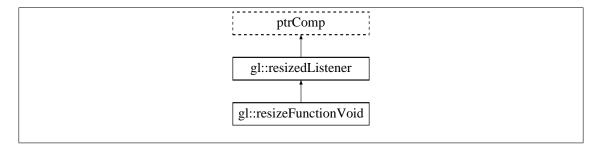

- resizeFunctionVoid (elementHandler_void handler, void *void_ptr)
- virtual ~resizeFunctionVoid ()
- virtual void receivedResize (os::smart ptr< element > elm)

Protected Attributes

- elementHandler_void ehan
- void * vptr

36.51.1 Constructor & Destructor Documentation

gl::resizeFunctionVoid::resizeFunctionVoid (**elementHandler_void** handler, void * void_ptr) [inline]

virtual gl::resizeFunctionVoid::~resizeFunctionVoid() [inline], [virtual]

36.51.2 Member Function Documentation

virtual void gl::resizeFunctionVoid::receivedResize (os::smart_ptr< element > elm) [inline],
[virtual]

Reimplemented from gl::resizedListener (p. 739).


36.51.3 Member Data Documentation

elementHandler_void gl::resizeFunctionVoid::ehan [protected]

void* gl::resizeFunctionVoid::vptr [protected]

36.52 gl::scrollArea Class Reference

Inheritance diagram for gl::scrollArea:

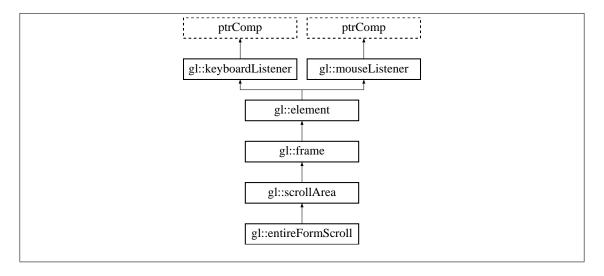

- scrollArea (frame *master, elementDepth depth=defaultDepth)
- virtual ~scrollArea ()
- virtual void resize ()
- const scrollbar & vertical () const
- scrollbar & vertical ()
- const scrollbar & lateral () const
- scrollbar & lateral ()
- const frame & scrollZone () const
- frame & scrollZone ()

Private Attributes


- scrollbar scrollVertical
- scrollbar scrollLateral
- frame scrollZone

Additional Inherited Members

```
36.52.1 Constructor & Destructor Documentation
gl::scrollArea::scrollArea ( frame * master, elementDepth depth = defaultDepth )
virtual gl::scrollArea::~scrollArea( ) [inline], [virtual]
36.52.2 Member Function Documentation
const scrollbar& gl::scrollArea::lateral ( ) const [inline]
scrollbar& gl::scrollArea::lateral( ) [inline]
virtual void gl::scrollArea::resize( ) [virtual]
Reimplemented from gl::element (p. 696).
const frame& gl::scrollArea::scrollZone ( ) const [inline]
frame& gl::scrollArea::scrollZone( ) [inline]
const scrollbar& gl::scrollArea::vertical( ) const [inline]
scrollbar& gl::scrollArea::vertical( ) [inline]
36.52.3 Member Data Documentation
frame gl::scrollArea::_scrollZone [private]
scrollbar gl::scrollArea::scrollLateral [private]
scrollbar gl::scrollArea::scrollVertical [private]
```

36.53 gl::scrollbar Class Reference

Inheritance diagram for gl::scrollbar:

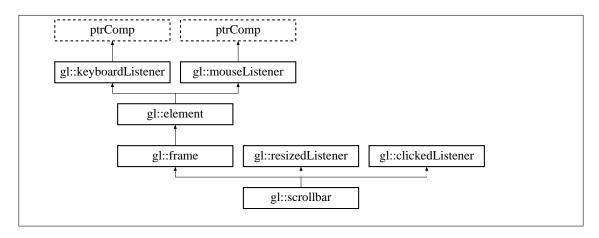

Public Member Functions

- scrollbar (scrollArea *master, scrollbarDir scrDir)
- virtual ~scrollbar ()
- virtual void resize ()
- virtual void draw ()
- virtual void drawMain ()
- virtual void receivedResize (os::smart_ptr< element > elm)
- virtual void receivedClicked (os::smart_ptr< element > elm)
- virtual void buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- bool childrenFocusable () const
- int scrollSize () const
- int scrollPos () const
- void setActive (bool active)
- bool active () const
- int thickness () const
- void setThickness (int thick)
- void setButtonColor (const color &col)
- void setClickedColor (const color &col)
- const color & buttonColor () const
- · const color & clickedColor () const

Private Attributes

- scrollArea * _scrollArea
- arrowButton upArrow
- arrowButton downArrow
- scrollbarDir scrollDir

- bool _active
- int scrollSize
- int _thickness
- bool _sideBarClicked
- int lastPos
- color _buttonColor
- color _clickedColor
- int _scrollPos
- int _scrollbarSize
- int barSize
- int _startPos

Friends

• class scrollArea

Additional Inherited Members

Reimplemented from **gl::frame** (p. 716).

```
36.53.1 Constructor & Destructor Documentation
gl::scrollbar::scrollbar ( scrollArea * master, scrollbarDir scrDir )
virtual gl::scrollbar::~scrollbar ( ) [inline], [virtual]
36.53.2 Member Function Documentation
bool gl::scrollbar::active ( ) const [inline]
virtual void gl::scrollbar::buttonClicked ( int button, int state, int mousePositionX, int mousePositionY ) [virtual]
Reimplemented from gl::frame (p. 715).

const color& gl::scrollbar::buttonColor ( ) const [inline]
bool gl::scrollbar::childrenFocusable ( ) const [inline], [virtual]
Reimplemented from gl::frame (p. 715).

const color& gl::scrollbar::clickedColor ( ) const [inline]
virtual void gl::scrollbar::draw ( ) [virtual]
Reimplemented from gl::element (p. 693).


virtual void gl::scrollbar::drawMain ( ) [virtual]
```

```
virtual void gl::scrollbar::mouseMove ( int mousePositionX, int mousePositionY ) [virtual]
Reimplemented from gl::frame (p. 716).
virtual void gl::scrollbar::receivedClicked ( os::smart_ptr< element > elm ) [virtual]
Reimplemented from gl::clickedListener (p. 682).
virtual void gl::scrollbar::receivedResize ( os::smart_ptr< element > elm ) [virtual]
Reimplemented from gl::resizedListener (p. 739).
virtual void gl::scrollbar::resize ( ) [virtual]
Reimplemented from gl::element (p. 696).
int gl::scrollbar::scrollPos ( ) const [inline]
int gl::scrollbar::scrollSize ( ) const [inline]
void gl::scrollbar::setActive ( bool active )
void gl::scrollbar::setButtonColor ( const color & col )
void gl::scrollbar::setClickedColor ( const color & col )
void gl::scrollbar::setThickness ( int thick )
int gl::scrollbar::thickness ( ) const [inline]
36.53.3 Friends And Related Function Documentation
friend class scrollArea [friend]
36.53.4 Member Data Documentation
bool gl::scrollbar::_active [private]
int gl::scrollbar::_barSize [private]
color gl::scrollbar::_buttonColor [private]
color gl::scrollbar:: clickedColor [private]
int gl::scrollbar::_lastPos [private]
scrollArea* gl::scrollbar::_scrollArea [private]
int gl::scrollbar::_scrollbarSize [private]
scrollbarDir gl::scrollbar::_scrollDir [private]
int gl::scrollbar::_scrollPos [private]
int gl::scrollbar::_scrollSize [private]
```

```
bool gl::scrollbar::_sideBarClicked [private]
int gl::scrollbar::_startPos [private]
int gl::scrollbar::_thickness [private]
arrowButton gl::scrollbar::downArrow [private]
arrowButton gl::scrollbar::upArrow [private]
```

36.54 gl::singleButtonPopUp Class Reference

Inheritance diagram for gl::singleButtonPopUp:

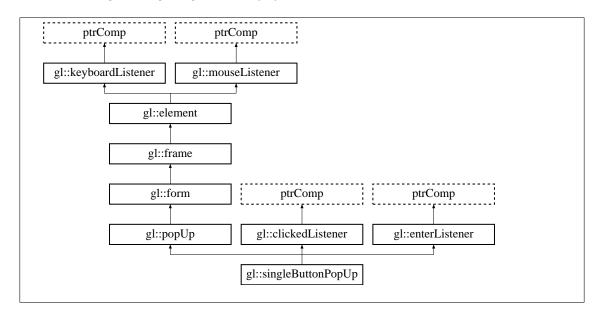

Public Member Functions

- singleButtonPopUp (os::smart_ptr< form > prev, std::string labelText="", std::string button ← Text="Ok")
- virtual ~singleButtonPopUp ()
- virtual void receivedClicked (os::smart_ptr< element > elm)
- virtual void receivedEnter (os::smart_ptr< element > elm)

Protected Member Functions

• virtual void resizeFrame ()

Protected Attributes

- gl::button btnMain
- gl::label lblMain

36.54.1 Constructor & Destructor Documentation

gl::singleButtonPopUp::singleButtonPopUp (os::smart_ptr< form > prev, std::string labelText = "", std::string buttonText = "0k")

virtual gl::singleButtonPopUp::~singleButtonPopUp() [inline], [virtual]

36.54.2 Member Function Documentation

 $virtual\ void\ gl::singleButtonPopUp::receivedClicked\ (\ os::smart_ptr<\\ \textbf{element}>elm\)\quad [virtual]$

Reimplemented from gl::clickedListener (p. 682).

virtual void gl::singleButtonPopUp::receivedEnter(os::smart_ptr< element > elm) [virtual]

Reimplemented from gl::enterListener (p. 700).

virtual void gl::singleButtonPopUp::resizeFrame () [protected], [virtual]

Reimplemented from gl::popUp (p. 734).


36.54.3 Member Data Documentation

gl::button gl::singleButtonPopUp::btnMain [protected]

gl::label gl::singleButtonPopUp::lblMain [protected]

36.55 test::singleUlFunctionTest Class Reference

Inheritance diagram for test::singleUIFunctionTest:

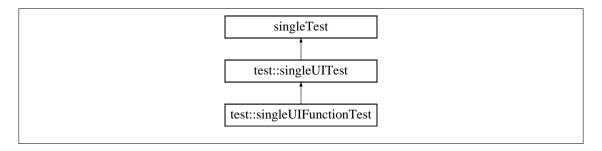

Public Member Functions

- singleUlFunctionTest (std::string tn, testFunction f)
- virtual ~singleUlFunctionTest ()
- void test () throw (os::smart_ptr<std::exception>)

Private Attributes

• testFunction func

36.55.1 Constructor & Destructor Documentation

test::singleUIFunctionTest::singleUIFunctionTest (std::string tn, testFunction f)

virtual test::singleUIFunctionTest::~singleUIFunctionTest() [inline], [virtual]

36.55.2 Member Function Documentation


void test::singleUIFunctionTest::test () throw os::smart_ptr< std::exception >)

36.55.3 Member Data Documentation

testFunction test::singleUIFunctionTest::func [private]

36.56 test::singleUITest Class Reference

Inheritance diagram for test::singleUITest:

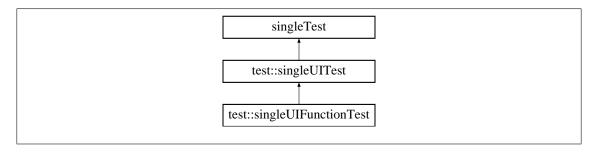

Public Member Functions

- singleUITest (std::string tn)
- virtual ~singleUlTest ()
- virtual void setupTest () throw (os::smart ptr<std::exception>)
- virtual void teardownTest () throw (os::smart_ptr<std::exception>)

36.56.1 Constructor & Destructor Documentation

test::singleUITest::singleUITest (std::string tn) [inline]

virtual test::singleUITest::~singleUITest() [inline], [virtual]


36.56.2 Member Function Documentation

 $\label{limit} \begin{tabular}{ll} virtual void test::singleUITest::setupTest () throw os::smart_ptr< std::exception >) & [inline], \\ [virtual] \end{tabular}$

virtual void test::singleUITest::teardownTest () throw os::smart_ptr< std::exception >)
[inline], [virtual]

36.57 test::testForm Class Reference

Inheritance diagram for test::testForm:

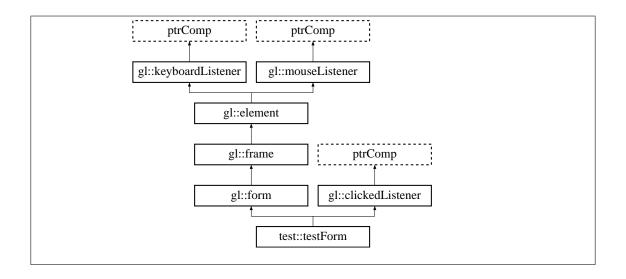

- **testForm** (int *argc, char **argv)
- testForm (os::smart_ptr< form > prev)
- virtual ~testForm ()
- virtual void receivedClicked (os::smart_ptr< element > elm)

Public Attributes

- gl::fileBar barTop
- gl::button btn1
- gl::button btn2
- gl::button btn3
- gl::button btn4
- gl::button btn5
- os::smart_ptr< gl::barGroup > btnExit
- os::smart_ptr< gl::barGroup > btnBack
- os::smart_ptr< gl::barGroup > btnScrollform
- os::smart_ptr< gl::barGroup > btnTextboxform
- os::smart_ptr< gl::barGroup > btnCheckboxform
- os::smart_ptr< gl::barGroup > btnPopup

Private Member Functions

• void initForm ()

Additional Inherited Members

36.57.1 Constructor & Destructor Documentation

```
test::testForm::testForm ( int * argc, char ** argv )
test::testForm::testForm ( os::smart_ptr< form > prev )
virtual test::testForm::~testForm( ) [inline], [virtual]
36.57.2 Member Function Documentation
```

```
void test::testForm::initForm( ) [private]
```

virtual void test::testForm::receivedClicked (os::smart ptr< element > elm) [virtual]

36.57.3 Member Data Documentation

```
gl::fileBar test::testForm::barTop
gl::button test::testForm::btn1
gl::button test::testForm::btn2
gl::button test::testForm::btn3
```

gl::button test::testForm::btn4

gl::button test::testForm::btn5 os::smart_ptr<gl::barGroup> test::testForm::btnBack

os::smart ptr<gl::barGroup> test::testForm::btnCheckboxform

os::smart ptr<gl::barGroup> test::testForm::btnExit


os::smart_ptr<**gl::barGroup**> test::testForm::btnPopup

os::smart_ptr<**gl::barGroup**> test::testForm::btnScrollform

os::smart_ptr<gl::barGroup> test::testForm::btnTextboxform

36.58 gl::testingDriver Class Reference

Inheritance diagram for gl::testingDriver:



- testingDriver ()
- virtual ~testingDriver ()
- bool opengl () const
- void buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- void **mouseMove** (int mousePositionX, int mousePositionY)
- void display ()
- int windowWidth () const
- int windowHeight () const
- void setWindowDimensions (int width, int height)

Private Attributes

- int width
- int height

Additional Inherited Members

```
36.58.1 Constructor & Destructor Documentation
gl::testingDriver::testingDriver()
virtual gl::testingDriver::~testingDriver( ) [virtual]
36.58.2 Member Function Documentation
void gl::testingDriver::buttonClicked ( int button, int state, int mousePositionX, int mousePositionY
) [virtual]
Reimplemented from gl::baseUIDriver (p. 666).
void gl::testingDriver::display( ) [virtual]
Reimplemented from gl::baseUIDriver (p. 666).
void gl::testingDriver::mouseMove ( int mousePositionX, int mousePositionY ) [virtual]
Reimplemented from gl::baseUIDriver (p. 666).
bool gl::testingDriver::opengl( ) const [inline], [virtual]
Reimplemented from gl::baseUIDriver (p. 667).
void gl::testingDriver::setWindowDimensions( int width, int height ) [virtual]
Reimplemented from gl::baseUIDriver (p. 667).
int gl::testingDriver::windowHeight( ) const [inline], [virtual]
Reimplemented from gl::baseUIDriver (p. 667).
```

int gl::testingDriver::windowWidth() const [inline], [virtual]


Reimplemented from gl::baseUlDriver (p. 667).

36.58.3 Member Data Documentation

int gl::testingDriver::height [private]
int gl::testingDriver::width [private]

36.59 gl::textbox Class Reference

Inheritance diagram for gl::textbox:

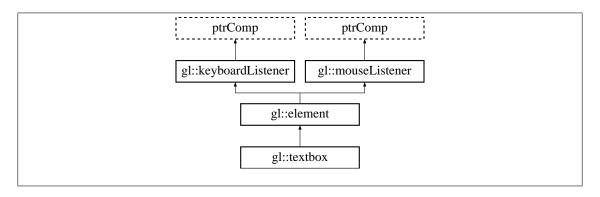

Public Member Functions

- textbox (frame *master)
- virtual ~textbox ()
- virtual void drawBackground ()
- virtual void drawMain ()
- virtual void drawTop ()
- void setBorderSize (int border)
- int borderSize () const
- void setHeight (int height)
- void setWidth (int width)
- const os::smart_ptr< font > getFont () const
- void setFont (os::smart_ptr< font > fnt)
- void setFontSize (int font size)
- void setTextHidden (bool textHidden)
- bool setText (std::string text)
- bool textHidden () const
- const std::string & trueText () const
- const std::string & displayText () const
- const std::string stringID () const
- void setFrameColor (const color &frameColor)
- void setTextColor (const color &textColor)

- void setClickedColor (const color &clickedColor)
- const color & frameColor () const
- const color & textColor () const
- const color & clickedColor () const
- void setKeyWhiteList (bool whitelist)
- bool keyWhitelist () const
- void **setGood** (unsigned char **key**)
- void unsetGood (unsigned char key)
- void **setBad** (unsigned char **key**)
- void **unsetBad** (unsigned char **key**)
- bool goodKey (unsigned char key) const
- bool badKey (unsigned char key) const
- void **setTabEvent** (bool enbtab)
- bool tabEvent () const
- bool focusable () const
- void focus ()
- void unsetFocus ()
- void buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
- void **mouseMove** (int mousePositionX, int mousePositionY)
- bool **keyPress** (const **key** &_key)
- bool **keyUnpress** (const **key** &_key)

Protected Member Functions

• int horizontalPositionQuery (int trueHorz)

Protected Attributes

- color _frameColor
- color _textColor
- color _clickedColor
- bool _keyWhitelist
- bool **goodKey** [256]
- bool _badKey [256]
- bool tabEvent

Private Attributes

- bool hideText
- std::string trueText
- std::string _displayText
- os::smart_ptr< font > _font
- int _cursorPos
- int _cursorPos2
- int _textHeight
- int _cursorDisplayCount
- int _borderSize


```
36.59.1 Constructor & Destructor Documentation
gl::textbox::textbox ( frame * master )
virtual gl::textbox::~textbox( ) [inline], [virtual]
36.59.2 Member Function Documentation
bool gl::textbox::badKey ( unsigned char key ) const [inline]
int gl::textbox::borderSize ( ) const [inline]
void gl::textbox::buttonClicked ( int button, int state, int mousePositionX, int mousePositionY )
[virtual]
Reimplemented from gl::mouseListener (p. 730).
const color& gl::textbox::clickedColor( ) const [inline]
const std::string& gl::textbox::displayText( ) const [inline]
virtual void gl::textbox::drawBackground( ) [virtual]
Reimplemented from gl::element (p. 693).
virtual void gl::textbox::drawMain( ) [virtual]
Reimplemented from gl::element (p. 693).
virtual void gl::textbox::drawTop( ) [virtual]
Reimplemented from gl::element (p. 693).
void gl::textbox::focus( ) [virtual]
Reimplemented from gl::element (p. 693).
bool gl::textbox::focusable ( ) const [inline], [virtual]
Reimplemented from gl::element (p. 693).
const color& gl::textbox::frameColor ( ) const [inline]
const os::smart_ptr<font> gl::textbox::getFont ( ) const [inline]
bool gl::textbox::goodKey ( unsigned char key ) const [inline]
int gl::textbox::horizontalPositionQuery ( int trueHorz ) [protected]
bool gl::textbox::keyPress ( const key & _key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
```

```
bool gl::textbox::keyUnpress ( const key & _key ) [virtual]
Reimplemented from gl::keyboardListener (p. 725).
bool gl::textbox::keyWhitelist ( ) const [inline]
void gl::textbox::mouseMove ( int mousePositionX, int mousePositionY ) [virtual]
Reimplemented from gl::element (p. 694).
void gl::textbox::setBad ( unsigned char key ) [inline]
void gl::textbox::setBorderSize ( int border )
void gl::textbox::setClickedColor ( const color & clickedColor ) [inline]
void gl::textbox::setFont ( os::smart ptr< font > fnt )
void gl::textbox::setFontSize ( int font_size )
void gl::textbox::setFrameColor ( const color & frameColor ) [inline]
void gl::textbox::setGood ( unsigned char key ) [inline]
void gl::textbox::setHeight ( int height ) [virtual]
Reimplemented from gl::element (p. 696).
void gl::textbox::setKeyWhiteList ( bool whitelist ) [inline]
void gl::textbox::setTabEvent ( bool enbtab ) [inline]
bool gl::textbox::setText ( std::string text )
void gl::textbox::setTextColor ( const color & textColor ) [inline]
void gl::textbox::setTextHidden ( bool textHidden )
void gl::textbox::setWidth ( int width ) [virtual]
Reimplemented from gl::element (p. 696).
const std::string gl::textbox::stringID ( ) const [inline], [virtual]
Reimplemented from gl::element (p. 696).
bool gl::textbox::tabEvent( ) const [inline]
const color& gl::textbox::textColor( ) const [inline]
bool gl::textbox::textHidden() const [inline]
const std::string& gl::textbox::trueText( ) const [inline]
void gl::textbox::unsetBad ( unsigned char key ) [inline]
```

```
void gl::textbox::unsetFocus( ) [virtual]
Reimplemented from gl::element (p. 697).
void gl::textbox::unsetGood ( unsigned char key ) [inline]
36.59.3 Member Data Documentation
bool gl::textbox:: badKey[256] [protected]
int gl::textbox::_borderSize [private]
color gl::textbox::_clickedColor [protected]
int gl::textbox::_cursorDisplayCount [private]
int gl::textbox::_cursorPos [private]
int gl::textbox::_cursorPos2 [private]
std::string gl::textbox::_displayText [private]
os::smart_ptr<font> gl::textbox::_font [private]
color gl::textbox::_frameColor [protected]
bool gl::textbox::_goodKey[256] [protected]
bool gl::textbox::_hideText [private]
bool gl::textbox::_keyWhitelist [protected]
bool gl::textbox::_tabEvent [protected]
color gl::textbox::_textColor [protected]
int gl::textbox::_textHeight [private]
std::string gl::textbox::_trueText [private]
```

36.60 test::textboxForm Class Reference

Inheritance diagram for test::textboxForm:

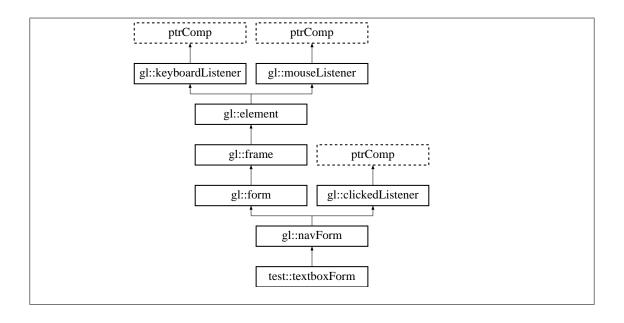

- textboxForm (os::smart_ptr< gl::form > prev)
- virtual ~textboxForm ()

Public Attributes

- gl::textbox tbxOne
- gl::textbox tbxTwo

Additional Inherited Members

```
36.60.1 Constructor & Destructor Documentation
```

```
test:: textboxForm:: textboxForm \ ( \ os:: smart\_ptr < \textbf{gl::form} > prev \ )
```

virtual test::textboxForm::~textboxForm() [inline], [virtual]

36.60.2 Member Data Documentation

gl::textbox test::textboxForm::tbxOne

gl::textbox test::textboxForm::tbxTwo

36.61 gl::texture_data Struct Reference

Public Member Functions

• ~texture_data ()

Public Attributes

- std::string file_path
- std::string name
- std::string full file path
- GLuint texture

36.61.1 Constructor & Destructor Documentation

gl::texture_data::~texture_data()

36.61.2 Member Data Documentation

std::string gl::texture_data::file_path

std::string gl::texture_data::full_file_path

std::string gl::texture_data::name

GLuint gl::texture_data::texture

36.62 gl::textureManager Class Reference

Public Member Functions

- ~textureManager ()
- void **setDefaultPath** (std::string path)
- std::string getDefaultPath ()
- GLuint **getTexture** file (std::string file)
- GLuint **getTexture_name** (std::string nick_name)
- bool checkTexture (GLuint t)
- texture data * getFullTexture file (std::string file)
- texture_data * getFullTexture_name (std::string file)
- texture_data * getFullTexture (GLuint t)
- GLuint setTexture (std::string file, std::string name)
- bool deleteTexture (GLuint t)

Static Public Member Functions

• static os::smart ptr< textureManager > singleton ()

Private Member Functions

• textureManager ()

Private Attributes


- std::string default_path
- std::map< std::string, texture data * > by name
- std::map< std::string, texture data * > by file
- std::map< GLuint, texture data * > by texture

36.62.1 Constructor & Destructor Documentation

```
gl::textureManager::textureManager( ) [private]
gl::textureManager::~textureManager()
36.62.2 Member Function Documentation
bool gl::textureManager::checkTexture ( GLuint t )
bool gl::textureManager::deleteTexture ( GLuint t )
std::string gl::textureManager::getDefaultPath ( )
texture_data* gl::textureManager::getFullTexture ( GLuint t )
texture_data* gl::textureManager::getFullTexture_file ( std::string file )
texture_data* gl::textureManager::getFullTexture_name ( std::string file )
GLuint gl::textureManager::getTexture_file ( std::string file )
GLuint gl::textureManager::getTexture_name ( std::string nick_name )
void gl::textureManager::setDefaultPath ( std::string path )
GLuint gl::textureManager::setTexture ( std::string file, std::string name )
static os::smart ptr<textureManager> gl::textureManager::singleton( ) [static]
36.62.3 Member Data Documentation
std::map<std::string,texture data*> gl::textureManager::by file [private]
std::map<std::string,texture_data*> gl::textureManager::by_name [private]
std::map<GLuint,texture_data*> gl::textureManager::by_texture [private]
std::string gl::textureManager::default_path [private]
```

36.63 gl::TimesMonoRomanStroke Class Reference

Inheritance diagram for gl::TimesMonoRomanStroke:



Public Member Functions

- TimesMonoRomanStroke ()
- virtual ~TimesMonoRomanStroke ()

• virtual const std::string & name () const

Additional Inherited Members

36.63.1 Constructor & Destructor Documentation

gl::TimesMonoRomanStroke::TimesMonoRomanStroke() [inline]

virtual gl::TimesMonoRomanStroke::~TimesMonoRomanStroke() [inline], [virtual]


36.63.2 Member Function Documentation

virtual const std::string& gl::TimesMonoRomanStroke::name () const [inline], [virtual]

Reimplemented from gl::font (p. 706).

36.64 gl::TimesRoman Class Reference

Inheritance diagram for gl::TimesRoman:



Public Member Functions

- TimesRoman ()
- virtual ~TimesRoman ()
- virtual void setSize (unsigned int size)
- virtual const std::string & name () const

Additional Inherited Members

36.64.1 Constructor & Destructor Documentation

gl::TimesRoman::TimesRoman() [inline]

virtual gl::TimesRoman::~TimesRoman() [inline], [virtual]

36.64.2 Member Function Documentation

virtual const std::string& gl::TimesRoman::name () const [inline], [virtual]


Reimplemented from gl::font (p. 706).

virtual void gl::TimesRoman::setSize (unsigned int size) [virtual]

Reimplemented from gl::font (p. 706).

36.65 gl::TimesRomanStroke Class Reference

Inheritance diagram for gl::TimesRomanStroke:

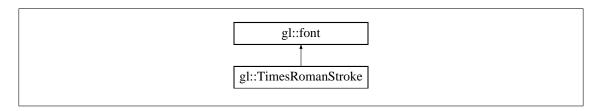

Public Member Functions

- TimesRomanStroke ()
- virtual ~TimesRomanStroke ()
- virtual const std::string & name () const

Additional Inherited Members

36.65.1 Constructor & Destructor Documentation

gl::TimesRomanStroke::TimesRomanStroke() [inline]

virtual gl::TimesRomanStroke::~TimesRomanStroke() [inline], [virtual]


36.65.2 Member Function Documentation

virtual const std::string& gl::TimesRomanStroke::name () const [inline], [virtual]

Reimplemented from gl::font (p. 706).

36.66 gl::UIDriver Class Reference

Inheritance diagram for gl::UIDriver:



Public Member Functions

- virtual ~UIDriver ()
- bool opengl () const
- double fps () const
- double & fps ()

- void display ()
- void **setTypingMode** (bool **typingMode**)
- int windowWidth () const
- int windowHeight () const
- void **setWindowDimensions** (int _width, int _height)

Private Member Functions

• **UIDriver** (os::smart_ptr< **form** > **root**, int *argc, char **argv)

Private Attributes

• double fps

Friends

• class form

Additional Inherited Members

Reimplemented from gl::baseUIDriver (p. 667).

```
36.66.1 Constructor & Destructor Documentation
gl::UIDriver::UIDriver ( os::smart_ptr< form > root, int * argc, char ** argv ) [private]
virtual gl::UIDriver::~UIDriver ( ) [virtual]
36.66.2 Member Function Documentation
void gl::UIDriver::display ( ) [virtual]
Reimplemented from gl::baseUIDriver (p. 666).

double gl::UIDriver::fps ( ) const [inline]
double& gl::UIDriver::fps ( ) [inline]
bool gl::UIDriver::opengl ( ) const [inline], [virtual]
Reimplemented from gl::baseUIDriver (p. 667).

void gl::UIDriver::setTypingMode ( bool typingMode ) [virtual]
Reimplemented from gl::baseUIDriver (p. 667).

void gl::UIDriver::setWindowDimensions ( int_width, int_height ) [inline], [virtual]
Reimplemented from gl::baseUIDriver (p. 667).

int gl::UIDriver::windowHeight ( ) const [inline], [virtual]
```

int gl::UIDriver::windowWidth () const [inline], [virtual]

Reimplemented from gl::baseUlDriver (p. 667).

36.66.3 Friends And Related Function Documentation


friend class form [friend]

36.66.4 Member Data Documentation

double gl::UIDriver::_fps [private]

36.67 test::UITestSuite Class Reference

Inheritance diagram for test::UITestSuite:



Public Member Functions

- **UITestSuite** (std::string sn)
- virtual ~UITestSuite ()
- virtual void **pushTest** (std::string str, testFunction tst)

36.67.1 Constructor & Destructor Documentation

test::UITestSuite::UITestSuite (std::string sn) [inline]


virtual test::UITestSuite::~UITestSuite() [inline], [virtual]

36.67.2 Member Function Documentation

virtual void test::UITestSuite::pushTest (std::string str, testFunction tst) [inline], [virtual]

36.68 gl::wrappableBox Class Reference

Inheritance diagram for gl::wrappableBox:

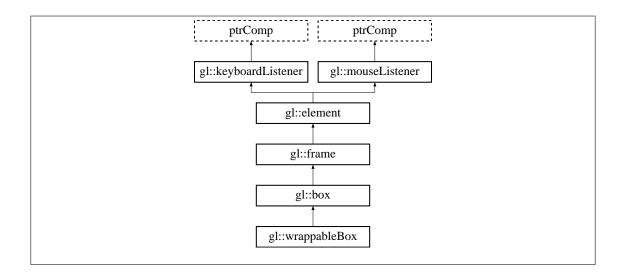

- wrappableBox (frame *master, elementDepth depth=defaultDepth)
- virtual ~wrappableBox ()

Protected Member Functions

• bool wrapFocus () const

Additional Inherited Members

36.68.1 Constructor & Destructor Documentation

```
gl::wrappableBox::wrappableBox ( frame * master, elementDepth depth = defaultDepth ) [inline]
```

virtual gl::wrappableBox::~wrappableBox() [inline], [virtual]

36.68.2 Member Function Documentation

bool gl::wrappableBox::wrapFocus () const [inline], [protected], [virtual]

Reimplemented from **gl::frame** (p. 717).