



Technical Service Bulletin: TSB210137

Released Date: 27-Jun-2022

Exhaust Gas Temperature (EGT) Sensor Types and Selection Strategy

Exhaust Gas Temperature (EGT) Sensor Types and Selection Strategy

Warranty Statement

The information in this document has no effect on present warranty coverage or repair practices, nor does it authorize TRP or Campaign actions.

Contents

Product Affected

- QSK50 CM2150 K107
- QSK50 CM2150 MCRS
- QSK50 DF CM850/CM2150
- QSK60 CM2150 MCRS

Description of Change

This document announces the new engine control module (ECM) calibrations which allow for detection, selection, and support of one of the two different types of exhaust gas temperature (EGT) sensor technologies available: Thermistors and Thermocouples.

Reason for Change

- Thermocouples EGT sensors were recently released as a more robust alternative to the existing thermistor EGT sensors.
- For details on the introduction of the more robust thermocouple EGT sensors:
 - For QSK50 See Technical Service Bulletin, New Thermocouple Exhaust Gas Temperature Sensor (EGTS) Introduction, TSB210001.
 - For QSK60, See Technical Service Bulletin, New Thermocouple Exhaust Gas Temperature Sensor (EGTS), TSB210002.

Customer Communication

- Newly built Industrial engines (except for engines in Oil and Gas applications) from the manufacturing plants will have the default EGT sensors type set to "Thermocouple" in the ECM calibrations. This is because new Industrial engines will be upfitted with thermocouple EGT sensors.
- For engines in the field with thermistor EGT sensors, "Thermistor EGTS" selection type will continue to be used whenever a new ECM calibration code is downloaded.

- For engines in the field with thermocouple EGT sensors, "Thermocouple EGTS" selection type will continue to be used whenever a new ECM calibration code is downloaded.
- For engines in the field without EGT sensors, the EGT sensors will continue to be disabled whenever a new ECM calibration code is downloaded.

Service Instructions

- The Cummins INSITE™ Electronic Service tool can also be used to adjust the EGT sensors selection type among Thermocouples, Thermistors, or None (for engines without EGT sensors).
- **Only** INSITE™ electronic service tool version 8.7.1 and later can support this selection feature. Confirm the tool is version 8.7.1 and later.

Changing the EGT sensor type selection using INSITE Electronic Service Tool:

1. Navigate to "Features and Parameters" => CM2150E[1][Secondary 1] => "EGT Sensor Type Selection" and select the EGT sensor type that is installed on the engine. See Figures 1 and 2 below.

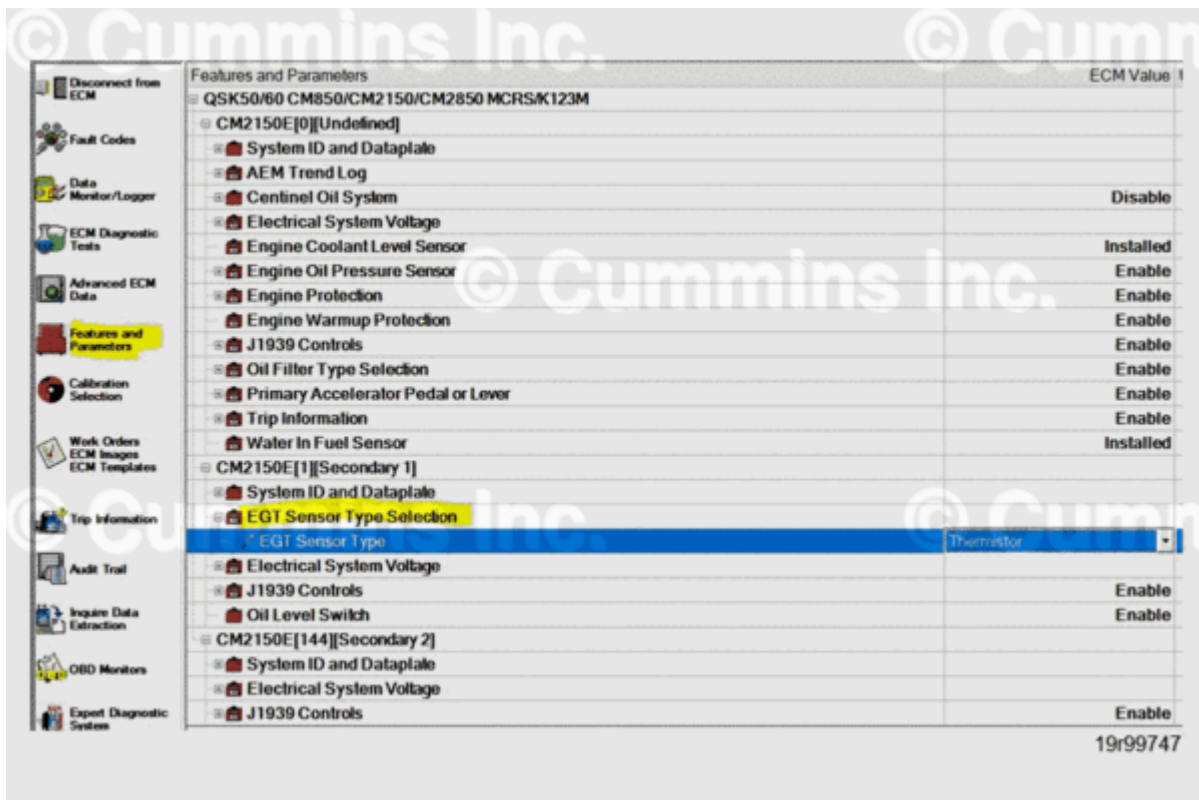


Figure 1, EGT Sensor Type Navigation.

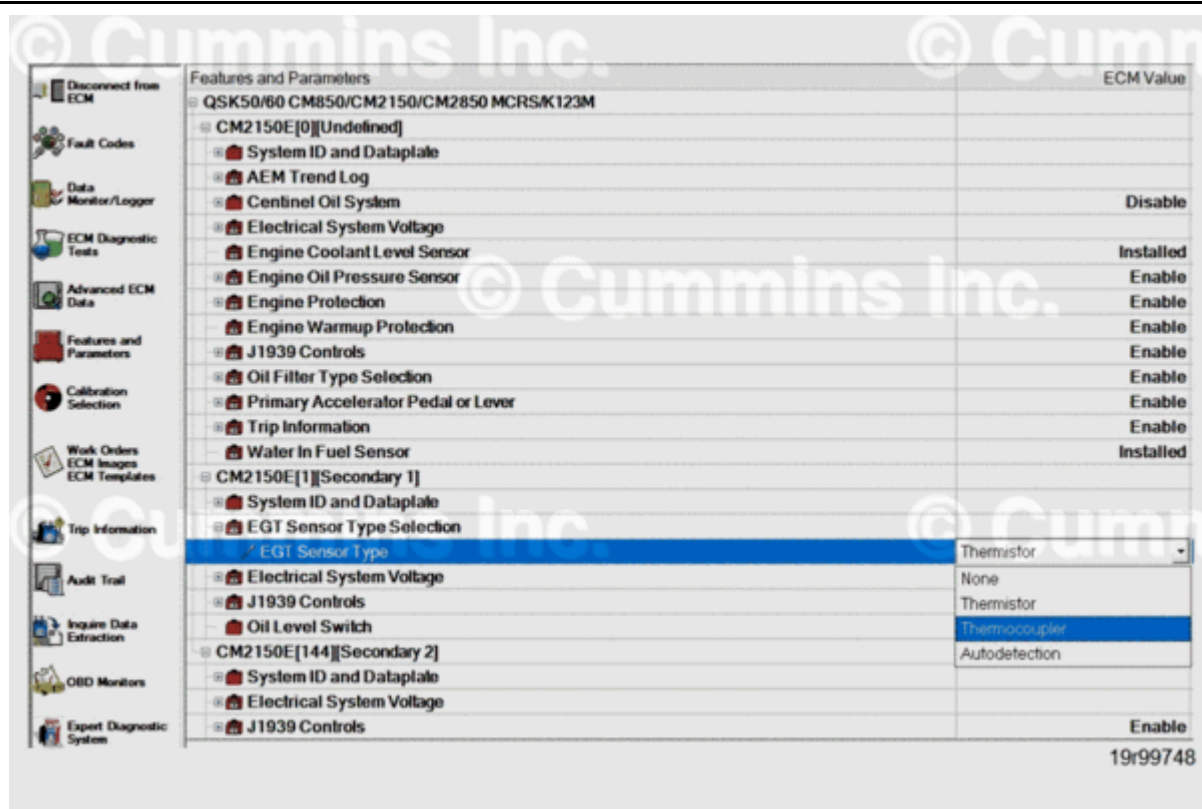


Figure 2, Select Appropriate EGT Sensor Type.

Note : The “Autodetection” selection logic is not currently implemented in the software. If the “Autodetection” selection is made, then Thermistor EGT sensor type will be used for EGT processing.

2. Select the highlighted “Send to ECM” icon or Right click, select "Send To", "ECM" and select "OK". See Figure 3 below.

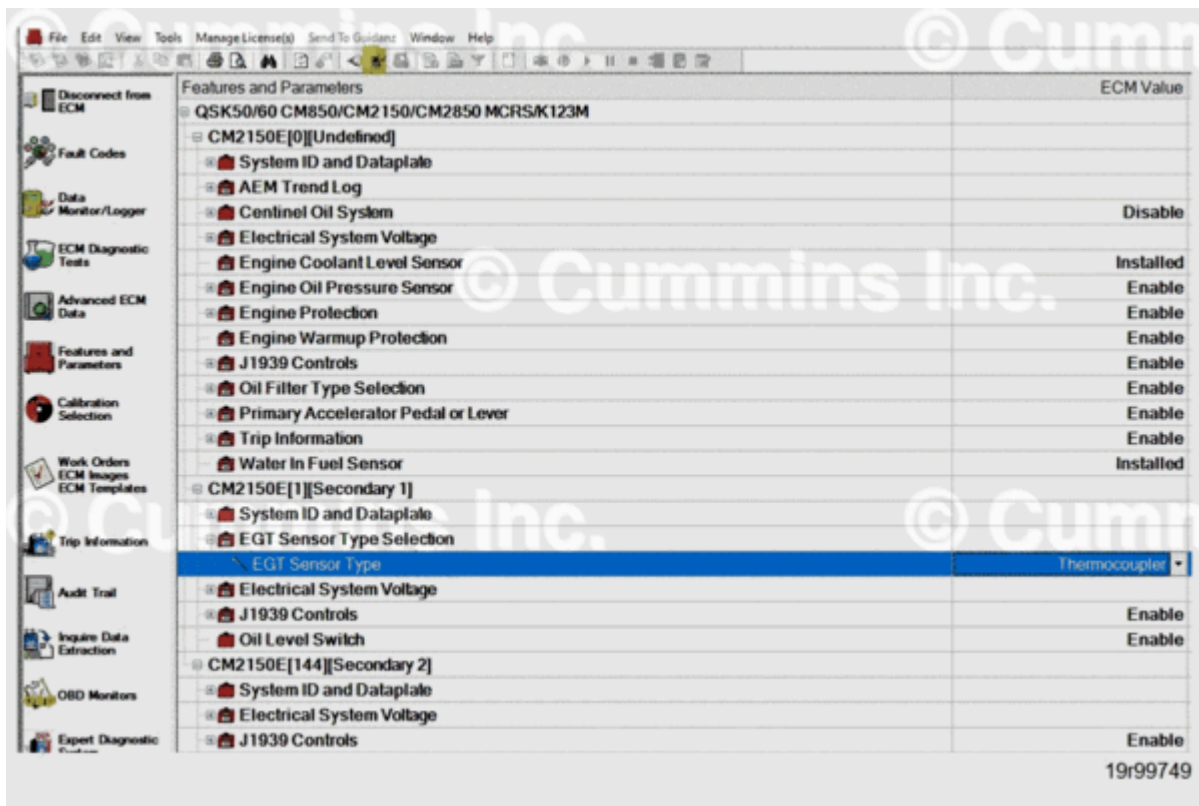


Figure 3, Select "Send to ECM".

3. Select "OK" to confirm ECM Adjustment. See Figure 4 below.

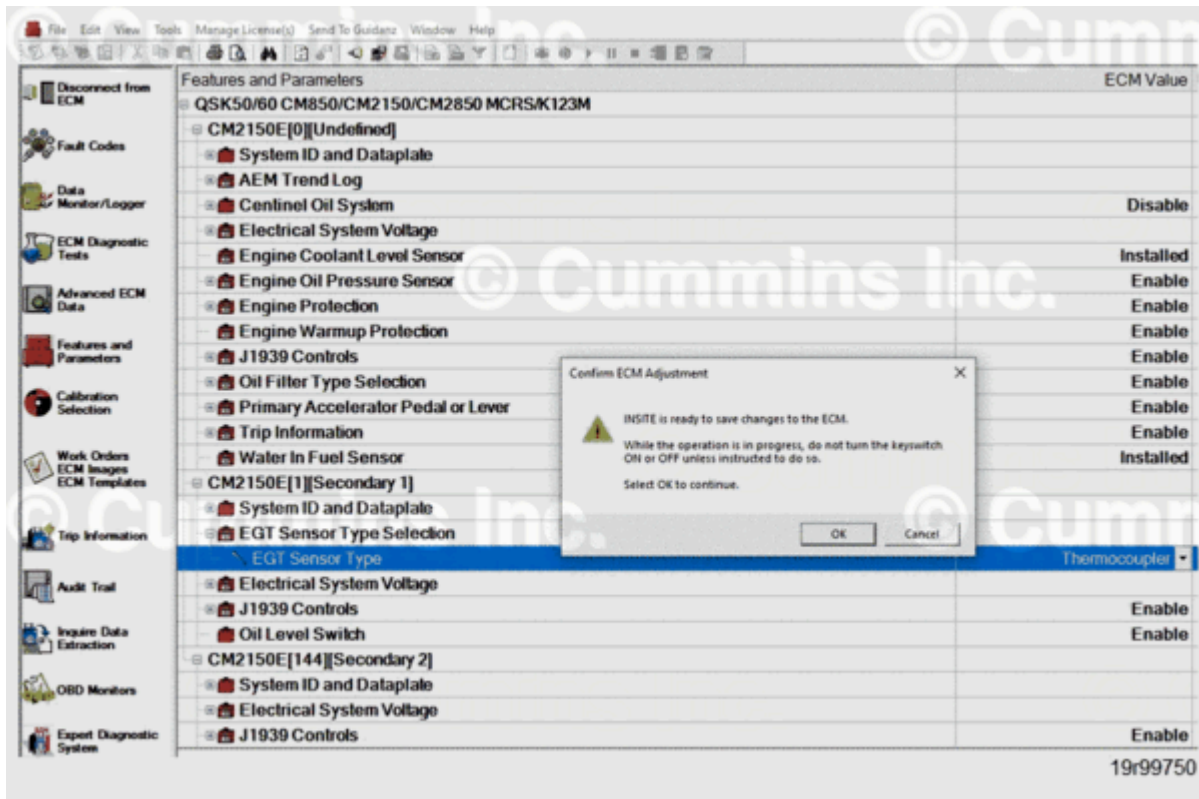


Figure 4, Confirm ECM Adjustment.

4. Turn Key Switch to OFF position and select "OK" See Figure 5 below.

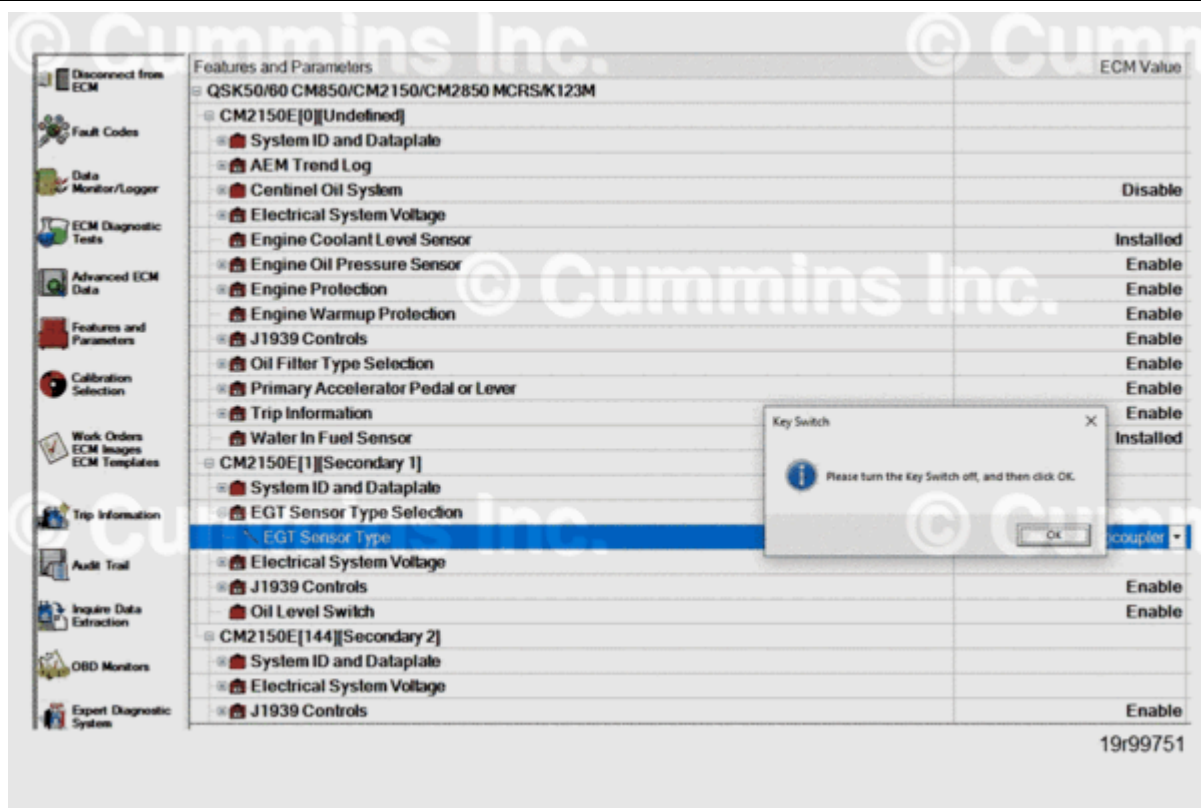


Figure 5, Key Switch Off.

5. Turn Key Switch to ON position and select "OK". See Figure 6 below.

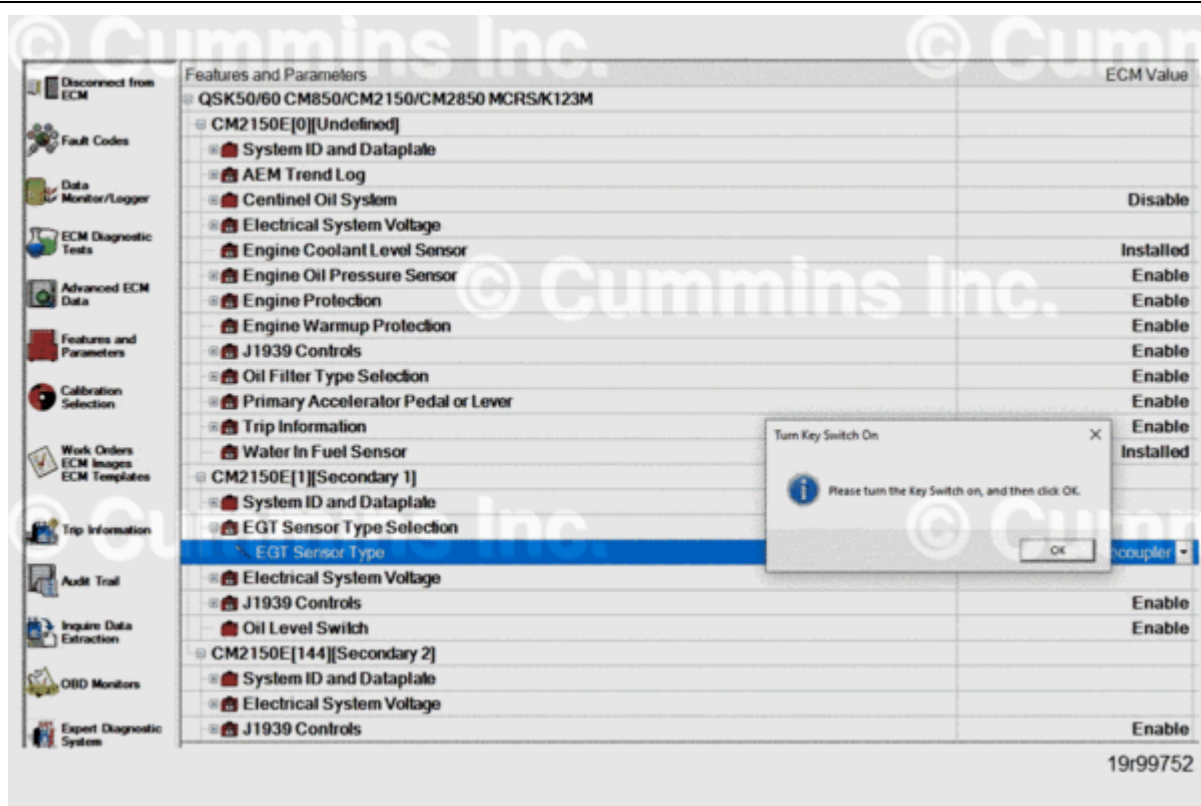


Figure 6, Key Switch On.

6. Follow the prompt and select "OK". EGT Sensor Type will be successfully saved. See Figure 7 below.

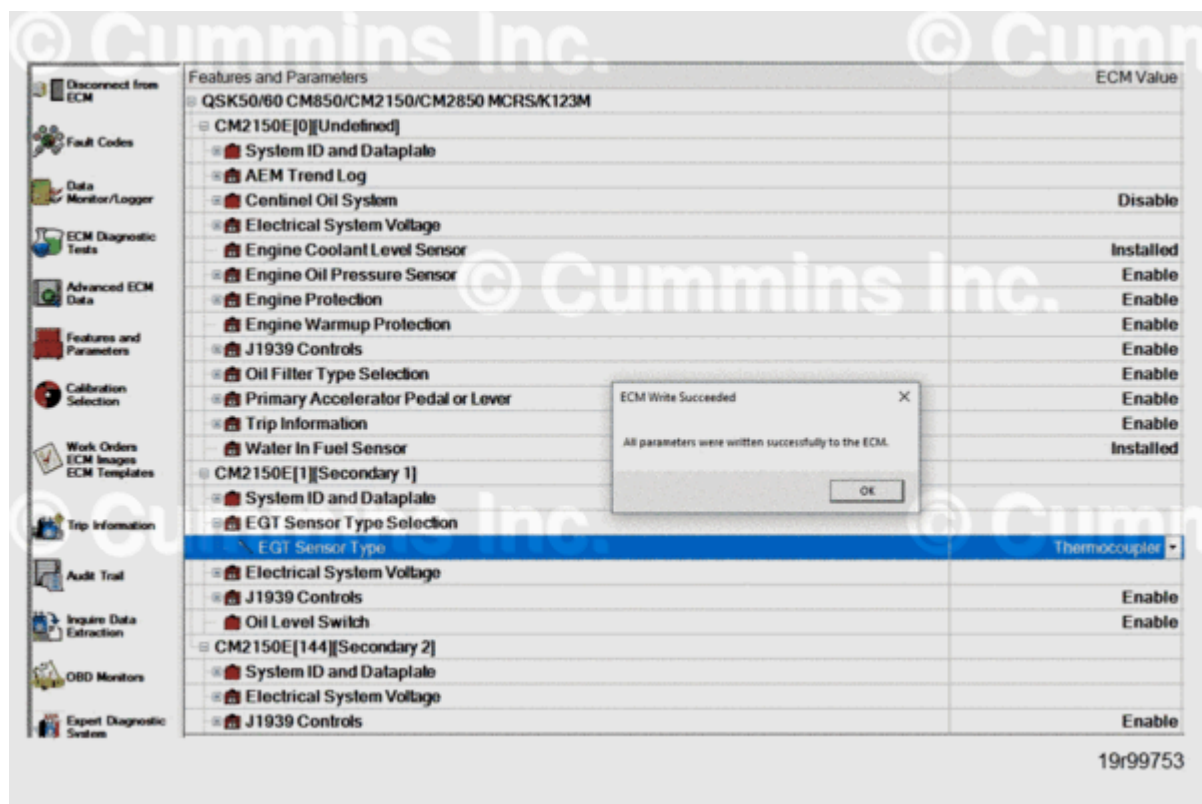


Figure 7, ECM Write Succeeded.

EGT Sensor Type Monitoring:

This screen is used to monitor EGT sensor type used by the ECM for EGT input processing.

1. Navigate to "Data Monitor/Logger" => CM2150E[1][Secondary 1] => "EGT Sensor Type Detected". Click "Log Data" or "Start/Resume" to monitor the EGT Sensor Type Detected and used for EGT processing in the software. See Figure 8 below.

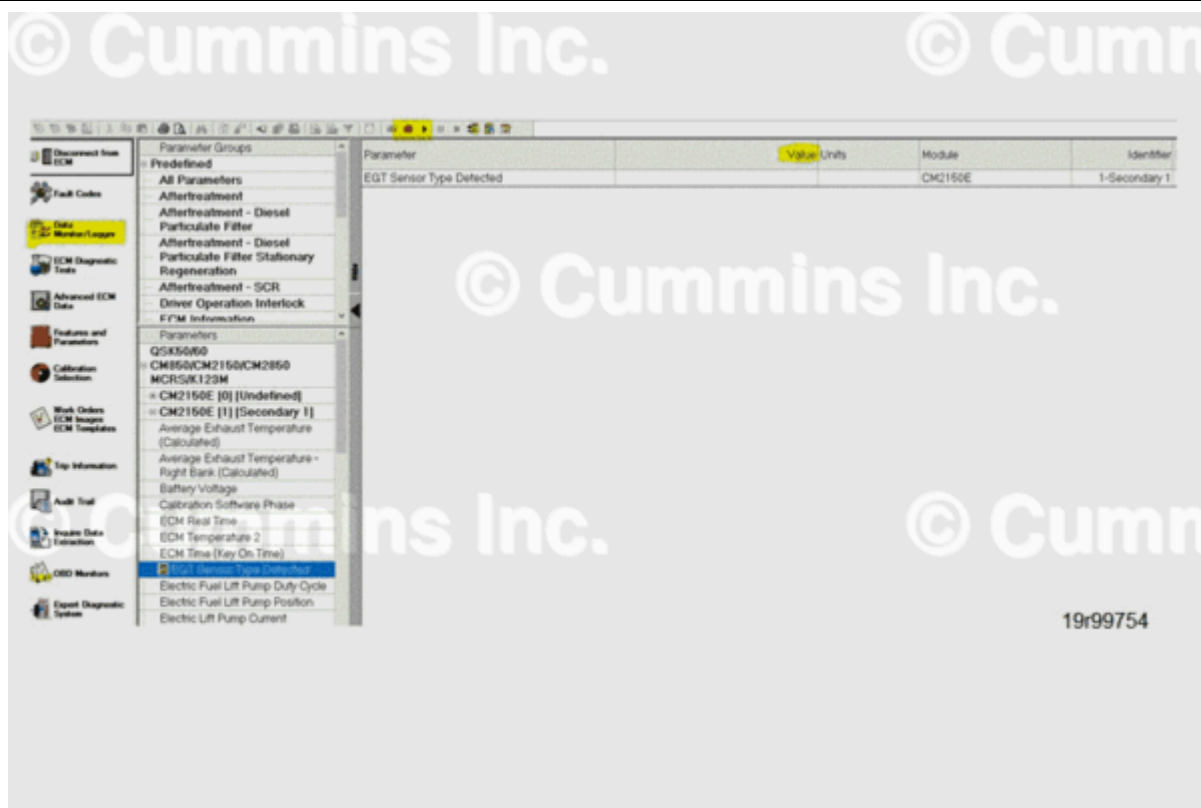


Figure 8, Monitoring EGT Sensor Type Detected.

Part Identification

To run the latest software with the EGT sensor selection type functionality, verify the ECM calibrations installed on the engine are listed in the tables below. All ECM calibration codes released prior to this software release will **not** support the EGT sensor selection type functionality.

Table 1, Software Phase

Engine Platform	Software Phase
QSK50 CM2150	25.02.01.20
QSK50 CM2150 (KOMNET)	25.02.30.18
QSK60 CM2150	25.02.01.20

Table 2, QSK50 CM2150

SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC60621	QSKTA50-CE	DO06765	FR06734	PP43379	AQ60217.28
SC60623	QSKTA50-CE	DO06767	FR06736	PP43391	AQ60220.25
SC60707	QSKTA50-CE	DO06853	FR06782	PP43548	AQ60287.19
SC60720	QSKTA50-CE	DO06866	FR06790	PP43548	AQ60288.19
SC60724	QSKTA50-CE	DO06870	FR06794	PP43905	AQ60421.17
SC60725	QSKTA50-CE	DO06871	FR06795	PP43548	AQ60289.22

Table 2, QSK50 CM2150					
SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC60776	QSKTA50-CE	DO06928	FR06734	PP43379	AQ60252.21
SC60823	QSKTA50-CE	DO06976	FR06734	PP43379	AQ60296.18
SC60824	QSKTA50-CE	DO06977	FR06856	PP43548	AQ60292.17
SC60825	QSKTA50-CE	DO06978	FR06857	PP43391	AQ60293.16
SC60826	QSKTA50-CE	DO06979	FR06858	PP43548	AQ60294.17
SC60827	QSKTA50-CE	DO06980	FR06859	PP43669	AQ60297.16
SC60828	QSKTA50-CE	DO06981	FR06860	PP43669	AQ60309.20
SC60829	QSKTA50-CE	DO06982	FR06861	PP43669	AQ60310.20
SC60833	QSKTA50-CE	DO06988	FR06974	PP43548	AQ60301.19
SC60861	QSKTA50-CE	DO60018	FR06734	PP43379	AQ60320.19
SC60869	QSKTA50-CE	DO60026	FR06901	PP43905	AQ60429.17
SC60881	QSKTA50-CE	DO60038	FR06905	PP43379	AQ60401.19
SC60924	QSKTA50-CE	DO60081	FR06736	PP43391	AQ60338.22
SC60987	QSKTA50-CE	DO60148	FR06905	PP43379	AQ60399.23
SC61043	QSKTA50-CE	DO60202	FR06795	PP43548	AQ60417.17
SC61045	QSKTA50-CE	DO60204	FR06975	PP43379	AQ60420.15
SC61056	QSKTA50-CE	DO60215	FR06861	PP43669	AQ60444.17
SC61210	QSKTA50-CE	DO60371	FR06858	PP43548	AQ60458.15
SC61069	QSKTA50-CE	DO60228	FR06990	PP43976	AQ60463.16
SC61070	QSKTA50-CE	DO60229	FR06991	PP43976	AQ60464.17
SC61227	QSKTA50-CE	DO60388	FR60014	PP43548	AQ60989.02
SC61244	QSKTA50-CE	DO60405	FR06734	PP43379	AQ60479.16
SC61245	QSKTA50-CE	DO60406	FR06790	PP43548	AQ60480.15
SC61246	QSKTA50-CE	DO60407	FR06795	PP43548	AQ60481.16
SC61247	QSKTA50-CE	DO60408	FR06736	PP43391	AQ60490.19
SC61248	QSKTA50-CE	DO60409	FR06782	PP43548	AQ60491.15
SC61249	QSKTA50-CE	DO60410	FR06974	PP43548	AQ60492.15
SC61250	QSKTA50-CE	DO60411	FR06794	PP43905	AQ60493.16
SC61255	QSKTA50-CE	DO60230	FR06858	PP43548	AQ60489.12
SC61259	QSKTA50-CE	DO60418	FR06734	PP43379	AQ60484.15
SC61286	QSKTA50-CE	DO60445	FR06794	PP43905	AQ60498.16
SC61287	QSKTA50-CE	DO60446	FR06901	PP43905	AQ60500.16
SC61288	QSKTA50-CE	DO60447	FR06734	PP43379	AQ60504.15
SC61585	QSKTA50-CE	DO60747	FR06734	PP43379	AQ60701.13

Table 2, QSK50 CM2150					
SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC61687	QSKTA50-CE	DO60848	FR60457	PP43669	AQ60805.06
SC61704	QSKTA50-CE	DO60870	FR06736	PP43391	AQ60756.05
SC61716	QSKTA50-CE	DO60882	FR60048	PP43548	AQ60765.08
SC61719	QSKTA50-CE	DO60885	FR60350	PP43391	AQ60803.03
SC61774	QSKTA50-CE	DO60940	FR06736	PP43391	AQ60769.09
SC61803	QSKTA50-CE	DO60969	FR06860	PP43669	AQ60775.07
SC61804	QSKTA50-CE	DO60970	FR06861	PP43669	AQ60776.07
SC61810	QSKTA50-CE	DO60976	FR06859	PP43669	AQ60800.06
SC61813	QSKTA50-CE	DO60979	FR06794	PP43905	AQ60785.06
SC61814	QSKTA50-CE	DO60980	FR06901	PP43905	AQ60786.06
SC61844	QSKTA50-CE	DO61010	FR60457	PP43669	AQ60796.06
SC61864	QSKTA50-CE	DO61028	FR60457	PP43669	AQ60807.07
SC61878	QSKTA50-CE	DO61042	FR06734	PP43379	AQ60809.06
SC61918	QSKTA50-CE	DO61084	FR06858	PP43548	AQ60889.03
SC61928	QSKTA50-CE	DO61094	FR06790	PP43548	AQ60888.03
SC61929	QSKTA50-CE	DO61095	FR60048	PP43548	AQ60882.03
SC61981	QSKTA50-CE	DO61147	FR60457	PP43669	AQ60874.03
SC61985	QSKTA50-CE	DO61160	FR60522	PP43669	AQ60883.03
SC61993	QSKTA50-CE	DO61159	FR60522	PP43669	AQ60884.03
SC62006	QSKTA50-CE	DO61180	FR60457	PP43669	AQ60892.03
SC62022	QSKTA50-CE	DO61182	FR06794	PP43905	AQ60941.03
SC62023	QSKTA50-CE	DO61183	FR06901	PP43905	AQ60942.03
SC62024	QSKTA50-CE	DO61184	FR06859	PP43669	AQ60939.02
SC62025	QSKTA50-CE	DO61185	FR06859	PP43669	AQ60940.02
SC62030	QSKTA50-CE	DO61190	FR06858	PP43548	AQ60911.02
SC62031	QSKTA50-CE	DO61191	FR06858	PP43548	AQ60912.02
SC62039	QSKTA50-CE	DO61199	FR06856	PP43548	AQ60934.02
SC62040	QSKTA50-CE	DO61200	FR06857	PP43391	AQ60935.02
SC62041	QSKTA50-CE	DO61201	FR60351	PP43391	AQ60936.03
SC62042	QSKTA50-CE	DO61202	FR06858	PP43548	AQ60937.02
SC62043	QSKTA50-CE	DO61203	FR06858	PP43548	AQ60938.02
SC62044	QSKTA50-CE	DO61204	FR06905	PP43379	AQ60901.02
SC62045	QSKTA50-CE	DO61205	FR06905	PP43379	AQ60902.03
SC62046	QSKTA50-CE	DO61206	FR06901	PP43905	AQ60903.02

Table 2, QSK50 CM2150

SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC62047	QSKTA50-CE	DO61207	FR06901	PP43905	AQ60904.02
SC62129	QSKTA50-CE	DO61306	FR06901	PP43905	AQ60979.01
SC62130	QSKTA50-CE	DO61307	FR06790	PP43548	AQ60980.01
SC60853	QSKTA50-CE	DO60010	FR06888	PP43728	AQ60359.21
SC60854	QSKTA50-CE	DO60011	FR06889	PP43728	AQ60360.19
SC60855	QSKTA50-CE	DO60012	FR06890	PP43728	AQ60361.19
SC60856	QSKTA50-CE	DO60013	FR06888	PP43728	AQ60362.22
SC60936	QSKTA50-CE	DO60096	FR06890	PP43728	AQ60363.21
SC60937	QSKTA50-CE	DO60097	FR06890	PP43728	AQ60364.19
SC60938	QSKTA50-CE	DO60098	FR06890	PP43728	AQ60365.20
SC60939	QSKTA50-CE	DO60099	FR06888	PP43728	AQ60366.19
SC60940	QSKTA50-CE	DO60100	FR06888	PP43728	AQ60378.20
SC60941	QSKTA50-CE	DO60101	FR06888	PP43728	AQ60379.20
SC60942	QSKTA50-CE	DO60102	FR06888	PP43728	AQ60380.19
SC60943	QSKTA50-CE	DO60103	FR06888	PP43728	AQ60386.21
SC60944	QSKTA50-CE	DO60104	FR06888	PP43728	AQ60381.19
SC60957	QSKTA50-CE	DO60118	FR06888	PP43728	AQ60373.21
SC60958	QSKTA50-CE	DO60119	FR06888	PP43728	AQ60374.20
SC60959	QSKTA50-CE	DO60120	FR06888	PP43728	AQ60375.21
SC60960	QSKTA50-CE	DO60121	FR06888	PP43728	AQ60376.18
SC60961	QSKTA50-CE	DO60122	FR06888	PP43728	AQ60377.20
SC60962	QSKTA50-CE	DO60123	FR06889	PP43728	AQ60367.19
SC60963	QSKTA50-CE	DO60124	FR06889	PP43728	AQ60368.19
SC60964	QSKTA50-CE	DO60125	FR06889	PP43728	AQ60369.19
SC60965	QSKTA50-CE	DO60126	FR06889	PP43728	AQ60370.19
SC60966	QSKTA50-CE	DO60127	FR06889	PP43728	AQ60371.19
SC60967	QSKTA50-CE	DO60128	FR06890	PP43728	AQ60387.22
SC60968	QSKTA50-CE	DO60129	FR06890	PP43728	AQ60388.21
SC60969	QSKTA50-CE	DO60130	FR06890	PP43728	AQ60389.19
SC60970	QSKTA50-CE	DO60131	FR06890	PP43728	AQ60390.19
SC60971	QSKTA50-CE	DO60132	FR06888	PP43728	AQ60395.20
SC60972	QSKTA50-CE	DO60133	FR06890	PP43728	AQ60391.21
SC60973	QSKTA50-CE	DO60134	FR06890	PP43728	AQ60392.17
SC60974	QSKTA50-CE	DO60135	FR06890	PP43728	AQ60402.19

Table 2, QSK50 CM2150

SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC60993	QSKTA50-CE	DO60154	FR06888	PP43728	AQ60404.20
SC60996	QSKTA50-CE	DO60157	FR06890	PP43728	AQ60397.19
SC61013	QSKTA50-CE	DO60173	FR06890	PP43728	AQ60410.18
SC61031	QSKTA50-CE	DO60191	FR06889	PP43728	AQ60441.18
SC61035	QSKTA50-CE	DO60195	FR06889	PP43728	AQ60416.16
SC61037	QSKTA50-CE	DO60197	FR06890	PP43728	AQ60442.16
SC61046	QSKTA50-CE	DO60205	FR06890	PP43728	AQ60443.22
SC61055	QSKTA50-CE	DO60213	FR06890	PP43728	AQ60440.18
SC61076	QSKTA50-CE	DO60236	FR06888	PP43728	AQ60445.16
SC61207	QSKTA50-CE	DO60368	FR06888	PP43728	AQ60453.19
SC61208	QSKTA50-CE	DO60369	FR06889	PP43728	AQ60454.19
SC61209	QSKTA50-CE	DO60370	FR06890	PP43728	AQ60455.19
SC61214	QSKTA50-CE	DO60375	FR06890	PP43728	AQ60456.17
SC61216	QSKTA50-CE	DO60377	FR06890	PP43728	AQ60475.17
SC61222	QSKTA50-CE	DO60383	FR06888	PP43728	AQ60476.16
SC61284	QSKTA50-CE	DO60443	FR06890	PP43728	AQ60499.16
SC61468	QSKTA50-CE	DO60629	FR06888	PP43728	AQ60690.11
SC61485	QSKTA50-CE	DO60646	FR06890	PP43728	AQ60694.12
SC61516	QSKTA50-CE	DO60677	FR06890	PP43728	AQ60677.13
SC61550	QSKTA50-CE	DO60711	FR06890	PP43728	AQ60691.14
SC61575	QSKTA50-CE	DO60737	FR06888	PP43728	AQ60695.12
SC61577	QSKTA50-CE	DO60739	FR06888	PP43728	AQ60696.12
SC61579	QSKTA50-CE	DO60741	FR06888	PP43728	AQ60700.14
SC61682	QSKTA50-CE	DO60849	FR06888	PP43728	AQ60751.09
SC61773	QSKTA50-CE	DO60939	FR06888	PP43728	AQ60770.07
SC61783	QSKTA50-CE	DO60949	FR06890	PP43728	AQ60773.07
SC61860	QSKTA50-CE	DO61026	FR06890	PP43728	AQ60811.06
SC61893	QSKTA50-CE	DO61059	FR06890	PP43728	AQ60824.05
SC61900	QSKTA50-CE	DO61066	FR06890	PP43728	AQ60825.05
SC61978	QSKTA50-CE	DO61144	FR06890	PP43728	AQ60876.03
SC61998	QSKTA50-CE	DO61165	FR06889	PP43728	AQ60890.03
SC61999	QSKTA50-CE	DO61166	FR06890	PP43728	AQ60886.03
SC62019	QSKTA50-CE	DO61178	FR06890	PP43728	AQ60891.03

Table 3, QSK60 CM2150

SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC60620	QSKTA60-CE	DO06764	FR06733	PP43416	AQ60218.26
SC60648	QSKTA60-CE	DO06792	FR06746	PP43451	AQ60221.24
SC60659	QSKTA60-CE	DO06803	FR06751	PP43416	AQ60236.23
SC60660	QSKTA60-CE	DO06804	FR06751	PP43416	AQ60237.24
SC60693	QSKTTA60-CE	DO06839	FR06773	PP43501	AQ60238.23
SC60706	QSKTA60-CE	DO06852	FR06781	PP43416	AQ60317.19
SC60721	QSKTA60-CE	DO06867	FR06791	PP43451	AQ60337.19
SC60722	QSKTA60-CE	DO06868	FR06792	PP43451	AQ60302.18
SC60723	QSKTA60-CE	DO06869	FR06793	PP43451	AQ60305.23
SC60726	QSKTA60-CE	DO06872	FR06796	PP43451	AQ60303.25
SC60777	QSKTA60-CE	DO06929	FR06746	PP43451	AQ60253.24
SC60779	QSKTA60-CE	DO06931	FR06829	PP43378	AQ60255.17
SC60780	QSKTA60-CE	DO06932	FR06830	PP43378	AQ60285.16
SC60781	QSKTA60-CE	DO06933	FR06831	PP43451	AQ60254.27
SC60822	QSKTA60-CE	DO06975	FR06746	PP43451	AQ60295.15
SC60834	QSKTA60-CE	DO06989	FR06792	PP43451	AQ60304.21
SC60842	QSKTA60-CE	DO06997	FR06781	PP43416	AQ60318.15
SC60846	QSKTA60-CE	DO60002	FR06792	PP43451	AQ60314.19
SC60847	QSKTA60-CE	DO60003	FR06751	PP43416	AQ60312.18
SC60848	QSKTA60-CE	DO60004	FR06733	PP43416	AQ60313.17
SC60849	QSKTA60-CE	DO60005	FR06792	PP43451	AQ60315.17
SC60850	QSKTA60-CE	DO60006	FR06792	PP43451	AQ60316.18
SC60863	QSKTA60-CE	DO60020	FR06895	PP43451	AQ60326.21
SC60864	QSKTA60-CE	DO60021	FR06896	PP43451	AQ60327.23
SC60865	QSKTA60-CE	DO60022	FR06897	PP43416	AQ60328.26
SC60866	QSKTA60-CE	DO60023	FR06898	PP43451	AQ60329.22
SC60867	QSKTA60-CE	DO60024	FR06899	PP43416	AQ60330.19
SC60868	QSKTA60-CE	DO60025	FR06900	PP43451	AQ60451.14
SC60880	QSKTA60-CE	DO60037	FR06895	PP43451	AQ60325.17
SC60882	QSKTA60-CE	DO60039	FR06906	PP43451	AQ60331.18
SC60883	QSKTA60-CE	DO60040	FR06907	PP43451	AQ60341.22

Table 3, QSK60 CM2150

SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC60885	QSKTA60-CE	DO60042	FR06908	PP43451	AQ60342.19
SC60891	QSKTA60-CE	DO60048	FR06898	PP43451	AQ60335.17
SC60911	QSKTA60-CE	DO60068	FR06863	PP43451	AQ60343.18
SC60912	QSKTA60-CE	DO60069	FR06864	PP43451	AQ60344.16
SC60913	QSKTA60-CE	DO60070	FR06865	PP43451	AQ60345.16
SC60951	QSKTA60-CE	DO60111	FR06746	PP43451	AQ60352.18
SC60986	QSKTTA60-CE	DO60147	FR06938	PP43501	AQ60398.20
SC61014	QSKTA60-CE	DO60174	FR06866	PP43451	AQ60412.13
SC61015	QSKTA60-CE	DO60175	FR06867	PP43451	AQ60413.14
SC61039	QSKTTA60-CE	DO60198	FR06773	PP43501	AQ60415.14
SC61040	QSKTTA60-CE	DO60199	FR06938	PP43501	AQ60433.14
SC61044	QSKTA60-CE	DO60203	FR06831	PP43451	AQ60431.16
SC61073	QSKTA60-CE	DO60233	FR06863	PP43451	AQ60446.19
SC61224	QSKTA60-CE	DO60385	FR06906	PP43451	AQ60477.13
SC61254	QSKTA60-CE	DO60227	FR06746	PP43451	AQ60482.14
SC61264	QSKTA60-CE	DO60423	FR06831	PP43451	AQ60509.16
SC61265	QSKTA60-CE	DO60424	FR06781	PP43416	AQ60510.13
SC61266	QSKTTA60-CE	DO60425	FR06773	PP43501	AQ60511.16
SC61267	QSKTA60-CE	DO60426	FR06796	PP43451	AQ60512.16
SC61268	QSKTA60-CE	DO60427	FR06792	PP43451	AQ60506.13
SC61269	QSKTA60-CE	DO60428	FR06733	PP43416	AQ60507.13
SC61270	QSKTA60-CE	DO60429	FR06906	PP43451	AQ60508.14
SC61272	QSKTA60-CE	DO60431	FR06751	PP43416	AQ60501.14
SC61273	QSKTA60-CE	DO60432	FR06791	PP43451	AQ60502.13
SC61274	QSKTA60-CE	DO60433	FR06793	PP43451	AQ60503.13
SC61279	QSKTA60-CE	DO60438	FR60369	PP43451	AQ60793.05
SC61315	QSKTA60-CE	DO60475	FR06751	PP43416	AQ60528.13
SC61318	QSKTA60-CE	DO60478	FR06746	PP43451	AQ60530.13
SC61319	QSKTA60-CE	DO60479	FR06898	PP43451	AQ60531.13
SC61323	QSKTA60-CE	DO60843	FR60088	PP43416	AQ60534.10

Table 3, QSK60 CM2150

SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC61514	QSKTA60-CE	DO60884	FR06898	PP43451	AQ60759.10
SC61595	QSKTA60-CE	DO60760	FR06791	PP43451	AQ60717.11
SC61596	QSKTA60-CE	DO60761	FR06908	PP43451	AQ60716.11
SC61612	QSKTTA60-CE	DO60775	FR06773	PP43501	AQ60724.11
SC61664	QSKTA60-CE	DO60827	FR60323	PP43416	AQ60748.09
SC61665	QSKTA60-CE	DO60828	FR60323	PP43416	AQ60749.10
SC61673	QSKTA60-CE	DO60836	FR06897	PP43416	AQ60750.15
SC61710	QSKTA60-CE	DO60876	FR06751	PP43416	AQ60761.12
SC61711	QSKTTA60-CE	DO60877	FR06773	PP43501	AQ60762.10
SC61712	QSKTTA60-CE	DO60878	FR06938	PP43501	AQ60763.10
SC61764	QSKTA60-CE	DO60930	FR60407	PP43416	AQ60801.05
SC61765	QSKTA60-CE	DO60931	FR60408	PP43416	AQ60804.05
SC61794	QSKTA60-CE	DO60960	FR60429	PP44768	AQ60789.06
SC61795	QSKTTA60-CE	DO60961	FR60444	PP44828	AQ60792.06
SC61796	QSKTA60-CE	DO60962	FR60431	PP44768	AQ60790.06
SC61805	QSKTA60-CE	DO60971	FR06867	PP43451	AQ60777.05
SC61806	QSKTA60-CE	DO60972	FR06865	PP43451	AQ60778.06
SC61807	QSKTA60-CE	DO60973	FR06864	PP43451	AQ60779.06
SC61808	QSKTA60-CE	DO60974	FR06863	PP43451	AQ60780.06
SC61809	QSKTA60-CE	DO60975	FR06866	PP43451	AQ60781.05
SC61819	QSKTA60-CE	DO60985	FR60430	PP44768	AQ60791.06
SC61848	QSKTA60-CE	DO61014	FR06746	PP43451	AQ60799.04
SC61858	QSKTA60-CE	DO61025	FR06906	PP43451	AQ60808.05
SC61894	QSKTA60-CE	DO61060	FR06796	PP43451	AQ60946.02
SC61913	QSKTTA60-CE	DO61079	FR60444	PP44828	AQ60881.03
SC61914	QSKTA60-CE	DO61080	FR06896	PP43451	AQ60947.02
SC61980	QSKTA60-CE	DO61146	FR06733	PP43416	AQ60879.03
SC61987	QSKTA60-CE	DO61152	FR06746	PP43451	AQ60880.03
SC61989	QSKTA60-CE	DO61155	FR06831	PP43451	AQ60877.03

Table 3, QSK60 CM2150

SC Option	Engine Family	DO Option	FR Option	PP Option	ECM Calibration Code
SC61996	QSKTA60-CE	DO61163	FR06830	PP43378	AQ60949.01
SC61997	QSKTA60-CE	DO61164	FR06896	PP43451	AQ60948.01
SC62032	QSKTA60-CE	DO61192	FR06896	PP43451	AQ60913.03
SC62048	QSKTA60-CE	DO61208	FR06830	PP43378	AQ60915.02
SC62049	QSKTA60-CE	DO61209	FR06895	PP43451	AQ60916.02
SC62050	QSKTA60-CE	DO61210	FR06895	PP43451	AQ60917.02
SC62051	QSKTA60-CE	DO61211	FR06897	PP43416	AQ60918.04
SC62052	QSKTA60-CE	DO61212	FR06897	PP43416	AQ60919.03
SC62053	QSKTA60-CE	DO61213	FR06907	PP43451	AQ60920.02
SC62054	QSKTA60-CE	DO61214	FR06898	PP43451	AQ60921.03
SC62055	QSKTA60-CE	DO61215	FR06898	PP43451	AQ60922.02
SC62056	QSKTA60-CE	DO61216	FR06898	PP43451	AQ60923.02
SC62057	QSKTA60-CE	DO61217	FR06898	PP43451	AQ60924.03
SC62058	QSKTA60-CE	DO61218	FR06908	PP43451	AQ60925.03
SC62059	QSKTA60-CE	DO61219	FR06908	PP43451	AQ60926.02
SC62060	QSKTA60-CE	DO61220	FR06899	PP43416	AQ60927.02
SC62061	QSKTA60-CE	DO61221	FR06900	PP43451	AQ60928.02
SC62062	QSKTTA60-CE	DO61222	FR06938	PP43501	AQ60929.02
SC62063	QSKTTA60-CE	DO61223	FR06938	PP43501	AQ60930.03
SC62064	QSKTA60-CE	DO61224	FR60323	PP43416	AQ60931.03
SC62065	QSKTA60-CE	DO61225	FR60323	PP43416	AQ60932.03
SC62066	QSKTA60-CE	DO61226	FR60408	PP43416	AQ60933.02
SC62082	QSKTA60-CE	DO61244	FR06831	PP43451	AQ60914.02
SC62131	QSKTA60-CE	DO61308	FR06792	PP43451	AQ60981.01
SC62132	QSKTA60-CE	DO61309	FR06791	PP43451	AQ60982.01
SC62133	QSKTA60-CE	DO61310	FR06796	PP43451	AQ60983.01
SC62163	QSKTTA60-CE	DO61337	FR06773	PP43501	AQ60994.01
SC62164	QSKTA60-CE	DO61338	FR06831	PP43451	AQ60995.01

Document History

Date	Details
2021-6-22	Module Created
2022-6-15	Updated Table 1 with QSK50 CM2150 (KOMNET).

Last Modified: 27-Jun-2022
