

Executable and Linkable Format

In computing, the **Executable and Linkable Format**^[2] (**ELF**, formerly named **Extensible Linking Format**), is a common standard file format for executable files, object code, shared libraries, and core dumps. First published in the specification for the application binary interface (ABI) of the Unix operating system version named System V Release 4 (SVR4), and later in the Tool Interface Standard, it was quickly accepted among different vendors of Unix systems. In 1999, it was chosen as the standard binary file format for Unix and Unix-like systems on x86 processors by the 86open project.

By design, the ELF format is flexible, extensible, and <u>cross-platform</u>. For instance, it supports different <u>endiannesses</u> and address sizes so it does not exclude any particular <u>central processing unit</u> (CPU) or <u>instruction set architecture</u>. This has allowed it to be adopted by many different <u>operating systems</u> on many different hardware platforms.


File layout

Each ELF file is made up of one ELF header, followed by file data. The data can include:


- Program header table, describing zero or more <u>memory</u> segments
- Section header table, describing zero or more sections
- Data referred to by entries in the program header table or section header table

Executable and Linkable Format

Filename extension	none, .axf, .bin, .elf, .o, .out, .prx, .puff, .ko, .mod, and .so
Magic number	0x7F 'E' 'L' 'F'
Developed by	Unix System Laboratories ^{[1]:3}
Type of format	Binary, executable, object, shared library, core dump
Container for	Many executable binary formats

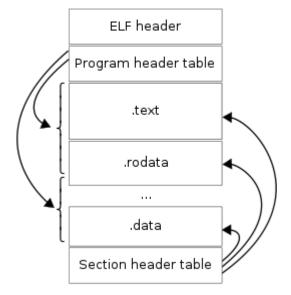

An ELF file has two views: the program header shows the *segments* used at run time, whereas the section header lists the set of *sections*.

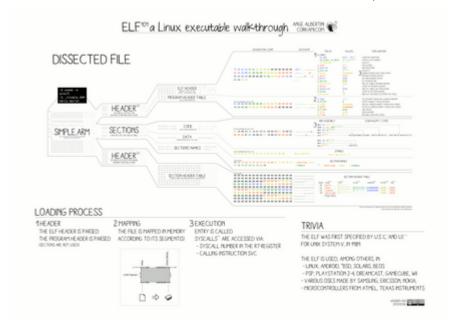

Structure of an ELF file with key entries highlighted

The segments contain information that is needed for <u>run time</u> execution of the file, while sections contain important data for linking and relocation. Any <u>byte</u> in the entire file can be owned by one section at most, and orphan bytes can occur which are unowned by any section.

```
00000000
              7f
                   45
                         4c
                               46
                                    02
                                          01
                                                01
                                                     00
                                                           00
                                                                00
                                                                      00
                                                                            00
                                                                                 00
                                                                                       00
                                                                                            00
                                                                                                  00
1.ELF....
00000010
              02
                   00
                         3e
                               00
                                    01
                                          00
                                                00
                                                     00
                                                           c5
                                                                48
                                                                      40
                                                                            00
                                                                                 00
                                                                                       00
                                                                                            00
                                                                                                  00
| . . > . . . . . . H@ . . . . . |
Example hexdump of ELF file header [4]
```

File header

The ELF header defines whether to use <u>32-bit</u> or <u>64-bit</u> addresses. The header contains three fields that are affected by this setting and offset other fields that follow them. The ELF header is <u>52</u> or <u>64</u> bytes long for <u>32-bit</u> and <u>64-bit</u> binaries respectively.

ELF header $^{[5]}$

Offset 32- 64-			ze tes)	Eiold	P				
32- bit	64- bit	32- bit	64- bit	Field	Purpose				
0x00		4		e_ident[EI_MAG0] through e_ident[EI_MAG3]		0x7F followed by ELF(45 4c 46) in ASCII; these four bytes constitute the magic number.			
0x04		1		e_ident[EI_CLASS]		e is set to either 1 or 2 to signify 32- espectively.	or 64-bit		
0x05		1		e_ident[EI_DATA]	endianne	e is set to either 1 or 2 to signify littless, respectively. This affects interper fields starting with offset 0x10.			
0x06		1		e_ident[EI_VERSION]	Set to 1	for the original and current version	of ELF.		
					Identifies	the target operating system ABI.			
					Value	ABI			
					0x00	System V			
					0x01	HP-UX			
					0x02	NetBSD			
					0x03	Linux	-		
					0x04	GNU Hurd	1		
					0x06	Solaris			
					0x07	AIX (Monterey)			
					0x08	IRIX			
0x07		1	1		e_ident[EI_OSABI]	0x09	FreeBSD		
					0x0A	Tru64			
					0x0B	Novell Modesto			
					0x0C	OpenBSD			
					0x0D	OpenVMS			
					0x0E	NonStop Kernel			
					0x0F	AROS			
					0x10	FenixOS			
					0x11	Nuxi CloudABI			
					0x12	Stratus Technologies OpenVOS			
0x08 1				e_ident[EI_ABIVERSION]	depends 2.6) has	specifies the ABI version. Its interpresent on the target ABI. Linux kernel (aft no definition of it, ^[6] so it is ignored secutables. In that case, offset and sare 8.	er at least for statically		

			3 treats t linker:[7] features, e_ident level re (executa load it if e_ident	this field as AE it defines a [8] t [EI_ABIVER equested by ble or dynami an unknown f	the shared object c library) and refuses to feature is requested, i.e.
0x09	7	e_ident[EI_PAD]		padding bytes. C zeros and ignored	urrently unused. Should be d when read.
			Identifies o	bject file type.	
			Value	Туре	Meaning
			0x00	ET_NONE	Unknown.
			0x01	ET_REL	Relocatable file.
			0x02	ET_EXEC	Executable file.
0x10	2	e_type	0x03	ET_DYN	Shared object.
		_ 31	0x04	ET_CORE	Core file.
			0xFE00	ET_LOOS	Reserved inclusive range.
			0xFEFF	ET_HIOS	Operating system specific.
			0xFF00	ET_LOPROC	Reserved inclusive range.
			0xFFFF	ET_HIPROC	Processor specific.
0x12	2	e_machine	Specifies t examples		set architecture. Some

Value	ISA
0x00	No specific instruction set
0x01	AT&T WE 32100
0x02	SPARC
0x03	<u>x86</u>
0x04	Motorola 68000 (M68k)
0x05	Motorola 88000 (M88k)
0x06	Intel MCU
0x07	Intel 80860
0x08	MIPS
0x09	IBM System/370
0x0A	MIPS RS3000 Little-endian
0x0B - 0x0E	Reserved for future use
0x0F	Hewlett-Packard PA-RISC
0x13	Intel 80960
0x14	PowerPC
0x15	PowerPC (64-bit)
0x16	S390, including S390x
0x17	IBM SPU/SPC
0x18 - 0x23	Reserved for future use
0x24	NEC V800
0x25	Fujitsu FR20
0x26	TRW RH-32
0x27	Motorola RCE
0x28	Arm (up to Armv7/AArch32)
0x29	Digital Alpha
0x2A	SuperH
0x2B	SPARC Version 9
0x2C	Siemens TriCore embedded processor
0x2D	Argonaut RISC Core
0x2E	Hitachi H8/300
0x2F	Hitachi H8/300H
0x30	Hitachi H8S
0x31	Hitachi H8/500
0x32	IA-64

0x33 Stanford MIPS-X 0x34 Motorola ColdFire 0x35 Motorola M68HC12 0x36 Fujitsu MMA Multimedia Accelerator 0x37 Siemens PCP 0x38 Sony nCPU embedded RISC processor 0x39 Denso NDR1 microprocessor 0x3A Motorola Star*Core processor 0x3B Toyota ME16 processor 0x3C STMicroelectronics ST100 processor 0x3D Advanced Logic Corp. TinyJ embedded processor family 0x3E AMD x86-64 0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC08 Microcontroller 0x47 Motorola MC68HC05 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x40 <t< th=""><th></th><th></th></t<>		
0x35 Motorola M68HC12 0x36 Fujitsu MMA Multimedia Accelerator 0x37 Siemens PCP 0x38 Sony nCPU embedded RISC processor 0x39 Denso NDR1 microprocessor 0x3A Motorola Star*Core processor 0x3B Toyota ME16 processor 0x3C STMicroelectronics ST100 processor 0x3D Advanced Logic Corp. TinyJ embedded processor family 0x3E AMD x86-64 0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC16 Microcontroller 0x47 Motorola MC68HC08 Microcontroller 0x48 Motorola MC68HC08 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4C Infineon Technologies 32-bit embedded processor 0x4F LSI Logic 16-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x33	Stanford MIPS-X
Ox36 Fujitsu MMA Multimedia Accelerator Ox37 Siemens PCP Ox38 Sony nCPU embedded RISC processor Ox39 Denso NDR1 microprocessor Ox3A Motorola Star*Core processor Ox3B Toyota ME16 processor Ox3C STMicroelectronics ST100 processor Ox3D Advanced Logic Corp. TinyJ embedded processor family Ox3E AMD x86-64 Ox3F Sony DSP Processor Ox40 Digital Equipment Corp. PDP-10 Ox41 Digital Equipment Corp. PDP-11 Ox42 Siemens FX66 microcontroller Ox43 STMicroelectronics ST9 + 8/16 bit microcontroller Ox44 STMicroelectronics ST7 8-bit microcontroller Ox45 Motorola MC68HC16 Microcontroller Ox46 Motorola MC68HC11 Microcontroller Ox47 Motorola MC68HC05 Microcontroller Ox48 Motorola MC68HC05 Microcontroller Ox49 Silicon Graphics SVx Ox4A STMicroelectronics ST19 8-bit microcontroller Ox4B Digital VAX Ox4C Axis Communications 32-bit embedded processor Ox4E Element 14 64-bit DSP Processor Ox4F LSI Logic 16-bit DSP Processor Ox8C TMS320C6000 Family OxAF MCST Elbrus e2k OxB7 Arm 64-bits (Armv8/AArch64)	0x34	Motorola ColdFire
0x37Siemens PCP0x38Sony nCPU embedded RISC processor0x39Denso NDR1 microprocessor0x3AMotorola Star*Core processor0x3BToyota ME16 processor0x3CSTMicroelectronics ST100 processor0x3DAdvanced Logic Corp. TinyJ embedded processor family0x3EAMD x86-640x3FSony DSP Processor0x40Digital Equipment Corp. PDP-100x41Digital Equipment Corp. PDP-110x42Siemens FX66 microcontroller0x43STMicroelectronics ST9+ 8/16 bit microcontroller0x44STMicroelectronics ST7 8-bit microcontroller0x45Motorola MC68HC16 Microcontroller0x46Motorola MC68HC08 Microcontroller0x47Motorola MC68HC08 Microcontroller0x48Motorola MC68HC05 Microcontroller0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFArm 64-bits (Armv8/AArch64)	0x35	Motorola M68HC12
0x38Sony nCPU embedded RISC processor0x39Denso NDR1 microprocessor0x3AMotorola Star*Core processor0x3BToyota ME16 processor0x3CSTMicroelectronics ST100 processor0x3DAdvanced Logic Corp. TinyJ embedded processor family0x3EAMD x86-640x3FSony DSP Processor0x40Digital Equipment Corp. PDP-100x41Digital Equipment Corp. PDP-110x42Siemens FX66 microcontroller0x43STMicroelectronics ST9+ 8/16 bit microcontroller0x44STMicroelectronics ST7 8-bit microcontroller0x45Motorola MC68HC16 Microcontroller0x46Motorola MC68HC11 Microcontroller0x47Motorola MC68HC08 Microcontroller0x48Motorola MC68HC05 Microcontroller0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFArm 64-bits (Armv8/AArch64)	0x36	Fujitsu MMA Multimedia Accelerator
Ox39 Denso NDR1 microprocessor Ox3A Motorola Star*Core processor Ox3B Toyota ME16 processor Ox3C STMicroelectronics ST100 processor Ox3D Advanced Logic Corp. TinyJ embedded processor family Ox3E AMD x86-64 Ox3F Sony DSP Processor Ox40 Digital Equipment Corp. PDP-10 Ox41 Digital Equipment Corp. PDP-11 Ox42 Siemens FX66 microcontroller Ox43 STMicroelectronics ST9+ 8/16 bit microcontroller Ox44 STMicroelectronics ST7 8-bit microcontroller Ox45 Motorola MC68HC16 Microcontroller Ox46 Motorola MC68HC11 Microcontroller Ox47 Motorola MC68HC05 Microcontroller Ox48 Motorola MC68HC05 Microcontroller Ox49 Silicon Graphics SVx Ox4A STMicroelectronics ST19 8-bit microcontroller Ox4B Digital VAX Ox4C Axis Communications 32-bit embedded processor Ox4E Element 14 64-bit DSP Processor Ox4F LSI Logic 16-bit DSP Processor Ox8C TMS320C6000 Family OxAF MCST Elbrus e2k OxB7 Arm 64-bits (Armv8/AArch64)	0x37	Siemens PCP
0x3A Motorola Star*Core processor 0x3B Toyota ME16 processor 0x3C STMicroelectronics ST100 processor 0x3D Advanced Logic Corp. TinyJ embedded processor family 0x3E AMD x86-64 0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC08 Microcontroller 0x47 Motorola MC68HC05 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF Arm 64-b	0x38	Sony nCPU embedded RISC processor
0x3B Toyota ME16 processor 0x3C STMicroelectronics ST100 processor 0x3D Advanced Logic Corp. TinyJ embedded processor family 0x3E AMD x86-64 0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC11 Microcontroller 0x47 Motorola MC68HC08 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x39	Denso NDR1 microprocessor
0x3C STMicroelectronics ST100 processor 0x3D Advanced Logic Corp. TinyJ embedded processor family 0x3E AMD x86-64 0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC11 Microcontroller 0x47 Motorola MC68HC05 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x3A	Motorola Star*Core processor
0x3D Advanced Logic Corp. TinyJ embedded processor family 0x3E AMD x86-64 0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC11 Microcontroller 0x47 Motorola MC68HC08 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x3B	Toyota ME16 processor
processor family 0x3E AMD x86-64 0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC11 Microcontroller 0x47 Motorola MC68HC08 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x3C	STMicroelectronics ST100 processor
0x3F Sony DSP Processor 0x40 Digital Equipment Corp. PDP-10 0x41 Digital Equipment Corp. PDP-11 0x42 Siemens FX66 microcontroller 0x43 STMicroelectronics ST9+ 8/16 bit microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC11 Microcontroller 0x47 Motorola MC68HC08 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x3D	
0x40Digital Equipment Corp. PDP-100x41Digital Equipment Corp. PDP-110x42Siemens FX66 microcontroller0x43STMicroelectronics ST9+ 8/16 bit microcontroller0x44STMicroelectronics ST7 8-bit microcontroller0x45Motorola MC68HC16 Microcontroller0x46Motorola MC68HC11 Microcontroller0x47Motorola MC68HC08 Microcontroller0x48Motorola MC68HC05 Microcontroller0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x3E	AMD x86-64
0x41Digital Equipment Corp. PDP-110x42Siemens FX66 microcontroller0x43STMicroelectronics ST9+ 8/16 bit microcontroller0x44STMicroelectronics ST7 8-bit microcontroller0x45Motorola MC68HC16 Microcontroller0x46Motorola MC68HC11 Microcontroller0x47Motorola MC68HC08 Microcontroller0x48Motorola MC68HC05 Microcontroller0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x3F	Sony DSP Processor
Ox42 Siemens FX66 microcontroller Ox43 STMicroelectronics ST9+ 8/16 bit microcontroller Ox44 STMicroelectronics ST7 8-bit microcontroller Ox45 Motorola MC68HC16 Microcontroller Ox46 Motorola MC68HC11 Microcontroller Ox47 Motorola MC68HC08 Microcontroller Ox48 Motorola MC68HC05 Microcontroller Ox49 Silicon Graphics SVx Ox4A STMicroelectronics ST19 8-bit microcontroller Ox4B Digital VAX Ox4C Axis Communications 32-bit embedded processor Ox4D Infineon Technologies 32-bit embedded processor Ox4E Element 14 64-bit DSP Processor Ox4F LSI Logic 16-bit DSP Processor Ox8C TMS320C6000 Family OxAF MCST Elbrus e2k OxB7 Arm 64-bits (Armv8/AArch64)	0x40	Digital Equipment Corp. PDP-10
Ox43 STMicroelectronics ST9+ 8/16 bit microcontroller Ox44 STMicroelectronics ST7 8-bit microcontroller Ox45 Motorola MC68HC16 Microcontroller Ox46 Motorola MC68HC11 Microcontroller Ox47 Motorola MC68HC08 Microcontroller Ox48 Motorola MC68HC05 Microcontroller Ox49 Silicon Graphics SVx Ox4A STMicroelectronics ST19 8-bit microcontroller Ox4B Digital VAX Ox4C Axis Communications 32-bit embedded processor Ox4E Element 14 64-bit DSP Processor Ox4F LSI Logic 16-bit DSP Processor Ox4F MCST Elbrus e2k OxB7 Arm 64-bits (Armv8/AArch64)	0x41	Digital Equipment Corp. PDP-11
microcontroller 0x44 STMicroelectronics ST7 8-bit microcontroller 0x45 Motorola MC68HC16 Microcontroller 0x46 Motorola MC68HC11 Microcontroller 0x47 Motorola MC68HC08 Microcontroller 0x48 Motorola MC68HC05 Microcontroller 0x49 Silicon Graphics SVx 0x4A STMicroelectronics ST19 8-bit microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x42	Siemens FX66 microcontroller
microcontroller 0x45	0x43	
0x46Motorola MC68HC11 Microcontroller0x47Motorola MC68HC08 Microcontroller0x48Motorola MC68HC05 Microcontroller0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x44	
0x47Motorola MC68HC08 Microcontroller0x48Motorola MC68HC05 Microcontroller0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x45	Motorola MC68HC16 Microcontroller
0x48Motorola MC68HC05 Microcontroller0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x46	Motorola MC68HC11 Microcontroller
0x49Silicon Graphics SVx0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x47	Motorola MC68HC08 Microcontroller
0x4ASTMicroelectronics ST19 8-bit microcontroller0x4BDigital VAX0x4CAxis Communications 32-bit embedded processor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x48	Motorola MC68HC05 Microcontroller
microcontroller 0x4B Digital VAX 0x4C Axis Communications 32-bit embedded processor 0x4D Infineon Technologies 32-bit embedded processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x49	Silicon Graphics SVx
Ox4C Axis Communications 32-bit embedded processor Ox4D Infineon Technologies 32-bit embedded processor Ox4E Element 14 64-bit DSP Processor Ox4F LSI Logic 16-bit DSP Processor Ox8C TMS320C6000 Family OxAF MCST Elbrus e2k OxB7 Arm 64-bits (Armv8/AArch64)	0x4A	
0x4Cprocessor0x4DInfineon Technologies 32-bit embedded processor0x4EElement 14 64-bit DSP Processor0x4FLSI Logic 16-bit DSP Processor0x8CTMS320C6000 Family0xAFMCST Elbrus e2k0xB7Arm 64-bits (Armv8/AArch64)	0x4B	Digital VAX
0x4D processor 0x4E Element 14 64-bit DSP Processor 0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x4C	
0x4F LSI Logic 16-bit DSP Processor 0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x4D	_
0x8C TMS320C6000 Family 0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x4E	Element 14 64-bit DSP Processor
0xAF MCST Elbrus e2k 0xB7 Arm 64-bits (Armv8/AArch64)	0x4F	LSI Logic 16-bit DSP Processor
0xB7 Arm 64-bits (Armv8/AArch64)	0x8C	TMS320C6000 Family
` , , , , , , , , , , , , , , , , , , ,	0xAF	MCST Elbrus e2k
0xDC Zilog Z80	0xB7	Arm 64-bits (Armv8/AArch64)
	0xDC	Zilog Z80

7,25,5.1.	J / (IVI			Excediable	and Linkable i c	
					0xF3	RISC-V
					0xF7	Berkeley Packet Filter
					0x101	WDC 65C816
0x14		4		e_version	Set to 1 for	the original version of ELF.
0x18		4	8	e_entry	This is the memory address of the entry point from where the process starts executing. This field is eith 32 or 64 bits long, depending on the format defined earlier (byte 0x04). If the file doesn't have an assoc entry point, then this holds zero.	
0x1C	0x20	4	8	e_phoff	follows the f	e start of the program header table. It usually file header immediately following this one, offset 0x34 or 0x40 for 32- and 64-bit ELF s, respectively.
0x20	0x28	4	8	e_shoff	Points to the	e start of the section header table.
0x24	0x30	4		e_flags	Interpretatio architecture	on of this field depends on the target
0x28	0x34	2		e_ehsize	Contains the size of this header, normally 64 By 64-bit and 52 Bytes for 32-bit format.	
0x2A	0x36	2		e_phentsize	Contains the	e size of a program header table entry.
0x2C	0x38	2		e_phnum	Contains the table.	e number of entries in the program header
0x2E	0x3A	2		e_shentsize	Contains the	e size of a section header table entry.
0x30	0x3C	C 2 e_shnum		e_shnum	Contains the number of entries in the section heatable.	
0x32	0x3E	2		e_shstrndx		dex of the section header table entry that e section names.
0x34	0x40				End of ELF	Header (size).

Program header

The program header table tells the system how to create a process image. It is found at file offset e_phoff, and consists of e_phnum entries, each with size e_phentsize. The layout is slightly different in 32-bit ELF vs 64-bit ELF, because the p_flags are in a different structure location for alignment reasons. Each entry is structured as:

Program header $^{[10]}$

Offset		Size (bytes)		Field	Durnaga					
32- bit	64- bit	32- bit	64- bit	rieia				Purpose	•	
			Identifies the type of the segment.							
					Val	ue	Name		Meaning	
					0x0000	0000	PT_NULL	Prograr	m header table entry unused.	
					0x0000	0001	PT_LOAD	Loadab	ole segment.	
					0x0000	0002	PT_DYNAMIC	Dynam	ic linking information.	
					0x0000	0003	PT_INTERP	Interpre	eter information.	
					0x0000	0004	PT_NOTE	Auxiliar	y information.	
0x00		4		p_type	0x0000	0005	PT_SHLIB	Reserv	ed.	
					0x0000	0006	PT_PHDR	Segme table its	nt containing program header self.	
					0x0000	0007	PT_TLS	Thread	-Local Storage template.	
					0x60000000		PT_L00S	Reserv	ed inclusive range. Operating	
					0x6FFFFFF		PT_HIOS	system	specific.	
					0x70000000		PT_LOPROC	Reserv	ed inclusive range. Processor	
					0x7FFF	FFFF	PT_HIPROC speci		cific.	
					Segment	t-depend	dent flags (posit	ion for 64	-bit structure).	
					Value	Name	Meanii	ng		
	0x04		4	p_flags	0x1	PF_X	Executable s	egment.		
	0.04		4	p_rrays	0x2	PF_W	Writeable seg	gment.		
					0x4	PF_R	Readable se	gment.		
0x04	0x08	4	8	p_offset	Offset of	the seg	ment in the file i	mage.		
0x08	0x10	4	8	p_vaddr	Virtual ad	ddress o	of the segment in	n memory	<i>I</i> .	
0x0C	0x18	4	8	p_paddr	On syste physical			ress is rel	levant, reserved for segment's	
0x10	0x20	4	8	p_filesz	Size in bytes of the segment in the file image. May be 0.					
0x14	0x28	4	8	p_memsz	Size in bytes of the segment in memory. May be 0.					
0x18		4		p_flags	Segment-dependent flags (position for 32-bit structure). See above p_flags field for flag definitions.					
0x1C	0x30	4	8	p_align	0 and 1 s	specify r	no alignment. O	therwise	should be a positive, integral	

				power of 2, with p_vaddr equating p_offset modulus p_align.
0x20	0x38			End of Program Header (size).

Section header

Offset			ize tes)							
32- bit	64- bit	32- bit	64- bit	Field		Purpose				
0x00		4		sh_name	An offset to a si this section.	tring in the .shstrtab section	on that represents the name of			
					Identifies the ty	pe of this header.				
					Value	Name	Meaning			
					0x0	SHT_NULL	Section header table entry unused			
					0x1	SHT_PROGBITS	Program data			
					0x2	SHT_SYMTAB	Symbol table			
					0x3	SHT_STRTAB	String table			
					0x4	SHT_RELA	Relocation entries with addends			
					0x5	SHT_HASH	Symbol hash table			
					0x6	SHT_DYNAMIC	Dynamic linking information			
					0x7	SHT_NOTE	Notes			
0x04	4	4	4				sh_type	0x8	SHT_NOBITS	Program space with no data (bss)
					0x9	SHT_REL	Relocation entries, no addends			
					0x0A	SHT_SHLIB	Reserved			
					0x0B	SHT_DYNSYM	Dynamic linker symbol table			
					0x0E	SHT_INIT_ARRAY	Array of constructors			
					0x0F	SHT_FINI_ARRAY	Array of destructors			
					0x10	SHT_PREINIT_ARRAY	Array of pre-constructors			
					0x11	SHT_GROUP	Section group			
					0x12	SHT_SYMTAB_SHNDX	Extended section indices			
					0x13	SHT_NUM	Number of defined types.			
					0x60000000	SHT_LOOS	Start OS-specific.			
0x08		4	8	sh_flags	Identifies the at	tributes of the section.				

					Value Name		Meaning			
					0x1	SHF_WRITE	Writable			
					0x2	SHF_ALLOC	Occupies memory during execution			
					0x4	SHF_EXECINSTR	Executable			
					0x10	SHF_MERGE	Might be merged			
					0x20	SHF_STRINGS	Contains null- terminated strings			
					0x40	SHF_INFO_LINK	'sh_info' contains SHT index			
					0x80	SHF_LINK_ORDER	Preserve order after combining			
					0x100	SHF_OS_NONCONFORMING	Non-standard OS specific handling required			
					0x200	SHF_GROUP	Section is member of a group			
					0x400	SHF_TLS	Section hold thread- local data			
					0x0FF00000	SHF_MASKOS	OS-specific			
					0xF0000000	SHF_MASKPROC	Processor-specific			
					0x4000000	SHF_ORDERED	Special ordering requirement (Solaris)			
					0x8000000	SHF_EXCLUDE	Section is excluded unless referenced or allocated (Solaris)			
0x0C	0x10	4	8	ob oddr	Virtual address	of the section in memory, for secti	one that are leaded			
0x0C	0x10	4	8	sh_addr sh_offset			ons that are loaded.			
0x10	0x10	4	8	sh size	Offset of the section in the file image.					
0.8.14	0,20	4	0	311_3126	Size in bytes of the section in the file image. May be 0.					
0x18	0x28	4		sh_link	Contains the section index of an associated section. This field is used for several purposes, depending on the type of section.					
0x1C	0x2C	4		sh_info	Contains extra information about the section. This field is used for several purposes, depending on the type of section.					
0x20	0x30	4	8	sh_addralign	Contains the required alignment of the section. This field must be a power of two.					
0x24	0x38	4	8	sh_entsize	Contains the size, in bytes, of each entry, for sections that contain fixed-size entries. Otherwise, this field contains zero.					
0x28	0x40				End of Section Header (size).					

Tools

readelf is a Unix binary utility that displays information about one or more ELF files. A free

software implementation is provided by GNU Binutils.

- elfutils provides alternative tools to GNU Binutils purely for Linux.
- e1fdump is a command for viewing ELF information in an ELF file, available under Solaris and FreeBSD.
- objdump provides a wide range of information about ELF files and other object formats. objdump uses the Binary File Descriptor library as a back-end to structure the ELF data.
- The Unix <u>file</u> utility can display some information about ELF files, including the <u>instruction set</u> <u>architecture</u> for which the code in a relocatable, executable, or shared object file is intended, or on which an ELF core dump was produced.

Applications

Unix-like systems

The ELF format has replaced older executable formats in various environments. It has replaced <u>a.out</u> and COFF formats in Unix-like operating systems:

- Linux
- Solaris / Illumos
- IRIX
- FreeBSD^[12]
- NetBSD
- OpenBSD
- Redox
- DragonFly BSD
- Syllable
- HP-UX (except for 32-bit PA-RISC programs which continue to use SOM)
- QNX Neutrino
- MINIX^[13]

Non-Unix adoption

ELF has also seen some adoption in non-Unix operating systems, such as:

- OpenVMS, in its Itanium and amd64 versions^[14]
- <u>BeOS</u> Revision 4 and later for <u>x86</u> based computers (where it replaced the <u>Portable Executable</u> format; the <u>PowerPC</u> version stayed with <u>Preferred Executable Format</u>)
- Haiku, an open source reimplementation of BeOS
- RISC OS^[15]
- Stratus VOS, in PA-RISC and x86 versions
- SkyOS
- Fuchsia OS
- Z/TPF
- HPE NonStop OS^[16]

Deos

Microsoft Windows also uses the ELF format, but only for its Windows Subsystem for Linux compatibility system. [17]

Game consoles

Some game consoles also use ELF:

- PlayStation Portable, [18] PlayStation Vita, PlayStation (console), PlayStation 2, PlayStation 3, PlayStation 4, PlayStation 5
- GP2X
- Dreamcast
- GameCube
- Nintendo 64
- Wii
- Wii U

PowerPC

Other (operating) systems running on PowerPC that use ELF:

- AmigaOS 4, the ELF executable has replaced the prior Extended Hunk Format (EHF) which was
 used on Amigas equipped with PPC processor expansion cards.
- MorphOS
- AROS
- Café OS (The operating system ran on Wii U)

Mobile phones

Some operating systems for mobile phones and mobile devices use ELF:

- Symbian OS v9 uses E32Image^[19] format that is based on the ELF file format;
- Sony Ericsson, for example, the W800i, W610, W300, etc.
- Siemens, the SGOLD and SGOLD2 platforms: from Siemens C65 to S75 and BenQ-Siemens E71/EL71;
- Motorola, for example, the E398, <u>SLVR L7</u>, v360, <u>v3i</u> (and all phone LTE2 which has the patch applied).
- Bada, for example, the Samsung Wave S8500.
- Nokia phones or tablets running the Maemo or the Meego OS, for example, the Nokia N900.
- Android uses ELF. so (shared object^[20]) libraries for the <u>Java Native Interface</u>. With <u>Android Runtime</u> (ART), the default since <u>Android 5.0 "Lollipop"</u>, all applications are compiled into native ELF binaries on installation.^[21] It also possible to use native Linux software from package managers like Termux, or compile them from sources via Clang or GCC, that also available in repositories.

Some phones can run ELF files through the use of a patch that adds assembly code to the main firmware, which is a feature known as *ELFPack* in the underground modding culture. The ELF file format is also used with the Atmel AVR (8-bit), AVR32^[22] and with Texas Instruments MSP430 microcontroller architectures. Some implementations of Open Firmware can also load ELF files, most notably Apple's implementation used in almost all PowerPC machines the company produced.

Specifications

- Generic:
 - System V Application Binary Interface (http://www.sco.com/developers/devspecs/gabi41.pdf)
 Edition 4.1 (1997-03-18)
 - System V ABI Update (http://www.sco.com/developers/gabi/latest/contents.html) (October 2009)
- AMD64:
 - System V ABI, AMD64 Supplement (http://refspecs.linuxbase.org/elf/x86_64-abi-0.99.pdf)
- Arm:
 - ELF for the ARM Architecture (https://github.com/ARM-software/abi-aa/releases/download/202 2Q1/aaelf32.pdf)
- IA-32:
 - System V ABI, Intel386 Architecture Processor Supplement (http://www.sco.com/developers/devspecs/abi386-4.pdf)
- IA-64:
 - Itanium Software Conventions and Runtime Guide (http://refspecs.linux-foundation.org/IA64conventions.pdf) (September 2000)
- M32R:
 - M32R ELF ABI Supplement (http://www.linux-m32r.org/cmn/m32r/M32R-elf-abi.pdf) Version 1.2 (2004-08-26)
- MIPS:
 - System V ABI, MIPS RISC Processor Supplement (http://www.sco.com/developers/devspecs/mipsabi.pdf)
 - MIPS EABI documentation (http://sources.redhat.com/ml/binutils/2003-06/msg00436.html)
 Archived (https://web.archive.org/web/20120401235051/http://sources.redhat.com/ml/binutils/2003-06/msg00436.html) 2012-04-01 at the Wayback Machine (2003-06-11)
- Motorola 6800:
 - Motorola 8- and 16- bit Embedded ABI (http://uclibc.org/docs/psABI-m8-16.pdf)
- PA-RISC:
 - ELF Supplement for PA-RISC (https://web.archive.org/web/20110317045038/http://refspecs.fr eestandards.org/elf/elf-pa.pdf) Version 1.43 (October 6, 1997)
- PowerPC:
 - System V ABI, PPC Supplement (https://web.archive.org/web/20070630123210/http://refspec s.freestandards.org/elf/elfspec_ppc.pdf)
 - PowerPC Embedded Application Binary Interface (https://web.archive.org/web/201107230037 58/http://sources-redhat.mirrors.airband.net/binutils/ppc-docs/ppc-eabi-1995-01.pdf) 32-Bit Implementation (1995-10-01)
 - 64-bit PowerPC ELF Application Binary Interface Supplement (http://refspecs.linuxfoundation.org/ELF/ppc64/PPC-elf64abi-1.9.html) Version 1.9 (2004)

- RISC-V:
 - RISC-V ELF Specification (https://github.com/riscv-non-isa/riscv-elf-psabi-doc/blob/master/risc v-elf.adoc)
- SPARC:
 - System V ABI, SPARC Supplement (https://web.archive.org/web/20080517110249/http://www.sparc.org/standards/psABI3rd.pdf)
- S/390:
 - S/390 32bit ELF ABI Supplement (http://refspecs.linuxbase.org/ELF/zSeries/lzsabi0_s390.html)
- zSeries:
 - zSeries 64bit ELF ABI Supplement (http://refspecs.linuxbase.org/ELF/zSeries/lzsabi0_zSeries. html)
- Symbian OS 9:
 - E32Image file format on Symbian OS 9 (https://web.archive.org/web/20080518002831/http://wiki.forum.nokia.com/index.php/E32Image_file_format_on_Symbian_OS_9)

The <u>Linux Standard Base (LSB)</u> supplements some of the above specifications for architectures in which it is specified. For example, that is the case for the System V ABI, AMD64 Supplement. [24][25]

86open

86open was a project to form consensus on a common binary file format for Unix and Unix-like operating systems on the common PC compatible x86 architecture, to encourage software developers to port to the architecture. The initial idea was to standardize on a small subset of Spec 1170, a predecessor of the Single UNIX Specification, and the GNU C Library (glibc) to enable unmodified binaries to run on the x86 Unix-like operating systems. The project was originally designated "Spec 150".

The format eventually chosen was ELF, specifically the Linux implementation of ELF, after it had turned out to be a *de facto* standard supported by all involved vendors and operating systems.

The group began email discussions in 1997 and first met together at the <u>Santa Cruz Operation</u> offices on August 22, 1997.

The steering committee was Marc Ewing, Dion Johnson, Evan Leibovitch, Bruce Perens, Andrew Roach, Bryan Wayne Sparks and Linus Torvalds. Other people on the project were Keith Bostic, Chuck Cranor, Michael Davidson, Chris G. Demetriou, Ulrich Drepper, Don Dugger, Steve Ginzburg, Jon "maddog" Hall, Ron Holt, Jordan Hubbard, Dave Jensen, Kean Johnston, Andrew Josey, Robert Lipe, Bela Lubkin, Tim Marsland, Greg Page, Ronald Joe Record, Tim Ruckle, Joel Silverstein, Chiapi Tien, and Erik Troan. Operating systems and companies represented were BeOS, BSDI, FreeBSD, Intel, Linux, NetBSD, SCO and SunSoft.

The project progressed and in mid-1998, SCO began developing lxrun, an open-source compatibility layer able to run Linux binaries on OpenServer, UnixWare, and Solaris. SCO announced official support of lxrun at LinuxWorld in March 1999. Sun Microsystems began officially supporting lxrun for Solaris in early 1999, and later moved to integrated support of the Linux binary format via Solaris Containers for Linux Applications.

With the BSDs having long supported Linux binaries (through a <u>compatibility layer</u>) and the main x86 Unix vendors having added support for the format, the project decided that Linux ELF was the format chosen by the industry and "declare[d] itself dissolved" on July 25, 1999. [28]

FatELF: universal binaries for Linux

Fatelf is an elf binary-format extension that adds fat binary capabilities. [29] It is aimed for Linux and other Unix-like operating systems. Additionally to the CPU architecture abstraction (byte order, word size, CPU instruction set etc.), there is the potential advantage of software-platform abstraction e.g., binaries which support multiple kernel ABI versions. As of 2021, Fatelf has not been integrated into the mainline Linux kernel. [30][31][32]

See also



- Application binary interface
- Comparison of executable file formats
- DWARF a format for debugging data
- Intel Binary Compatibility Standard
- Portable Executable format used by Windows
- vDSO virtual DSO
- Position-independent code

References

- 1. Tool Interface Standard (TIS) <u>Executable and Linking Format (ELF) Specification (http://refspecs.linuxbase.org/elf/elf.pdf) Version 1.2</u> (May 1995)
- Tool Interface Standard (TIS) <u>Portable Formats Specification (https://refspecs.linuxfoundation.org/elf/TIS1.1.pdf)</u> Version 1.1 (October 1993)
- 3. <u>System V Application Binary Interface (http://www.sco.com/developers/devspecs/gabi41.pdf)</u> Edition 4.1 (1997-03-18)
- 4. "Available lexers Pygments" (http://pygments.org/docs/lexers#lexers-for-hexadecimal-dumps). pygments.org.
- 5. "ELF Header" (http://www.sco.com/developers/gabi/2000-07-17/ch4.eheader.html). Sco.com. July 2000. Retrieved 2014-02-07.
- 6. "LXR linux/include/linux/elf.h" (http://lxr.linux.no/linux+v2.6.11/include/linux/elf.h#L380). *linux.no*. Retrieved 27 April 2015.
- 7. "glibc 2.12 announce" (https://sourceware.org/ml/libc-alpha/2010-05/msg00000.html).
- 8. "sourceware.org Git glibc.git/blob libc-abis" (https://sourceware.org/git/?p=glibc.git;a=blob;f=libc-abis;h=e702f6ae245c1528f5a608df8cfae4f037809de2;hb=HEAD).

- 9. "sourceware.org Git glibc.git/blob sysdeps/gnu/ldsodefs.h" (https://web.archive.org/web/202103 07223850/https://sourceware.org/git/?p=glibc.git%3Ba%3Dblob%3Bf%3Dsysdeps%2Fgnu%2Flds odefs.h%3Bh%3D253b4d934c5ca457ab5580a2a6398205e4f961ba%3Bhb%3DHEAD#I32). Archived from the original (https://sourceware.org/git/?p=glibc.git%3Ba%3Dblob%3Bf%3Dsysdeps%2Fgnu%2Fldsodefs.h%3Bh%3D253b4d934c5ca457ab5580a2a6398205e4f961ba%3Bhb%3DHEAD#I32) on 2021-03-07. Retrieved 2019-10-28.
- 10. "Program Header" (http://www.sco.com/developers/gabi/2000-07-17/ch5.pheader.html). Sco.com. July 2000. Retrieved 2017-04-05.
- 11. "elfutils" (https://sourceware.org/elfutils/). sourceware.org. Retrieved 30 April 2017.
- "Binary Formats" (https://web.archive.org/web/20190331192807/https://docs.freebsd.org/doc/4.9-RELEASE/usr/share/doc/handbook/binary-formats.html). Archived from the original (https://docs.freebsd.org/doc/4.9-RELEASE/usr/share/doc/handbook/binary-formats.html) on 2019-03-31. Retrieved 2019-03-31.
- "MinixReleases Minix Wiki" (https://web.archive.org/web/20130330150621/http://wiki.minix3.org/en/MinixReleases).
 Wiki.minix3.org. Archived from the original (http://wiki.minix3.org/en/MinixReleases) on 2013-03-30.
 Retrieved 2014-01-19.
- 14. "Archived copy" (https://web.archive.org/web/20200915215111/https://vmssoftware.com/pdfs/State_of_Port_20160906.pdf) (PDF). Archived from the original (https://vmssoftware.com/pdfs/State_of_Port_20160906.pdf) (PDF) on 2020-09-15. Retrieved 2016-10-19.
- 15. "GCCSDK RISC OS" (http://www.riscos.info/index.php/GCCSDK). Riscos.info. 2012-04-22. Retrieved 2014-01-19.
- 16. "Guardian Programmer's Guide" (https://web.archive.org/web/20180530042640/http://h20628.www2.hp.com/km-ext/kmcsdirect/emr_na-c02543407-12.pdf) (PDF). Hewlett Packard Enterprise. Archived from the original (http://h20628.www2.hp.com/km-ext/kmcsdirect/emr_na-c02543407-12.pdf) (PDF) on 2018-05-30. Retrieved 2018-05-30. p. 44 archived from the original (http://h20628.www2.hp.com/km-ext/kmcsdirect/emr_na-c02543407-12.pdf) Archived (https://web.archive.org/web/20180530042640/http://h20628.www2.hp.com/km-ext/kmcsdirect/emr_na-c02543407-12.pdf) 2018-05-30 at the Wayback Machine on 2018-5-30
- 17. Foley, Mary Jo. "Under the hood of Microsoft's Windows Subsystem for Linux | ZDNet" (https://www.zdnet.com/article/under-the-hood-of-microsofts-windows-subsystem-for-linux/). ZDNet. Retrieved 2016-08-19.
- 18. PlayStation Portable use encrypted & relocated ELF: PSP
- 19. Symbian OS executable file format (https://web.archive.org/web/20091213034509/http://wiki.forum.nokia.com/index.php/E32Image)
- Rosen, Kenneth; Host, Douglas; Klee, Rachel; Rosinski, Richard (2007). <u>UNIX: The Complete Reference</u> (https://books.google.com/books?id=2Et--84HlkwC) (2 ed.). McGraw Hill Professional. p. 707. <u>ISBN 9780071706988</u>. Retrieved 2017-06-08. "Dynamically linked libraries are also called shared objects (.so)."
- 21. Thomas, Romain. "Android formats" (https://archive.today/20230216233708/https://lief-project.gith ub.io/doc/latest/tutorials/10_android_formats.html). Quarks Lab. Archived from the original (https://lief-project.github.io/doc/latest/tutorials/10_android_formats.html) on 16 Feb 2023. Retrieved 17 Jan 2023.
- 22. "Chapter 4: Object Files" (http://www.sco.com/developers/gabi/2009-10-26/ch4.eheader.html#e_m achine), System V Application Binary Interface, 2009-10-26, e_machine
- 23. "LSB Referenced Specifications" (http://refspecs.linuxfoundation.org/lsb.shtml). linuxfoundation.org. Retrieved 27 April 2015.
- 24. "Executable and Linking Format (ELF)" (http://refspecs.linuxfoundation.org/LSB_4.1.0/LSB-Core-AMD64/LSB-Core-AMD64/elf-amd64.html). *linuxfoundation.org*. Retrieved 27 April 2015.

- 25. "Introduction" (http://refspecs.linuxfoundation.org/LSB_4.1.0/LSB-Core-AMD64/LSB-Core-AMD6 4/elfintro.html). *linuxfoundation.org*. Retrieved 27 April 2015.
- 26. Leibovitch, Evan (1997-12-23). <u>"86Open Frequently-Asked Questions" (https://web.archive.org/web/20070311032337/http://www.telly.org/86open-faq)</u>. Archived from the original (http://www.telly.org/86open-faq) on 2007-03-11. Retrieved 2007-06-06.
- 27. Record, Ronald (1998-05-21). "Bulletin on status of 86open at SCO" (https://web.archive.org/web/20081208013909/http://www.mavetju.org/mail/view_message.php?list=freebsd-emulation&id=361608). Archived from the original (http://www.mavetju.org/mail/view_message.php?list=freebsd-emulation&id=361608) on 2008-12-08. Retrieved 2008-05-06.
- 28. Leibovitch, Evan (1999-07-25). "The86open Project Final Update" (https://web.archive.org/web/20070227214032/http://www.telly.org/86open/). Archived from the original (http://www.telly.org/86open/) on 2007-02-27. Retrieved 2007-05-06.
- 29. Gordon, Ryan. "fatelf-specification v1" (http://hg.icculus.org/icculus/fatelf/raw-file/tip/docs/fatelf-specification.txt). icculus.org. Retrieved 2010-07-25.
- 30. Gordon, Ryan. "FatELF: Turns out I liked the uncertainty better" (http://icculus.org/cgi-bin/finger/finger.pl?user=icculus&date=2009-11-03&time=19-08-04). icculus.org. Retrieved 2010-07-13.
- 31. Holwerda, Thom (2009-11-03). "Ryan Gordon Halts FatELF Project" (https://www.osnews.com/story/22446/ryan-gordon-halts-fatelf-project). osnews.com. Retrieved 2010-07-05.
- 32. Brockmeier, Joe (June 23, 2010). "SELF: Anatomy of an (alleged) failure" (https://lwn.net/Articles/392862/). Linux Weekly News. Retrieved 2011-02-06.

Further reading

- Levine, John R. (2000) [October 1999]. Linkers and Loaders (https://www.iecc.com/linker/). The Morgan Kaufmann Series in Software Engineering and Programming (1 ed.). San Francisco, USA: Morgan Kaufmann. ISBN 1-55860-496-0. OCLC 42413382 (https://www.worldcat.org/oclc/42413382). Archived (https://archive.today/20121205032107/http://www.iecc.com/linker/) from the original on 2012-12-05. Retrieved 2020-01-12. Code: [1] (https://archive.today/20200114225034/https://linker.iecc.com/code.html)[2] (ftp://ftp.iecc.com/pub/linker/) Errata: [3] (https://linker.iecc.com/)
- <u>Drepper, Ulrich</u> (2006-08-20). "How To Write Shared Libraries" (http://people.redhat.com/drepper/dsohowto.pdf) (PDF). 4.0. Retrieved 2007-06-20.
- An unsung hero: The hardworking ELF (https://web.archive.org/web/20070224140341/http://www-128.ibm.com/developerworks/power/library/pa-spec12/) by Peter Seebach, December 20, 2005, archived from the original on February 24, 2007
- LibElf and GElf A Library to Manipulate ELf Files (https://web.archive.org/web/20040225174057/ http://developers.sun.com/solaris/articles/elf.html) at the Wayback Machine (archived February 25, 2004)
- The ELF Object File Format: Introduction (https://www.linuxjournal.com/article/1059), The ELF Object File Format by Dissection (https://www.linuxjournal.com/article/1060) by Eric Youngdale (1995-05-01)
- A Whirlwind Tutorial on Creating Really Teensy ELF Executables for Linux (http://www.muppetlabs.com/~breadbox/software/tiny/teensy.html) by Brian Raiter
- ELF relocation into non-relocatable objects (http://www.phrack.org/issues.html?issue=61&id=8#art icle) by Julien Vanegue (2003-08-13)
- Embedded ELF debugging without ptrace (http://www.phrack.org/issues.html?issue=63&id=9#article) by the ELFsh team (2005-08-01)
- Study of ELF loading and relocs (http://netwinder.osuosl.org/users/p/patb/public_html/elf_relocs.ht ml) by Pat Beirne (1999-08-03)

External links

- FreeBSD Handbook: Binary formats (https://web.archive.org/web/20130403001804/http://www.freebsd.org/doc/en_US.ISO8859-1/books/handbook/binary-formats.html) (archived version)
- FreeBSD elf(5) manual page (http://www.freebsd.org/cgi/man.cgi?query=elf&sektion=5)
- NetBSD ELF FAQ (http://www.netbsd.org/Documentation/elf.html)
- Linux elf(5) manual page (https://manpages.debian.org/stretch/manpages/elf.5.en.html)
- Oracle Solaris Linker and Libraries Guide (http://www.oracle.com/pls/topic/lookup?ctx=solaris11&i d=OSLLG)
- The ERESI project : reverse engineering on ELF-based operating systems (http://www.eresi-project.org/) Archived (https://web.archive.org/web/20210314190846/http://www.eresi-project.org/) 2021-03-14 at the Wayback Machine
- Linux Today article on 86open (http://www.linuxtoday.com/developer/1999072600605PS)
 July 26, 1999
- Announcement of 86open on Debian Announce mailing list (http://lists.debian.org/debian-announce/1997/msg00028.html) October 10, 1997, Bruce Perens
- Declaration of Ulrich Drepper (PDF) (http://www.groklaw.net/pdf/IBM-835-Exhibit_184.pdf) in The SCO Group vs IBM, September 19, 2006
- 86open and ELF discussion (http://www.groklaw.net/articlebasic.php?story=20060813114048520)
 Archived (https://web.archive.org/web/20190201013659/http://www.groklaw.net/articlebasic.php?story=20060813114048520)
 2019-02-01 at the Wayback Machine on Groklaw, August 13, 2006

Retrieved from "https://en.wikipedia.org/w/index.php?title=Executable and Linkable Format&oldid=1174409285"