


POS MERCHANT/POS DEVICE CONFIGURATION



Component Interactions

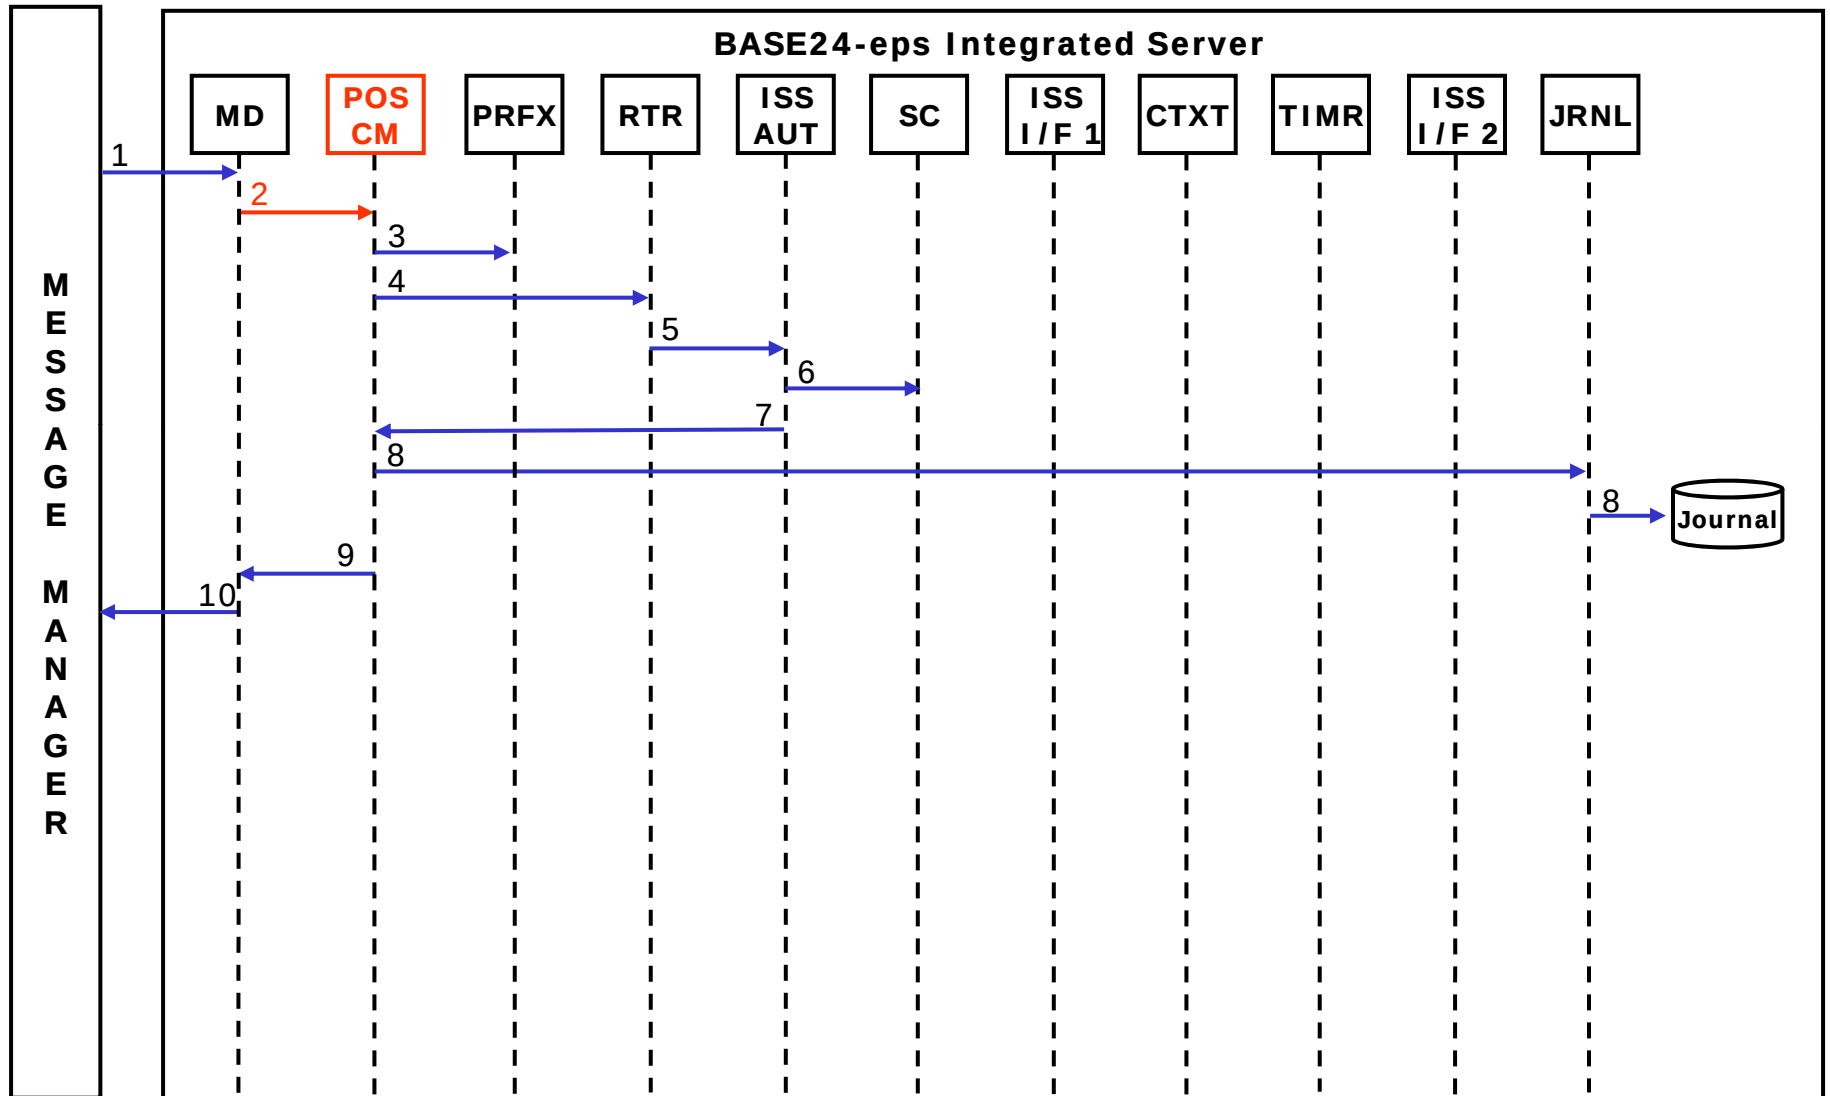

Internal Authorization – Request/Response

POS Message Support

- The POS Channel Manager supports:
 - ACI POS Standard Message (SPDH)
 - APACS
 - Hypercom
 - AS2805



POS Device Handler Functions

- SPDH Message Profile enhancements
- 3DES support
- SPDH Dynamic Key Management
- SPDH EMV Support
- Contactless Card support
- SPDH Interac Processing support
- SPDH Message Data Encryption (Balance data)
- VISA DUKPT MACing (06.2)
- APACS MACing and APACS 3DES (06.2)
- Transaction Limit Thresholds by terminal and card type
- Transaction Limit Thresholds by Merchant and card type
- SPDH Initial Working Key Download support



POS Merchant Configuration

- Configuration of POS merchants in the BASE24-es system require the configuration of:
 - *Institution records*: the institution that acquires transaction on behalf of the merchant, or the merchant headquarters
 - *Merchant records*: the merchants supported by the institution, or the merchant outlets
 - *POS device records*: each channel ID you enter for a POS device must be associated with a merchant and a merchant channel profile.



POS Merchant Configuration

ACI Merchant Configuration

Institution ID: BNK1 (FIRSTSTATEBANK) Merchant ID: 345111

Merchant Name: 00001 (RIPLEY'S BANK ONE)
00006 (RIPLEY'S BANK SIX)
AFFN_INST (AFFN BANK)
BNK1 (FIRSTSTATEBANK)
CU24_INST (CU24 BANK)
DANUTZA (dsfsdf)
DHTEST (RIPLEY'S BANK ONE)
DHTESTCC (DHTESTCC)

Account: Conta

Currency Code: CU24_INST (CU24 BANK)
DANUTZA (dsfsdf)

Bank Information: DHTEST (RIPLEY'S BANK ONE)
DHTESTCC (DHTESTCC)

Account Number: 11145678

Transit/Bank Number: 10922345671

The Institution ID drop down on the Merchant Configuration window is populated via the Institution Configuration UI.

ACI Institution Configuration

Institution ID: SELECT/ENTER

Institution Number: BNK1

Institution Name:

Address and Contact: DCA_TEST_01

Address Information: DH_00001

Line 1:

Line 2:

City:

Postal Code:


Country:

State / Province:

Contact Information:

Contact	Phone	Email	Comments


Merchant Channel Configuration

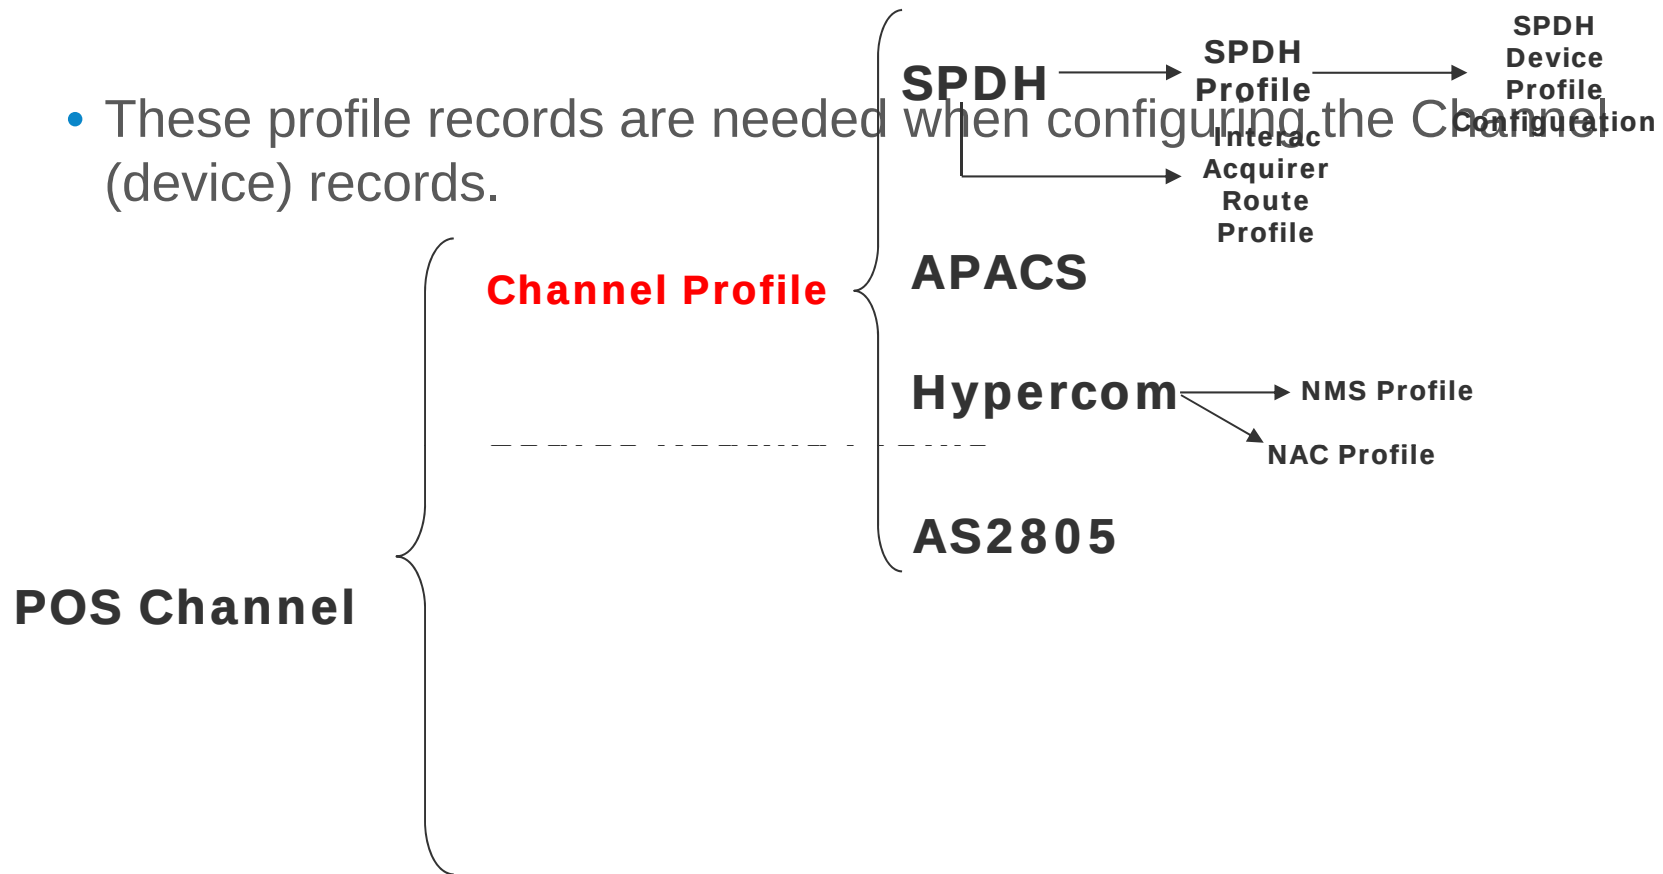


- There are some configuration requirements based on device protocol configured in the Channel Profile record

Merchant Channel Configuration

- These profiles are required when the Merchant record is added

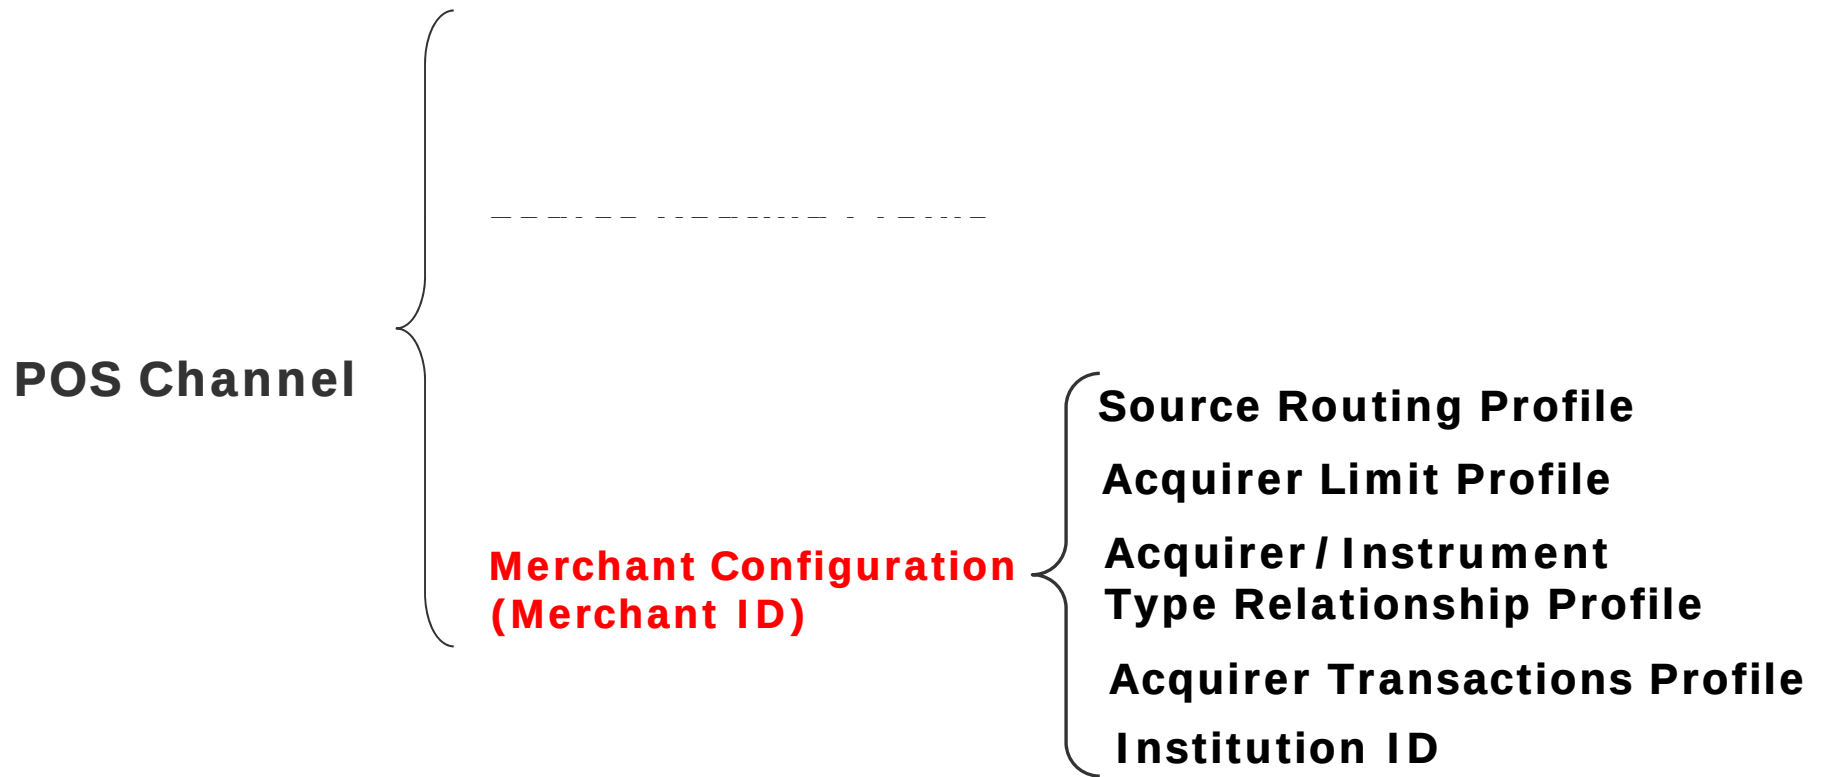

POS Merchant Configuration

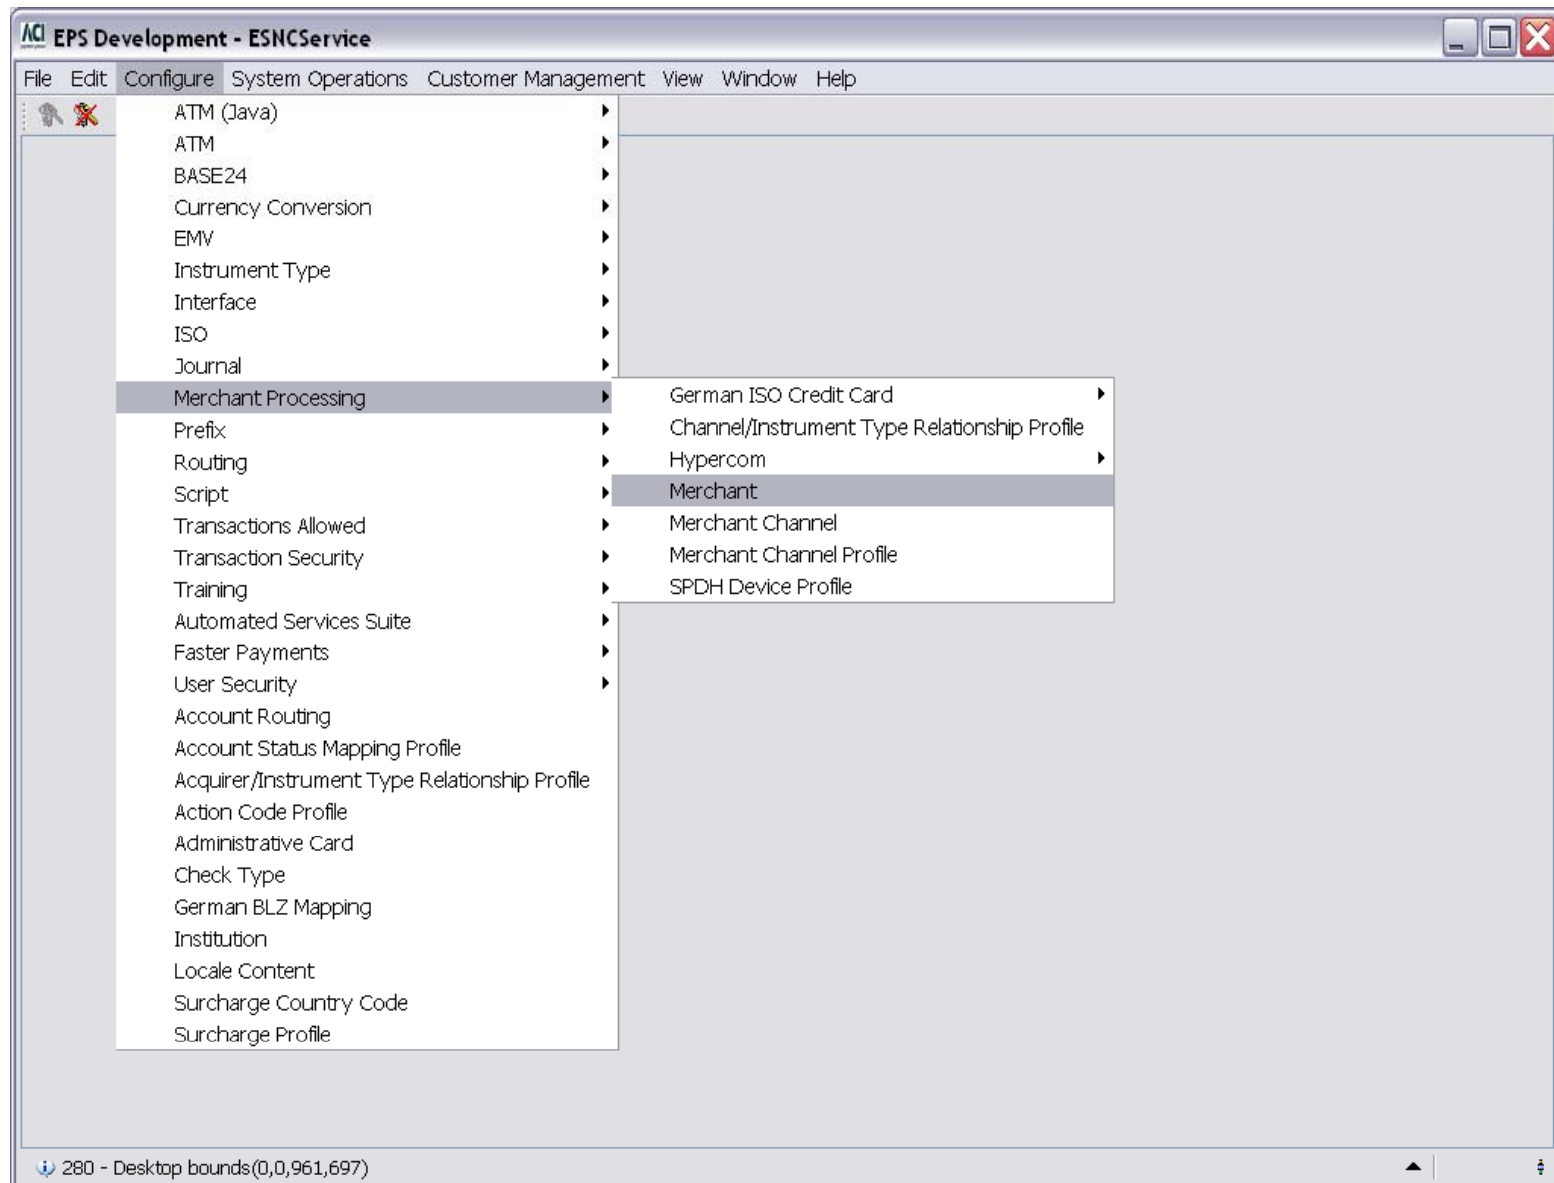

Merchant Configuration

The screenshot shows a software window titled "EPS Development - ESNService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. Inside, a sub-window titled "Merchant Configuration - TESTMERCHANT" is active. It features a toolbar with icons for file operations and a tabbed interface with tabs for "Account", "Contact Information", "Contact Information (Locale)", "General", "Instrument Types", and "Devices". The "Account" tab is selected, showing fields for "Institution ID" (BNK1 (FIRSTSTATEBANK)), "Merchant ID" (TESTMERCHANT), "Merchant Name" (TEST MERCHANT), and "Merchant Name (Locale)" (Test Merchant). Below these is a "Currency Code" dropdown set to "USD (840)". A "Bank Information" section contains "Account Number" (1234567899) and "Transit/Bank Number" (empty). A status bar at the bottom displays "2 - Successful view of TESTMERCHANT." and "280 - Desktop bounds(0,0,961,697)".

Institution ID and Merchant ID are required to read/add a record.

Merchant Configuration

The screenshot shows a software window titled "ACI EPS Development - ESNCService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "ACI Merchant Configuration - TESTMERCHANT" is open, displaying a form for configuring a merchant. The form includes fields for Institution ID (BNK1 (FIRSTSTATEBANK)), Merchant ID (TESTMERCHANT), Merchant Name (TEST MERCHANT), and Merchant Name (Locale) (TestMerchant). Below these are tabs for Account, Contact Information (selected), Contact Information (Locale), General, Instrument Types, and Devices. The Contact Information tab shows address details: Line 1 (1010 N. MAIN STREET), Country (USA (840)), Line 2, State / Province (CA (California)), City (SAN DIEGO), and Postal Code (89989). A table below the address fields lists contact information with columns for Contact Name, Phone, Email, and Comments. The table contains one entry with the name "DEB". At the bottom of the form is a large text area for Notes. A status bar at the bottom of the window displays the message "2 - Successful view of TESTMERCHANT." and the desktop bounds "(0,0,961,697)".

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Configuration - TESTMERCHANT

Institution ID BNK1 (FIRSTSTATEBANK) Merchant ID TESTMERCHANT

Merchant Name TEST MERCHANT Merchant Name (Locale) TestMerchant

Account Contact Information Contact Information (Locale) General Instrument Types Devices

Address Information

Line 1 1010 N. MAIN STREET Country USA (840)

Line 2 State / Province CA (California)

City SAN DIEGO Postal Code 89989

Contact Name	Phone	Email	Comments
DEB			

Notes

2 - Successful view of TESTMERCHANT.

280 - Desktop bounds(0,0,961,697)

Merchant Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Configuration - TESTMERCHANT

Institution ID: BNK1 (FIRSTSTATEBANK) Merchant ID: TESTMERCHANT

Merchant Name: TEST MERCHANT Merchant Name (Locale): TestMerchant

Account Contact Information Contact Information (Locale) General Instrument Types Devices

Address Information (Locale)

Line 1: Country:

Line 2: State / Province:

City: Postal Code:

Contact Name	Phone	Email	Comments

Notes (Locale):

2 - Successful view of TESTMERCHANT.

280 - Desktop bounds(0,0,961,697)

Merchant Configuration

The screenshot shows the 'Merchant Configuration - TESTMERCHANT' window. The 'General' tab is selected, displaying various configuration fields. The 'Reporting Hierarchy' section on the right shows five levels for configuration. A status bar at the bottom indicates a successful view of the merchant configuration.

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Configuration - TESTMERCHANT

Institution ID: BNK1 (FIRSTSTATEBANK) Merchant ID: TESTMERCHANT

Merchant Name: TEST MERCHANT Merchant Name (Locale): TestMerchant

Account Contact Information Contact Information (Locale) **General** Instrument Types Devices

Default Merchant Category Code: 6100

Mail/Phone Order Merchant Category Code: 0

Default POS Condition Code: Unattended on mer...

Merchant Status: Open

Financial Cutover Start Time: 05:00 pm

Balance Window Start Time: 06:00 pm

Balance and Cutover End Time: 07:00 pm

Default Time Offset From Processor (hrs:mins): 00:00

Incentive Eligibility Value:

Source Routing Profile:

Acquirer Transactions Profile:

Acquirer Limit Profile:

Acquirer/Instrument Type Relationship Profile:

Reporting Hierarchy

Level 1:

Level 2:

Level 3:

Level 4:

Level 5:

2 - Successful view of TESTMERCHANT.

280 - Desktop bounds(0,0,961,697)

Acquirer Limit Profile and Acquirer/Instrument Type Relationship Profile used to set Merchant level limits.

Acquirer Transactions Profile used by Voice Authorization; overrides the Voice Auth Interface record

Merchant Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Configuration - TESTMERCHANT

Institution ID: BNK1 (FIRSTSTATEBANK) Merchant ID: TESTMERCHANT

Merchant Name: TEST MERCHANT Merchant Name (Locale): TestMerchant

Account Contact Information Contact Information (Locale) General Instrument Types Devices

Instrument Type	Merchant Program	Alternate Merchant ID	Acquiring Institution ID
MS - Maestro	Regular		

2 - Successful view of TESTMERCHANT.

280 - Desktop bounds(0,0,961,697)

Merchant Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Configuration - TESTMERCHANT

Institution ID: BNK1 (FIRSTSTATEBANK) Merchant ID: TESTMERCHANT

Merchant Name: TEST MERCHANT Merchant Name (Locale): TestMerchant

Account Contact Information Contact Information (Locale) General Instrument Types **Devices**

Channel ID	Channel Name	Channel Profile	Status	Origination Site Indicator	Home Site Indicator
UT_TEST_01		AAAA	New	L	H

Transfer Selected Devices to a Different Merchant ID

Institution ID: Select Merchant ID: Enter Submit Transfer

2 - Successful view of TESTMERCHANT.


280 - Desktop bounds(0,0,961,697)

Configuring Merchant Devices

- Each POS channel is configured in the Merchant Channel Configuration UI.
- Each POS channel configured in the database will be associated with a Merchant and a Merchant Channel Profile.
- Each Merchant Channel Profile will define the POS channel type (SPDH, Hypercom, APACS or AS2805).
- If the POS channel type is an SPDH, an SPDH device profile will also be configured.
- Hypercom will have an associated NAC and/or NMS profile.
Network Access Controller, Network Management System



Merchant Channel Profile Configuration

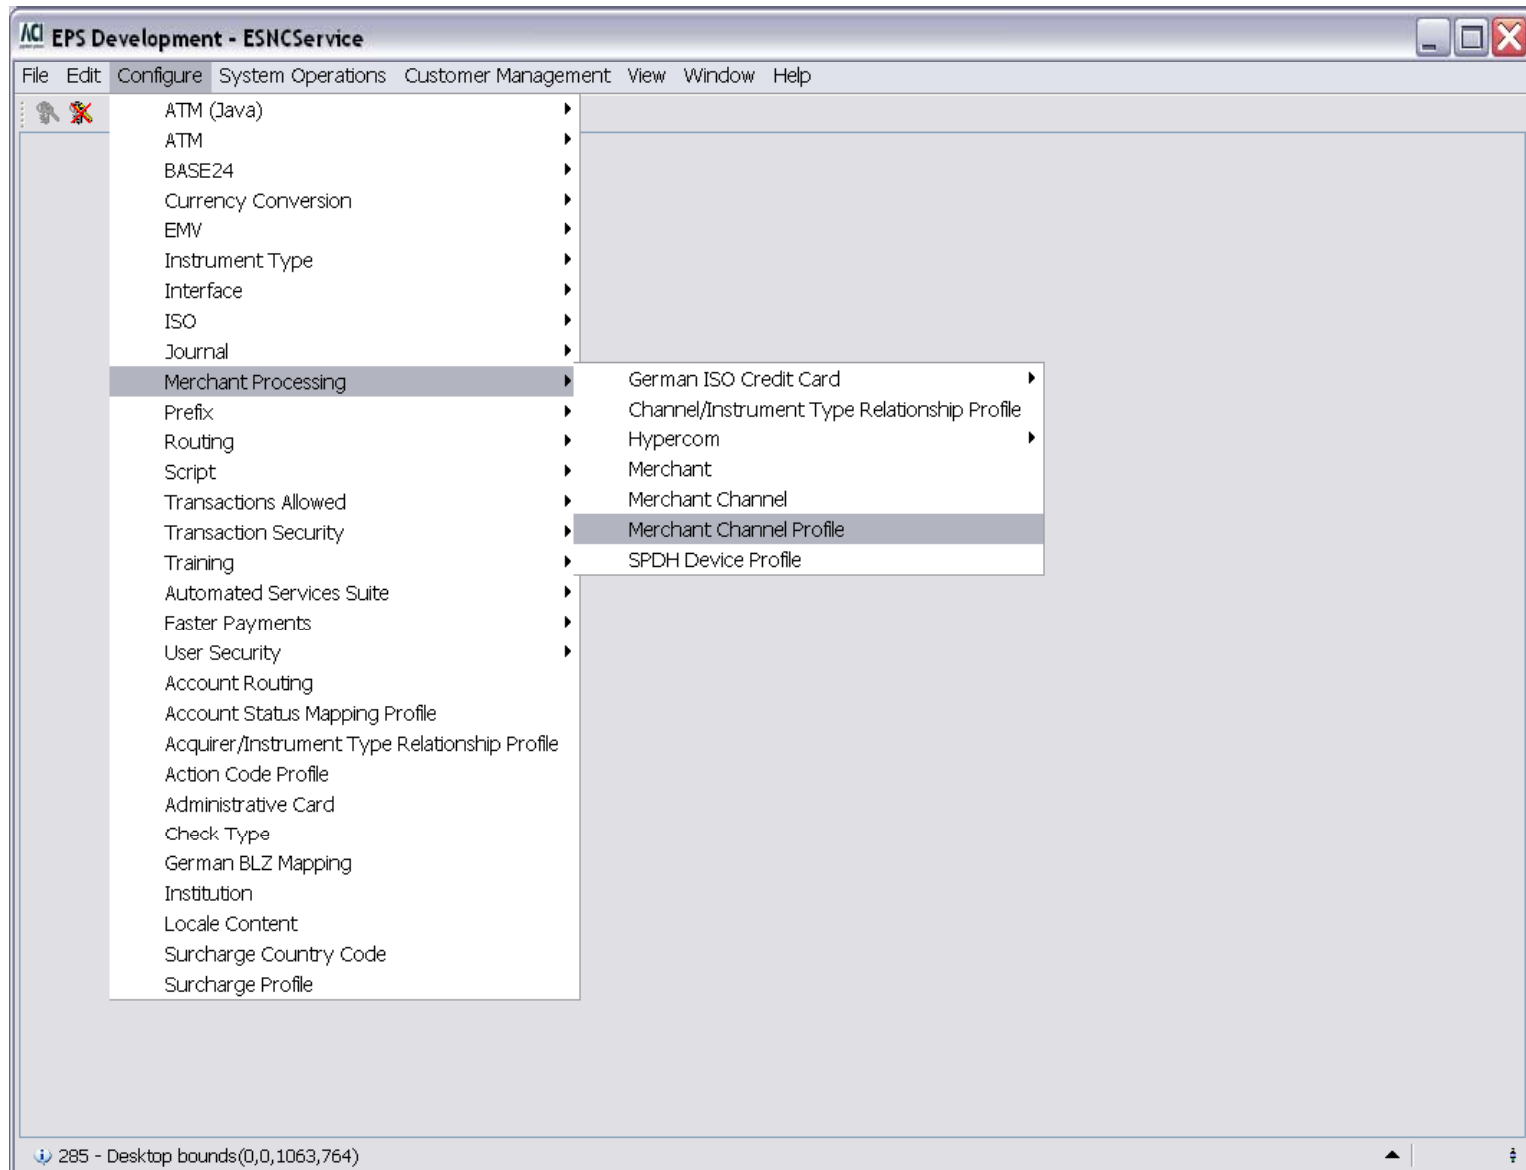

Merchant Channel Profile Configuration

The screenshot shows the 'Merchant Channel Profile Configuration - AAAA' window. The 'Device' tab is active, displaying the following fields:

- Channel Profile: AAAA
- Profile Description: AAA
- Device Protocol: SPDH (selected)
- Communication Protocol: Other
- Default Merchant Category Code: 0
- Default Preauthorization Hold: Time 0 Days

A red arrow points from the 'Device Protocol' dropdown to a list of options: Other, SPDH, APACS, Hypercom, AS2805, and GICC.

The 'Message Profile' tab is also visible, showing a list of options: Other, SPDH, APACS, Hypercom, AS2805, and GICC.

The status bar at the bottom indicates: 280 - Security Information - Last successful login: 7/11/11 7:53 AM

The Device Protocol field of the Merchant Channel profile configures support for various message formats. Based on that selection, the associated sub-tab on the Message Profile tab is activated.

Merchant Channel Profile Configuration

The screenshot displays the 'EPS Development - ESNService' application window. The main menu includes File, Edit, Configure, System Operations, Customer Management, View, Window, and Help. A toolbar with various icons is located below the menu. The primary window is titled 'Merchant Channel Profile Configuration - AAAA'. It features a toolbar with icons for file operations and a tabbed interface with the following tabs: Processing, Device (selected), Key Management, Balancing, Instrument Types, and Message Profile. The 'Device' tab contains the following configuration fields:

- Channel Profile: AAAA
- Profile Description: AAA
- PIN Capture Code: No PIN Capture (dropdown)
- Data Encrypt Type: No data encryption (dropdown)
- Approval Code Length: 6 (spin box)
- Response Time Limit (seconds): 15 (spin box)
- ☒ Complete Track Data Supported
- ☐ PIN Capable
- ☐ MAC Support
- ☐ Partial Authorizations Supported

A status bar at the bottom of the window shows the message: '2 - Successful view of AAAA.' The system tray at the bottom right indicates '280 - Security Information - Last successful login: 7/11/11 7:53 AM'.

Merchant Channel Profile Configuration

The screenshot shows a software window titled "EPS Development - ESNCService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Profile Configuration - AAAA" is open, displaying configuration options for a channel profile named "AAAA".

Channel Profile: Profile Description:

Processing | **Device** | Key Management | Balancing | Instrument Types | Message Profile

MAC Key Information

Usage Time Limit (minutes)	0
Transaction Count Limit	1
Consecutive Error Limit	6
Error Limit	6

PIN Key Information

Usage Time Limit (minutes)	0
Transaction Count Limit	n
Error Limit	2

Data Key Information

Usage Time Limit (minutes)	2
Transaction Count Limit	2
Error Limit	3

2 - Successful view of AAAA.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

Merchant Channel Profile Configuration

The screenshot shows a software window titled "EPS Development - ESNService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Profile Configuration - AAAA" is open, displaying configuration options for a channel profile named "AAAA".

At the top of the sub-window, there are two text fields: "Channel Profile" containing "AAAA" and "Profile Description" containing "AAA". Below these are several tabs: "Processing", "Device", "Key Management", "Balancing" (which is selected), "Instrument Types", and "Message Profile".

The "Balancing" tab contains the following settings:

- "Balance Transaction Type" is set to "Day Totals" via a dropdown menu.
- "Cutover Type" is set to "Merchant Forced" via a dropdown menu.
- "Implied Close" is set to "Not supported" via a dropdown menu.

Below these settings are two expandable sections:

- Supported Totals:** This section is expanded and shows a grid of checkboxes for "Batch", "Day", "Clerk", "Network", "Shift", and "Instrument Type". All checkboxes are currently unchecked.
- Journal Totals:** This section is collapsed and also shows a grid of checkboxes for "Batch", "Day", "Clerk", "Network", "Shift", and "Instrument Type".

At the bottom of the sub-window, a status bar displays the message: "2 - Successful view of AAAA." The main window's status bar at the very bottom shows: "280 - Security Information - Last successful login: 7/11/11 7:53 AM".

Merchant Channel Profile Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Channel Profile Configuration - AAAA

Channel Profile: AAAA Profile Description: AAA

Processing Device Key Management Balancing Instrument Types Message Profile

Instrument Type	Capture Mode	Instrument Type Totals Indicator	Balance Returned Indicator
AB - AB			☐
AC - American Express Corp			
AD - Administrative			
AF - Armed Forces Financial			
AG - American Express Gold			
AN - American Express Cent.			
AO - American Express Optir			
AP - American Express Persc			

AB - AB

AC - American Express Corp

AD - Administrative

AF - Armed Forces Financial

AG - American Express Gold

AN - American Express Cent.

AO - American Express Optir

AP - American Express Persc

Channel determines capture mode for each transaction

Authorize Only

Authorize and Capture

Keep Totals In Relation Table

Keep Totals In Channel Record

280 - Security Information - Last successful login: 7/11/11 7:53 AM

Merchant Channel Profile Configuration

The screenshot shows the 'Merchant Channel Profile Configuration - AAAA' window. At the top, the 'Channel Profile' is set to 'AAAA' and the 'Profile Description' is 'AAA'. Below this are tabs for 'Processing', 'Device', 'Key Management', 'Balancing', 'Instrument Types', and 'Message Profile'. The 'Message Profile' tab is active, showing sub-tabs for 'SPDH', 'APACS', 'Hypercom', and 'AS2805'. The 'SPDH' sub-tab is selected, displaying a list of configuration options: 'Override Channel Date/Time' (checked), 'SPDH Profile' (SPDH01-PRFL-1), 'Reversal Response' (No), 'Totals Type' (Draft), 'Channel Processing Mode' (Single-threaded), 'Maximum Response Message Length' (b), and 'Interac Acquirer Route Profile'. A status bar at the bottom indicates '2 - Successful view of AAAA.' and '280 - Security Information - Last successful login: 7/11/11 7:53 AM'.

ACI EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Channel Profile Configuration - AAAA

Channel Profile AAAA Profile Description AAA

Processing Device Key Management Balancing Instrument Types Message Profile

SPDH APACS Hypercom AS2805

☒ Override Channel Date/Time

SPDH Profile SPDH01-PRFL-1

Reversal Response No

Totals Type Draft

Channel Processing Mode Single-threaded


Maximum Response Message Length b

Interac Acquirer Route Profile

2 - Successful view of AAAA.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

SPDH Device Profile Configuration

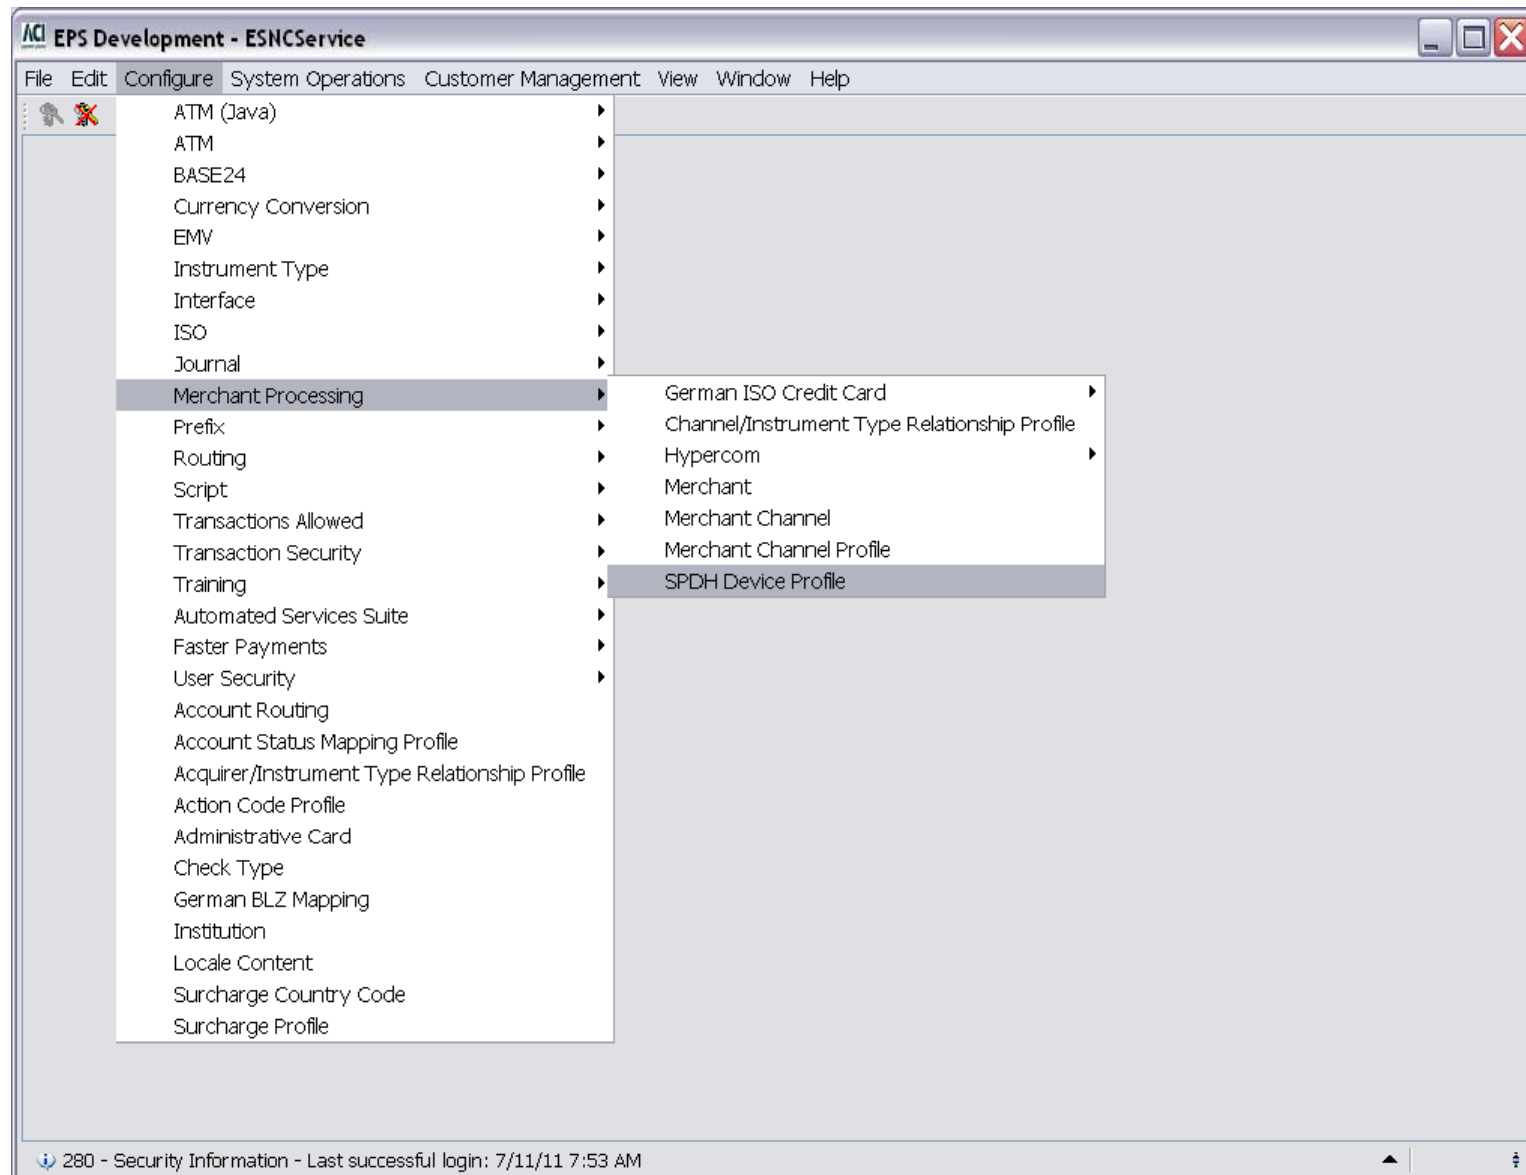

SPDH Device Profile Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI SPDH Device Profile Configuration - SPDH01-PRFL-1

SPDH Profile: SPDH01-PRFL-1

SPDH Response Code Alternate Descriptions Transaction Code Alternate Descriptions

Message Configuration Optional Response Data

Set Unvalued FIDs in Inserted Response Rows to Conditional

Transaction Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	a	t
00 Normal purchase		R	M								R																	
<-- response					C																							
01 Preauthorization purc...		R									R																	
<-- response					C																							
02 Preauthorization purc...		R	R								R					R												
<-- response					C																							
03 Mail or telephone order		R									R																	
<-- response					C																							

Configured FIDs for the Selected Row (view only)

00 Normal purchase (request row selected)

Request: B=R, C=M, K=R, d=R, q=R

Response: F=C, g=R

2 - Successful view of SPDH01-PRFL-1.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

SPDH Device Profile Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI SPDH Device Profile Configuration - SPDH01-PRFL-1

SPDH Profile: SPDH01-PRFL-1

SPDH Response Code Alternate Descriptions

Transaction Code Alternate Descriptions

Message Configuration

Optional Response Data

SPDH Response Code: 000 Approved balances available

Available Fields Identifiers

- A - Address
- B - Amount 1
- C - Amount 2
- D - Appl Acct Type
- E - Appl Acct Number
- F - Approval Code
- G - Authen. Code
- H - Authen. Key
- I - Data Key
- J - Avail Bal

Fields in SPDH Response Code Buffer

- Z - Addr Verify Stat

2 - Successful view of SPDH01-PRFL-1.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

SPDH Device Profile Configuration

ACS EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

ACS SPDH Device Profile Configuration - SPDH01-PRFL-1

SPDH Profile: SPDH01-PRFL-1

Message Configuration		Optional Response Data		
SPDH Response Code Alternate Descriptions		Transaction Code Alternate Descriptions		
SPDH Response Code	English	French	Spanish	
000 Approved balances available				
001 Approved no balances available	APPROVED NO BA...	APPROVED NO BA...		
002 Approved country club status	APPROVED COUN...	APPROVED COUN...		
003 Approved (maybe more identification is requ...				
004 Approved pending identification (sign paper ...				
005 Approved blind				
006 Approved VIP status				
007 Approved administrative transaction	APPROVED ADMIN...			
008 Approved negative card file hit OK				
009 Approved commercial status				
050 General				
051 Expired card				
052 Number of PIN tries exceeded				
053 No sharing allowed				
054 No security module				
055 Invalid transaction				
056 Transaction not supported by institution				
057 Lost or stolen card				
058 ...				

2 - Successful view of SPDH01-PRFL-1.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

SPDH Device Profile Configuration

The screenshot displays the 'ACI SPDH Device Profile Configuration - SPDH01-PRFL-1' window. The 'Message Configuration' tab is active, showing a table of transaction codes and their alternate descriptions in English, French, and Spanish. The table includes 17 rows of transaction codes, each with a corresponding English description and alternate descriptions in French and Spanish. The status bar at the bottom indicates '280 - Security Information - Last successful login: 7/11/11 7:53 AM'.

SPDH Profile: SPDH01-PRFL-1

Message Configuration

SPDH Response Code Alternate Descriptions

Transaction Code	English	French	Spanish
00 Normal purchase	PURCHASE		
01 Preauthorization purchase	PRE-AUTH PURCH...		
02 Preauthorization purchase completion	PRE-AUTH PURCH...		
03 Mail or telephone order	MAIL/TELEPHONE ...		
04 Merchandise return	REFUND		
05 Cash advance	CASH ADVANCE		
06 Card verification	CARD VERIFICATI...		
07 Balance inquiry	BALANCE ENQUIRY		
08 Purchase with cash back	PURCHASE WITH ...		
09 Check verification	CHECK VERIFICAT...		
10 Check guarantee	CHECK GUARANTEE		
11 Purchase adjustment	PURCHASE ADJUS...		
12 Merchandise return adjustment	REFUND ADJUST...		
13 Cash advance adjustment	CASH ADVANCE ADJ		
14 Cash back adjustment	CASH BACK ADJ		
15 Card activation			
16 Additional card activation			
17 Replenishment			

2 - Successful view of SPDH01-PRFL-1.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

APACS Device Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Channel Profile Configuration

Channel Profile: Enter Profile Description:

Processing Device Key Management Balancing Instrument Types **Message Profile**

SPDH APACS Hypercom AS2805

Confirmation for

Authorization: Not Required

Financial: Not Required

Reconciliation: Not Required

Message Holds

Indicator: Not Used

Time limit before first message issued (seconds): 30

Time interval between messages (seconds): 120

Floor limit for online authorization

Amount: 0 Action: Don't send

Floor limit for online authorization failure

Amount: 0 Action: Don't send

280 - Security Information - Last successful login: 7/11/11 7:53 AM

Hypercom Device Configuration

The screenshot displays the 'ACI Merchant Channel Profile Configuration' window. The main window is titled 'EPS Development - ESNCService' and has a menu bar with 'File', 'Edit', 'Configure', 'System Operations', 'Customer Management', 'View', 'Window', and 'Help'. The configuration window has a toolbar with icons for file operations and a tabbed interface. The 'Message Profile' tab is selected, showing a 'Channel Profile' field with the value 'Enter' and a 'Profile Description' field. Below the tabs, there are four sub-tabs: 'SPDH', 'APACS', 'Hypercom', and 'AS2805'. The 'Hypercom' sub-tab is active, displaying a 'Journal Terminal Statistics Indicator' checkbox and two dropdown menus for 'NMS Profile' and 'NAC Profile'. The status bar at the bottom indicates '280 - Security Information - Last successful login: 7/11/11 7:53 AM'.

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Channel Profile Configuration

Channel Profile Enter Profile Description

Processing Device Key Management Balancing Instrument Types Message Profile

SPDH APACS Hypercom AS2805

Journal Terminal Statistics Indicator ☐

NMS Profile

NAC Profile

280 - Security Information - Last successful login: 7/11/11 7:53 AM

AS2805 Device Configuration

The screenshot shows a software window titled "ACI EPS Development - ESNCService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "ACI Merchant Channel Profile Configuration" is open, featuring its own toolbar and tabs: Processing, Device, Key Management, Balancing, Instrument Types, and Message Profile. The "Device" tab is active, showing a "Channel Profile" field with the value "Enter" and a "Profile Description" field. Below these are tabs for "SPDH", "APACS", "Hypercom", and "AS2805", with "AS2805" selected. The configuration area includes a checkbox for "Roll KEK2 if KEK1 Verification Fails" (unchecked) and a "Key Management Scheme" dropdown menu set to "AS2805 6.4". A status bar at the bottom indicates "280 - Security Information - Last successful login: 7/11/11 7:53 AM".

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Channel Profile Configuration

Channel Profile Enter Profile Description

Processing Device Key Management Balancing Instrument Types Message Profile


SPDH APACS Hypercom AS2805

Roll KEK2 if KEK1 Verification Fails ☐


Key Management Scheme AS2805 6.4

280 - Security Information - Last successful login: 7/11/11 7:53 AM

Acquirer/Instrument Type Relationship Profile

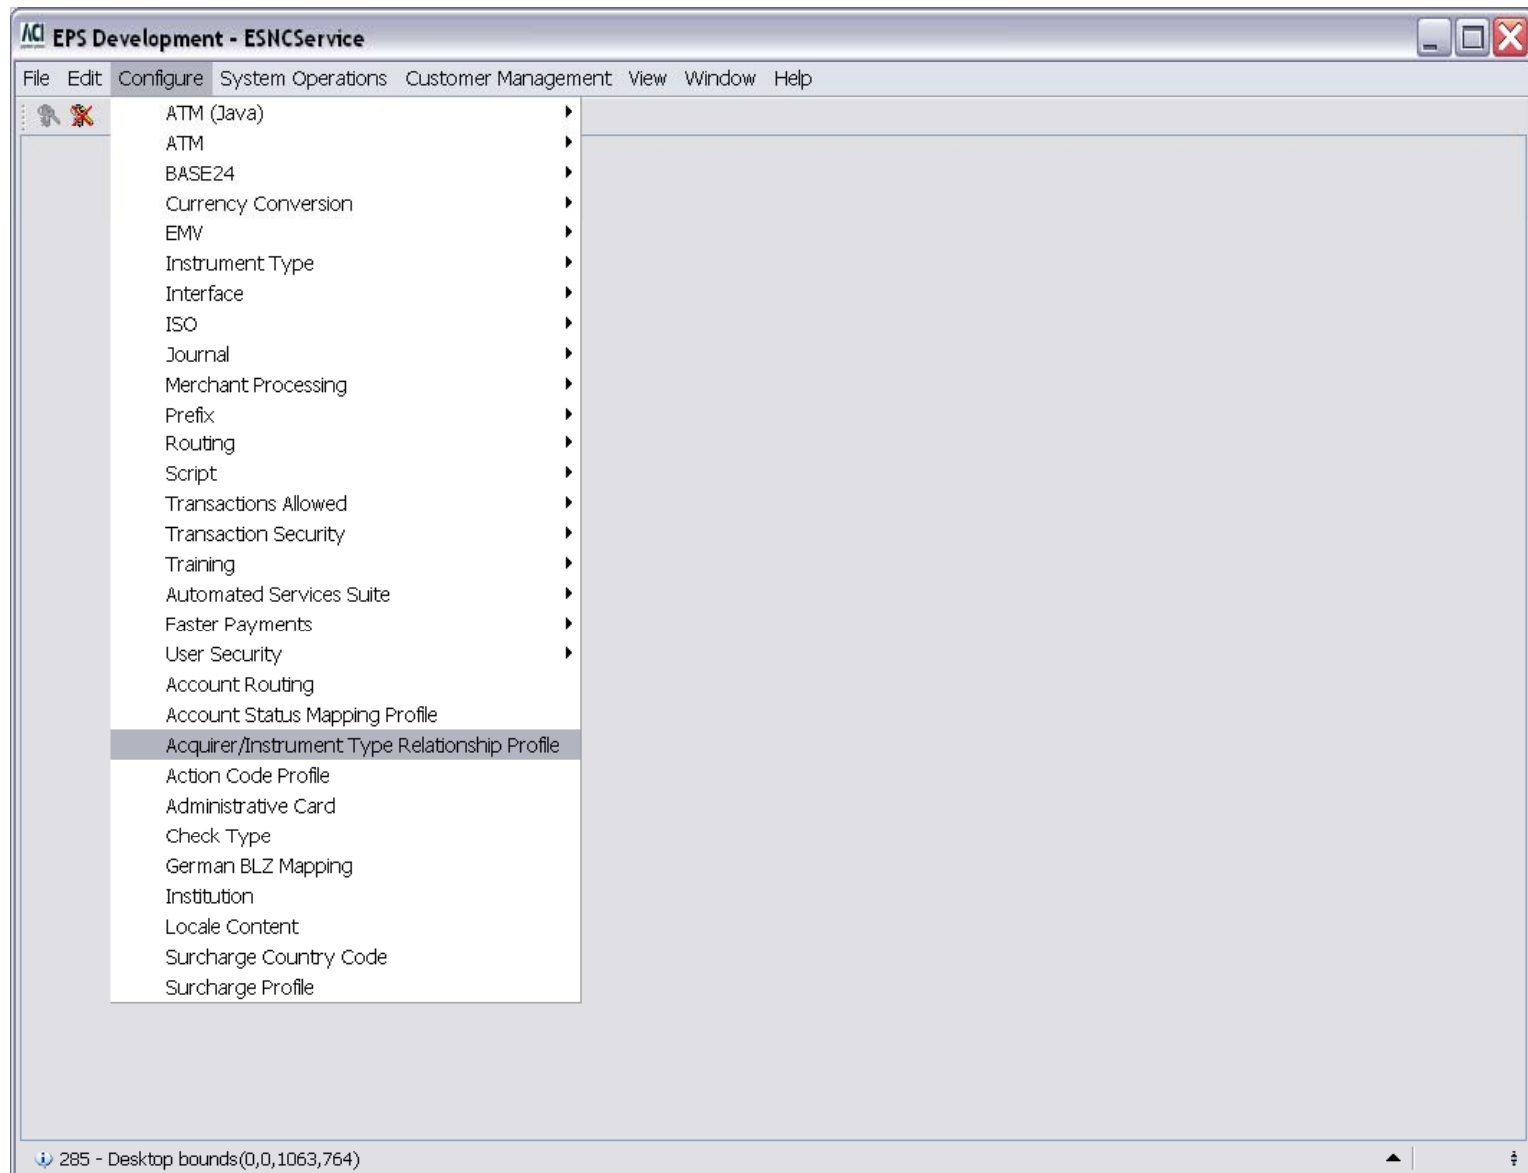

Acquirer/Instrument Type Relationship Profile

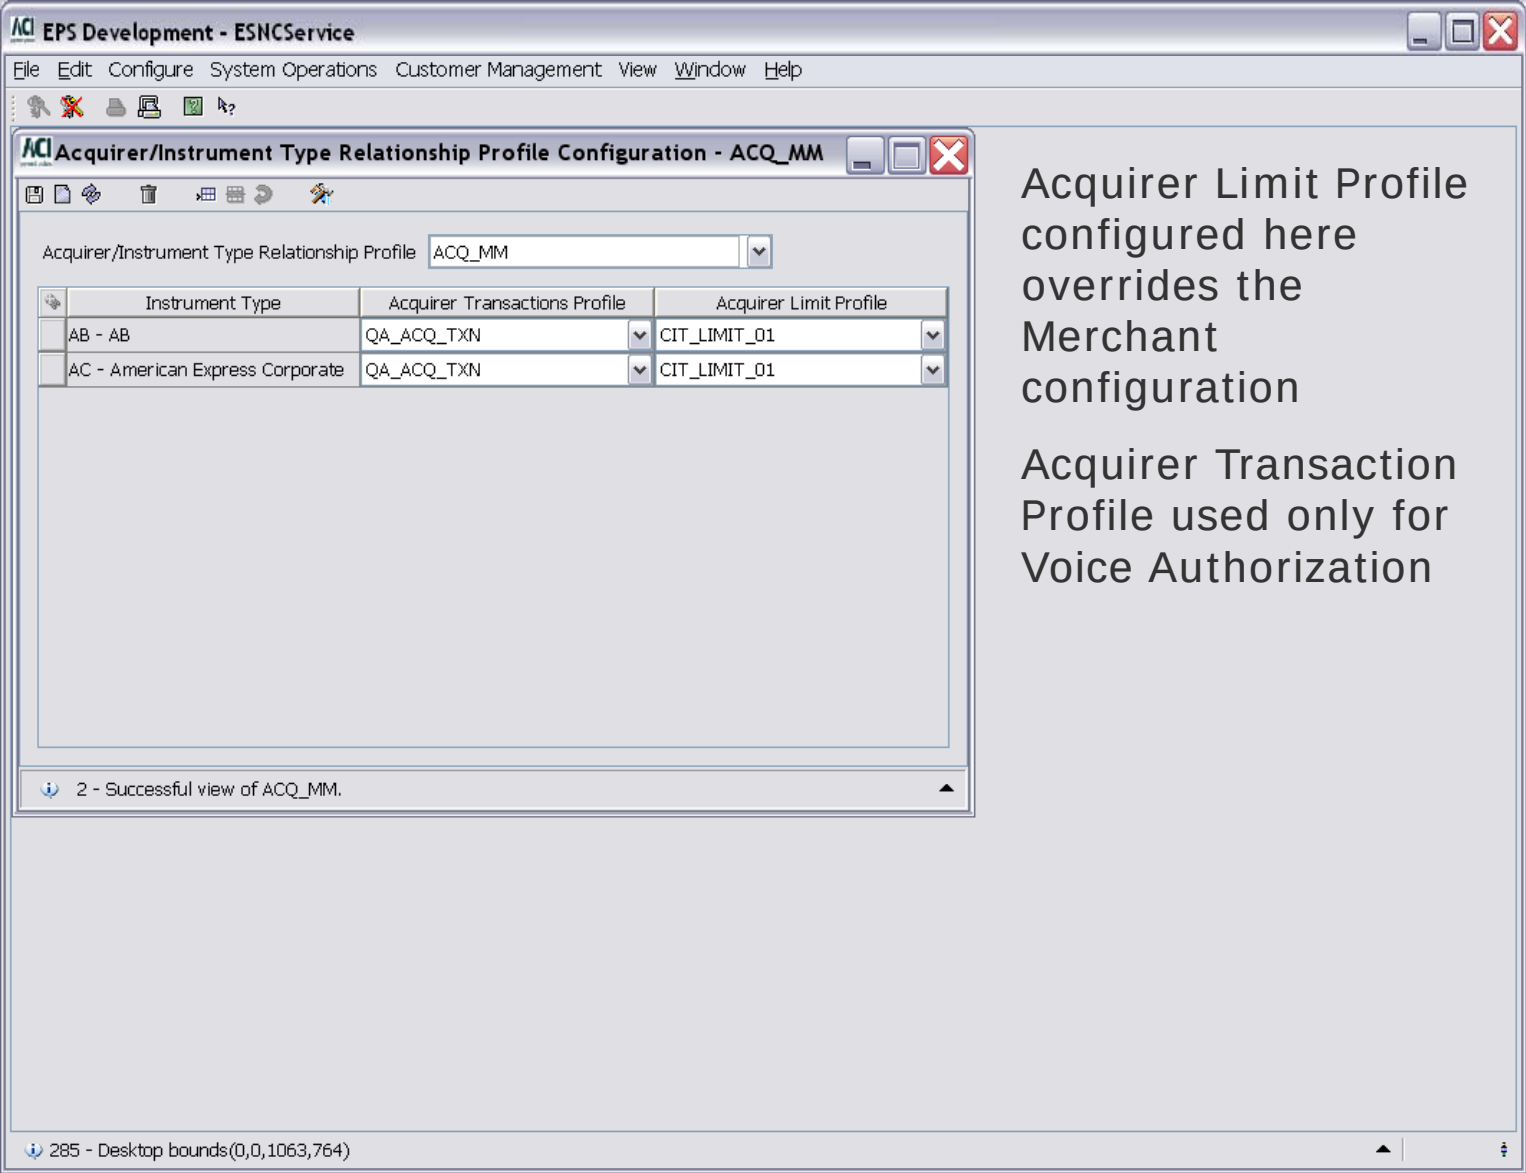

The screenshot displays the ACI EPS Development - ESNCService application. The main window is titled "Acquirer/Instrument Type Relationship Profile Configuration - ACQ_MM". It features a menu bar with options: File, Edit, Configure, System Operations, Customer Management, View, Window, and Help. Below the menu bar is a toolbar with various icons. The main content area shows a dropdown menu for "Acquirer/Instrument Type Relationship Profile" set to "ACQ_MM". Below this is a table with three columns: "Instrument Type", "Acquirer Transactions Profile", and "Acquirer Limit Profile". The table contains two rows of data. At the bottom of the window, a status bar indicates "2 - Successful view of ACQ_MM."

Instrument Type	Acquirer Transactions Profile	Acquirer Limit Profile
AB - AB	QA_ACQ_TXN	CIT_LIMIT_01
AC - American Express Corporate	QA_ACQ_TXN	CIT_LIMIT_01

Acquirer Limit Profile configured here overrides the Merchant configuration

Acquirer Transaction Profile used only for Voice Authorization

285 - Desktop bounds(0,0,1063,764)

Channel Limit Profile

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

Card
Card Block
Check
Limit Profile
Positive Balance
Preauthorization Hold
Prefix Block
Stop Payment
Usages

ACI Merchant Channel Configuration

Channel ID Enter Merchant ID
Channel Name Channel Profile
Institution ID
Merchant Name Merchant Name (Locale)

Key Management Clerk Accumulators Instrument Totals Device Inventory EMV
Status Processing Terminal Information Terminal Information (Locale) Returns/Adjustments


Manufacturer/Model Not Specified
Currency Code USD (840)
Language Table Language ta...
Merchant Category Code
Capture Mode Authorize only
Time Offset From Processor (hrs:mins) 00:00
Action Code Profile
Source Routing Profile
Acquirer Transactions Profile
ISO Transaction Mapping Profile
Channel Limit Profile
Channel/Instrument Type Relationship Profile

Point of Service Data
Contact Card Data Input Capability Magnetic Str...
Contactless Card Data Input Capability None (conta...
Card Data Output Capability Unknown
Cardholder Authentication Capability Off
Card Capture Supported None
POS Condition Code Unattended ...
Cardholder Present Indicator Cardholder ...
Card Present Indicator Card present
Terminal Output Capability Printing and ...

{none}
CDH_LIMIT_PRFL
DEFAULT_LIMITS
DEP_CR_LMT_EX1
DEP_CR_LMT_EX2
DEP_CR_LMT_EX3
DEP_CR_LMT_EX4
DEP_CR_LMT_EX5

298 - Desktop bounds(0,0,1082,775)

Channel Limit Profile

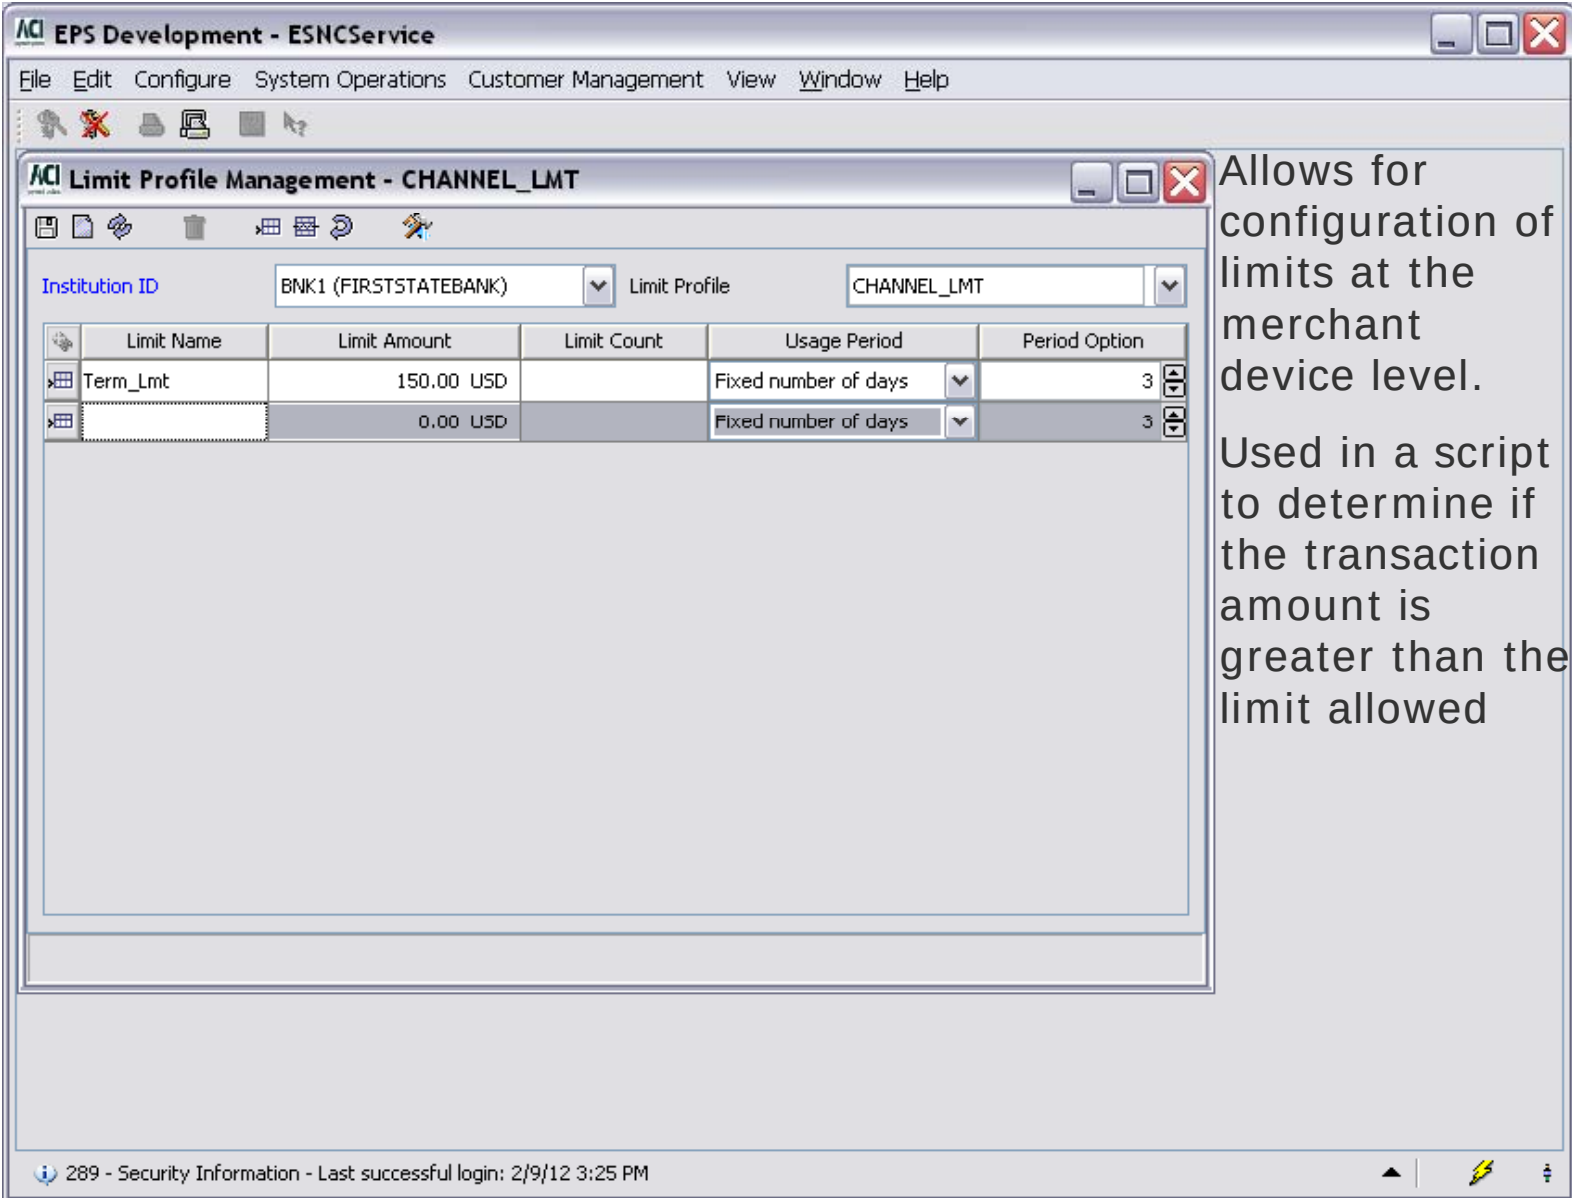

ACI EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

ACI Limit Profile Management - CHANNEL_LMT

Institution ID: BNK1 (FIRSTSTATEBANK) Limit Profile: CHANNEL_LMT


Limit Name	Limit Amount	Limit Count	Usage Period	Period Option
Term_Lmt	150.00 USD		Fixed number of days	3
	0.00 USD		Fixed number of days	3

289 - Security Information - Last successful login: 2/9/12 3:25 PM

Allows for configuration of limits at the merchant device level.

Used in a script to determine if the transaction amount is greater than the limit allowed

Action Code Profile

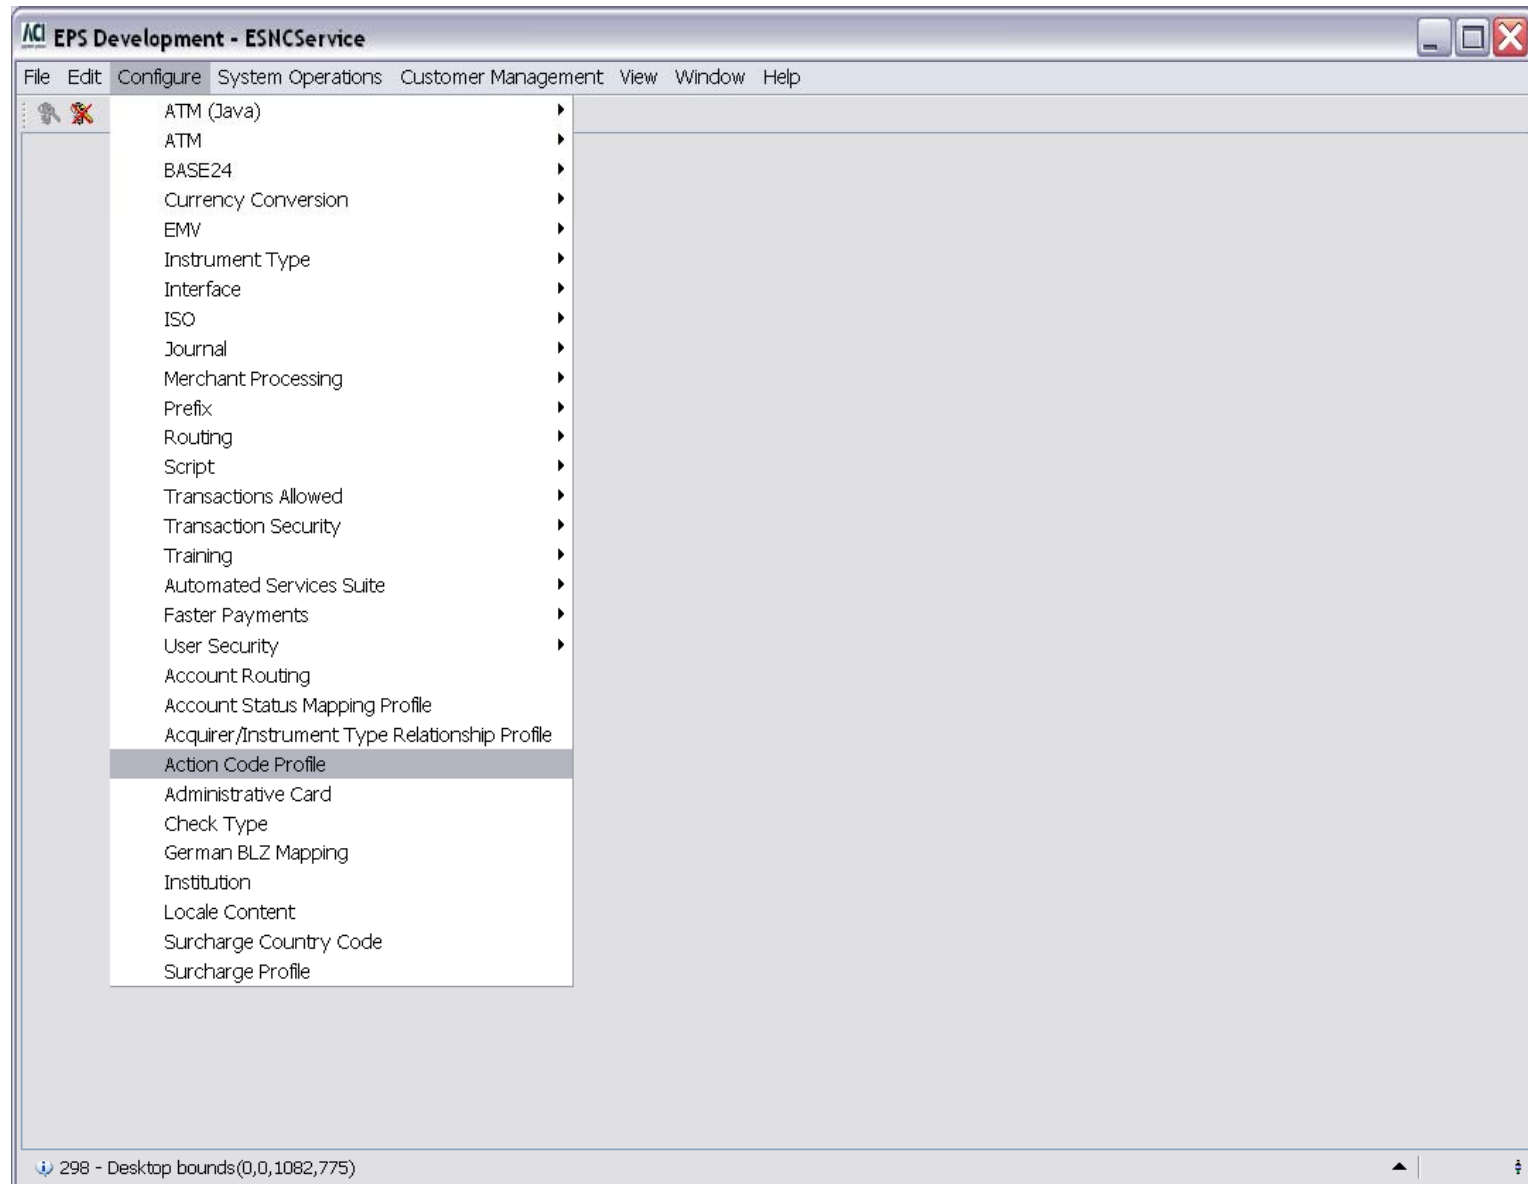

Action Code Profile

ACI EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

ACI Action Code Profile Configuration - SPDH-ACT-PRFL

Action Code Profile: SPDH-ACT-PRFL


Inbound Mapping Outbound Mapping

External Action Code	External Action Code Description	External Action Code Description (Locale)	Internal Action Code
000	APPROVED WITH BALANCES		000 Approved
001	APPROVED NO BALANCES AVAI...		000 Approved
002	APPROVED COUNTRY CLUB STA...		000 Approved
003	APPROVED (MORE ID MAY BE R...		001 Honor with identification
004	APPROVED PENDING ID (SIGN P...		001 Honor with identification
005	APPROVED BLIND		000 Approved
006	APPROVED VIP STATUS		003 Approved (VIP)
007	APPROVED ADMIN TRANSACTION		600 Administrative transacti...
008	APPROVED NEG CARD FILE HIT ...		000 Approved
009	APPROVED COMMERCIAL STAT...		000 Approved
010	APPROVED FOR A LESSER AMO...		002 Approved for partial a...
050	GENERAL		100 Deny, do not honor
051	EXPIRED CARD		101 Deny, expired Card
052	PIN TRIES EXCEEDED		106 Deny, allowable PIN tri...
053	NO SHARING ALLOWED		905 Acquirer not supported ...
054	NO SECURITY MODULE		921 Security software/hard...


2 - Successful view of SPDH-ACT-PRFL.

298 - Desktop bounds(0,0,1082,775)


Source Routing Profile

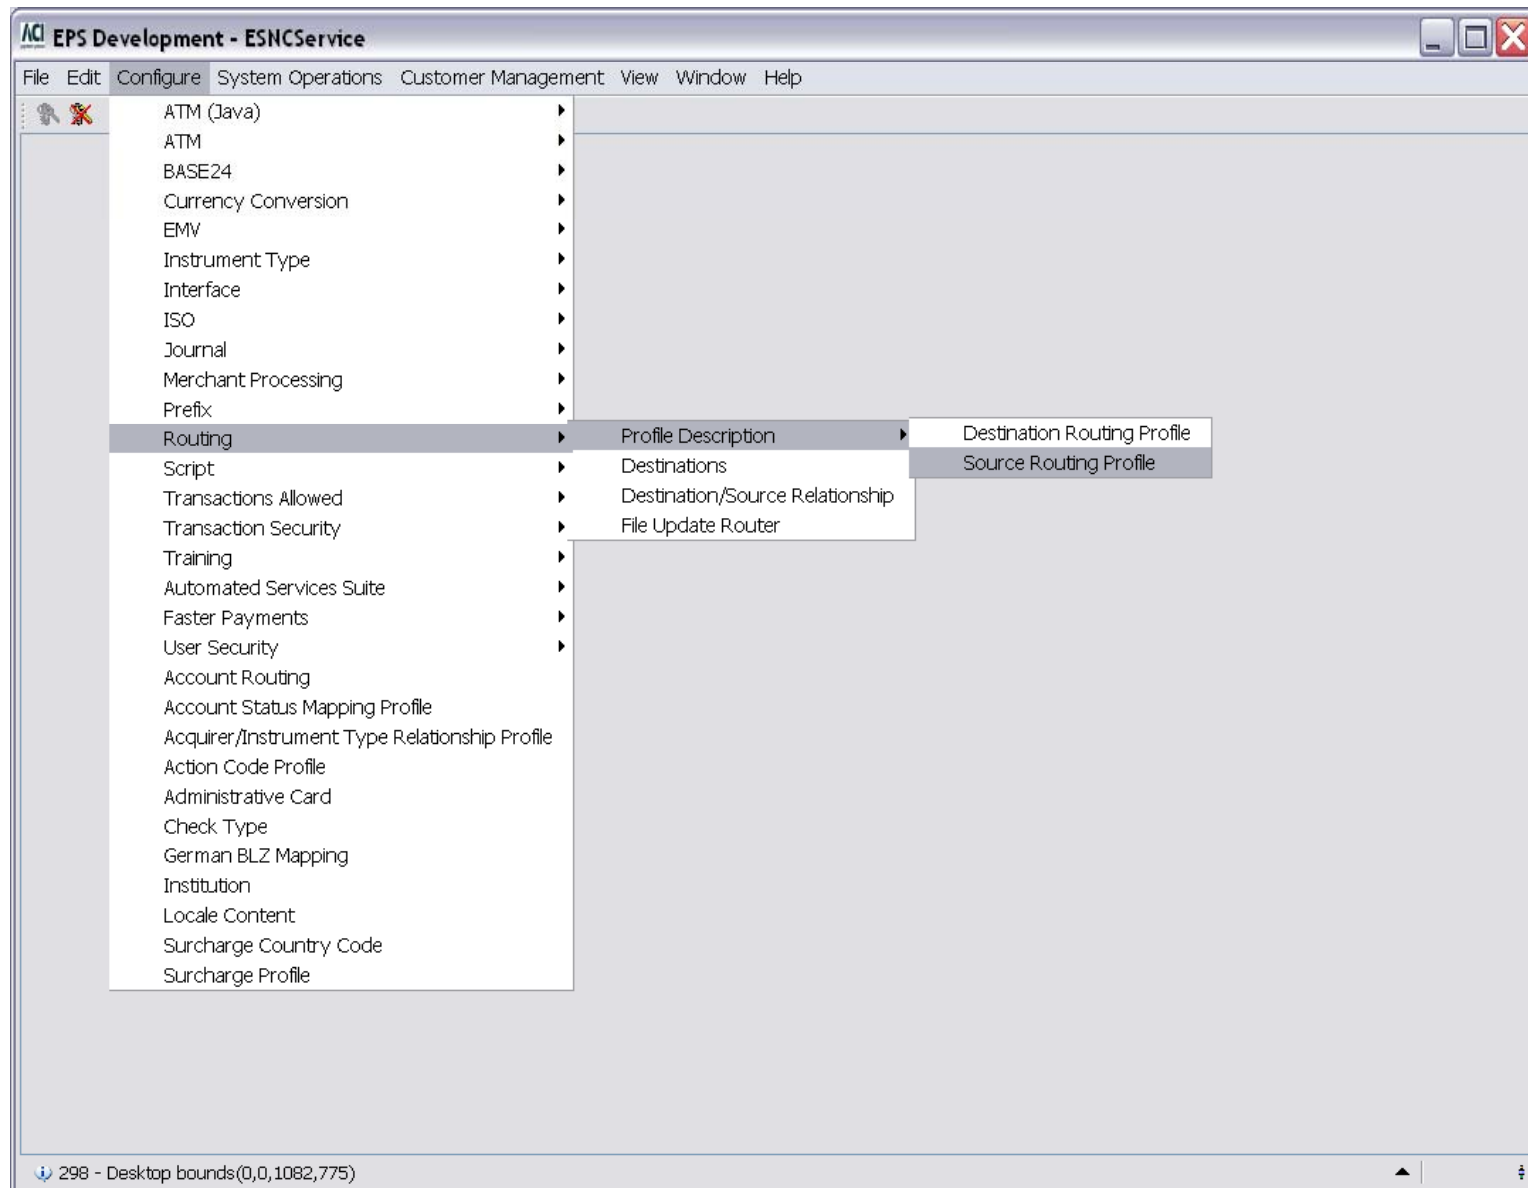

Source Routing Profile

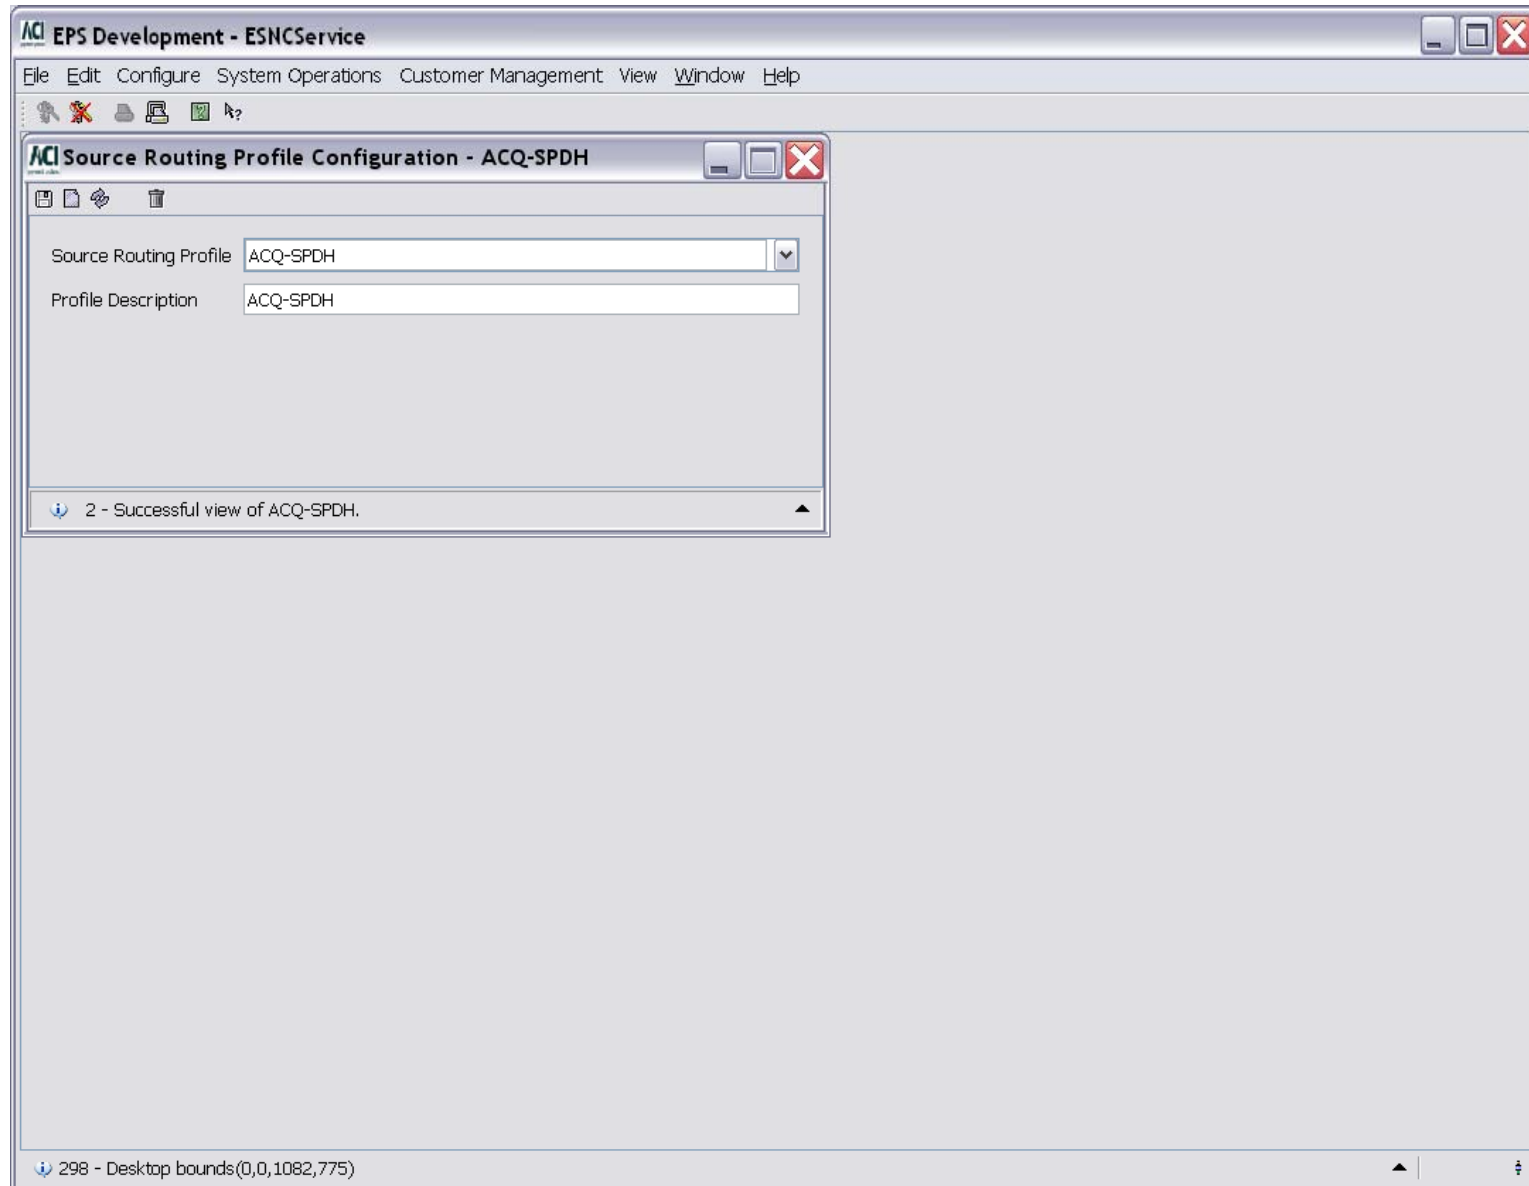

Acquirer Transaction Profile

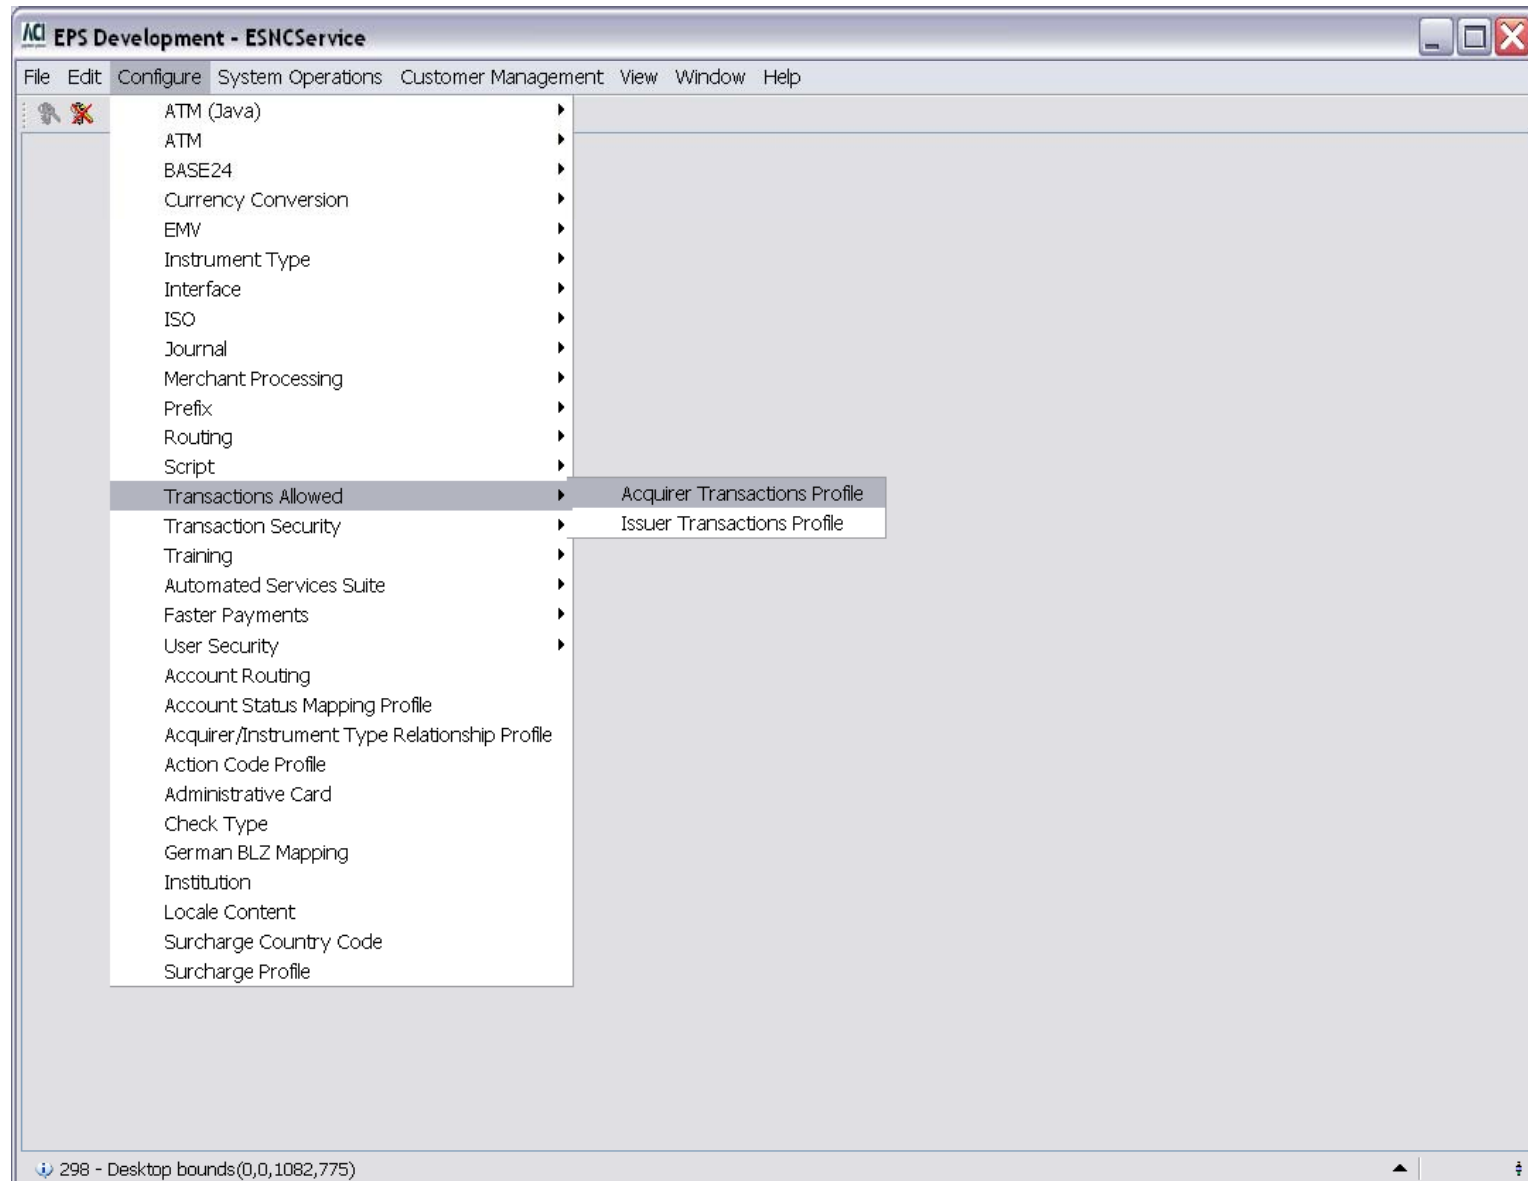

Acquirer Transaction Profile

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Acquirer Transactions Allowed Profile Configuration - QA_ACQ_TXN


Acquirer Transactions Profile QA_ACQ_TXN

Message Category	BASE24-eps Processing Code			Admin Card Required	On-Us
	Transaction Code	Account Type 1	Account Type 2		
Authorization	00 (Purchase)	10 (Savings)	00 (Default/None)	☐	Internationally
Authorization	00 (Purchase)	20 (Checking)	00 (Default/None)	☐	Internationally
Authorization	00 (Purchase)	30 (Credit)	00 (Default/None)	☐	Internationally
Authorization	00 (Purchase)	40 (Universal Account)	00 (Default/None)	☐	Internationally
Authorization	01 (Withdrawal/Cash ...)	00 (Default/None)	00 (Default/None)	☐	Internationally
Authorization	01 (Withdrawal/Cash ...)	10 (Savings)	00 (Default/None)	☐	Internationally
Authorization	01 (Withdrawal/Cash ...)	20 (Checking)	00 (Default/None)	☐	Internationally
Authorization	01 (Withdrawal/Cash ...)	30 (Credit)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	00 (Default/None)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	10 (Savings)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	20 (Checking)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	30 (Credit)	00 (Default/None)	☐	Internationally
Authorization	03 (Check Guarantee)	00 (Default/None)	00 (Default/None)	☐	Internationally
Authorization	09 (Purchase with Cas...)	00 (Default/None)	00 (Default/None)	☐	Internationally
Authorization	09 (Purchase with Cas...)	10 (Savings)	00 (Default/None)	☐	Internationally
Authorization	09 (Purchase with Cas...)	20 (Checking)	00 (Default/None)	☐	Internationally

2 - Successful view of QA_ACQ_TXN.

298 - Desktop bounds(0,0,1082,775)

ISO Transaction Mapping Profile

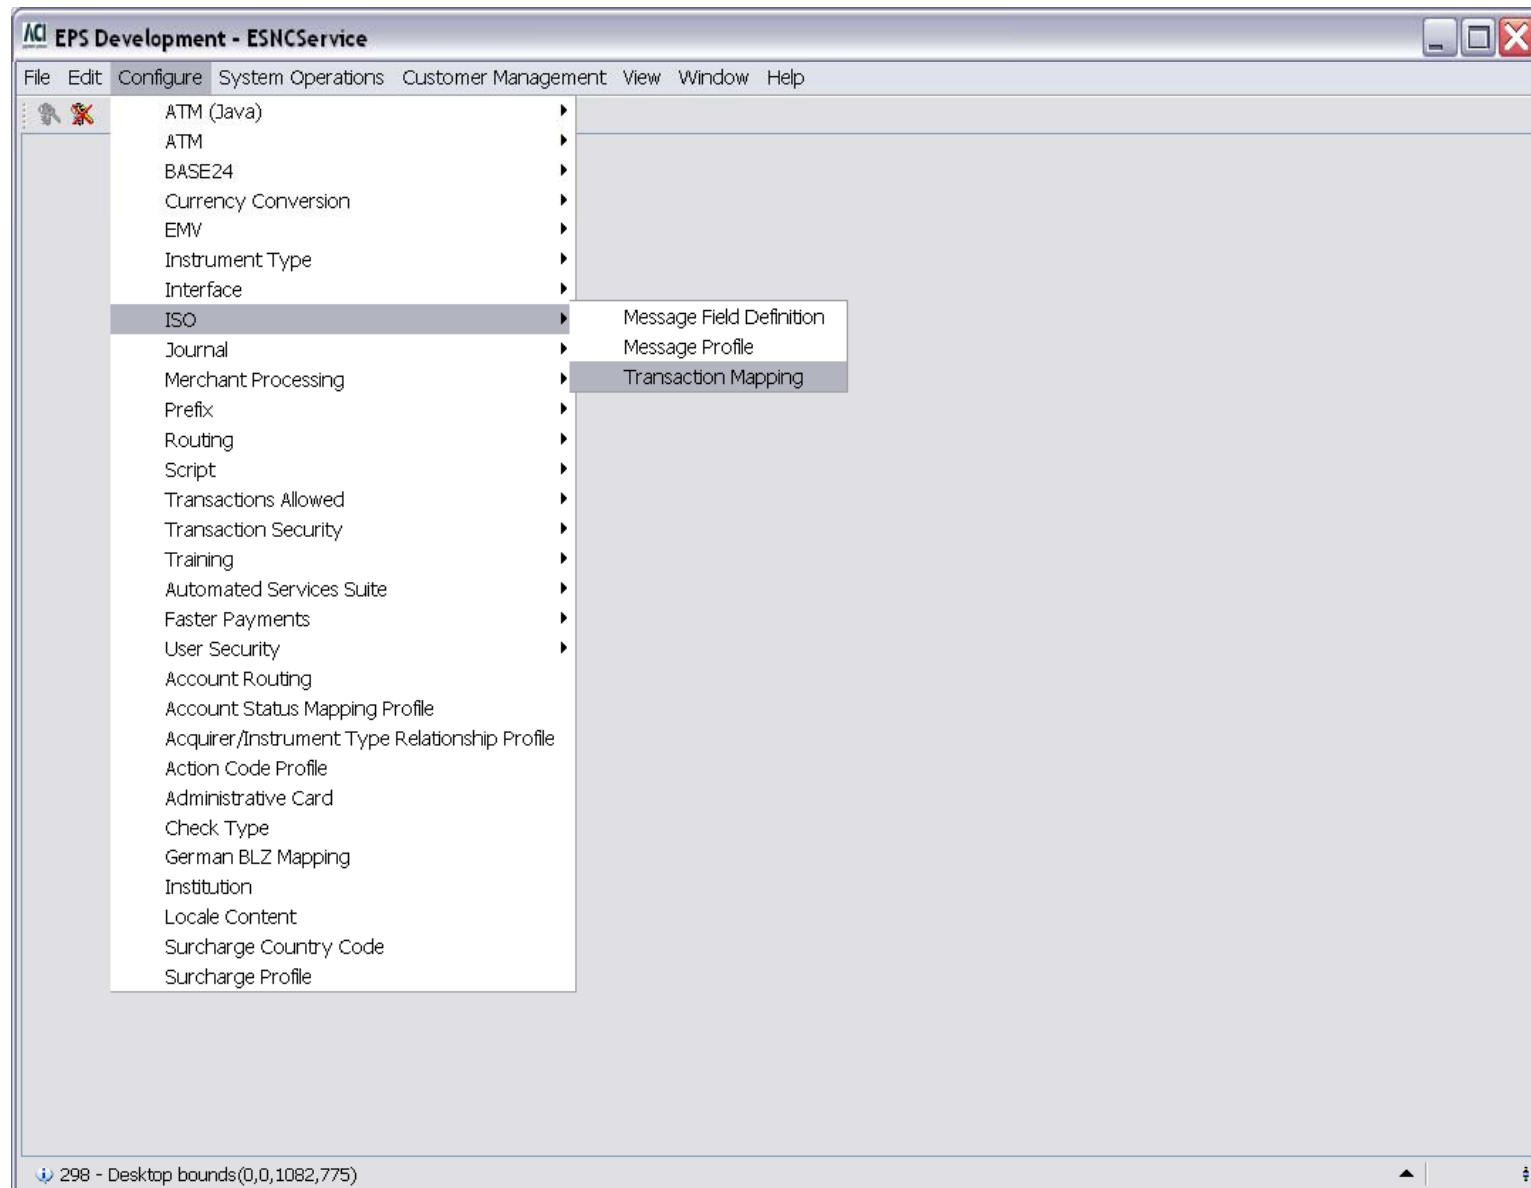


ISO Transaction Mapping Profile

ISO Transaction Mapping Profile: MRCH87_PC_PRFL


2 - Successful view of MRCH87_PC_PRFL.

External Processing Code	External Subtype Token	BASE24-eps Processing Code		
		Transaction Code	Account Type 1	Account Type 2
000000		00 (Purchase)	00 (Default/None)	00 (Default/None)
001000		00 (Purchase)	10 (Savings)	00 (Default/None)
002000		00 (Purchase)	20 (Checking)	00 (Default/None)
011000		01 (Withdrawal/Cash ...)	10 (Savings)	00 (Default/None)
012000		01 (Withdrawal/Cash ...)	20 (Checking)	00 (Default/None)
092000		09 (Purchase with Ca...)	20 (Checking)	00 (Default/None)
312000		31 (Balance Inquiry)	20 (Checking)	00 (Default/None)
402000		40 (Transfer)	20 (Checking)	00 (Default/None)
960000		90 (PIN Select/Change)	00 (Default/None)	00 (Default/None)

Channel/Instrument Type Relationship Profile

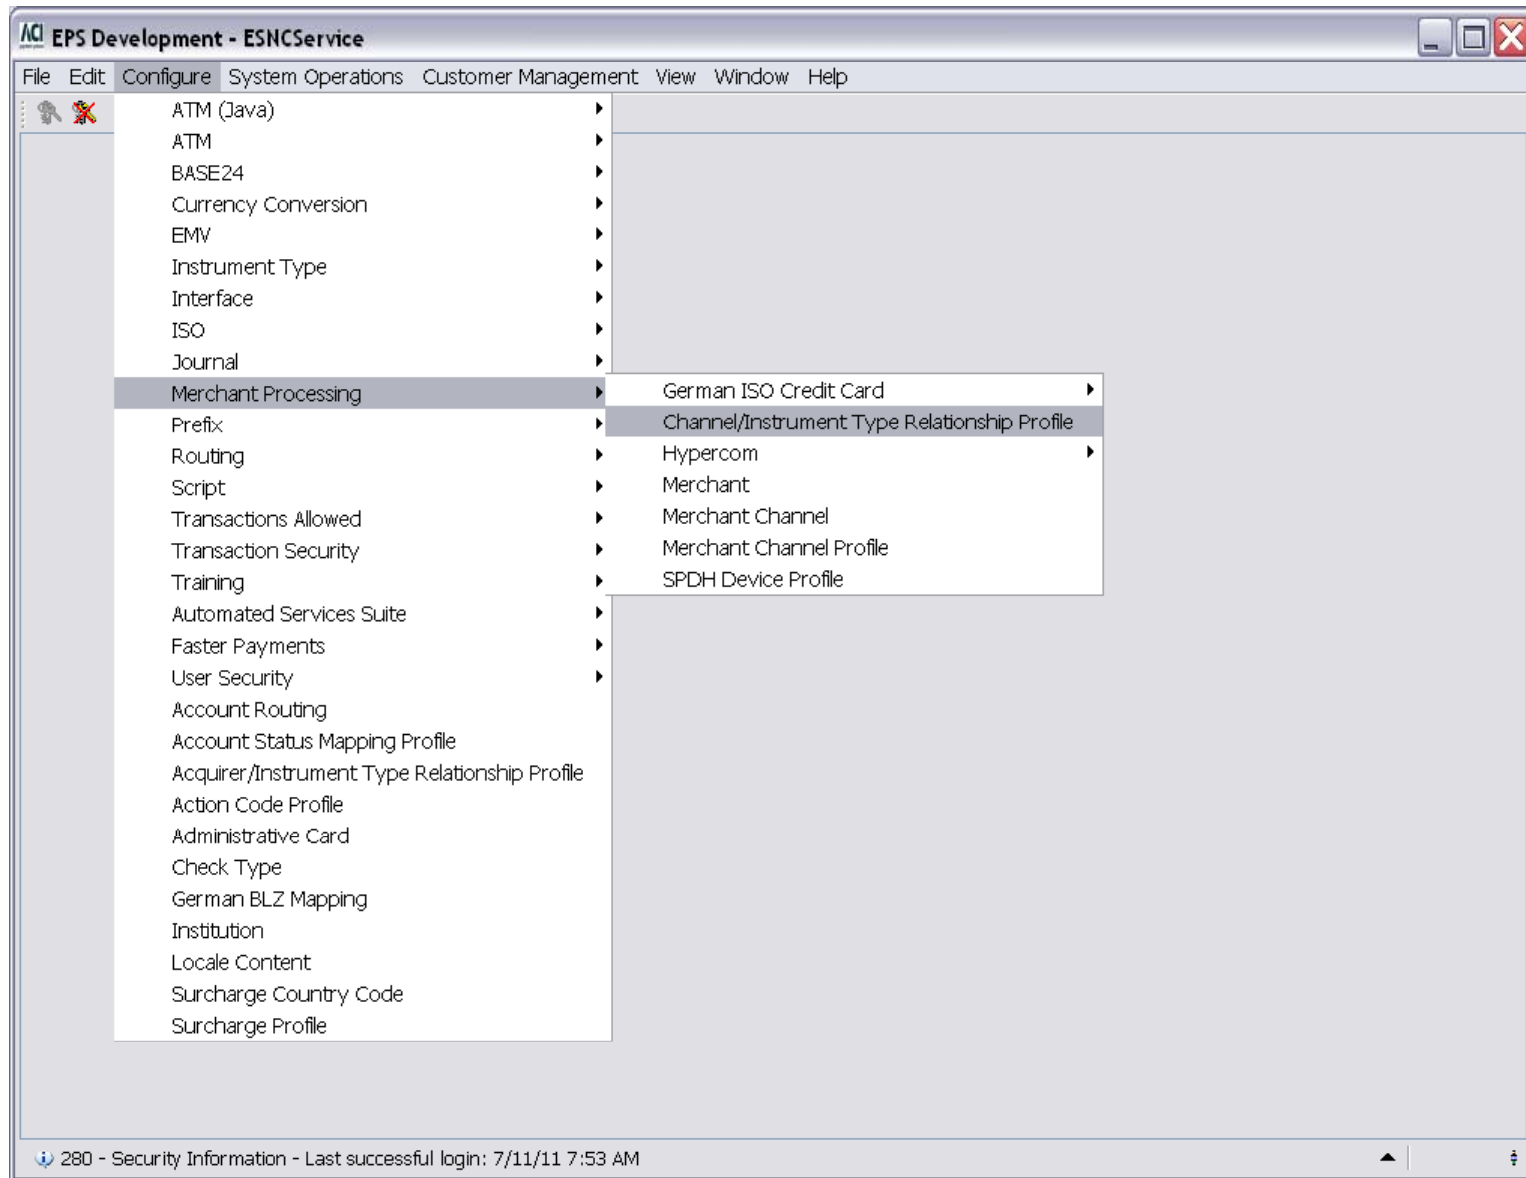

Channel/Instrument Type Relationship Profile

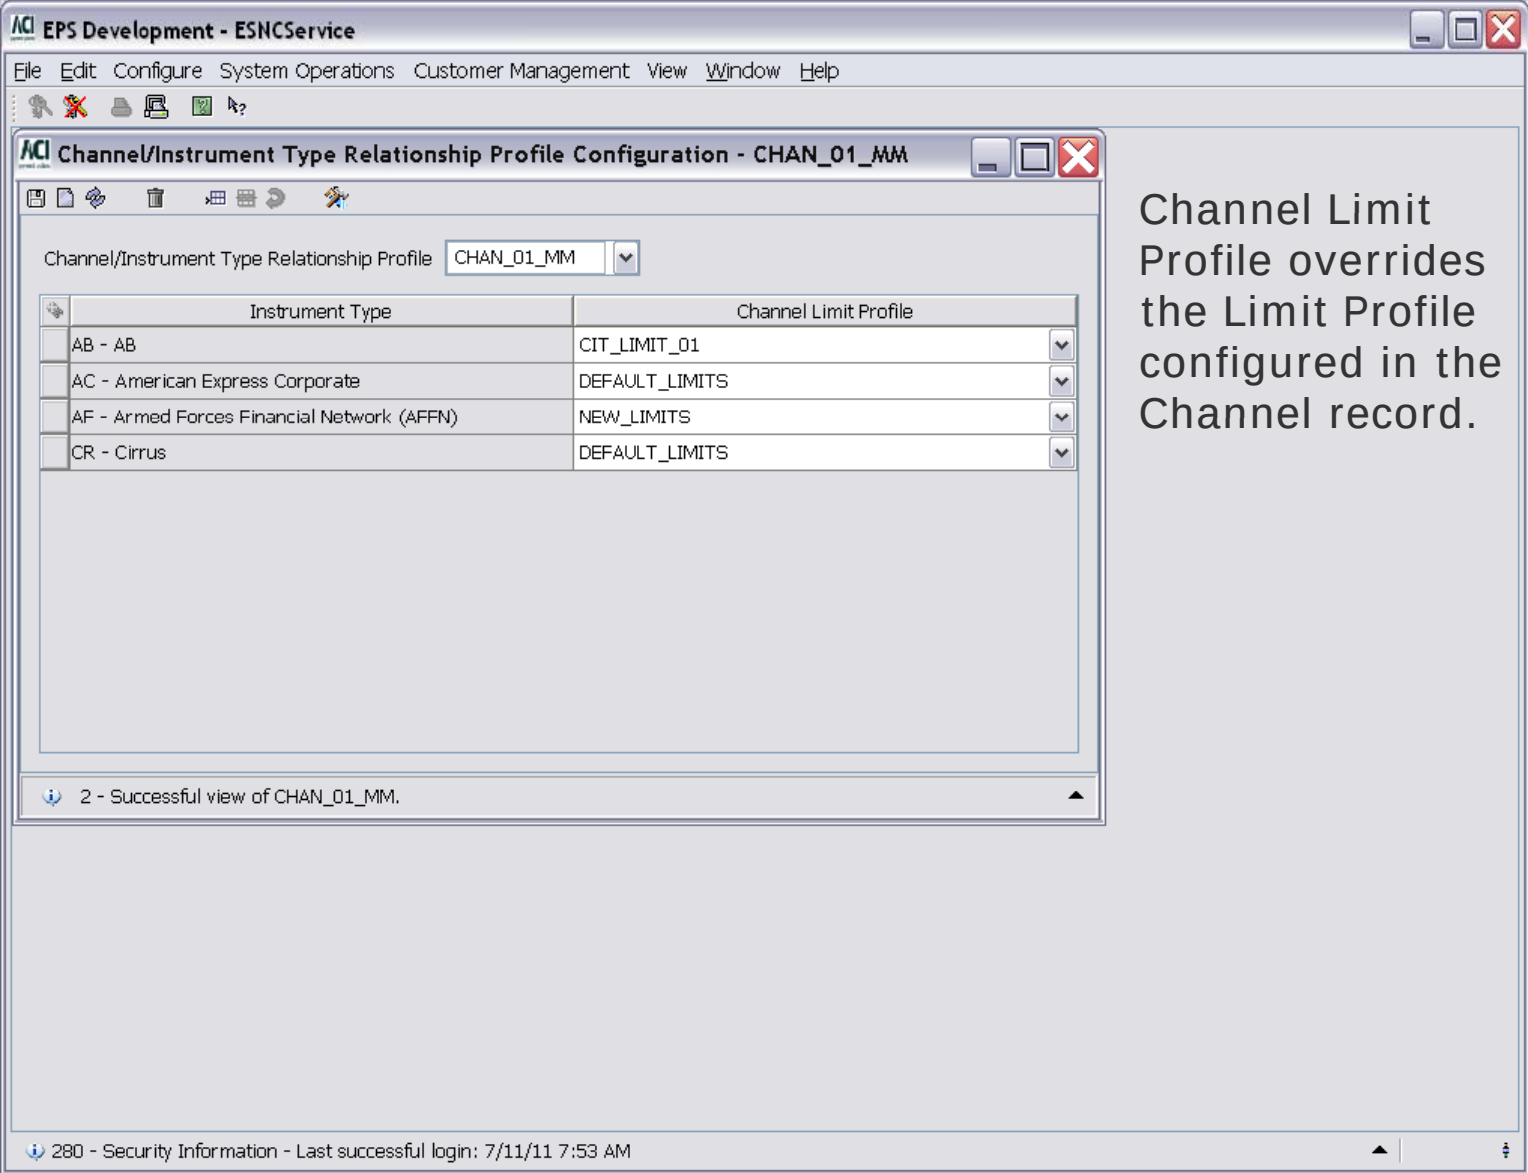


The screenshot displays the ACI EPS Development - ESNCService application. The main window is titled "Channel/Instrument Type Relationship Profile Configuration - CHAN_01_MM". It features a menu bar with options: File, Edit, Configure, System Operations, Customer Management, View, Window, and Help. Below the menu bar is a toolbar with various icons. The main content area shows a dropdown menu for "Channel/Instrument Type Relationship Profile" set to "CHAN_01_MM". Below this is a table with two columns: "Instrument Type" and "Channel Limit Profile".

Instrument Type	Channel Limit Profile
AB - AB	CIT_LIMIT_01
AC - American Express Corporate	DEFAULT_LIMITS
AF - Armed Forces Financial Network (AFFN)	NEW_LIMITS
CR - Cirrus	DEFAULT_LIMITS

At the bottom of the window, there is a status bar showing "280 - Security Information - Last successful login: 7/11/11 7:53 AM".

Channel Limit Profile overrides the Limit Profile configured in the Channel record.

Merchant Channel Configuration

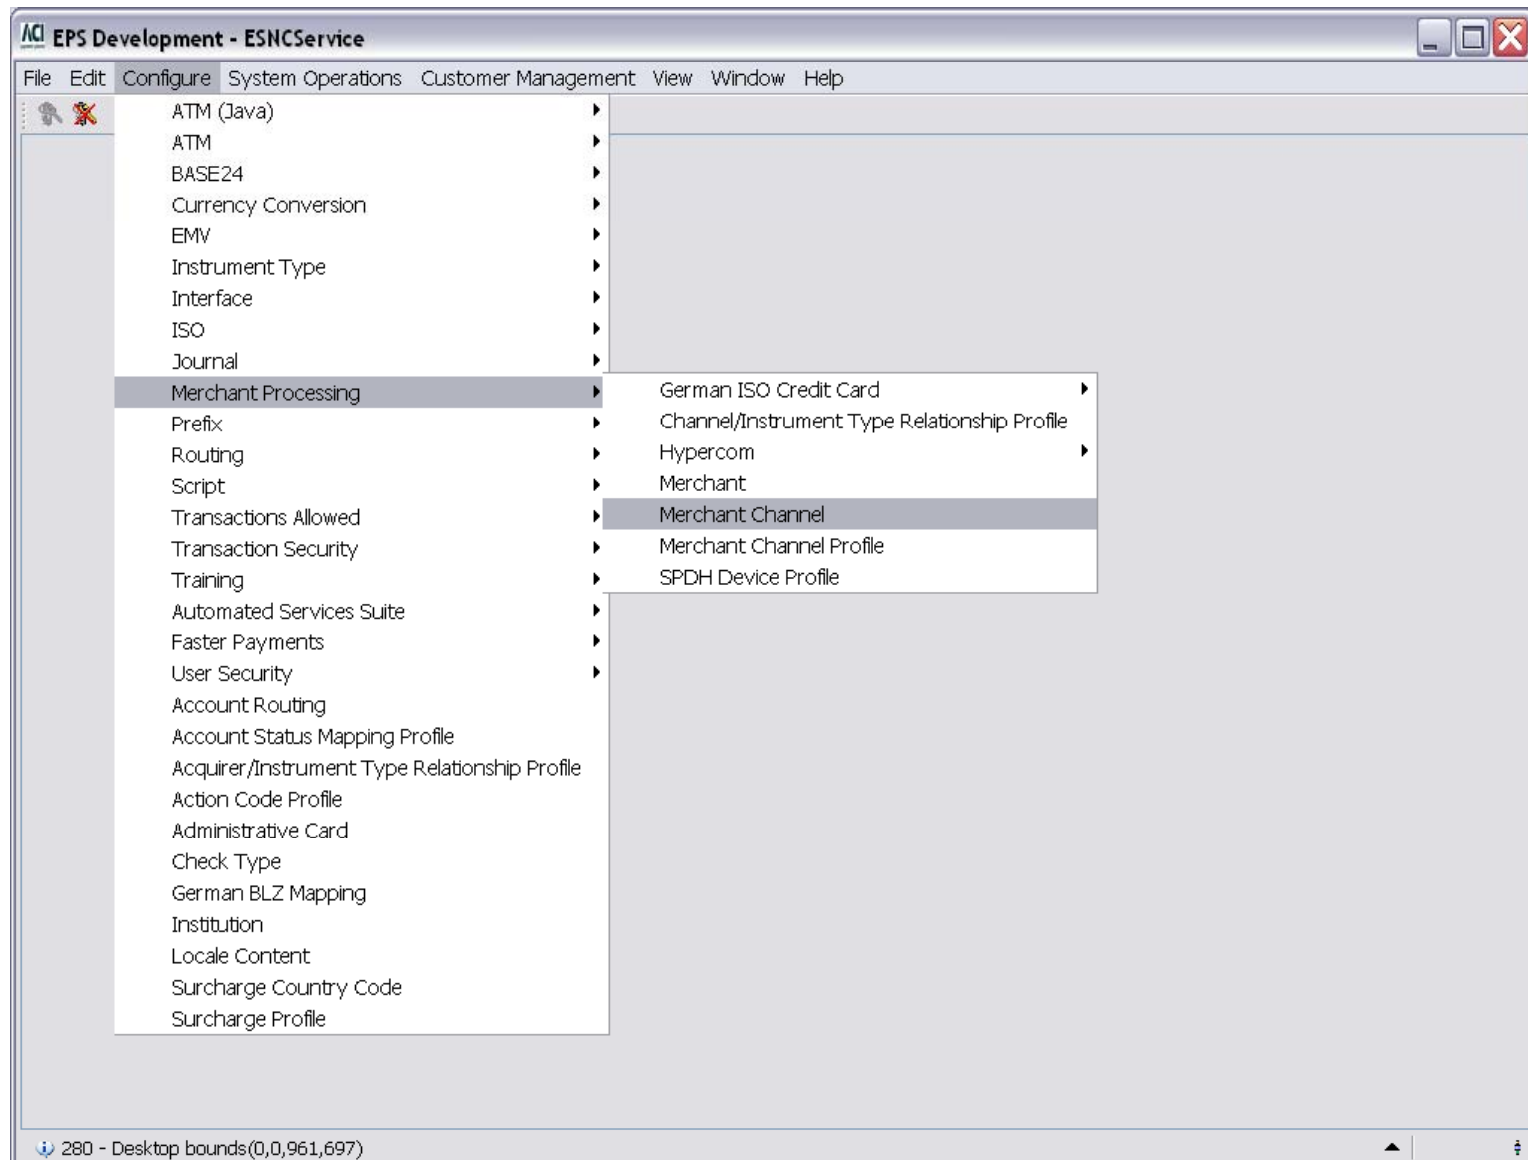

Merchant Channel Configuration

The screenshot shows a software window titled "EPS Development - ESNCServices" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Configuration - UT_TEST_01" is open, displaying configuration fields for a merchant channel. The fields include Channel ID (UT_TEST_01), Merchant ID (TESTMERCHANT), Channel Name, Channel Profile (AAAA), Institution ID (BNK1 (FIRSTSTATEBANK)), Merchant Name (TEST MERCHANT), and Merchant Name (Locale) (Test Merchant). Below these fields is a tabbed interface with tabs for Key Management, Clerk, Accumulators, Instrument Totals, Device Inventory, and EMV. The "Status" tab is active, showing a "Processing" sub-tab. The "Status" sub-tab displays various fields: Device Status (New), Current Capture Date (Monday, January 17, 2011), Origination Site Indicator (L), Last Transaction Date/Time, Home Site Indicator (H), Last Settlement Date/Time, Cutover Status (Unbalanced), Last Cutover Date / Time (December 31, 1969 6:00:00 PM), Balance Confirmation Status (Not Waiting), Transaction Sequence Number (0), Current Batch Number (1), Current Shift Number (1), and a section for "Number Since Last Cutover" with Batches (0), Cards Retained (0), and Shifts (0). A status bar at the bottom indicates "2 - Successful view of UT_TEST_01." and "280 - Desktop bounds(0,0,961,697)".

Channel ID: UT_TEST_01 Merchant ID: TESTMERCHANT

Channel Name: Channel Profile: AAAA

Institution ID: BNK1 (FIRSTSTATEBANK)

Merchant Name: TEST MERCHANT Merchant Name (Locale): Test Merchant

Key Management Clerk Accumulators Instrument Totals Device Inventory EMV

Status Processing Terminal Information Terminal Information (Locale) Returns/Adjustments

Device Status: New Current Capture Date: Monday, January 17, 2011

Origination Site Indicator: L Last Transaction Date/Time:

Home Site Indicator: H Last Settlement Date/Time:

Cutover Status: Unbalanced Last Cutover Date / Time: December 31, 1969 6:00:00 PM

Balance Confirmation Status: Not Waiting

Transaction Sequence Number: 0

Current Batch Number: 1

Current Shift Number: 1

Number Since Last Cutover

Batches: 0

Cards Retained: 0

Shifts: 0

2 - Successful view of UT_TEST_01.

280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

BASE24-eps Education - ESNCService

File Edit Configure System Operations Customer Management View Window Help

Merchant Channel Configuration

Channel ID Enter Merchant ID

Channel Name Channel Profile

Institution ID

Merchant Name Merchant Name (Locale)

Key Management	Clerk	Accumulators	Instrument Totals	Device Inventory	EMV
Status	Processing	Terminal Information	Terminal Information (Locale)	Returns/Adjustments	

Manufacturer/Model Not Specified

Currency Code USD (840)

Language Table Language table 1

Merchant Category Code

Capture Mode Authorize only

Time Offset From Processor (hrs:mins) 00:00

Action Code Profile

Source Routing Profile

Acquirer Transactions Profile

ISO Transaction Mapping Profile

Channel Limit Profile

Channel/Instrument Type Relationship Profile

Manual Transactions Allowed Indicator ☒

Point of Service Data

Contact Card Data Input Capability Magnetic Stripe

Contactless Card Data Input Capability None (contact-o...

Card Data Output Capability Unknown

Cardholder Authentication Capability Off

Card Capture Supported None

POS Condition Code Unattended on ...

Cardholder Present Indicator Cardholder pres...

Card Present Indicator Card present

Terminal Output Capability Printing and dis...

Channel Limit Profile and Channel/Instrument Type Relationship Profile allow for configuration of transaction limits at the terminal.

Merchant Channel Configuration

The screenshot shows a software window titled "EPS Development - ESNCService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Configuration - UT_TEST_01" is open, displaying configuration fields for a merchant channel. The fields are organized into sections: Channel ID (UT_TEST_01), Merchant ID (TESTMERCHANT), Channel Name (empty), Channel Profile (AAAA), Institution ID (BNK1 (FIRSTSTATEBANK)), Merchant Name (TEST MERCHANT), and Merchant Name (Locale) (Test Merchant). Below these are tabs for Key Management, Clerk, Accumulators, Instrument Totals, Device Inventory, and EMV. The "Terminal Information" tab is selected, showing fields for Terminal Description, Line 1, Line 2, City, Country, State / Province, and Postal Code. The "Terminal Service Representative" section includes fields for Contact Name and Phone. A status bar at the bottom indicates "2 - Successful view of UT_TEST_01." and "280 - Desktop bounds(0,0,961,697)".

Channel ID: UT_TEST_01

Merchant ID: TESTMERCHANT

Channel Name:

Channel Profile: AAAA

Institution ID: BNK1 (FIRSTSTATEBANK)

Merchant Name: TEST MERCHANT

Merchant Name (Locale): Test Merchant

Key Management | Clerk | **Accumulators** | Instrument Totals | Device Inventory | EMV

Status | Processing | **Terminal Information** | Terminal Information (Locale) | Returns/Adjustments

Terminal Location

Terminal Description:

Line 1: Country:

Line 2: State / Province:

City: Postal Code: 0

Terminal Service Representative

Contact Name:

Phone:

2 - Successful view of UT_TEST_01.

280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

The screenshot shows a software window titled "EPS Development - ESNService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Configuration - UT_TEST_01" is open, displaying a form for configuring a merchant channel. The form includes fields for Channel ID (UT_TEST_01), Merchant ID (TESTMERCHANT), Channel Name, Channel Profile (AAAA), Institution ID (BNK1 (FIRSTSTATEBANK)), and Merchant Name (TEST MERCHANT). Below these fields is a tabbed interface with tabs for Key Management, Clerk, Accumulators, Instrument Totals (selected), Device Inventory, and EMV. Under the Instrument Totals tab, there are sub-tabs for Status, Processing, Terminal Information, Terminal Information (Locale) (selected), and Returns/Adjustments. The Terminal Information (Locale) sub-tab contains sections for "Terminal Location (Locale)" with fields for Terminal Description, Line 1, Country, Line 2, State / Province, City, and Postal Code, and "Terminal Service Representative (Locale)" with fields for Contact Name and Phone. A status bar at the bottom shows a message: "2 - Successful view of UT_TEST_01." and a desktop bounds indicator: "280 - Desktop bounds(0,0,961,697)".

EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

Merchant Channel Configuration - UT_TEST_01

Channel ID: UT_TEST_01 Merchant ID: TESTMERCHANT

Channel Name: Channel Profile: AAAA

Institution ID: BNK1 (FIRSTSTATEBANK)

Merchant Name: TEST MERCHANT Merchant Name (Locale): Test Merchant

Key Management Clerk Accumulators **Instrument Totals** Device Inventory EMV

Status Processing Terminal Information **Terminal Information (Locale)** Returns/Adjustments

Terminal Location (Locale)

Terminal Description:

Line 1: Country:

Line 2: State / Province:

City: Postal Code:

Terminal Service Representative (Locale)

Contact Name:

Phone:

2 - Successful view of UT_TEST_01.

280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

The screenshot shows a software window titled "EPS Development - ESNCService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Configuration - UT_TEST_01" is open, displaying configuration fields and tabs.

Configuration Fields:

- Channel ID: UT_TEST_01
- Merchant ID: TESTMERCHANT
- Channel Name: (empty)
- Channel Profile: AAAA
- Institution ID: BNK1 (FIRSTSTATEBANK)
- Merchant Name: TEST MERCHANT
- Merchant Name (Locale): Test Merchant

Tabs: Key Management, Clerk, Accumulators, Instrument Totals, Device Inventory (selected), EMV. Sub-tabs under Device Inventory: Status, Processing, Terminal Information, Terminal Information (Locale), Returns/Adjustments (selected).

Returns Section:

Amount Allowed: 0.00 USD | Count Allowed: 0

Threshold Action: Raise an event and continue...

Adjustments Section:

Amount Allowed: 0.00 USD | Count Allowed: 0

Threshold Action: Raise an event and continue...

Accumulators Section:

Returns Actual Amount	0.00 USD	Returns Actual Count	0
Adjustments Actual Amount	0.00 USD	Adjustments Actual Count	0

Status Bar:

- 2 - Successful view of UT_TEST_01.
- 280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

The screenshot shows a software window titled "EPS Development - ESNService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Configuration - UT_TEST_01" is open, displaying configuration fields and tabs.

Configuration Fields:

- Channel ID: UT_TEST_01
- Merchant ID: TESTMERCHANT
- Channel Name: (empty)
- Channel Profile: AAAA
- Institution ID: BNK1 (FIRSTSTATEBANK)
- Merchant Name: TEST MERCHANT
- Merchant Name (Locale): Test Merchant

Tabs:

- Status
- Processing (selected)
- Terminal Information
- Terminal Information (Locale)
- Returns/Adjustments

Sub-Tabs under Processing:

- Key Management (selected)
- Clerk
- Accumulators
- Instrument Totals
- Device Inventory
- EMV

MAC Key Information:

Transaction Count Limit	1
Transaction Count	0
Last Key Exchange Date/Time	
Consecutive Error Limit	6
Consecutive Error Count	0
Error Limit	6
Error Count	0

Data Key Information:

Transaction Count Limit	2
Transaction Count	0
Last Key Exchange Date/Time	
Error Limit	3
Error Count	0

PIN Key Information:

Transaction Count Limit	0
Transaction Count	0
Last Key Exchange Date/Time	
Error Limit	2
Error Count	0

Status Bar:

- 2 - Successful view of UT_TEST_01.
- 280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

ACS EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACS Merchant Channel Configuration - UT_TEST_01

Channel ID: UT_TEST_01 Merchant ID: TESTMERCHANT

Channel Name: Channel Profile: AAAA

Institution ID: BNK1 (FIRSTSTATEBANK)

Merchant Name: TEST MERCHANT Merchant Name (Locale): Test Merchant

Status Processing Terminal Information Terminal Information (Locale) Returns/Adjustments

Key Management Clerk Accumulators Instrument Totals Device Inventory EMV

Clerk ID

	Debits	Credits	Adjustments	Cash Backs	Checks
Count	0	0	0	0	0
Amount	0.00 USD	0.00 USD	0.00 USD	0.00 USD	0.00 USD

2 - Successful view of UT_TEST_01.

280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

The screenshot shows a software window titled "EPS Development - ESNCService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Configuration - UT_TEST_01" is open, displaying configuration fields and a data table.

Configuration fields:

- Channel ID: UT_TEST_01
- Merchant ID: TESTMERCHANT
- Channel Name: (empty)
- Channel Profile: AAAA
- Institution ID: BNK1 (FIRSTSTATEBANK)
- Merchant Name: TEST MERCHANT
- Merchant Name (Locale): Test Merchant

Navigation tabs:

- Status
- Processing
- Terminal Information (selected)
- Terminal Information (Locale)
- Returns/Adjustments
- Key Management
- Clerk
- Accumulators
- Instrument Totals
- Device Inventory
- EMV

	Net	Debits	Debit Amount	Credits	Credit Amount	Adjustme...	Adjustment Amount

Status bar messages:

- 2 - Successful view of UT_TEST_01.
- 280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Channel Configuration - UT_TEST_01

Channel ID: UT_TEST_01 Merchant ID: TESTMERCHANT

Channel Name: Channel Profile: AAAA

Institution ID: BNK1 (FIRSTSTATEBANK)

Merchant Name: TEST MERCHANT Merchant Name (Locale): Test Merchant

Status Processing Terminal Information Terminal Information (Locale) Returns/Adjustments

Key Management Clerk Accumulators Instrument Totals Device Inventory EMV

Instrument Type	Net	Debits	Debit Amount	Credits	Credit Amount	Adjustm...	Adjustment Amount
-----------------	-----	--------	--------------	---------	---------------	------------	-------------------

2 - Successful view of UT_TEST_01.

280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

The screenshot shows a software window titled "EPS Development - ESNService" with a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Merchant Channel Configuration - UT_TEST_01" is open, displaying a form for configuring a merchant channel. The form includes fields for Channel ID (UT_TEST_01), Merchant ID (TESTMERCHANT), Channel Name, Channel Profile (AAAA), Institution ID (BNK1 (FIRSTSTATEBANK)), and Merchant Name (TEST MERCHANT). Below these fields is a tabbed interface with tabs for Status, Processing, Terminal Information, Terminal Information (Locale), Returns/Adjustments, Key Management, Clerk, Accumulators, Instrument Totals, Device Inventory, and EMV. The "Terminal Information" tab is currently selected, showing fields for PIN Pad Number, Inventory Control 1, Inventory Control 2, Notes, and Notes (Locale). A status bar at the bottom indicates "2 - Successful view of UT_TEST_01." and "280 - Desktop bounds(0,0,961,697)".

Channel ID: UT_TEST_01

Merchant ID: TESTMERCHANT

Channel Name:

Channel Profile: AAAA

Institution ID: BNK1 (FIRSTSTATEBANK)

Merchant Name: TEST MERCHANT

Merchant Name (Locale): Test Merchant

Processing

Terminal Information

Terminal Information (Locale)

Returns/Adjustments

Key Management

Clerk

Accumulators

Instrument Totals

Device Inventory

EMV

PIN Pad Number:

Inventory Control 1:

Inventory Control 2:

Notes:

Notes (Locale):

2 - Successful view of UT_TEST_01.

280 - Desktop bounds(0,0,961,697)

Merchant Channel Configuration

The screenshot shows the 'Merchant Channel Configuration - UT_TEST_01' window. The main configuration area includes fields for Channel ID (UT_TEST_01), Merchant ID (TESTMERCHANT), Channel Name, Channel Profile (AAAA), Institution ID (BNK1 (FIRSTSTATEBANK)), and Merchant Name (TEST MERCHANT). Below these are tabs for Status, Processing, Terminal Information, Terminal Information (Locale), Returns/Adjustments, Key Management, Clerk, Accumulators, Instrument Totals, Device Inventory, and EMV. The 'Processing' tab is active, showing 'Card Data Input Capability (byte 1)' and 'CVM Capability (byte 2)' sections. The 'Card Data Input Capability' section has checkboxes for Key Entry (bit 8), Magnetic Stripe (bit 7), and ICC (bit 6). The 'CVM Capability' section has checkboxes for Plain PIN/ICC (bit 8), Online PIN (bit 7), Signature (bit 6), Offline PIN (bit 5), and No CVM Required (bit 4). Below these is the 'Security Capability (byte 3)' section with checkboxes for Static Data Authentication (bit 8), Dynamic Data Authentication (bit 7), Card Capture (bit 6), and Combined DDA / AC Generation (bit 4). An 'Interface Device (IFD) Serial Number' field is also present. The status bar at the bottom shows '2 - Successful view of UT_TEST_01.' and '280 - Desktop bounds(0,0,961,697)'.

ACI EPS Development - ESNCService

File Edit Configure System Operations Customer Management View Window Help

ACI Merchant Channel Configuration - UT_TEST_01

Channel ID UT_TEST_01 Merchant ID TESTMERCHANT

Channel Name Channel Profile AAAA

Institution ID BNK1 (FIRSTSTATEBANK)

Merchant Name TEST MERCHANT Merchant Name (Locale) Test Merchant

Status Processing Terminal Information Terminal Information (Locale) Returns/Adjustments

Key Management Clerk Accumulators Instrument Totals Device Inventory EMV

Card Data Input Capability (byte 1)

☐ Key Entry (bit 8)

☐ Magnetic Stripe (bit 7)

☐ ICC (bit 6)

CVM Capability (byte 2)

☐ Plain PIN/ICC (bit 8) ☐ Online PIN (bit 7)

☐ Signature (bit 6) ☐ Offline PIN (bit 5)

☐ No CVM Required (bit 4)

Security Capability (byte 3)

☐ Static Data Authentication (bit 8)

☐ Dynamic Data Authentication (bit 7)

☐ Card Capture (bit 6)

☐ Combined DDA / AC Generation (bit 4)

Interface Device (IFD) Serial Number

2 - Successful view of UT_TEST_01.

280 - Desktop bounds(0,0,961,697)

Lab Exercise

BASE24-eps POS Merchant Configuration Lab

Lab 9





ACI UNIVERSAL
PAYMENTS.



MEETS THE CHALLENGE OF CHANGE