
LVGL Documentation 8.0

LVGL community

May 25, 2021

CONTENTS

1	Introduction	2
1.1	Key features	2
1.2	Requirements	3
1.3	License	3
1.4	Repository layout	3
1.5	Release policy	3
1.6	FAQ	4
2	Get started	7
2.1	Quick overview	7
2.2	Simulator on PC	12
2.3	STM32	15
2.4	NXP	15
2.5	Espressif (ESP32)	17
2.6	Arduino	18
2.7	Micropython	20
2.8	NuttX RTOS	22
3	Porting	26
3.1	Set-up a project	26
3.2	Display interface	27
3.3	Input device interface	37
3.4	Tick interface	45
3.5	Task Handler	46
3.6	Sleep management	46
3.7	Operating system and interrupts	47
3.8	Logging	48
4	Overview	50
4.1	Objects	50
4.2	Positions, sizes, and layouts	56
4.3	Styles	64
4.4	Style properties	95
4.5	Scroll	105
4.6	Layers	109
4.7	Events	110
4.8	Input devices	114
4.9	Displays	123
4.10	Fonts	134
4.11	Images	142

4.12	File system	156
4.13	Animations	162
4.14	Timers	171
4.15	Drawing	175
4.16	New widget	181
5	Widgets	182
5.1	Base object (lv_obj)	182
5.2	Core widgets	193
5.3	Extra widgets	300
6	Layouts	378
6.1	Flex	378
6.2	Grid	388
7	Contributing	400
7.1	Introduction	400
7.2	Pull request	401
7.3	Developer Certification of Origin (DCO)	402
7.4	Ways to contribute	403
8	Changelog	406
8.1	v8.0.0 (Planned in May 2021)	406
8.2	v7.11.0 (16.03.2021)	408
8.3	v7.10.1 (16.02.2021)	408
8.4	v7.10.0 (02.02.2021)	409
8.5	v7.9.1 (19.01.2021)	409
8.6	v7.9.0 (05.01.2021)	409
8.7	v7.8.1 (15.12.2020)	410
8.8	v7.8.0 (01.12.2020)	410
8.9	v7.7.2 (17.11.2020)	411
8.10	v7.7.1 (03.11.2020)	411
8.11	v7.7.0 (20.10.2020)	411
8.12	v7.6.1 (06.10.2020)	412
8.13	v7.6.0 (22.09.2020)	412
8.14	v7.5.0 (15.09.2020)	413
8.15	v7.4.0 (01.09.2020)	413
8.16	v7.3.1 (18.08.2020)	414
8.17	v7.3.0 (04.08.2020)	414
8.18	v7.2.0 (21.07.2020)	415
8.19	v7.1.0 (07.07.2020)	416
8.20	v7.0.2 (16.06.2020)	417
8.21	v7.0.1 (01.06.2020)	417
8.22	v7.0.0 (18.05.2020)	418
9	Roadmap	422
9.1	v8.X	422
9.2	Ideas	422
9.3	v8	423
	Index	424

PDF version: LVGL.pdf

INTRODUCTION

LVGL (Light and Versatile Graphics Library) is a free and open-source graphics library providing everything you need to create embedded GUI with easy-to-use graphical elements, beautiful visual effects and low memory footprint.

1.1 Key features

- Powerful building blocks such as buttons, charts, lists, sliders, images etc.
- Advanced graphics with animations, anti-aliasing, opacity, smooth scrolling
- Various input devices such as touchpad, mouse, keyboard, encoder etc.
- Multi-language support with UTF-8 encoding
- Multi-display support, i.e. use more TFT, monochrome displays simultaneously
- Fully customizable graphic elements withh CSS-like styles
- Hardware independent to use with any microcontroller or display
- Scalable to operate with little memory (64 kB Flash, 16 kB RAM)
- OS, External memory and GPU supported but not required
- Single frame buffer operation even with advanced graphical effects
- Written in C for maximal compatibility (C++ compatible)
- Simulator to start embedded GUI design on a PC without embedded hardware
- Binding to MicroPython
- Tutorials, examples, themes for rapid GUI design
- Documentation is available online and PDF
- Free and open-source under MIT license

1.2 Requirements

Basically, every modern controller (which is able to drive a display) is suitable to run LVGL. The minimal requirements are:

1.3 License

The LVGL project (including all repositories) is licensed under [MIT license](#). It means you can use it even in commercial projects.

It's not mandatory but we highly appreciate it if you write a few words about your project in the [My projects](#) category of the Forum or a private message from [lvgl.io](#).

Although you can get LVGL for free there is a huge work behind it. It's created by a group of volunteers who made it available for you in their free time.

To make the LVGL project sustainable, please consider [Contributing](#) to the project. You can choose from [many ways of contributions](#) such as simply writing a tweet about you are using LVGL, fixing bugs, translating the documentation, or even becoming a maintainer.

1.4 Repository layout

All repositories of the LVGL project are hosted on GitHub: <https://github.com/lvgl>

You find these repositories there:

- [lvgl](#) The library itself with many [examples](#).
- [lv_demos](#) Demos created with LVGL.
- [lv_drivers](#) Display and input device drivers
- [blog](#) Source of the blog's site (<https://blog.lvgl.io>)
- [sim](#) Source of the online simulator's site (<https://sim.lvgl.io>)
- [lv_sim_...](#) Simulator projects for various IDEs and platforms
- [lv_port_...](#) LVGL ports to development boards
- [lv_binding_..](#) Bindings to other languages
- [lv_...](#) Ports to other platforms

1.5 Release policy

The core repositories follow the rules of [Semantic versioning](#):

- Major versions for incompatible API changes. E.g. v5.0.0, v6.0.0
- Minor version for new but backward-compatible functionalities. E.g. v6.1.0, v6.2.0
- Patch version for backward-compatible bug fixes. E.g. v6.1.1, v6.1.2

Tags like vX.Y.Z are created for every release.

1.5.1 Release cycle

- Bugfixes: Released on demand even weekly
- Minor releases: In every 3-4 month
- Major releases: Approximately yearly

1.5.2 Branches

The core repositories have at least the following branches:

- `master` latest version, patches are merged directly here.
- `release/vX.Y` stable versions of the minor releases
- `fix/some-description` temporal branches for bug fixes
- `feat/some-description` temporal branches for features

1.5.3 Changelog

The changes are recorded in *CHANGELOG.md*.

1.5.4 Version support

Before v8 every minor release of major releases are supported for 1 year. From v8 every minor release is supported for 1 year.

1.6 FAQ

1.6.1 Where can I ask questions?

You can ask questions in the Forum: <https://forum.lvgl.io/>.

We use [GitHub issues](#) for development related discussion. So you should use them only if your question or issue is tightly related to the development of the library.

1.6.2 Is my MCU/hardware supported?

Every MCU which is capable of driving a display via Parallel port, SPI, RGB interface or anything else and fulfills the *Requirements* is supported by LLVGL.

It includes:

- "Common" MCUs like STM32F, STM32H, NXP Kinetis, LPC, iMX, dsPIC33, PIC32 etc.
- Bluetooth, GSM, WiFi modules like Nordic NRF and Espressif ESP32
- Linux frame buffer like `/dev/fb0` which includes Single-board computers too like Raspberry Pi
- And anything else with a strong enough MCU and a periphery to drive a display

1.6.3 Is my display supported?

LVGL needs just one simple driver function to copy an array of pixels into a given area of the display. If you can do this with your display then you can use that display with LVGL.

Some examples of the supported display types:

- TFTs with 16 or 24 bit color depth
- Monitors with HDMI port
- Small monochrome displays
- Gray-scale displays
- even LED matrices
- or any other display where you can control the color/state of the pixels

See the [Porting](#) section to learn more.

1.6.4 Nothing happens, my display driver is not called. What have I missed?

Be sure you are calling `lv_tick_inc(x)` in an interrupt and `lv_timer_handler()` in your main `while(1)`.

Learn more in the [Tick](#) and [Task handler](#) section.

1.6.5 Why the display driver is called only once? Only the upper part of the display is refreshed.

Be sure you are calling `lv_disp_flush_ready(drv)` at the end of your *"display flush callback"*.

1.6.6 Why I see only garbage on the screen?

Probably there a bug in your display driver. Try the following code without using LVGL. You should see a square with red-blue gradient

```
#define BUF_W 20
#define BUF_H 10

lv_color_t buf[BUF_W * BUF_H];
lv_color_t * buf_p = buf;
uint16_t x, y;
for(y = 0; y < BUF_H; y++) {
    lv_color_t c = lv_color_mix(LV_COLOR_BLUE, LV_COLOR_RED, (y * 255) / BUF_H);
    for(x = 0; x < BUF_W; x++){
        (*buf_p) = c;
        buf_p++;
    }
}

lv_area_t a;
a.x1 = 10;
a.y1 = 40;
a.x2 = a.x1 + BUF_W - 1;
a.y2 = a.y1 + BUF_H - 1;
my_flush_cb(NULL, &a, buf);
```


1.6.7 Why I see non-sense colors on the screen?

Probably LVGL's color format is not compatible with your displays color format. Check `LV_COLOR_DEPTH` in `lv_conf.h`.

If you are using 16 bit colors with SPI (or other byte-oriented interface) probably you need to set `LV_COLOR_16_SWAP` 1 in `lv_conf.h`. It swaps the upper and lower bytes of the pixels.

1.6.8 How to speed up my UI?

- Turn on compiler optimization and enable cache if your MCU has
- Increase the size of the display buffer
- Use 2 display buffers and flush the buffer with DMA (or similar periphery) in the background
- Increase the clock speed of the SPI or Parallel port if you use them to drive the display
- If your display has SPI port consider changing to a model with parallel because it has much higher throughput
- Keep the display buffer in the internal RAM (not in external SRAM) because LVGL uses it a lot and it should have a small access time

1.6.9 How to reduce flash/ROM usage?

You can disable all the unused features (such as animations, file system, GPU etc.) and object types in `lv_conf.h`.

If you are using GCC you can add

- `-fdata-sections -ffunction-sections` compiler flags
- `--gc-sections` linker flag

to remove unused functions and variables from the final binary

1.6.10 How to reduce the RAM usage

- Lower the size of the *Display buffer*
- Reduce `LV_MEM_SIZE` in `lv_conf.h`. This memory used when you create objects like buttons, labels, etc.
- To work with lower `LV_MEM_SIZE` you can create the objects only when required and deleted them when they are not required anymore

1.6.11 How to work with an operating system?

To work with an operating system where tasks can interrupt each other (preemptive) you should protect LVGL related function calls with a mutex. See the *Operating system and interrupts* section to learn more.

GET STARTED

There are several ways to get your feet wet with LVGL. This list shows the recommended way of learning the library:

1. Check the [Online demos](#) to see LVGL in action (3 minutes)
2. Read the [Introduction](#) page of the documentation (5 minutes)
3. Read the [Quick overview](#) page of the documentation (15 minutes)
4. Set up a [Simulator](#) (10 minutes)
5. Try out some [Examples](#)
6. Port LVGL to a board. See the [Porting](#) guide or check the ready to use [Projects](#)
7. Read the [Overview](#) page to get a better understanding of the library. (2-3 hours)
8. Check the documentation of the [Widgets](#) to see their features and usage
9. If you have questions got to the [Forum](#)
10. Read the [Contributing](#) guide to see how you can help to improve LVGL (15 minutes)

2.1 Quick overview

Here you can learn the most important things about LVGL. You should read it first to get a general impression and read the detailed [Porting](#) and [Overview](#) sections after that.

2.1.1 Get started in a simulator

Instead of porting LVGL to an embedded hardware, it's highly recommended to get started in a simulator first.

LVGL is ported to many IDEs to be sure you will find your favorite one. Go to the [Simulators](#) section to get ready-to-use projects that can be run on your PC. This way you can save the time of porting for now and make some experience with LVGL immediately.

2.1.2 Add LVGL into your project

If you rather want to try LVGL on your own project follow these steps:

- [Download](#) or Clone the library from GitHub with `git clone https://github.com/lvgl/lvgl.git`.
- Copy the `lvgl` folder into your project.
- Copy `lvgl/lv_conf_template.h` as `lv_conf.h` next to the `lvgl` folder, change the first `#if 0` to 1 to enable the file's content and set the `LV_COLOR_DEPTH` defines.
- Include `lvgl/lvgl.h` in files where you need to use LVGL related functions.
- Call `lv_tick_inc(x)` every `x` milliseconds in a Timer or Task (`x` should be between 1 and 10). It is required for the internal timing of LVGL. Alternatively, configure `LV_TICK_CUSTOM` (see `lv_conf.h`) so that LVGL can retrieve the current time directly.
- Call `lv_init()`
- Create a draw buffer: LVGL will render the graphics here first, and send the rendered image to the display. The buffer size can be set freely but 1/10 screen size is a good starting point.

```
static lv_disp_draw_buf_t draw_buf;
static lv_color_t buf1[DISP_HOR_RES * DISP_VER_RES / 10];
/*Declare a buffer for 1/10 screen size*/
lv_disp_draw_buf_init(&draw_buf, buf1, NULL, MY_DISP_HOR_RES * MY_DISP_VER_RES / 10);
/*Initialize the display buffer*/
```

- Implement and register a function which can copy the rendered image to an area of your display:

```
lv_disp_drv_t disp_drv;          /*Descriptor of a display driver*/
lv_disp_drv_init(&disp_drv);      /*Basic initialization*/
disp_drv.flush_cb = my_disp_flush; /*Set your driver function*/
disp_drv.buffer = &draw_buf;      /*Assign the buffer to the display*/
disp_drv.hor_res = MY_DISP_HOR_RES; /*Set the horizontal resolution of the display*/
disp_drv.ver_res = MY_DISP_VER_RES; /*Set the vertical resolution of the display*/
lv_disp_drv_register(&disp_drv);   /*Finally register the driver*/

void my_disp_flush(lv_disp_drv_t * disp, const lv_area_t * area, lv_color_t * color_p)
{
    int32_t x, y;
    /*It's a very slow but simple implementation.
    *`set_pixel` needs to be written by you to a set pixel on the screen*/
    for(y = area->y1; y <= area->y2; y++) {
        for(x = area->x1; x <= area->x2; x++) {
            set_pixel(x, y, *color_p);
            color_p++;
        }
    }

    lv_disp_flush_ready(disp);      /* Indicate you are ready with the flushing*/
}
```

- Implement and register a function which can read an input device. E.g. for a touch pad:

```
lv_indev_drv_t indev_drv;          /*Descriptor of a input device driver*/
lv_indev_drv_init(&indev_drv);      /*Basic initialization*/
indev_drv.type = LV_INDEV_TYPE_POINTER; /*Touch pad is a pointer-like device*/
indev_drv.read_cb = my_touchpad_read; /*Set your driver function*/
lv_indev_drv_register(&indev_drv);   /*Finally register the driver*/
```

(continues on next page)

(continued from previous page)

```

bool my_touchpad_read(lv_indev_t * indev, lv_indev_data_t * data)
{
    /*`touchpad_is_pressed` and `touchpad_get_xy` needs to be implemented by you*/
    if(touchpad_is_pressed()) {
        data->state = LV_INDEV_STATE_PRESSED;
        touchpad_get_xy(&data->point.x, &data->point.y);
    } else {
        data->state = LV_INDEV_STATE_RELEASED;
    }
}

```

- Call `lv_timer_handler()` periodically every few milliseconds in the main `while(1)` loop or in an Operation system task. It will redraw the screen if required, handle input devices, animation etc.

For a more detailed guide go to the [Porting](#) section.

2.1.3 Learn the basics

Widgets

The graphical elements like Buttons, Labels, Sliders, Charts etc. are called objects or widgets. Go to [Widgets](#) to see the full list of available widgets.

Every object has a parent object where it is create. For example if a label is created on a button, the button is the parent of label.

The child object moves with the parent and if the parent is deleted the children will be deleted too.

Children can be visible only on their parent. In other words, the parts of the children out of the parent are clipped.

A Screen is the "root" parent. You can have any number of screens.

To get the current screen call `lv_scr_act()`, and to load a screen use `lv_scr_load(scr1)`.

You can create a new object with `lv_<type>_create(parent)`. It will return an `lv_obj_t *` variable that can be used as a reference to the object to set its parameters.

For example:

```
lv_obj_t * slider1 = lv_slider_create(lv_scr_act());
```

To set some basic attribute `lv_obj_set_<parameters_name>(obj, <value>)` function can be used. For example:

```

lv_obj_set_x(btn1, 30);
lv_obj_set_y(btn1, 10);
lv_obj_set_size(btn1, 200, 50);

```

The widgets have type specific parameters too which can be set by `lv_<widget_type>_set_<parameters_name>(obj, <value>)` functions. For example:

```
lv_slider_set_value(slider1, 70, LV_ANIM_ON);
```

To see the full API visit the documentation of the widgets or the related header file (e.g. `lvgl/src/widgets/lv_slider.h`).

Events

Events are used to inform the user if something has happened with an object. You can assign one or more callbacks to an object which will be called if the object is clicked, released, dragged, being deleted etc.

It should look like this:

```
lv_obj_add_event_cb(btn, btn_event_cb, LV_EVENT_CLICKED, NULL); /*Assign a callback_
↳to the button*/

...

void btn_event_cb(lv_event_t * e)
{
    printf("Clicked\n");
}
```

Instead of LV_EVENT_CLICKED LV_EVENT_ALL can be used too to call the callback for any event.

From lv_event_t * e the current event code can be get with

```
lv_event_code_t code = lv_event_get_code(e);
```

The object that triggered the event can be retrieved with

```
lv_obj_t * obj = lv_event_get_target(e);
```

To learn all features of the events go to the [Event overview](#) section.

Parts

Widgets might be built from one or more *parts*. For example a button has only one part called LV_PART_MAIN. However, a [Slider](#) has LV_PART_MAIN, LV_PART_INDICATOR and LV_PART_KNOB.

By using parts you can apply different styles to different parts. (See below)

To learn which parts are used by which object read the widgets' documentation.

States

The objects can be in a combination of the following states:

- LV_STATE_DEFAULT Normal, released state
- LV_STATE_CHECKED Toggled or checked state
- LV_STATE_FOCUSED Focused via keypad or encoder or clicked via touchpad/mouse
- LV_STATE_FOCUS_KEY Focused via keypad or encoder but not via touchpad/mouse
- LV_STATE_EDITED Edit by an encoder
- LV_STATE_HOVERED Hovered by mouse (not supported now)
- LV_STATE_PRESSED eing pressed
- LV_STATE_SCROLLED Being scrolled
- LV_STATE_DISABLED Disabled

For example, if you press an object it will automatically goes to `LV_STATE_FOCUSED` and `LV_STATE_PRESSED` state and when you release it, the `LV_STATE_PRESSED` state will be removed.

To check if an object is in a given state use `lv_obj_has_state(obj, LV_STATE_...)`. It will return `true` if the object "has" the given state at that moment.

To manually add remove the states use

```
lv_obj_add_state(obj, LV_STATE_...);
lv_obj_clear_state(obj, LV_STATE_...);
```

Styles

Styles contains properties such as background color, border width, font, etc to describe the appearance of the objects.

The styles are `lv_style_t` variables. Only their pointer is saved in the objects so they need to be static or global. Before using a style it needs to be initialized with `lv_style_init(&style1)`. After that properties can be added. For example:

```
static lv_style_t style1;
lv_style_init(&style1);
lv_style_set_bg_color(&style1, lv_color_hex(0xa03080))
lv_style_set_border_width(&style1, 2))
```

See the full list of properties go [here](#).

The styles are assigned to an object's part and state. For example to *"Use this style on the slider's indicator when the slider is pressed"*:

```
lv_obj_add_style(slider1, &style1, LV_PART_INDICATOR | LV_STATE_PRESSED);
```

If the *part* is `LV_PART_MAIN` it can be omitted:

```
lv_obj_add_style(btn1, &style1, LV_STATE_PRESSED); /*Equal to LV_PART_MAIN | LV_STATE_PRESSED*/
```

Similarly, `LV_STATE_DEFAULT` can be omitted too:

```
lv_obj_add_style(slider1, &style1, LV_PART_INDICATOR); /*Equal to LV_PART_INDICATOR | LV_STATE_DEFAULT*/
```

For `LV_STATE_DEFAULT` and `LV_PART_MAIN` simply write 0:

```
lv_obj_add_style(btn1, &style1, 0); /*Equal to LV_PART_MAIN | LV_STATE_DEFAULT*/
```

The styles can be cascaded (similarly to CSS). It means you can add more styles to a part of an object. For example `style_btn` can set a default button appearance, and `style_btn_red` can overwrite the background color to make the button red:

```
lv_obj_add_style(btn1, &style_btn, 0);
lv_obj_add_style(btn1, &style_btn_red, 0);
```

If a property is not set on for the current state the style with `LV_STATE_DEFAULT` will be used. If the property is not defined even in the default state a default value is used.

Some properties (typically the text-related ones) can be inherited. It means if a property is not set in an object it will be searched in its parents too. For example, you can set the font once in the screen's style and every text will inherit it by default.

Local style properties also can be added to the objects. It creates a style inside the object that is used only by the object:

```
lv_obj_set_style_bg_color(slider1, lv_color_hex(0x2080bb), LV_PART_INDICATOR | LV_
↪STATE_PRESSED);
```

To learn all the features of styles see the [Style overview](#) section

Themes

Themes are the default styles of the objects. The styles from the themes are applied automatically when the objects are created.

You can select the theme to use in `lv_conf.h`.

2.1.4 Examples

2.1.5 Micropython

Learn more about [Micropython](#).

```
# Create a Button and a Label
scr = lv.obj()
btn = lv.btn(scr)
btn.align(lv.scr_act(), lv.ALIGN.CENTER, 0, 0)
label = lv.label(btn)
label.set_text("Button")

# Load the screen
lv.scr_load(scr)
```

2.2 Simulator on PC

You can try out the LVGL **using only your PC** (i.e. without any development boards). The LVGL will run on a simulator environment on the PC where anyone can write and experiment the real LVGL applications.

Simulator on the PC have the following advantages:

- Hardware independent - Write a code, run it on the PC and see the result on the PC monitor.
- Cross-platform - Any Windows, Linux or OSX PC can run the PC simulator.
- Portability - the written code is portable, which means you can simply copy it when using an embedded hardware.
- Easy Validation - The simulator is also very useful to report bugs because it means common platform for every user. So it's a good idea to reproduce a bug in simulator and use the code snippet in the [Forum](#).

2.2.1 Select an IDE

The simulator is ported to various IDEs (Integrated Development Environments). Choose your favorite IDE, read its README on GitHub, download the project, and load it to the IDE.

- **Eclipse with SDL driver:** Recommended on Linux and Mac
- **CodeBlocks:** Recommended on Windows
- **VisualStudio with SDL driver:** For Windows
- **VSCoDe with SDL driver:** Recommended on Linux and Mac
- **PlatformIO with SDL driver:** Recommended on Linux and Mac

You can use any IDEs for the development but, for simplicity, the configuration for Eclipse CDT is focused in this tutorial. The following section describes the set-up guide of Eclipse CDT in more details.

Note: If you are on Windows, it's usually better to use the Visual Studio or CodeBlocks projects instead. They work out of the box without requiring extra steps.

2.2.2 Set-up Eclipse CDT

Install Eclipse CDT

Eclipse CDT is a C/C++ IDE.

Eclipse is a Java based software therefore be sure **Java Runtime Environment** is installed on your system.

On Debian-based distros (e.g. Ubuntu): `sudo apt-get install default-jre`

Note: If you are using other distros, then please refer and install 'Java Runtime Environment' suitable to your distro. Note: If you are using macOS and get a "Failed to create the Java Virtual Machine" error, uninstall any other Java JDK installs and install Java JDK 8u. This should fix the problem.

You can download Eclipse's CDT from: <https://www.eclipse.org/cdt/downloads.php>. Start the installer and choose *Eclipse CDT* from the list.

Install SDL 2

The PC simulator uses the **SDL 2** cross platform library to simulate a TFT display and a touch pad.

Linux

On **Linux** you can easily install SDL2 using a terminal:

1. Find the current version of SDL2: `apt-cache search libsdl2` (e.g. `libsdl2-2.0-0`)
2. Install SDL2: `sudo apt-get install libsdl2-2.0-0` (replace with the found version)
3. Install SDL2 development package: `sudo apt-get install libsdl2-dev`
4. If build essentials are not installed yet: `sudo apt-get install build-essential`

Windows

If you are using **Windows** firstly you need to install MinGW (64 bit version). After installing MinGW, do the following steps to add SDL2:

1. Download the development libraries of SDL. Go to <https://www.libsdl.org/download-2.0.php> and download *Development Libraries: SDL2-devel-2.0.5-mingw.tar.gz*
2. Decompress the file and go to *x86_64-w64-mingw32* directory (for 64 bit MinGW) or to *i686-w64-mingw32* (for 32 bit MinGW)
3. Copy *...mingw32/include/SDL2* folder to *C:/MinGW/.../x86_64-w64-mingw32/include*
4. Copy *...mingw32/lib/* content to *C:/MinGW/.../x86_64-w64-mingw32/lib*
5. Copy *...mingw32/bin/SDL2.dll* to *{eclipse_worksapce}/pc_simulator/Debug/*. Do it later when Eclipse is installed.

Note: If you are using **Microsoft Visual Studio** instead of Eclipse then you don't have to install MinGW.

OSX

On **OSX** you can easily install SDL2 with brew: `brew install sdl2`

If something is not working, then please refer [this tutorial](#) to get started with SDL.

Pre-configured project

A pre-configured graphics library project (based on the latest release) is always available to get started easily. You can find the latest one on [GitHub](#). (Please note that, the project is configured for Eclipse CDT).

Add the pre-configured project to Eclipse CDT

Run Eclipse CDT. It will show a dialogue about the **workspace path**. Before accepting the path, check that path and copy (and unzip) the downloaded pre-configured project there. After that, you can accept the workspace path. Of course you can modify this path but, in that case copy the project to the corresponding location.

Close the start up window and go to **File->Import** and choose **General->Existing project into Workspace**. **Browse the root directory** of the project and click **Finish**

On **Windows** you have to do two additional things:

- Copy the **SDL2.dll** into the project's Debug folder
- Right click on the project -> Project properties -> C/C++ Build -> Settings -> Libraries -> Add ... and add *mingw32* above *SDLmain* and *SDL*. (The order is important: *mingw32*, *SDLmain*, *SDL*)

Compile and Run

Now you are ready to run the LVGL Graphics Library on your PC. Click on the Hammer Icon on the top menu bar to Build the project. If you have done everything right, then you will not get any errors. Note that on some systems additional steps might be required to "see" SDL 2 from Eclipse but, in most of cases the configurations in the downloaded project is enough.

After a success build, click on the Play button on the top menu bar to run the project. Now a window should appear in the middle of your screen.

Now everything is ready to use the LVGL in the practice or begin the development on your PC.

2.3 STM32

TODO

2.4 NXP

NXP has integrated LVGL into the MCUXpresso SDK packages for several of their general purpose and crossover microcontrollers, allowing easy evaluation and migration into your product design. [Download an SDK for a supported board](#) today and get started with your next GUI application.

2.4.1 Creating new project with LVGL

Downloading the MCU SDK example project is recommended as a starting point. It comes fully configured with LVGL (and with PXP support if module is present), no additional integration work is required.

2.4.2 Adding HW acceleration for NXP iMX RT platforms using PXP (PiXeL Pipeline) engine for existing projects

Several drawing features in LVGL can be offloaded to PXP engine. In order to use CPU time while PXP is running, RTOS is required to block the LVGL drawing thread and switch to another task, or simply to idle task, where CPU could be suspended to save power.

Features supported:

- RGB565 color format
- Area fill + optional transparency
- BLIT (BLock Image Transfer) + optional transparency
- Color keying + optional transparency
- Recoloring (color tint) + optional transparency
- RTOS integration layer
- Default FreeRTOS and bare metal code provided

Basic configuration:

- Select NXP PXP engine in lv_conf.h: Set LV_USE_GPU_NXP_PXP to 1
- Enable default implementation for interrupt handling, PXP start function and automatic initialization: Set LV_USE_GPU_NXP_PXP_AUTO_INIT to 1
- If FSL_RTOS_FREE_RTOS symbol is defined, FreeRTOS implementation will be used, otherwise bare metal code will be included

Basic initialization:

- If LV_USE_GPU_NXP_PXP_AUTO_INIT is enabled, no user code is required; PXP is initialized automatically in lv_init()
- For manual PXP initialization, default configuration structure for callbacks can be used. Initialize PXP before calling lv_init()

```

#if LV_USE_GPU_NXP_PXP
    #include "lv_gpu/lv_gpu_nxp_pxp.h"
    #include "lv_gpu/lv_gpu_nxp_pxp_osa.h"
#endif
.
.
.
#if LV_USE_GPU_NXP_PXP
    if (lv_gpu_nxp_pxp_init(&pxp_default_cfg) != LV_RES_OK) {
        PRINTF("PXP init error. STOP.\n");
        for ( ; ; ) ;
    }
#endif

```

Project setup:

- Add PXP related files to project:
 - lv_gpu/lv_gpu_nxp.c, lv_gpu/lv_gpu_nxp.h: low level drawing calls for LVGL
 - lv_gpu/lv_gpu_nxp_osa.c, lv_gpu/lv_gpu_osa.h: default implementation of OS-specific functions (bare metal and FreeRTOS only)
 - * optional, required only if LV_USE_GPU_NXP_PXP_AUTO_INIT is set to 1
- PXP related code depends on two drivers provided by MCU SDK. These drivers need to be added to project:
 - fsl_pxp.c, fsl_pxp.h: PXP driver
 - fsl_cache.c, fsl_cache.h: CPU cache handling functions

Advanced configuration:

- Implementation depends on multiple OS-specific functions. Structure `lv_nxp_pxp_cfg_t` with callback pointers is used as a parameter for `lv_gpu_nxp_pxp_init()` function. Default implementation for FreeRTOS and baremetal is provided in `lv_gpu_nxp_osa.c`
 - `pxp_interrupt_init()`: Initialize PXP interrupt (HW setup, OS setup)
 - `pxp_interrupt_deinit()`: Deinitialize PXP interrupt (HW setup, OS setup)
 - `pxp_run()`: Start PXP job. Use OS-specific mechanism to block drawing thread. PXP must finish drawing before leaving this function.
- There are configurable area thresholds which are used to decide whether the area will be processed by CPU, or by PXP. Areas smaller than defined value will be processed by CPU, areas bigger than the threshold will be processed by PXP. These thresholds may be defined as a preprocessor variables. Default values are defined `lv_gpu/lv_gpu_nxp_pxp.h`
 - `GPU_NXP_PXP_BLIT_SIZE_LIMIT`: size threshold for image BLIT, BLIT with color keying, and BLIT with recolor ($OPA > LV_OPA_MAX$)
 - `GPU_NXP_PXP_BLIT_OPA_SIZE_LIMIT`: size threshold for image BLIT and BLIT with color keying with transparency ($OPA < LV_OPA_MAX$)
 - `GPU_NXP_PXP_FILL_SIZE_LIMIT`: size threshold for fill operation ($OPA > LV_OPA_MAX$)
 - `GPU_NXP_PXP_FILL_OPA_SIZE_LIMIT`: size threshold for fill operation with transparency ($OPA < LV_OPA_MAX$)

2.5 Espressif (ESP32)

Since v7.7.1 LVGL includes a Kconfig file, so LVGL can be used as an ESP-IDF v4 component.

2.5.1 Get the LVGL demo project for ESP32

We've created `lv_port_esp32`, a project using ESP-IDF and LVGL to show one of the demos from `lv_examples`. You are able to configure the project to use one of the many supported display controllers, see `lvgl_esp32_drivers` for a complete list of supported display and indev (touch) controllers.

2.5.2 Use LVGL in your ESP32 project

Prerequisites

ESP-IDF v4 framework is the suggested version to use.

Get LVGL

You are suggested to add LVGL as a "component". This component can be located inside a directory named "components" on your project root directory.

When your project is a git repository you can include LVGL as a git submodule:

```
git submodule add https://github.com/lvgl/lvgl.git components/lvgl
```

The above command will clone LVGL's main repository into the `components/lvgl` directory. LVGL includes a `CMakeLists.txt` file that sets some configuration options so you can use LVGL right away.

When you are ready to configure LVGL launch the configuration menu with `idf.py menuconfig` on your project root directory, go to `Component config` and then `LVGL configuration`.

2.5.3 Use lvgl_esp32_drivers in your project

You are suggested to add `lvgl_esp32_drivers` as a "component". This component can be located inside a directory named "components" on your project root directory.

When your project is a git repository you can include `lvgl_esp32_drivers` as a git submodule:

```
git submodule add https://github.com/lvgl/lvgl\_esp32\_drivers.git components/lvgl_esp32_drivers
```

Support for ESP32-S2

Basic support for ESP32-S2 has been added into the `lvgl_esp32_drivers` repository.

2.6 Arduino

The `core LVGL library` and the `examples` are directly available as Arduino libraries.

Note that you need to choose a powerful enough board to run LVGL and your GUI. See the `requirements of LVGL`.

For example ESP32 is a good candidate to create your UI with LVGL.

2.6.1 Get the LVGL Arduino library

LVGL can be installed via Arduino IDE Library Manager or as an .ZIP library. It will also install `lv_exmaples` which contains a lot of examples and demos to try LVGL.

2.6.2 Set up drivers

To get started it's recommended to use [TFT_eSPI](#) library as a TFT driver to simplify testing. To make it work setup [TFT_eSPI](#) according to your TFT display type via editing either

- `User_Setup.h`
- or by selecting a configuration in the `User_Setup_Select.h`

Both files are located in `TFT_eSPI` library's folder.

2.6.3 Configure LVGL

LVGL has its own configuration file called `lv_conf.h`. When LVGL is installed the followings needs to be done to configure it:

1. Go to directory of the installed Arduino libraries
2. Go to `lvgl` and copy `lv_conf_template.h` as `lv_conf.h` into the Arduino Libraries directory next to the `lvgl` library folder.
3. Open `lv_conf.h` and change the first `#if 0` to `#if 1`
4. Set the resolution of your display in `LV_HOR_RES_MAX` and `LV_VER_RES_MAX`
5. Set the color depth of you display in `LV_COLOR_DEPTH`
6. Set `LV_TICK_CUSTOM 1`

2.6.4 Configure the examples

`lv_examples` can be configures similarly to LVGL but it's configuration file is called `lv_ex_conf.h`.

1. Go to directory of the installed Arduino libraries
2. Go to `lv_examples` and copy `lv_ex_template.h` as `lv_ex_conf.h` next to the `lv_examples` folder.
3. Open `lv_ex_conf.h` and change the first `#if 0` to `#if 1`
4. Enable the demos you want to use. (The small examples starting with `lv_ex_...()` are always enabled.)

2.6.5 Initialize LVGL and run an example

Take a look at [LVGL_Arduino.ino](#) to see how to initialize LVGL. It also uses `TFT_eSPI` as driver.

In the INO file you can see how to register a display and a touch pad for LVGL and call an example.

Note that, there is no dedicated INO file for every example but you can call functions like `lv_ex_btn1()` or `lv_ex_slider1()` to run an example. For the full list of examples see the [README](#) of `lv_examples`.

2.6.6 Debugging and logging

In case of trouble there are debug information inside LVGL. In the `LVGL_Arduino.ino` example there is `my_print` method, which allow to send this debug information to the serial interface. To enable this feature you have to edit `lv_conf.h` file and enable logging in section `log settings`:

```
/*Log settings*/
#define USE_LV_LOG      1  /*Enable/disable the log module*/
#if LV_USE_LOG
/* How important log should be added:
 * LV_LOG_LEVEL_TRACE    A lot of logs to give detailed information
 * LV_LOG_LEVEL_INFO     Log important events
 * LV_LOG_LEVEL_WARN     Log if something unwanted happened but didn't cause a
↪problem
 * LV_LOG_LEVEL_ERROR     Only critical issue, when the system may fail
 * LV_LOG_LEVEL_NONE     Do not log anything
 */
# define LV_LOG_LEVEL    LV_LOG_LEVEL_WARN
```

After enabling log module and setting `LV_LOG_LEVEL` accordingly the output log is sent to the `Serial` port @ 115200 Baud rate.

2.7 Micropython

2.7.1 What is Micropython?

[Micropython](#) is Python for microcontrollers. Using Micropython, you can write Python3 code and run it even on a bare metal architecture with limited resources.

Highlights of Micropython

- **Compact** - Fits and runs within just 256k of code space and 16k of RAM. No OS is needed, although you can also run it with an OS, if you want.
- **Compatible** - Strives to be as compatible as possible with normal Python (known as CPython).
- **Versatile** - Supports many architectures (x86, x86-64, ARM, ARM Thumb, Xtensa).
- **Interactive** - No need for the compile-flash-boot cycle. With the REPL (interactive prompt) you can type commands and execute them immediately, run scripts etc.
- **Popular** - Many platforms are supported. The user base is growing bigger. Notable forks: [MicroPython](#), [CircuitPython](#), [MicroPython_ESP32_psRAM_LoBo](#)
- **Embedded Oriented** - Comes with modules specifically for embedded systems, such as the [machine](#) module for accessing low-level hardware (I/O pins, ADC, UART, SPI, I2C, RTC, Timers etc.)

2.7.2 Why Micropython + LVGL?

Currently, Micropython does not have a good high-level GUI library by default. LVGL is an Object Oriented Component Based high-level GUI library, which seems to be a natural candidate to map into a higher level language, such as Python. LVGL is implemented in C and its APIs are in C.

Here are some advantages of using LVGL in Micropython:

- Develop GUI in Python, a very popular high level language. Use paradigms such as Object Oriented Programming.
- Usually, GUI development requires multiple iterations to get things right. With C, each iteration consists of **Change code > Build > Flash > Run**. In Micropython it's just **Change code > Run** ! You can even run commands interactively using the [REPL](#) (the interactive prompt)

Micropython + LVGL could be used for:

- Fast prototyping GUI.
- Shorten the cycle of changing and fine-tuning the GUI.
- Model the GUI in a more abstract way by defining reusable composite objects, taking advantage of Python's language features such as Inheritance, Closures, List Comprehension, Generators, Exception Handling, Arbitrary Precision Integers and others.
- Make LVGL accessible to a larger audience. No need to know C in order to create a nice GUI on an embedded system. This goes well with [CircuitPython vision](#). CircuitPython was designed with education in mind, to make it easier for new or unexperienced users to get started with embedded development.
- Creating tools to work with LVGL at a higher level (e.g. drag-and-drop designer).

2.7.3 So what does it look like?

TL;DR: It's very much like the C API, but Object Oriented for LVGL components.

Let's dive right into an example!

A simple example

```
import lvgl as lv
lv.init()
scr = lv.obj()
btn = lv.btn(scr)
btn.align(lv.scr_act(), lv.ALIGN.CENTER, 0, 0)
label = lv.label(btn)
label.set_text("Button")
lv.scr_load(scr)
```


2.7.4 How can I use it?

Online Simulator

If you want to experiment with LVGL + Micropython without downloading anything - you can use our online simulator! It's a fully functional LVGL + Micropython that runs entirely in the browser and allows you to edit a python script and run it.

[Click here to experiment on the online simulator](#)

Hello World

Note: the online simulator is available for lvgl v6 and v7.

PC Simulator

Micropython is ported to many platforms. One notable port is "unix", which allows you to build and run Micropython (+LVGL) on a Linux machine. (On a Windows machine you might need Virtual Box or WSL or MinGW or Cygwin etc.)

[Click here to know more information about building and running the unix port](#)

Embedded platform

At the end, the goal is to run it all on an embedded platform. Both Micropython and LVGL can be used on many embedded architectures, such as stm32, ESP32 etc. You would also need display and input drivers. We have some sample drivers (ESP32+ILI9341, as well as some other examples), but most chances are you would want to create your own input/display drivers for your specific purposes. Drivers can be implemented either in C as Micropython module, or in pure Micropython!

2.7.5 Where can I find more information?

- On the [Blog Post](#)
- On [lv_micropython README](#)
- On [lv_binding_micropython README](#)
- On LVGL forum (Feel free to ask anything!)
- On Micropython [docs](#) and [forum](#)

2.8 NuttX RTOS

2.8.1 What is NuttX?

NuttX is a mature and secure real-time operating system (RTOS) with an emphasis on technical standards compliance and small size. It is scalable from 8-bit to 64-bit microcontroller and microprocessors. Complaint with the Portable Operating System Interface (POSIX) and the American National Standards Institute (ANSI) standards and with many Linux-like subsystems. The best way to think about NuttX is thinking about a small Unix/Linux for microcontrollers.

Highlights of NuttX

- **Small** - Fits and runs within small microcontroller as small as 32KB Flash and 8KB of RAM.
 - **Compliant** - Strives to be as compatible as possible with POSIX and Linux.
 - **Versatile** - Supports many architectures (ARM, ARM Thumb, AVR, MIPS, OpenRISC, RISC-V 32-bit and 64-bit, RX65N, x86-64, Xtensa, Z80/Z180, etc).
 - **Modular** - Its modular design allows developers to select only what really matters and use modules to include new features.
 - **Popular** - NuttX is used by many companies around the world. Probably you already used a product with NuttX without knowing it was running NuttX.
 - **Predictable** - NuttX is a preemptible Realtime kernel, then you can use it to create predictable applications for realtime control.
-

2.8.2 Why NuttX + LVGL?

Although NuttX has its own graphic library called **NX**, LVGL is a good alternative because users could find more eye-candy demos and reuse it from previous projects. LVGL is an **Object Oriented Component Based** high-level GUI library, that could fit very well for a RTOS with advanced features like NuttX. LVGL is implemented in C and its APIs are in C.

Here are some advantages of using LVGL in NuttX

- Develop GUI in Linux first and when it is done just compile it for NuttX, nothing more, no wasting of time.
- Usually, GUI development for low level RTOS requires multiple iterations to get things right. Where each iteration consists of **Change code > Build > Flash > Run**. Using LVGL, Linux and NuttX you can reduce this process and just test everything on your computer and when it is done, compile it on NuttX and that is it.

NuttX + LVGL could be used for

- GUI demos to demonstrate your board graphics capacities.
 - Fast prototyping GUI for MVP (Minimum Viable Product) presentation.
 - Easy way to visualize sensors data directly on the board without using a computer.
 - Final products GUI without touchscreen (i.e. 3D Printer Interface using Rotary Encoder to Input data).
 - Final products interface with touchscreen (and bells and whistles).
-

2.8.3 How to get started with NuttX and LVGL?

There are many boards in the NuttX mainline (<https://github.com/apache/incubator-nuttX>) with support for LVGL. Let's to use the **STM32F429IDISCOVERY** as example because it is a very popular board.

First you need to install the pre-requisite on your system

Let's to use Linux and example, for [Windows](#)

```
$ sudo apt-get install automake bison build-essential flex gcc-arm-none-eabi gperf
↪git libncurses5-dev libtool libusb-dev libusb-1.0.0-dev pkg-config kconfig-
↪frontends openocd
```

Now let's to create a workspace to save our files

```
$ mkdir ~/nuttxspace
$ cd ~/nuttxspace
```

Clone the NuttX and Apps repositories:

```
$ git clone https://github.com/apache/incubator-nuttX nuttx
$ git clone https://github.com/apache/incubator-nuttX-apps apps
```

Configure NuttX to use the stm32f429i-disco board and the LVGL Demo

```
$ ./tools/configure.sh stm32f429i-disco:lvgl
$ make
```

If everything went fine you should have now the file `nuttX.bin` to flash on your board:

```
$ ls -l nuttx.bin
-rwxrwxr-x 1 alan alan 287144 Jun 27 09:26 nuttx.bin
```

Flashing the firmware in the board using OpenOCD:

```
$ sudo openocd -f interface/stlink-v2.cfg -f target/stm32f4x.cfg -c init -c "reset
↪halt" -c "flash write_image erase nuttx.bin 0x08000000"
```

Reset the board and using the 'NSH>' terminal start the LVGL demo:

```
nsh> lvgl_demo
```

2.8.4 Where can I find more information?

- On the [LVGL on LPCXpresso54628](#)
- NuttX mailing list [Apache NuttX Mailing List](#)

3.1 Set-up a project

3.1.1 Get the library

LVGL Graphics Library is available on GitHub: <https://github.com/lvgl/lvgl>.

You can clone it or download the latest version of the library from GitHub.

The graphics library is the **lvgl** directory which should be copied into your project.

3.1.2 Configuration file

There is a configuration header file for LVGL called **lv_conf.h**. In this you can set the library's basic behaviour, disable unused modules and features, adjusts the size of memory buffers in compile-time, etc.

Copy **lvgl/lv_conf_template.h** next to the *lvgl* directory and rename it to *lv_conf.h*. Open the file and change the `#if 0` at the beginning to `#if 1` to enable its content.

lv_conf.h can be copied other places as well but then you should add `LV_CONF_INCLUDE_SIMPLE` define to your compiler options (e.g. `-DLV_CONF_INCLUDE_SIMPLE` for gcc compiler) and set the include path manually. In this case LVGL will attempt to include *lv_conf.h* simply with `#include "lv_conf.h"`.

In the config file comments explain the meaning of the options. Be sure to set at least `LV_COLOR_DEPTH` according to your display's color depth.

3.1.3 Initialization

To use the graphics library you have to initialize it and the other components too. The order of the initialization is:

1. Call `lv_init()`.
2. Initialize your drivers.
3. Register the display and input devices drivers in LVGL. Learn more about *Display* and *Input device* registration.
4. Call `lv_tick_inc(x)` in every *x* milliseconds in an interrupt to tell the elapsed time. *Learn more*.
5. Call `lv_timer_handler()` periodically in every few milliseconds to handle LVGL related tasks. *Learn more*.

3.2 Display interface

To register a display for LVGL an `lv_disp_draw_buf_t` and an `lv_disp_drv_t` variables have to be initialized.

- `lv_disp_draw_buf_t` contains internal graphic buffer(s), called draw buffer(s).
- `lv_disp_drv_t` contains callback functions to interact with the display and manipulate drawing related things.

3.2.1 Draw buffer

Draw buffer(s) are simple array(s) that LVGL uses to render the content of the screen. Once rendering is ready the content of the draw buffer is send to display using the `flush_cb` set in the display driver (see below).

A draw draw buffer can be initialized via a `lv_disp_draw_buf_t` variable like this:

```
/*A static or global variable to store the buffers*/
static lv_disp_draw_buf_t disp_buf;

/*Static or global buffer(s). The second buffer is optional*/
static lv_color_t buf_1[MY_DISP_HOR_RES * 10];
static lv_color_t buf_2[MY_DISP_HOR_RES * 10];

/*Initialize `disp_buf` with the buffer(s). With only one buffer use NULL instead buf_
2 */
lv_disp_draw_buf_init(&disp_buf, buf_1, buf_2, MY_DISP_HOR_RES*10);
```

Note that `lv_disp_draw_buf_t` needs to be static, global or dynamically allocated and not a local variable destroyed if goes out of the scope.

As you can see the draw buffer can be smaller than the screen. In this case, the larger areas will be redrawn in smaller parts that fit into the draw buffer(s). If only a small area changes (e.g. a button is pressed) then only that area will be refreshed.

A larger buffer results in better performance but above 1/10 screen sized buffer(s) there is no significant performance improvement. Therefore it's recommended to choose the size of the draw buffer(s) to at least 1/10 screen sized.

If only **one buffer** is used LVGL draws the content of the screen into that draw buffer and sends it to the display. This way LVGL needs to wait until the content of the buffer is sent to the display before drawing something new in it.

If **two buffers** are used LVGL can draw into one buffer while the content of the other buffer is sent to display in the background. DMA or other hardware should be used to transfer the data to the display to let the MCU draw meanwhile. This way, the rendering and refreshing of the display become parallel.

In the display driver (`lv_disp_drv_t`) the `full_refresh` bit can be enabled to force LVGL always redraw the whole screen. It works in both *one buffer* and *two buffers* modes.

If `full_refresh` is enabled and 2 screen sized draw buffers are provided, LVGL work as "traditional" double buffering. It means in `flush_cb` only the address of the frame buffer needs to be changed to provided pointer (`color_p` parameter). This configuration should be used if the MCU has LCD controller periphery and not with an external display controller (e.g. ILI9341 or SSD1963).

You can measure the performance of different draw buffer configurations using the [benchmark example](#).

3.2.2 Display driver

Once the buffer initialization is ready a `lv_disp_drv_t` display drivers need to be

1. initialized with `lv_disp_drv_init(&disp_drv)`
2. its fields needs to be set
3. registered in LVGL with `lv_disp_drv_register(&disp_drv)`

Note that `lv_disp_drv_t` also needs to be static, global or dynamically allocated and not a local variable destroyed if goes out of the scope.

Mandatory fields

In the most simple case only the following fields of `lv_disp_drv_t` needs to be set:

- `draw_buf` pointer to an initialized `lv_disp_draw_buf_t` variable.
- `hor_res` horizontal resolution of the display in pixels.
- `ver_res` vertical resolution of the display in pixels.
- `flush_cb` a callback function to copy a buffer's content to a specific area of the display. `lv_disp_flush_ready(&disp_drv)` needs to be called when flushing is ready. LVGL might render the screen in multiple chunks and therefore call `flush_cb` multiple times. To see which is the last chunk of rendering use `lv_disp_flush_is_last(&disp_drv)`.

Optional fields

There are some optional data fields:

- `color_chroma_key` A color which will be drawn as transparent on chrome keyed images. Set to `LV_COLOR_CHROMA_KEY` by default from `lv_conf.h`.
- `anti_aliasing` use anti-aliasing (edge smoothing). Enabled by default if `LV_COLOR_DEPTH` is set to at least 16 in `lv_conf.h`.
- `rotated` and `sw_rotate` See the [Rotation](#) section below.
- `screen_transp` if 1 the screen itself can have transparency as well. `LV_COLOR_SCREEN_TRANSP` needs to enabled in `lv_conf.h` and requires `LV_COLOR_DEPTH 32`.
- `user_data` A custom `void` user data for the driver..

Some other optional callbacks to make easier and more optimal to work with monochrome, grayscale or other non-standard RGB displays:

- `rounder_cb` Round the coordinates of areas to redraw. E.g. a 2x2 px can be converted to 2x8. It can be used if the display controller can refresh only areas with specific height or width (usually 8 px height with monochrome displays).
- `set_px_cb` a custom function to write the draw buffer. It can be used to store the pixels more compactly in the draw buffer if the display has a special color format. (e.g. 1-bit monochrome, 2-bit grayscale etc.) This way the buffers used in `lv_disp_draw_buf_t` can be smaller to hold only the required number of bits for the given area size. Note that, rendering with `set_px_cb` is slower than normal rendering.
- `monitor_cb` A callback function that tells how many pixels were refreshed in how much time. Called when the last chunk is rendered and sent to the display.
- `clean_dcache_cb` A callback for cleaning any caches related to the display.

LVGL has built-in support to several GPUs (see `lv_conf.h`) but if something else is required these functions can be used to make LVGL use a GPU:

- `gpu_fill_cb` fill an area in the memory with a color.
- `gpu_wait_cb` if any GPU function return, while the GPU is still working, LVGL will use this function when required the be sure GPU rendering is ready.

Examples

All together it looks like this:

```
static lv_disp_drv_t disp_drv;           /*A variable to hold the drivers. Must be
↳static or global.*/
lv_disp_drv_init(&disp_drv);             /*Basic initialization*/
disp_drv.draw_buf = &disp_buf;           /*Set an initialized buffer*/
disp_drv.flush_cb = my_flush_cb;         /*Set a flush callback to draw to the
↳display*/
disp_drv.hor_res = 320;                  /*Set the horizontal resolution in pixels*/
disp_drv.ver_res = 240;                  /*Set the vertical resolution in pixels*/

lv_disp_t * disp;
disp = lv_disp_drv_register(&disp_drv); /*Register the driver and save the created
↳display objects*/
```

Here are some simple examples of the callbacks:

```
void my_flush_cb(lv_disp_drv_t * disp_drv, const lv_area_t * area, lv_color_t * color_
↳p)
{
    /*The most simple case (but also the slowest) to put all pixels to the screen one-
↳by-one
    *`put_px` is just an example, it needs to implemented by you.*/
    int32_t x, y;
    for(y = area->y1; y <= area->y2; y++) {
        for(x = area->x1; x <= area->x2; x++) {
            put_px(x, y, *color_p)
            color_p++;
        }
    }

    /* IMPORTANT!!!
    * Inform the graphics library that you are ready with the flushing*/
    lv_disp_flush_ready(disp_drv);
}

void my_gpu_fill_cb(lv_disp_drv_t * disp_drv, lv_color_t * dest_buf, const lv_area_t
↳
↳* dest_area, const lv_area_t * fill_area, lv_color_t color);
{
    /*It's an example code which should be done by your GPU*/
    uint32_t x, y;
    dest_buf += dest_width * fill_area->y1; /*Go to the first line*/

    for(y = fill_area->y1; y < fill_area->y2; y++) {
        for(x = fill_area->x1; x < fill_area->x2; x++) {
            dest_buf[x] = color;
        }
    }
}
```

(continues on next page)

(continued from previous page)

```

        dest_buf+=dest_width;    /*Go to the next line*/
    }
}

void my_rounder_cb(lv_disp_drv_t * disp_drv, lv_area_t * area)
{
    /* Update the areas as needed.
     * For example it makes the area to start only on 8th rows and have Nx8 pixel
     * height.*/
    area->y1 = area->y1 & 0x07;
    area->y2 = (area->y2 & 0x07) + 8;
}

void my_set_px_cb(lv_disp_drv_t * disp_drv, uint8_t * buf, lv_coord_t buf_w, lv_coord_t x, lv_coord_t y, lv_color_t color, lv_opa_t opa)
{
    /* Write to the buffer as required for the display.
     * For example it writes only 1-bit for monochrome displays mapped vertically.*/
    buf += buf_w * (y >> 3) + x;
    if(lv_color_brightness(color) > 128) (*buf) |= (1 << (y % 8));
    else (*buf) &= ~(1 << (y % 8));
}

void my_monitor_cb(lv_disp_drv_t * disp_drv, uint32_t time, uint32_t px)
{
    printf("%d px refreshed in %d ms\n", time, ms);
}

void my_clean_dcache_cb(lv_disp_drv_t * disp_drv, uint32_t)
{
    /* Example for Cortex-M (CMSIS) */
    SCB_CleanInvalidateDCache();
}

```

3.2.3 Rotation

LVGL supports rotation of the display in 90 degree increments. You can select whether you'd like software rotation or hardware rotation.

If you select software rotation (`sw_rotate` flag set to 1), LVGL will perform the rotation for you. Your driver can and should assume that the screen width and height have not changed. Simply flush pixels to the display as normal. Software rotation requires no additional logic in your `flush_cb` callback.

There is a noticeable amount of overhead to performing rotation in software, which is why hardware rotation is also available. In this mode, LVGL draws into the buffer as though your screen now has the width and height inverted. You are responsible for rotating the provided pixels yourself.

The default rotation of your display when it is initialized can be set using the `rotated` flag. The available options are `LV_DISP_ROT_NONE`, `LV_DISP_ROT_90`, `LV_DISP_ROT_180`, or `LV_DISP_ROT_270`. The rotation values are relative to how you would rotate the physical display in the clockwise direction. Thus, `LV_DISP_ROT_90` means you rotate the hardware 90 degrees clockwise, and the display rotates 90 degrees counterclockwise to compensate.

(Note for users upgrading from 7.10.0 and older: these new rotation enum values match up with the old 0/1 system for rotating 90 degrees, so legacy code should continue to work as expected. Software rotation is also disabled by default for compatibility.)

Display rotation can also be changed at runtime using the `lv_disp_set_rotation disp, rot` API.

Support for software rotation is a new feature, so there may be some glitches/bugs depending on your configuration. If you encounter a problem please open an issue on [GitHub](#).

3.2.4 Further reading

- [lv_port_disp_template.c](#) for a template for your own driver.
- [Drawing](#) to learn more about how rendering works in LVGL.
- [Display features](#) to learn more about higher level display features.

3.2.5 API

@description Display Driver HAL interface header file

Typedefs

typedef struct [_lv_disp_draw_buf_t](#) **lv_disp_draw_buf_t**
Structure for holding display buffer information.

typedef [_lv_disp_draw_buf_t](#) **lv_disp_draw_buf_t**

typedef struct [_lv_disp_drv_t](#) **lv_disp_drv_t**
Display Driver structure to be registered by HAL. Only its pointer will be saved in `lv_disp_t` so it should be declared as `static lv_disp_drv_t my_drv` or allocated dynamically.

typedef struct [_lv_disp_t](#) **lv_disp_t**
Display structure.

Note: `lv_disp_drv_t` should be the first member of the structure.

typedef [_lv_disp_t](#) **lv_disp_t**

Enums

enum **lv_disp_rot_t**
Values:

- enumerator **LV_DISP_ROT_NONE**
- enumerator **LV_DISP_ROT_90**
- enumerator **LV_DISP_ROT_180**
- enumerator **LV_DISP_ROT_270**

Functions

void **lv_disp_drv_init**(*lv_disp_drv_t* *driver)

Initialize a display driver with default values. It is used to have known values in the fields and not junk in memory. After it you can safely set only the fields you need.

Parameters **driver** -- pointer to driver variable to initialize

void **lv_disp_draw_buf_init**(*lv_disp_draw_buf_t* *draw_buf, void *buf1, void *buf2, uint32_t size_in_px_cnt)

Initialize a display buffer

Parameters

- **draw_buf** -- pointer *lv_disp_draw_buf_t* variable to initialize
- **buf1** -- A buffer to be used by LVGL to draw the image. Always has to be specified and can't be NULL. Can be an array allocated by the user. E.g. `static lv_color_t disp_buf1[1024 * 10]` Or a memory address e.g. in external SRAM
- **buf2** -- Optionally specify a second buffer to make image rendering and image flushing (sending to the display) parallel. In the `disp_drv->flush` you should use DMA or similar hardware to send the image to the display in the background. It lets LVGL to render next frame into the other buffer while previous is being sent. Set to NULL if unused.
- **size_in_px_cnt** -- size of the `buf1` and `buf2` in pixel count.

lv_disp_t ***lv_disp_drv_register**(*lv_disp_drv_t* *driver)

Register an initialized display driver. Automatically set the first display as active.

Parameters **driver** -- pointer to an initialized 'lv_disp_drv_t' variable. Only its pointer is saved!

Returns pointer to the new display or NULL on error

void **lv_disp_drv_update**(*lv_disp_t* *disp, *lv_disp_drv_t* *new_drv)

Update the driver in run time.

Parameters

- **disp** -- pointer to a display. (return value of `lv_disp_drv_register`)
- **new_drv** -- pointer to the new driver

void **lv_disp_remove**(*lv_disp_t* *disp)

Remove a display

Parameters **disp** -- pointer to display

void **lv_disp_set_default**(*lv_disp_t* *disp)

Set a default display. The new screens will be created on it by default.

Parameters **disp** -- pointer to a display

lv_disp_t ***lv_disp_get_default**(void)

Get the default display

Returns pointer to the default display

lv_coord_t **lv_disp_get_hor_res**(*lv_disp_t* *disp)

Get the horizontal resolution of a display

Parameters **disp** -- pointer to a display (NULL to use the default display)

Returns the horizontal resolution of the display

lv_coord_t **lv_disp_get_ver_res**(lv_disp_t *disp)

Get the vertical resolution of a display

Parameters **disp** -- pointer to a display (NULL to use the default display)

Returns the vertical resolution of the display

bool **lv_disp_get_antialiasing**(lv_disp_t *disp)

Get if anti-aliasing is enabled for a display or not

Parameters **disp** -- pointer to a display (NULL to use the default display)

Returns true: anti-aliasing is enabled; false: disabled

lv_coord_t **lv_disp_get_dpi**(const lv_disp_t *disp)

Get the DPI of the display

Parameters **disp** -- pointer to a display (NULL to use the default display)

Returns dpi of the display

void **lv_disp_set_rotation**(lv_disp_t *disp, lv_disp_rot_t rotation)

Set the rotation of this display.

Parameters

- **disp** -- pointer to a display (NULL to use the default display)
- **rotation** -- rotation angle

lv_disp_rot_t **lv_disp_get_rotation**(lv_disp_t *disp)

Get the current rotation of this display.

Parameters **disp** -- pointer to a display (NULL to use the default display)

Returns rotation angle

lv_disp_t ***lv_disp_get_next**(lv_disp_t *disp)

Get the next display.

Parameters **disp** -- pointer to the current display. NULL to initialize.

Returns the next display or NULL if no more. Give the first display when the parameter is NULL

lv_disp_draw_buf_t ***lv_disp_get_draw_buf**(lv_disp_t *disp)

Get the internal buffer of a display

Parameters **disp** -- pointer to a display

Returns pointer to the internal buffers

struct **lv_disp_draw_buf_t**

#include <lv_hal_disp.h> Structure for holding display buffer information.

Public Members

void ***buf1**
First display buffer.

void ***buf2**
Second display buffer.

void ***buf_act**

uint32_t **size**

lv_area_t **area**

int **flushing**

int **flushing_last**

uint32_t **last_area**

uint32_t **last_part**

struct **_lv_disp_drv_t**

#include <lv_hal_disp.h> Display Driver structure to be registered by HAL. Only its pointer will be saved in `lv_disp_t` so it should be declared as `static lv_disp_drv_t my_drv` or allocated dynamically.

Public Members

lv_coord_t **hor_res**
Horizontal resolution.

lv_coord_t **ver_res**
Vertical resolution.

lv_disp_draw_buf_t ***draw_buf**
Pointer to a buffer initialized with `lv_disp_draw_buf_init()`. LVGL will use this buffer(s) to draw the screens contents

uint32_t **full_refresh**
1: Always make the whole screen redrawn

uint32_t **sw_rotate**
1: use software rotation (slower)

uint32_t **antialiasing**
1: anti-aliasing is enabled on this display.

uint32_t **rotated**
1: turn the display by 90 degree.

Warning: Does not update coordinates for you!

uint32_t **screen_transp**

uint32_t **dpi**

Handle if the screen doesn't have a solid (opa == LV_OPA_COVER) background. Use only if required because it's slower.

void (***flush_cb**)(struct *_lv_disp_drv_t* *disp_drv, const lv_area_t *area, lv_color_t *color_p)

DPI (dot per inch) of the display. Default value is LV_DPI_DEF. MANDATORY: Write the internal buffer (draw_buf) to the display. 'lv_disp_flush_ready()' has to be called when finished

void (***rounder_cb**)(struct *_lv_disp_drv_t* *disp_drv, lv_area_t *area)

OPTIONAL: Extend the invalidated areas to match with the display drivers requirements E.g. round y to, 8, 16 ..) on a monochrome display

void (***set_px_cb**)(struct *_lv_disp_drv_t* *disp_drv, uint8_t *buf, lv_coord_t buf_w, lv_coord_t x, lv_coord_t y, lv_color_t color, lv_opa_t opa)

OPTIONAL: Set a pixel in a buffer according to the special requirements of the display Can be used for color format not supported in LittelvGL. E.g. 2 bit -> 4 gray scales

Note: Much slower then drawing with supported color formats.

void (***monitor_cb**)(struct *_lv_disp_drv_t* *disp_drv, uint32_t time, uint32_t px)

OPTIONAL: Called after every refresh cycle to tell the rendering and flushing time + the number of flushed pixels

void (***wait_cb**)(struct *_lv_disp_drv_t* *disp_drv)

OPTIONAL: Called periodically while lvgl waits for operation to be completed. For example flushing or GPU User can execute very simple tasks here or yield the task

void (***clean_dcache_cb**)(struct *_lv_disp_drv_t* *disp_drv)

OPTIONAL: Called when lvgl needs any CPU cache that affects rendering to be cleaned

void (***gpu_wait_cb**)(struct *_lv_disp_drv_t* *disp_drv)

OPTIONAL: called to wait while the gpu is working

void (***drv_update_cb**)(struct *_lv_disp_drv_t* *disp_drv)

OPTIONAL: called when driver parameters are updated

void (***gpu_fill_cb**)(struct *_lv_disp_drv_t* *disp_drv, lv_color_t *dest_buf, lv_coord_t dest_width, const lv_area_t *fill_area, lv_color_t color)

OPTIONAL: Fill a memory with a color (GPU only)

lv_color_t **color_chroma_key**

On CHROMA_KEYED images this color will be transparent. LV_COLOR_CHROMA_KEY by default. (lv_conf.h)

void ***user_data**

Custom display driver user data

struct **_lv_disp_t**
#include <lv_hal_disp.h> Display structure.

Note: `lv_disp_drv_t` should be the first member of the structure.

Public Members

lv_disp_drv_t ***driver**
 < Driver to the display A timer which periodically checks the dirty areas and refreshes them

lv_timer_t ***refr_timer**
 The theme assigned to the screen

struct *_lv_theme_t* ***theme**

struct *_lv_obj_t* ****screens**
 Screens of the display Array of screen objects.

struct *_lv_obj_t* ***act_scr**
 Currently active screen on this display

struct *_lv_obj_t* ***prev_scr**
 Previous screen. Used during screen animations

struct *_lv_obj_t* ***scr_to_load**
 The screen prepared to load in `lv_scr_load_anim`

struct *_lv_obj_t* ***top_layer**
 See *lv_disp_get_layer_top*

struct *_lv_obj_t* ***sys_layer**
 See *lv_disp_get_layer_sys*

uint32_t **screen_cnt**

uint8_t **del_prev**
 1: Automatically delete the previous screen when the screen load animation is ready

lv_opa_t **bg_opa**
 Opacity of the background color or wallpaper

lv_color_t **bg_color**
 Default display color when screens are transparent

const void ***bg_img**
 An image source to display as wallpaper

lv_area_t **inv_areas**[LV_INV_BUF_SIZE]
 Invalidated (marked to redraw) areas

```
uint8_t inv_area_joined[LV_INV_BUF_SIZE]
uint16_t inv_p
uint32_t last_activity_time
    Last time when there was activity on this display
```

3.3 Input device interface

3.3.1 Types of input devices

To register an input device an `lv_indev_drv_t` variable has to be initialized:

```
lv_indev_drv_t indev_drv;
lv_indev_drv_init(&indev_drv);           /*Basic initialization*/
indev_drv.type = ...                     /*See below.*/
indev_drv.read_cb = ...                  /*See below.*/
/*Register the driver in LVGL and save the created input device object*/
lv_indev_t * my_indev = lv_indev_drv_register(&indev_drv);
```

type can be

- `LV_INDEV_TYPE_POINTER` touchpad or mouse
- `LV_INDEV_TYPE_KEYPAD` keyboard or keypad
- `LV_INDEV_TYPE_ENCODER` encoder with left/right turn and push options
- `LV_INDEV_TYPE_BUTTON` external buttons virtually pressing the screen

`read_cb` is a function pointer which will be called periodically to report the current state of an input device.

Visit [Input devices](#) to learn more about input devices in general.

Touchpad, mouse or any pointer

Input devices that can click points of the screen belong to this category.

```
indev_drv.type = LV_INDEV_TYPE_POINTER;
indev_drv.read_cb = my_input_read;

...

void my_input_read(lv_indev_drv_t * drv, lv_indev_data_t*data)
{
    if(touchpad_pressed) {
        data->point.x = touchpad_x;
        data->point.y = touchpad_y;
        data->state = LV_INDEV_STATE_PRESSED;
    } else {
        data->state = LV_INDEV_STATE_RELEASED;
    }
}
```

To set a mouse cursor use `lv_indev_set_cursor(my_indev, &img_cursor)`. (`my_indev` is the return value of `lv_indev_drv_register`)

Keypad or keyboard

Full keyboards with all the letters or simple keypads with a few navigation buttons belong here.

To use a keyboard/keypad:

- Register a `read_cb` function with `LV_INDEV_TYPE_KEYPAD` type.
- An object group has to be created: `lv_group_t * g = lv_group_create()` and objects have to be added to it with `lv_group_add_obj(g, obj)`
- The created group has to be assigned to an input device: `lv_indev_set_group(my_indev, g)` (`my_indev` is the return value of `lv_indev_drv_register`)
- Use `LV_KEY_...` to navigate among the objects in the group. See `lv_core/lv_group.h` for the available keys.

```
indev_drv.type = LV_INDEV_TYPE_KEYPAD;
indev_drv.read_cb = keyboard_read;

...

void keyboard_read(lv_indev_drv_t * drv, lv_indev_data_t*data){
    data->key = last_key();           /*Get the last pressed or released key*/

    if(key_pressed()) data->state = LV_INDEV_STATE_PRESSED;
    else data->state = LV_INDEV_STATE_RELEASED;
}
```

Encoder

With an encoder you can do 4 things:

1. Press its button
2. Long-press its button
3. Turn left
4. Turn right

In short, the Encoder input devices work like this:

- By turning the encoder you can focus on the next/previous object.
- When you press the encoder on a simple object (like a button), it will be clicked.
- If you press the encoder on a complex object (like a list, message box, etc.) the object will go to edit mode whereby turning the encoder you can navigate inside the object.
- To leave edit mode press long the button.

To use an *Encoder* (similarly to the *Keypads*) the objects should be added to groups.

```
indev_drv.type = LV_INDEV_TYPE_ENCODER;
indev_drv.read_cb = encoder_read;

...

void encoder_read(lv_indev_drv_t * drv, lv_indev_data_t*data){
    data->enc_diff = enc_get_new_moves();
}
```

(continues on next page)

(continued from previous page)

```

if(enc_pressed()) data->state = LV_INDEV_STATE_PRESSED;
else data->state = LV_INDEV_STATE_RELEASED;
}

```

Using buttons with Encoder logic

In addition to standard encoder behavior, you can also utilize its logic to navigate(focus) and edit widgets using buttons. This is especially handy if you have only few buttons available, or you want to use other buttons in addition to encoder wheel.

You need to have 3 buttons available:

- LV_KEY_ENTER will simulate press or pushing of the encoder button
- LV_KEY_LEFT will simulate turning encoder left
- LV_KEY_RIGHT will simulate turning encoder right
- other keys will be passed to the focused widget

If you hold the keys it will simulate encoder click with period specified in `indev_drv.long_press_rep_time`.

```

indev_drv.type = LV_INDEV_TYPE_ENCODER;
indev_drv.read_cb = encoder_with_keys_read;

...

bool encoder_with_keys_read(lv_indev_drv_t * drv, lv_indev_data_t*data){
    data->key = last_key();           /*Get the last pressed or released key*/
                                     /* use LV_KEY_ENTER for encoder press */
    if(key_pressed()) data->state = LV_INDEV_STATE_PRESSED;
    else {
        data->state = LV_INDEV_STATE_RELEASED;
        /* Optionally you can also use enc_diff, if you have encoder*/
        data->enc_diff = enc_get_new_moves();
    }

    return false; /*No buffering now so no more data read*/
}

```

Button

Buttons mean external "hardware" buttons next to the screen which are assigned to specific coordinates of the screen. If a button is pressed it will simulate the pressing on the assigned coordinate. (Similarly to a touchpad)

To assign buttons to coordinates use `lv_indev_set_button_points(my_indev, points_array)`. `points_array` should look like `const lv_point_t points_array[] = { {12,30},{60,90}, ... }`

Important: The `points_array` can't go out of scope. Either declare it as a global variable or as a static variable inside a function.

```

indev_drv.type = LV_INDEV_TYPE_BUTTON;
indev_drv.read_cb = button_read;

...

void button_read(lv_indev_drv_t * drv, lv_indev_data_t*data){
    static uint32_t last_btn = 0;    /*Store the last pressed button*/
    int btn_pr = my_btn_read();      /*Get the ID (0,1,2...) of the pressed button*/
    if(btn_pr >= 0) {                 /*Is there a button press? (E.g. -1 indicated no
↪button was pressed)*/
        last_btn = btn_pr;           /*Save the ID of the pressed button*/
        data->state = LV_INDEV_STATE_PRESSED; /*Set the pressed state*/
    } else {
        data->state = LV_INDEV_STATE_RELEASED; /*Set the released state*/
    }

    data->btn = last_btn;             /*Save the last button*/
}

```

3.3.2 Other features

Parameters

The default value of the following parameters can be changed in `lv_indev_drv_t`:

- `scroll_limit` Number of pixels to slide before actually scrolling the object.
- `scroll_throw` Scroll throw (momentum) slow-down in [%]. Greater value means faster slow-down.
- `long_press_time` Press time to send `LV_EVENT_LONG_PRESSED` (in milliseconds)
- `long_press_rep_time` Interval of sending `LV_EVENT_LONG_PRESSED_REPEAT` (in milliseconds)
- `read_timer` pointer to the `lv_timer` which reads the input device. Its parameters can be changed by `lv_timer_...()` functions. `LV_INDEV_DEF_READ_PERIOD` in `lv_conf.h` sets the default read period.

Feedback

Besides `read_cb` a `feedback_cb` callback can be also specified in `lv_indev_drv_t`. `feedback_cb` is called when any type of event is sent by the input devices. (independently from its type). It allows making feedback for the user e.g. to play a sound on `LV_EVENT_CLICKED`.

Associating with a display

Every Input device is associated with a display. By default, a new input device is added to the lastly created or the explicitly selected (using `lv_disp_set_default()`) display. The associated display is stored and can be changed in `disp` field of the driver.

Buffered reading

By default LVGL calls `read_cb` periodically. This way there is a chance that some user gestures are missed.

To solve this you can write an event driven driver for your input device that buffers measured data. In `read_cb` you can set the buffered data instead of reading the input device. You can set the `data->continue_reading` flag to tell that LVGL there is more data to read and it should call the `read_cb` again.

3.3.3 Further reading

- [lv_port_indev_template.c](#) for a template for your own driver.
- [INdev features](#) to learn more about higher level input device features.

3.3.4 API

@description Input Device HAL interface layer header file

Typedefs

```
typedef struct \_lv\_indev\_drv\_t lv_indev_drv_t
    Initialized by the user and registered by 'lv_indev_add()'
```

```
typedef struct \_lv\_indev\_proc\_t lv_indev_proc_t
    Run time data of input devices Internally used by the library, you should not need to touch it.
```

```
typedef struct \_lv\_indev\_t lv_indev_t
    The main input device descriptor with driver, runtime data ('proc') and some additional information
```

```
typedef \_lv\_indev\_t lv_indev_t
```

Enums

```
enum lv_indev_type_t
    Possible input device types
```

Values:

```
enumerator LV_INDEV_TYPE_NONE
    Uninitialized state
```

```
enumerator LV_INDEV_TYPE_POINTER
    Touch pad, mouse, external button
```

```
enumerator LV_INDEV_TYPE_KEYPAD
    Keypad or keyboard
```

```
enumerator LV_INDEV_TYPE_BUTTON
    External (hardware button) which is assigned to a specific point of the screen
```

enumerator **LV_INDEV_TYPE_ENCODER**
Encoder with only Left, Right turn and a Button

enum **lv_indev_state_t**

States for input devices

Values:

enumerator **LV_INDEV_STATE_RELEASED**

enumerator **LV_INDEV_STATE_PRESSED**

Functions

void **lv_indev_drv_init**(*lv_indev_drv_t* *driver)

Initialize an input device driver with default values. It is used to surly have known values in the fields ant not memory junk. After it you can set the fields.

Parameters **driver** -- pointer to driver variable to initialize

lv_indev_t ***lv_indev_drv_register**(*lv_indev_drv_t* *driver)

Register an initialized input device driver.

Parameters **driver** -- pointer to an initialized 'lv_indev_drv_t' variable (can be local variable)

Returns pointer to the new input device or NULL on error

void **lv_indev_drv_update**(*lv_indev_t* *indev, *lv_indev_drv_t* *new_drv)

Update the driver in run time.

Parameters

- **indev** -- pointer to a input device. (return value of lv_indev_drv_register)
- **new_drv** -- pointer to the new driver

lv_indev_t ***lv_indev_get_next**(*lv_indev_t* *indev)

Get the next input device.

Parameters **indev** -- pointer to the current input device. NULL to initialize.

Returns the next input devise or NULL if no more. Give the first input device when the parameter is NULL

void **_lv_indev_read**(*lv_indev_t* *indev, *lv_indev_data_t* *data)

Read data from an input device.

Parameters

- **indev** -- pointer to an input device
- **data** -- input device will write its data here

struct **lv_indev_data_t**

#include <lv_hal_indev.h> Data structure passed to an input driver to fill

Public Members

`lv_point_t` **point**

For `LV_INDEV_TYPE_POINTER` the currently pressed point

`uint32_t` **key**

For `LV_INDEV_TYPE_KEYPAD` the currently pressed key

`uint32_t` **btn_id**

For `LV_INDEV_TYPE_BUTTON` the currently pressed button

`int16_t` **enc_diff**

For `LV_INDEV_TYPE_ENCODER` number of steps since the previous read

`lv_indev_state_t` **state**

`LV_INDEV_STATE_REL` or `LV_INDEV_STATE_PR`

`bool` **continue_reading**

Call the read callback until it's set to true

`struct` **lv_indev_drv_t**

`#include <lv_hal_indev.h>` Initialized by the user and registered by 'lv_indev_add()'

Public Members

`lv_indev_type_t` **type**

< Input device type Function pointer to read input device data.

`void (*read_cb)(struct lv_indev_drv_t *indev_drv, lv_indev_data_t *data)`

`void (*feedback_cb)(struct lv_indev_drv_t *, uint8_t)`

Called when an action happened on the input device. The second parameter is the event from `lv_event_t`

`void *user_data`

`struct lv_disp_t *disp`

< Pointer to the assigned display Timer to periodically read the input device

`lv_timer_t` ***read_timer**

Number of pixels to slide before actually drag the object

`uint8_t` **scroll_limit**

Drag throw slow-down in [%]. Greater value means faster slow-down

`uint8_t` **scroll_throw**

At least this difference should between two points to evaluate as gesture

`uint8_t` **gesture_min_velocity**

At least this difference should be to send a gesture

uint8_t **gesture_limit**
Long press time in milliseconds

uint16_t **long_press_time**
Repeated trigger period in long press [ms]

uint16_t **long_press_repeat_time**

struct **_lv_indev_proc_t**
#include <lv_hal_indev.h> Run time data of input devices Internally used by the library, you should not need to touch it.

Public Members

lv_indev_state_t **state**
Current state of the input device.

uint8_t **long_pr_sent**

uint8_t **reset_query**

uint8_t **disabled**

uint8_t **wait_until_release**

lv_point_t **act_point**
Current point of input device.

lv_point_t **last_point**
Last point of input device.

lv_point_t **last_raw_point**
Last point read from read_cb.

lv_point_t **vect**
Difference between act_point and last_point.

lv_point_t **scroll_sum**

lv_point_t **scroll_throw_vect**

lv_point_t **scroll_throw_vect_ori**

struct *_lv_obj_t* ***act_obj**

struct *_lv_obj_t* ***last_obj**

struct *_lv_obj_t* ***scroll_obj**

struct *_lv_obj_t* ***last_pressed**

lv_area_t **scroll_area**

lv_point_t **gesture_sum**

lv_dir_t **scroll_dir**

lv_dir_t **gesture_dir**

```

uint8_t gesture_sent
struct _lv_indev_proc_t::[anonymous]::[anonymous] pointer
lv_indev_state_t last_state
uint32_t last_key
struct _lv_indev_proc_t::[anonymous]::[anonymous] keypad
union _lv_indev_proc_t::[anonymous] types
uint32_t pr_timestamp
    Pressed time stamp

uint32_t longpr_rep_timestamp
    Long press repeat time stamp

```

```

struct _lv_indev_t
    #include <lv_hal_indev.h> The main input device descriptor with driver, runtime data ('proc') and some additional
    information

```

Public Members

```

lv_indev_drv_t *driver
_lv_indev_proc_t proc
struct _lv_obj_t *cursor
    Cursor for LV_INPUT_TYPE_POINTER

struct _lv_group_t *group
    Keypad destination group

const lv_point_t *btn_points
    Array points assigned to the button ()screen will be pressed here by the buttons

```

3.4 Tick interface

The LVGL needs a system tick to know the elapsed time for animation and other tasks.

You need to call the `lv_tick_inc(tick_period)` function periodically and tell the call period in milliseconds. For example, `lv_tick_inc(1)` for calling in every millisecond.

`lv_tick_inc` should be called in a higher priority routine than `lv_task_handler()` (e.g. in an interrupt) to precisely know the elapsed milliseconds even if the execution of `lv_task_handler` takes longer time.

With FreeRTOS `lv_tick_inc` can be called in `vApplicationTickHook`.

On Linux based operating system (e.g. on Raspberry Pi) `lv_tick_inc` can be called in a thread as below:

```

void * tick_thread (void *args)
{
    while(1) {
        usleep(5*1000);    /*Sleep for 5 millisecond*/
    }
}

```

(continues on next page)

(continued from previous page)

```

        lv_tick_inc(5);      /*Tell LVGL that 5 milliseconds were elapsed*/
    }
}

```

3.4.1 API

Provide access to the system tick with 1 millisecond resolution

Functions

uint32_t **lv_tick_get**(void)

Get the elapsed milliseconds since start up

Returns the elapsed milliseconds

uint32_t **lv_tick_elaps**(uint32_t prev_tick)

Get the elapsed milliseconds since a previous time stamp

Parameters **prev_tick** -- a previous time stamp (return value of *lv_tick_get()*)

Returns the elapsed milliseconds since 'prev_tick'

3.5 Task Handler

To handle the tasks of LVGL you need to call `lv_timer_handler()` periodically in one of the followings:

- *while(1)* of *main()* function
- timer interrupt periodically (low priority then `lv_tick_inc()`)
- an OS task periodically

The timing is not critical but it should be about 5 milliseconds to keep the system responsive.

Example:

```

while(1) {
    lv_timer_handler();
    my_delay_ms(5);
}

```

To learn more about timers visit the [Timer](#) section.

3.6 Sleep management

The MCU can go to sleep when no user input happens. In this case, the main `while(1)` should look like this:

```

while(1) {
    /*Normal operation (no sleep) in < 1 sec inactivity*/
    if(lv_disp_get_inactive_time(NULL) < 1000) {
        lv_task_handler();
    }
}

```

(continues on next page)

(continued from previous page)

```

/*Sleep after 1 sec inactivity*/
else {
    timer_stop(); /*Stop the timer where lv_tick_inc() is called*/
    sleep(); /*Sleep the MCU*/
}
my_delay_ms(5);
}

```

You should also add below lines to your input device read function if a wake-up (press, touch or click etc.) happens:

```

lv_tick_inc(LV_DISP_DEF_REFR_PERIOD); /*Force task execution on wake-up*/
timer_start(); /*Restart the timer where lv_tick_inc() is
↳ called*/
lv_task_handler(); /*Call 'lv_task_handler()' manually to process
↳ the wake-up event*/

```

In addition to `lv_disp_get_inactive_time()` you can check `lv_anim_count_running()` to see if every animations are finished.

3.7 Operating system and interrupts

LVGL is **not thread-safe** by default.

However, in the following conditions it's valid to call LVGL related functions:

- In *events*. Learn more in [Events](#).
- In *lv_timer*. Learn more in [Timers](#).

3.7.1 Tasks and threads

If you need to use real tasks or threads, you need a mutex which should be invoked before the call of `lv_timer_handler` and released after it. Also, you have to use the same mutex in other tasks and threads around every LVGL (`lv_...`) related function calls and codes. This way you can use LVGL in a real multitasking environment. Just make use of a mutex to avoid the concurrent calling of LVGL functions.

3.7.2 Interrupts

Try to avoid calling LVGL functions from the interrupts (except `lv_tick_inc()` and `lv_disp_flush_ready()`). But, if you need to do this you have to disable the interrupt which uses LVGL functions while `lv_timer_handler` is running. It's a better approach to set a flag or some value and periodically check it in an `lv_timer`.

3.8 Logging

LVGL has built-in *Log* module to inform the user about what is happening in the library.

3.8.1 Log level

To enable logging, set `LV_USE_LOG 1` in `lv_conf.h` and set `LV_LOG_LEVEL` to one of the following values:

- `LV_LOG_LEVEL_TRACE` A lot of logs to give detailed information
- `LV_LOG_LEVEL_INFO` Log important events
- `LV_LOG_LEVEL_WARN` Log if something unwanted happened but didn't cause a problem
- `LV_LOG_LEVEL_ERROR` Only critical issue, when the system may fail
- `LV_LOG_LEVEL_USER` Only user messages
- `LV_LOG_LEVEL_NONE` Do not log anything

The events which have a higher level than the set log level will be logged too. E.g. if you `LV_LOG_LEVEL_WARN`, errors will be also logged.

3.8.2 Printing logs

Logging with printf

If your system supports `printf`, you just need to enable `LV_LOG_PRINTF` in `lv_conf.h` to send the logs with `printf`.

Custom log function

If you can't use `printf` or want to use a custom function to log, you can register a "logger" callback with `lv_log_register_print_cb()`.

For example:

```
void my_log_cb(const char * buf)
{
    serial_send(buf, strlen(buf));
}

...

lv_log_register_print_cb(my_log_cb);
```

3.8.3 Add logs

You can also use the log module via the `LV_LOG_TRACE/INFO/WARN/ERROR/USER(text)` functions.

OVERVIEW

4.1 Objects

In the LVGL the **basic building blocks** of a user interface are the objects, also called *Widgets*. For example a *Button*, *Label*, *Image*, *List*, *Chart* or *Text area*.

Check all the *Object types* here.

All objects are referenced using an `lv_obj_t` pointer as a handle. This pointer can later be used to set or get the attributes of the object.

4.1.1 Attributes

Basic attributes

All object types share some basic attributes:

- Position
- Size
- Parent
- Styles
- Event handlers
- Etc

You can set/get these attributes with `lv_obj_set_...` and `lv_obj_get_...` functions. For example:

```
/*Set basic object attributes*/  
lv_obj_set_size(btn1, 100, 50);           /*Set a button's size*/  
lv_obj_set_pos(btn1, 20,30);              /*Set a button's position*/
```

To see all the available functions visit the *Base object's documentation*.

Specific attributes

The object types have special attributes too. For example, a slider has

- Minimum and maximum values
- Current value

For these attributes, every object type have unique API functions. For example for a slider:

```
/*Set slider specific attributes*/
lv_slider_set_range(slider1, 0, 100);           /*Set ↵
↪the min. and max. values*/
lv_slider_set_value(slider1, 40, LV_ANIM_ON);    /*Set the current value ↵
↪(position)*/
```

The API of the widgets is described in their [Documentation](#) but you can also check the respective header files (e.g. `widgets/lv_slider.h`)

4.1.2 Working mechanisms

Parent-child structure

A parent object can be considered as the container of its children. Every object has exactly one parent object (except screens), but a parent can have any number of children. There is no limitation for the type of the parent but, there are typical parent (e.g. button) and typical child (e.g. label) objects.

Moving together


If the position of the parent changes the children will move with the parent. Therefore all positions are relative to the parent.



```
lv_obj_t * parent = lv_obj_create(lv_scr_act());    /*Create a parent object on the_
↳current screen*/
lv_obj_set_size(parent, 100, 80);                  /*Set the size of the_
↳parent*/

lv_obj_t * obj1 = lv_obj_create(parent);            /*Create an object on the_
↳previously created parent object*/
lv_obj_set_pos(obj1, 10, 10);                       /*Set the position of the_
↳new object*/
```

Modify the position of the parent:

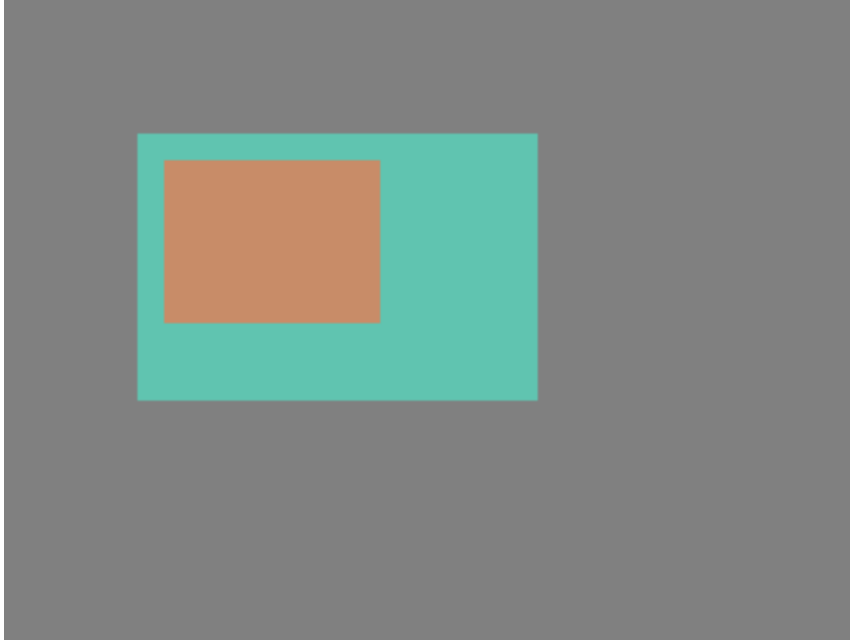


```
lv_obj_set_pos(parent, 50, 50);                    /*Move the parent. The child will move with it.
↳*/
```

(For simplicity the adjusting of colors of the objects is not shown in the example.)

Visibility only on the parent

If a child is partially or fully out of its parent then the parts outside will not be visible.

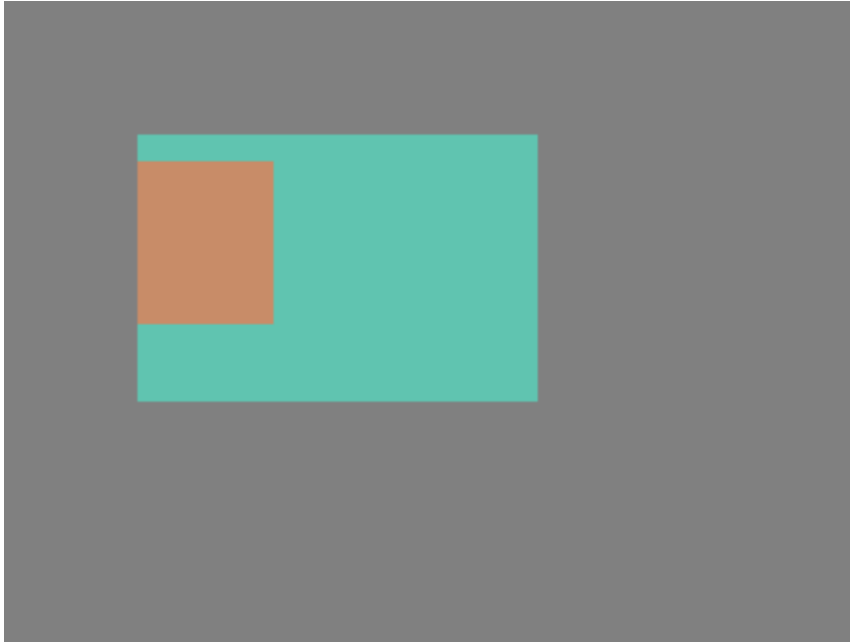

```
lv_obj_set_x(obj1, -30);           /*Move the child a little bit off the parent*/
```

Create and delete objects

In LVGL objects can be created and deleted dynamically in run time. It means only the currently created (existing) objects consume RAM.

It allows to create a screen just when a button is clicked to open it. A delete the screen when a new screen is loaded.

Or the UI can be created based on the current environment of the device. For example create meter, charts, bars, slider etc according to the currently attached sensors.

Every widget has its own **create** function with a prototype like this:

```
lv_obj_t * lv_<widget>_create(lv_obj_t * parent, <other paramaters if any>);
```

In most of the cases the create functions have only a *parent* parameter that tells on which object create the new widget.

The return value is a pointer to the created object with `lv_obj_t *` type.

There is a common **delete** function for all object types. It deletes the object and all of its children.

```
void lv_obj_del(lv_obj_t * obj);
```

`lv_obj_del` will delete the object immediately. If for any reason you can't delete the object immediately you can use `lv_obj_del_async(obj)` that will perform the deletion on the next call of `lv_timer_handler()`. It is useful e.g. if you want to delete the parent of an object in the child's `LV_EVENT_DELETE` signal.

You can remove all the children of an object (but not the object itself) using `lv_obj_clean(obj)`.

4.1.3 Screens

Create screens

The screens are special objects which have no parent object. So they can be created like:

```
lv_obj_t * scr1 = lv_obj_create(NULL);
```

Screens can be created with any object type. For example, a *Base object* or an image to make a wallpaper.

Get the active screen

There is always an active screen on each display. By default, the library creates and loads a "Base object" as a screen for each display.

To get the currently active screen use the `lv_scr_act()` function.

Load screens

To load a new screen, use `lv_scr_load(scr1)`.

Layers

There are two automatically generated layers:

- top layer
- system layer

They are independent of the screens and they will be shown on every screen. The *top layer* is above every object on the screen and the *system layer* is above the *top layer* too. You can add any pop-up windows to the *top layer* freely. But, the *system layer* is restricted to system-level things (e.g. mouse cursor will be placed here in `lv_indev_set_cursor()`).

The `lv_layer_top()` and `lv_layer_sys()` functions gives a pointer to the top or system layer.

Read the [Layer overview](#) section to learn more about layers.

Load screen with animation

A new screen can be loaded with animation too using `lv_scr_load_anim(scr, transition_type, time, delay, auto_del)`. The following transition types exist:

- `LV_SCR_LOAD_ANIM_NONE`: switch immediately after `delay` milliseconds
- `LV_SCR_LOAD_ANIM_OVER_LEFT/RIGHT/TOP/BOTTOM` move the new screen over the current towards the given direction
- `LV_SCR_LOAD_ANIM_MOVE_LEFT/RIGHT/TOP/BOTTOM` move both the current and new screens towards the given direction
- `LV_SCR_LOAD_ANIM_FADE_ON` fade the new screen over the old screen

Setting `auto_del` to `true` will automatically delete the old screen when the animation is finished.

The new screen will become active (returned by `lv_scr_act()`) when the animations starts after `delay` time.

Handling multiple displays

Screens are created on the currently selected *default display*. The *default display* is the last registered display with `lv_disp_drv_register` or you can explicitly select a new default display using `lv_disp_set_default(display)`.

`lv_scr_act()`, `lv_scr_load()` and `lv_scr_load_anim()` operate on the default screen.

Visit [Multi-display support](#) to learn more.

4.1.4 Parts

The widgets are built from multiple parts. For example a *Base object* uses the main and scroll bar parts but a *Slider* uses the main, the indicator and the knob parts. Parts are similar to *pseudo elements* in CSS.

The following predefined parts exist in LVGL:

- `LV_PART_MAIN` A background like rectangle*/
- `LV_PART_SCROLLBAR` The scrollbar(s)
- `LV_PART_INDICATOR` Indicator, e.g. for slider, bar, switch, or the tick box of the checkbox
- `LV_PART_KNOB` Like a handle to grab to adjust the value*/
- `LV_PART_SELECTED` Indicate the currently selected option or section
- `LV_PART_ITEMS` Used if the widget has multiple similar elements (e.g. label cells)*/
- `LV_PART_TICKS` Ticks on scales e.g. for a chart or meter
- `LV_PART_CURSOR` Mark a specific place e.g. text area's or chart's cursor
- `LV_PART_CUSTOM_FIRST` Custom parts can be added from here.

The main purpose of parts to allow styling the "components" of the widgets. Therefore the parts are described in more detail in the [Style overview](#) section.

4.1.5 States

The object can be in a combinations of the following states:

- `LV_STATE_DEFAULT` Normal, released state
- `LV_STATE_CHECKED` Toggled or checked state
- `LV_STATE_FOCUSED` Focused via keypad or encoder or clicked via touchpad/mouse
- `LV_STATE_FOCUS_KEY` Focused via keypad or encoder but not via touchpad/mouse
- `LV_STATE_EDITED` Edit by an encoder
- `LV_STATE_HOVERED` Hovered by mouse (not supported now)
- `LV_STATE_PRESSED` Being pressed
- `LV_STATE_SCROLLED` Being scrolled
- `LV_STATE_DISABLED` Disabled state
- `LV_STATE_USER_1` Custom state
- `LV_STATE_USER_2` Custom state

- `LV_STATE_USER_3` Custom state
- `LV_STATE_USER_4` Custom state

The states are usually automatically changed by the library as the user presses, releases, focuses etc an object. However, the states can be changed manually too. To set or clear given state (but leave the other states untouched) use `lv_obj_add/clear_state(obj, LV_STATE_...)` In both cases ORed state values can be used as well. E.g. `lv_obj_add_state(obj, part, LV_STATE_PRESSED | LV_PRESSED_CHECKED)`.

To learn more about the states read the related section of the [Style overview](#).

4.2 Positions, sizes, and layouts

4.2.1 Overview

Similarly to many other parts of LVGL, the concept of setting the coordinates were inspired by CSS. It doesn't mean a perfect copy of the standard but subsets of CSS were implemented (sometimes with minor adjustments). It shorts it means:

- the set coordinates (size, position, layouts, etc) are stored in styles
- support min-width, max-width, min-height, max-height
- have pixel, percentage, and "content" units
- `x=0; y=0` coordinate means the to top-left corner of the parent plus the left/top padding plus border width
- width/height means the full size, the "content area" is smaller with padding and border width
- a subset of flexbox and grid layouts are supported


Units

- pixel: Simply a position in pixels. A simple integer always mean pixel. E.g. `lv_obj_set_x(btn, 10)`
- percentage: The percentage of the size of the object or its parent (depending on the property). The `lv_pct(value)` converts a value to percentage. E.g. `lv_obj_set_width(btn, lv_pct(50))`
- `LV_SIZE_CONTENT`: Special value to set the width/height of an object to involve all the children. Its similar to `auto` in CSS. E.g. `lv_obj_set_width(btn, LV_SIZE_CONTENT)`.

Boxing model

LVGL follows CSS's [border-box](#) model. An object's "box" is built from the following parts:

- bounding box: the width/height of the elements.
- border width: the width of the border.
- padding: space between the sides of the object and its children.
- content: the content area which size if the bounding box reduced by the border width and the size of the paddings.

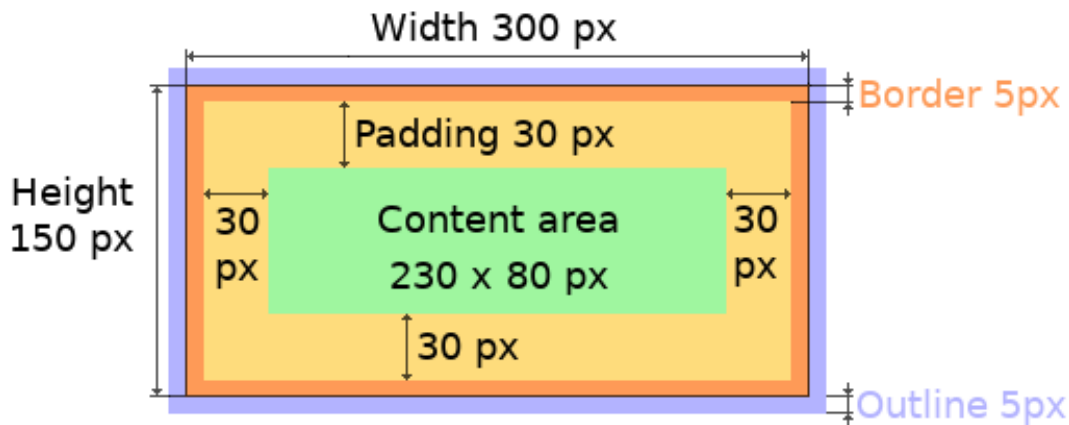

The border is drawn inside the bounding box. Inside the border LVGL keeps "padding size" to place the children. The outline is drawn outside of the bounding box.

Important notes

This section describes special cases in which LVGL's behavior might look unexpected.

Postponed coordinate calculation

LVGL doesn't recalculate all the coordinate changes immediately to improve performance. Instead, the objects are marked as "dirty" and before redrawing the screen LVGL checks if there are any "dirty" objects. If so it refreshes their position, size and layout.

In other words, if you need to get the any coordinate of an object and it the coordinates were just changed LVGL's needs to be forced to recalculate to coordinates. To do this call `lv_obj_update_layout(obj)`.

The size and position might depends on the parent or layout therefor `lv_obj_update_layout` recalculates the coordinates of all objects on the screen of `obj`.

Removing styles

As it's described in the [Using styles](#) section the coordinates can be set via style properties too. To be more precise under the hood every style coordinate related property is stored as style a property. If you use `lv_obj_set_x(obj, 20)` LVGL saves `x=20` in the local style of the object.

It's an internal mechanism and doesn't matter much as you use LVGL. However, there is one case in which you need to aware of that. If the style(s) of an object are removed by

```
lv_obj_remove_style_all(obj)
or
```c
lv_obj_remove_style(obj, NULL, LV_PART_MAIN);
```

The earlier set coordinates will be removed as well.

For example:

```
/*The size of obj1 will be set back to the default in the end*/
lv_obj_set_size(obj1, 200, 100); /*Now obj1 has 200;100 size*/
lv_obj_remove_style_all(obj1); /*It removes the set sizes*/

/*obj2 will have 200;100 size in the end */
lv_obj_remove_style_all(obj2);
lv_obj_set_size(obj2, 200, 100);
```

## 4.2.2 Position

### Simple way

To simple set the x and y coordinates of an object use

```
lv_obj_set_x(obj, 10);
lv_obj_set_y(obj, 20);
lv_obj_set_pos(obj, 10, 20); //Or in one function
```

By default the the x and y coordinates are measured from the top left corner of the parent's content area. For example if the parent has 5 pixel padding on every side, the above code will place `obj` to (15, 25) because the content area starts after the padding.

If percentage values are calculated from the parents content area size.

```
lv_obj_set_x(btn, lv_pct(10)); //x = 10 % of parant content area width
```

### Align

In some cases it's convenient to change the origin of the positioning from the the default top left. If the origin is changed e.g. to bottom-right, the (0,0) position means: align to the bottom-right corner. To change the origin use:

```
lv_obj_set_align(obj, align);
```

To change the alignment and set new coordinates:

```
lv_obj_align(obj, align, x, y);
```

The following alignment options can be used:

- LV\_ALIGN\_TOP\_LEFT
- LV\_ALIGN\_TOP\_MID
- LV\_ALIGN\_TOP\_RIGHT
- LV\_ALIGN\_BOTTOM\_LEFT
- LV\_ALIGN\_BOTTOM\_MID
- LV\_ALIGN\_BOTTOM\_RIGHT
- LV\_ALIGN\_LEFT\_MID
- LV\_ALIGN\_RIGHT\_MID

- LV\_ALIGN\_CENTER

It quite common to align a children to the center of its parent, there fore is a dedicated function for it:

```
lv_obj_center(obj);

//Has the same effect
lv_obj_align(obj, LV_ALIGN_CENTER, 0, 0);
```

If the parent's size changes the set alignment and position of the children is applied again automatically.

The functions introduced above aligns the object to its parent. However it's also possible to align an object to an arbitrary object.

```
lv_obj_align_to(obj_to_align, reference_obj, align, x, y);
```

Besides the alignments options above the following can be used to align the object outside of the reference object:

- LV\_ALIGN\_OUT\_TOP\_LEFT
- LV\_ALIGN\_OUT\_TOP\_MID
- LV\_ALIGN\_OUT\_TOP\_RIGHT
- LV\_ALIGN\_OUT\_BOTTOM\_LEFT
- LV\_ALIGN\_OUT\_BOTTOM\_MID
- LV\_ALIGN\_OUT\_BOTTOM\_RIGHT
- LV\_ALIGN\_OUT\_LEFT\_TOP
- LV\_ALIGN\_OUT\_LEFT\_MID
- LV\_ALIGN\_OUT\_LEFT\_BOTTOM
- LV\_ALIGN\_OUT\_RIGHT\_TOP
- LV\_ALIGN\_OUT\_RIGHT\_MID
- LV\_ALIGN\_OUT\_RIGHT\_BOTTOM

For example to align a label above a button and center the label is horizontally:

```
lv_obj_align_to(label, btn, LV_ALIGN_OUT_TOP_MID, 0, -10);
```

Not that - unlike with `lv_obj_align()` - `lv_obj_align_to()` can not realign the object if its coordinates or the reference object's coordinates changes.

### 4.2.3 Size

#### Simple way

The width and the height of an object can be set easily as well:

```
lv_obj_set_width(obj, 200);
lv_obj_set_height(obj, 100);
lv_obj_set_size(obj, 200, 100); //Or in one function
```

Percentage values are calculated based on the parent's content area size. For example to set the object's height to the screen height:

```
lv_obj_set_height(obj, lv_pct(100));
```

Size setting supports a value: `LV_SIZE_CONTENT`. It means the object's size in the respective direction will be set to involve its the children. Note that only children on the right and bottom will be considered and children on the top and left remains cropped. This limitation makes the behavior more predictable.

Object with `LV_OBJ_FLAG_HIDDEN` or `LV_OBJ_FLAG_FLOATING` will be ignored by `LV_SIZE_CONTENT` calculation.

The above functions set the size of the bounding box of the object but the size of the content area can be set as well. It means the object's bounding box will be larger with the paddings than the set size.

```
lv_obj_set_content_width(obj, 50); //The actual width: padding left + 50 + padding_
↪right
lv_obj_set_content_height(obj, 30); //The actual width: padding top + 30 + padding_
↪bottom
```

The size of the bounding box and the content area can be get with the following functions:

```
lv_coord_t w = lv_obj_get_width(obj);
lv_coord_t h = lv_obj_get_height(obj);
lv_coord_t content_w = lv_obj_get_content_width(obj);
lv_coord_t content_h = lv_obj_get_content_height(obj);
```

## 4.2.4 Using styles

Under the hood the position, size and alignment properties are style properties. The above described "simple functions" hide the style related code for the sake of simplicity and set the position, size, and alignment properties in the local styles of the object.

However, using styles as to set the coordinates has some great advantages:

- It makes easy to set the width/height/etc for several object together with ease. E.g. all make all the sliders 100x10 pixels sized.
- It also makes possible to modify the values in one place.
- The values can be overwritten by other styles. For example `style_btn` makes the object 100x50 by default but adding `style_full_width` overwrites only the width of the object.
- The object can have different position or size in different state. E.g. 100 px wide in `LV_STATE_DEFAULT` but 120 px in `LV_STATE_PRESSED`.
- Style transitions can be used to make the coordinate changes smooth.

Here are some examples to set an object's size using a style:

```
static lv_style_t style;
lv_style_init(&style);
lv_style_set_width(&style, 100);

lv_obj_t * btn = lv_btn_create(lv_scr_act());
lv_obj_add_style(btn, &style, LV_PART_MAIN);
```

As you will see below there are some other great features of size and position setting. However, to keep the LVGL's API lean only the most common coordinate setting features have a "simple" version and the more complex features can be used via styles.

### 4.2.5 Translation

Let's say there are 3 buttons next to each other. Their position is set as described above. Now you want to move a buttons up a little when it's pressed.

One way to achieve this is setting a new Y coordinate for pressed state:

```
static lv_style_t style_normal;
lv_style_init(&style_normal);
lv_style_set_y(&style_normal, 100);

static lv_style_t style_pressed;
lv_style_init(&style_pressed);
lv_style_set_y(&style_pressed, 80);

lv_obj_add_style(btn1, &style_normal, LV_STATE_DEFAULT);
lv_obj_add_style(btn1, &style_pressed, LV_STATE_PRESSED);

lv_obj_add_style(btn2, &style_normal, LV_STATE_DEFAULT);
lv_obj_add_style(btn2, &style_pressed, LV_STATE_PRESSED);

lv_obj_add_style(btn3, &style_normal, LV_STATE_DEFAULT);
lv_obj_add_style(btn3, &style_pressed, LV_STATE_PRESSED);
```

It works but it's not really flexible because the pressed coordinate is hard-coded. If the buttons are not at y=100 `style_pressed` won't work as expected. To solve this translations can be used:

```
static lv_style_t style_normal;
lv_style_init(&style_normal);
lv_style_set_y(&style_normal, 100);

static lv_style_t style_pressed;
lv_style_init(&style_pressed);
lv_style_set_translate_y(&style_pressed, -20);

lv_obj_add_style(btn1, &style_normal, LV_STATE_DEFAULT);
lv_obj_add_style(btn1, &style_pressed, LV_STATE_PRESSED);

lv_obj_add_style(btn2, &style_normal, LV_STATE_DEFAULT);
lv_obj_add_style(btn2, &style_pressed, LV_STATE_PRESSED);

lv_obj_add_style(btn3, &style_normal, LV_STATE_DEFAULT);
lv_obj_add_style(btn3, &style_pressed, LV_STATE_PRESSED);
```

Translation is applied from the current position of the object.

Percentage values can be used in translations as well. The percentage is relative to the size of the object (and not to the size of the parent). For example `lv_pct(50)` will move the object with half of its width/height.

The translations is applied after the layouts are calculated. Therefore, even the layouted objects' position can be translated.

The translation actually moves the object. It means it makes the scrollbars and `LV_SIZE_CONTENT` sized objects react on the position change.



## 4.2.6 Transformation

Similarly to the position the size can be changed relative to the current size as well. The transformed width and height is added on both sides of the object. That is 10 px transformed width makes the object 2x10 pixel wider.

Unlike position translation, the size transformation doesn't make the object "really" larger. In other words scrollbars, layouts, LV\_SIZE\_CONTENT will not consider the transformed size. Hence size transformation is "only" a visual effect.

This code makes the a button larger when it's pressed:

```
static lv_style_t style_pressed;
lv_style_init(&style_pressed);
lv_style_set_transform_width(&style_pressed, 10);
lv_style_set_transform_height(&style_pressed, 10);

lv_obj_add_style(btn, &style_pressed, LV_STATE_PRESSED);
```

## Min and Max size

Similarly to CSS, LVGL also support min-width, max-width, min-height and max-height. These are limits preventing an object's size to be smaller/larger then these values. They are especially useful if the size is set by percentage or LV\_SIZE\_CONTENT.

```
static lv_style_t style_max_height;
lv_style_init(&style_max_height);
lv_style_set_y(&style_max_height, 200);

lv_obj_set_height(obj, lv_pct(100));
lv_obj_add_style(obj, &style_max_height, LV_STATE_DEFAULT); //Limit the height to
↳ 200 px
```

Percentage values can be used as well which are relative to the size of the parent's content area size.

```
static lv_style_t style_max_height;
lv_style_init(&style_max_height);
lv_style_set_y(&style_max_height, lv_pct(50));

lv_obj_set_height(obj, lv_pct(100));
lv_obj_add_style(obj, &style_max_height, LV_STATE_DEFAULT); //Limit the height to
↳ half parent height
```

## 4.2.7 Layout

### Overview

Layouts can update the position and size of an object's children. They can be used to automatically arrange the children into a line or column, or in much more complicated forms.

The position and size set by the layout overwrites the "normal" x, y, width, and height settings.

There is only one function that is the same for every layout: `lv_obj_set_layout(obj, <LAYOUT_NAME>)` sets the layout on an object. For the further settings of the parent and children see the documentations of the given layout.

## Built-in layout

LVGL comes with two very powerful layouts:

- Flexbox
- Grid

Both are heavily inspired by the CSS layouts with the same name.

## Flags

There are some flags that can be used on object to affect how they behave with layouts:

- **LV\_OBJ\_FLAG\_HIDDEN** Hidden object are ignored from layout calculations.
- **LV\_OBJ\_FLAG\_IGNORE\_LAYOUT** The object is simply ignored by the layouts. Its coordinates can be set as usual.
- **LV\_OBJ\_FLAG\_FLOATING** Same as **LV\_OBJ\_FLAG\_IGNORE\_LAYOUT** but the object with **LV\_OBJ\_FLAG\_FLOATING** will be ignored from **LV\_SIZE\_CONTENT** calculations.

These flags can be added/removed with `lv_obj_add/clear_flag(obj, FLAG);`

## Adding new layouts

LVGL can be freely extended by a custom layouts like this:

```
uint32_t MY_LAYOUT;

...

MY_LAYOUT = lv_layout_register(my_layout_update, &user_data);

...

void my_layout_update(lv_obj_t * obj, void * user_data)
{
 /*Will be called automatically if required to reposition/resize the children
 ↳ of "obj" */
}
```

Custom style properties can be added too that can be get and used in the update callback. For example:

```
uint32_t MY_PROP;

...

LV_STYLE_MY_PROP = lv_style_register_prop();

...
static inline void lv_style_set_my_prop(lv_style_t * style, uint32_t value)
{
 lv_style_value_t v = {
 .num = (int32_t)value
 };
 lv_style_set_prop(style, LV_STYLE_MY_PROP, v);
}
```

## 4.2.8 Examples

## 4.3 Styles

*Styles* are used to set the appearance of the objects. Styles in lvgl are heavily inspired by CSS. The concept in nutshell is the following:

- A style is an `lv_style_t` variable which can hold properties, for example border width, text color and so on. It's similar to a `class` in CSS.
- Styles can be assigned to objects to change their appearance. During the assignment the target part (*pseudo element* in CSS) and target state (*pseudo class*) can be specified. For example add `style_blue` to the knob of a slider when it's in pressed state.
- The same style can be used by any number of objects.
- Styles can be cascaded which means multiple styles can be assigned to an object and each style can have different properties. Therefore not all properties have to be specified in style. LVGL will look for a property until a style defines it or use a default if it's not specified by any of the styles. For example `style_btn` can result in a default gray button and `style_btn_red` can add only a `background-color=red` to overwrite the background color.
- Later added styles have higher precedence. It means if a property is specified in two styles the later added will be used.
- Some properties (e.g. text color) can be inherited from the parent(s) if it's not specified in the object.
- Objects can have local styles that have higher precedence than "normal" styles.
- Unlike CSS (where pseudo-classes describe different states, e.g. `:focus`), in LVGL a property is assigned to a given state.
- Transitions can be applied when the object changes state.

### 4.3.1 States

The objects can be in the combination of the following states:

- `LV_STATE_DEFAULT` (0x0000) Normal, released state
- `LV_STATE_CHECKED` (0x0001) Toggled or checked state
- `LV_STATE_FOCUSED` (0x0002) Focused via keypad or encoder or clicked via touchpad/mouse
- `LV_STATE_FOCUS_KEY` (0x0004) Focused via keypad or encoder but not via touchpad/mouse
- `LV_STATE_EDITED` (0x0008) Edit by an encoder
- `LV_STATE_HOVERED` (0x0010) Hovered by mouse (not supported now)
- `LV_STATE_PRESSED` (0x0020) Being pressed
- `LV_STATE_SCROLLED` (0x0040) Being scrolled
- `LV_STATE_DISABLED` (0x0080) Disabled state
- `LV_STATE_USER_1` (0x1000) Custom state
- `LV_STATE_USER_2` (0x2000) Custom state
- `LV_STATE_USER_3` (0x4000) Custom state
- `LV_STATE_USER_4` (0x8000) Custom state

The combination states the object can be focused and pressed at the same time. It represented as `LV_STATE_FOCUSED | LV_STATE_PRESSED`.

The style can be added to any state and state combination. For example, setting a different background color for default and pressed state. If a property is not defined in a state the best matching state's property will be used. Typically it means the property with `LV_STATE_DEFAULT` state. If the property is not set even for the default state the default value will be used. (See later)

But what does the "best matching state's property" really means? States have a precedence which is shown by their value (see in the above list). A higher value means higher precedence. To determine which state's property to use let's use an example. Let's see the background color is defined like this:

- `LV_STATE_DEFAULT`: white
- `LV_STATE_PRESSED`: gray
- `LV_STATE_FOCUSED`: red

1. By the default the object is in default state, so it's a simple case: the property is perfectly defined in the object's current state as white.
2. When the object is pressed there are 2 related properties: default with white (default is related to every state) and pressed with gray. The pressed state has 0x0020 precedence which is higher than the default state's 0x0000 precedence, so gray color will be used.
3. When the object is focused the same thing happens as in pressed state and red color will be used. (Focused state has higher precedence than default state).
4. When the object is focused and pressed both gray and red would work, but the pressed state has higher precedence than focused so gray color will be used.
5. It's possible to set e.g. rose color for `LV_STATE_PRESSED | LV_STATE_FOCUSED`. In this case, this combined state has  $0x0020 + 0x0002 = 0x0022$  precedence, which higher than the pressed states precedence so rose color would be used.
6. When the object is in checked state there is no property to set the background color for this state. So in lack of a better option, the object remains white from the default state's property.

Some practical notes:

- The precedence (value) of states is quite intuitive and it's something the user would expect naturally. E.g. if an object is focused, the user still want to see if it's pressed, therefore pressed state has a higher precedence. If the focused state had higher precedence it would overwrite the pressed color.
- If you want to set a property for all state (e.g. red background color) just set it for the default state. If the object can't find a property for its current state it will fall back to the default state's property.
- Use ORed states to describe the properties for complex cases. (E.g. pressed + checked + focused)
- It might be a good idea to use different style elements for different states. For example, finding background colors for released, pressed, checked + pressed, focused, focused + pressed, focused + pressed + checked, etc states is quite difficult. Instead, for example, use the background color for pressed and checked states and indicate the focused state with a different border color.

### 4.3.2 Cascading styles

It's not required to set all the properties in one style. It's possible to add more styles to an object and let the later added style to modify or extend appearance. For example, create a general gray button style and create a new for red buttons where only the new background color is set.

It's the same concept when in CSS all the used classes are listed like `<div class=".btn .btn-red">`.

The later added styles have higher precedence over the earlier ones. So in the gray/red button example above, the normal button style should be added first and the red style second. However, the precedence coming from states are still taken into account. So let's examine the following case:

- the basic button style defines dark-gray color for default state and light-gray color pressed state
- the red button style defines the background color as red only in the default state

In this case, when the button is released (it's in default state) it will be red because a perfect match is found in the lastly added style (red style). When the button is pressed the light-gray color is a better match because it describes the current state perfectly, so the button will be light-gray.

### 4.3.3 Inheritance

Some properties (typically that are related to texts) can be inherited from the parent object's styles. Inheritance is applied only if the given property is not set in the object's styles (even in default state). In this case, if the property is inheritable, the property's value will be searched in the parents too until an object can tell a value for the property. The parents will use their own state to tell the value. So if a button is pressed, and the text color comes from here, the pressed text color will be used.

### 4.3.4 Parts

Objects can have *parts* which can have their own styles.

The following predefined parts exist in LVGL:

- LV\_PART\_MAIN A background like rectangle\*/
- LV\_PART\_SCROLLBAR The scrollbar(s)
- LV\_PART\_INDICATOR Indicator, e.g. for slider, bar, switch, or the tick box of the checkbox
- LV\_PART\_KNOB Like a handle to grab to adjust the value\*/
- LV\_PART\_SELECTED Indicate the currently selected option or section
- LV\_PART\_ITEMS Used if the widget has multiple similar elements (e.g. tabel cells)\*/
- LV\_PART\_TICKS Ticks on scales e.g. for a chart or meter
- LV\_PART\_CURSOR Mark a specific place e.g. text area's or chart's cursor
- LV\_PART\_CUSTOM\_FIRST Custom parts can be added from here.

For example a *Slider* has three parts:

- Background
- Indicator
- Knob

It means the all three parts of the slider can have their own styles. See later how to add style styles to objects and parts.

### 4.3.5 Initialize styles and set/get properties

Styles are stored in `lv_style_t` variables. Style variables should be `static`, global or dynamically allocated. In other words they can not be local variables in functions which are destroyed when the function exists. Before using a style it should be initialized with `lv_style_init(&my_style)`. After initializing the style properties can be set or added to it.

Property set functions looks like this: `lv_style_set_<property_name>(&style, <value>);` For example:

```
static lv_style_t style_btn;
lv_style_init(&style_btn);
lv_style_set_bg_color(&style_btn, lv_color_grey());
lv_style_set_bg_opa(&style_btn, LV_OPA_50);
lv_style_set_border_width(&style_btn, 2);
lv_style_set_border_color(&style_btn, lv_color_black());

static lv_style_t style_btn_red;
lv_style_init(&style_btn_red);
lv_style_set_bg_color(&style_btn_red, lv_color_red());
lv_style_set_bg_opa(&style_btn_red, LV_OPA_COVER);
```

To remove a property use:

```
lv_style_remove_prop(&style, LV_STYLE_BG_COLOR);
```

To get a properties value from style:

```
lv_style_value_t v;
lv_res_t res = lv_style_rget_prop(&style, LV_STYLE_BG_COLOR, &v);
if(res == LV_RES_OK) { /*Found*/
 do_something(v.color);
}
```

`lv_style_value_t` has 3 fields:

- `num` for integer, boolean and opacity properties
- `color` for color properties
- `ptr` for pointer properties

To reset a style (free all its data) use

```
lv_style_reset(&style);
```

### 4.3.6 Add and remove styles to a widget

A style on its own not that useful. It should be assigned to an object to take its effect.

## Add styles

To add a style to an object use `lv_obj_add_style(obj, &style, <selector>)`. `<selector>` is an OR-ed value of parts and state to which the style should be added. Some examples:

- `LV_PART_MAIN | LV_STATE_DEFAULT`
- `LV_STATE_PRESSED`: The main part in pressed state. `LV_PART_MAIN` can be omitted.
- `LV_PART_SCROLLBAR`: The scrollbar part in the default state. `LV_STATE_DEFAULT` can be omitted.
- `LV_PART_SCROLLBAR | LV_STATE_SCROLLED`: The scrollbar part when the object is being scrolled
- `0` Same as `LV_PART_MAIN | LV_STATE_DEFAULT`.
- `LV_PART_INDICATOR | LV_STATE_PRESSED | LV_STATE_CHECKED` The indicator part when the object is pressed and checked at the same time.

Using `lv_obj_add_style`:

```
lv_obj_add_style(btn, &style_btn, 0); /
↪ /*Default button style*/
lv_obj_add_style(btn, &btn_red, LV_STATE_PRESSED); /*Overwrite only a some colors to
↪ red when pressed*/
```

## Remove styles

To remove all styles from an object use `lv_obj_remove_style_all(obj)`.

To remove specific styles use `lv_obj_remove_style(obj, style, selector)`. This function will remove style only if the `selector` matches with the `selector` used in `lv_obj_add_style`. `style` can be `NULL` to check only the `selector` and remove all matching styles. The `selector` can use the `LV_STATE_ANY` and `LV_PART_ANY` values to remove the style with any state or part.

## Report style changes

If a style which is already assigned to object changes (i.e. a property is added or changed) the objects using that style should be notified. There are 3 options to do this:

1. If you know that the changed properties can be applied by a simple redraw (e.g. color or opacity changes) just call `lv_obj_invalidate(obj)` or `lv_obj_invalideate(lv_scr_act())`.
2. If more complex style properties were changed or added, and you know which object(s) are affected by that style call `lv_obj_refresh_style(obj, part, property)`. To refresh all parts and properties use `lv_obj_refresh_style(obj, LV_PART_ANY, LV_STYLE_PROP_ANY)`.
3. No make LVGL check all object whether they use the style and refresh them call `lv_obj_report_style_change(&style)`. If style is `NULL` all object's will be notified about the style change.

### Get a property's value on an object

To get a final value of property - considering cascading, inheritance, local styles and transitions (see below) - get functions like this can be used: `lv_obj_get_style_<property_name>(obj, <part>)`. These functions uses the object's current state and if no better candidate returns a default value. For example:

```
lv_color_t color = lv_obj_get_style_bg_color(btn, LV_PART_MAIN);
```

### 4.3.7 Local styles

Besides "normal" styles, the objects can store local styles too. This concept is similar to inline styles in CSS (e.g. `<div style="color:red">`) with some modification.

So local styles are like normal styles but they can't be shared among other objects. If used, local styles are allocated automatically, and freed when the object is deleted. They are useful to add local customization to the object.

Unlike in CSS, in LVGL local styles can be assigned to states (*pseudo-classes*) and parts (pseudo-elements).

To set a local property use functions like `lv_obj_set_style_local_<property_name>(obj, <value>, <selector>)`; For example:

```
lv_obj_set_style_local_bg_color(slider, lv_color_red(), LV_PART_INDICATOR | LV_STATE_
↪ FOCUSED);
```

### 4.3.8 Properties

For the full list of style properties click [here](#).

#### Typical background properties

In the documentation of the widgets you will see sentences like "The widget use the typical background properties". The "typical background properties" are the ones related to:

- Background
- Border
- Outline
- Shadow
- Padding
- Width and height transformation
- X and Y translation



### 4.3.9 Transitions

By default, when an object changes state (e.g. it's pressed) the new properties from the new state are set immediately. However, with transitions it's possible to play an animation on state change. For example, on pressing a button its background color can be animated to the pressed color over 300 ms.

The parameters of the transitions are stored in the styles. It's possible to set

- the time of the transition
- the delay before starting the transition
- the animation path (also known as timing or easing function)
- the properties to animate

The transition properties can be defined for each state. For example, setting 500 ms transition time in default state will mean that when the object goes to default state 500 ms transition time will be applied. Setting 100 ms transition time in the pressed state will mean a 100 ms transition time when going to pressed state. So this example configuration will result in fast going to pressed state and slow going back to default.

To describe a transition an `lv_transition_dsc_t` variable needs to be initialized and added to a style:

```
/*Only its pointer is saved so must static, global or dynamically allocated */
static const lv_style_prop_t trans_props[] = {
 ↪ STYLE_BG_OPA, LV_STYLE_BG_COLOR,
 ↪ /*End marker*/
};

static lv_style_transition_dsc_t trans1;
lv_style_transition_dsc_init(&trans1, trans_props, lv_anim_path_ease_out, duration_ms,
 ↪ delay_ms);

lv_style_set_transition(&style1, &trans1);
```

LV\_  
0,

### 4.3.10 Color filter

TODO

### 4.3.11 Themes

Themes are a collection of styles. If there is an active theme LVGL applies it on the every created widget. It gives a default appearance to UI which can be modified by adding further styles.

Every display can have a different theme. For example a colorful theme on a TFT and monochrome theme on a secondary monochrome display.

To set a theme for a display 2 steps are required:

1. Initialize a theme
2. Assign the initialized theme to a display.

Theme initialization functions can have different prototype. This example shows how to set the "default" theme:

```
lv_theme_t * th = lv_theme_default_init(display, /*Use the DPI, size, etc from this_
↪display*/
 LV_COLOR_PALETTE_BLUE, LV_COLOR_PALETTE_CYAN,
↪ /*Primary and secondary palette*/
 false, /*Light or dark mode*/
 &lv_font_montserrat_10, &lv_font_montserrat_
↪14, &lv_font_montserrat_18); /*Small, normal, large fonts*/

lv_disp_set_theme(display, th); /*Assign the theme to the display*/
```

The themes can be enabled in `lv_conf.h`. If the default theme is enabled by `LV_USE_THEME_DEFAULT 1` LVGL automatically initializes and sets it when a display is created.

## Extending themes

Built-in themes can be extended. If a custom theme is created a parent theme can be selected. The parent theme's styles will be added before the custom theme's styles. Any number of themes can be chained this way. E.g. default theme -> custom theme -> dark theme.

Here is an example about creating a custom theme based on the currently active theme.

```
/*Declare the style used in the theme*/
static lv_style_t style_btn;
...

/*Initialize the styles*/
lv_style_init(&style_btn);
lv_style_set_bg_color(&style_btn, lv_color_green());

/*Initialize the new theme from the current theme*/
lv_theme_t * th_act = lv_disp_get_theme(NULL);
static lv_theme_t th_new;
th_new = *th_act;

/*Set the parent theme and the style apply callback for the new theme*/
lv_theme_set_parent(&th_new, th_act);
lv_theme_set_apply_cb(&th_new, new_theme_apply_cb);

/*Assign the new theme to the current display*/
lv_disp_set_theme(NULL, &th_new);

...

/*Will be called when the styles of the base theme are already added
to add new styles*/
void new_theme_apply_cb(lv_theme_t * th, lv_obj_t * obj)
{
 if(lv_obj_check_type(obj, &lv_btn_class)) {
 lv_obj_add_style(obj, &style_btn, 0);
 }
}
```

### 4.3.12 Examples

### 4.3.13 API

#### Typedefs

```
typedef uint8_t lv_blend_mode_t
typedef uint8_t lv_text_decor_t
typedef uint8_t lv_border_side_t
typedef uint8_t lv_grad_dir_t
typedef struct _lv_style_transition_t lv_style_transition_dsc_t
 Descriptor for style transitions

typedef _lv_style_transition_dsc_t lv_style_transition_dsc_t
typedef _lv_style_t lv_style_t
```

#### Enums

```
enum [anonymous]
 Possible options how to blend opaque drawings

 Values:

 enumerator LV_BLEND_MODE_NORMAL
 Simply mix according to the opacity value

 enumerator LV_BLEND_MODE_ADDITIVE
 Add the respective color channels

 enumerator LV_BLEND_MODE_SUBTRACTIVE
 Subtract the foreground from the background

enum [anonymous]
 Some options to apply decorations on texts. 'OR'ed values can be used.

 Values:

 enumerator LV_TEXT_DECOR_NONE
 enumerator LV_TEXT_DECOR_UNDERLINE
 enumerator LV_TEXT_DECOR_STRIKETHROUGH

enum [anonymous]
 Selects on which sides border should be drawn 'OR'ed values can be used.

 Values:

 enumerator LV_BORDER_SIDE_NONE
 enumerator LV_BORDER_SIDE_BOTTOM
```

enumerator **LV\_BORDER\_SIDE\_TOP**  
enumerator **LV\_BORDER\_SIDE\_LEFT**  
enumerator **LV\_BORDER\_SIDE\_RIGHT**  
enumerator **LV\_BORDER\_SIDE\_FULL**  
enumerator **LV\_BORDER\_SIDE\_INTERNAL**  
FOR matrix-like objects (e.g. Button matrix)

enum **[anonymous]**  
The direction of the gradient.

*Values:*

enumerator **LV\_GRAD\_DIR\_NONE**  
No gradient (the `grad_color` property is ignored)  
  
enumerator **LV\_GRAD\_DIR\_VER**  
Vertical (top to bottom) gradient  
  
enumerator **LV\_GRAD\_DIR\_HOR**  
Horizontal (left to right) gradient

enum **lv\_style\_prop\_t**  
Enumeration of all built in style properties

*Values:*

enumerator **LV\_STYLE\_PROP\_INV**  
enumerator **LV\_STYLE\_WIDTH**  
enumerator **LV\_STYLE\_MIN\_WIDTH**  
enumerator **LV\_STYLE\_MAX\_WIDTH**  
enumerator **LV\_STYLE\_HEIGHT**  
enumerator **LV\_STYLE\_MIN\_HEIGHT**  
enumerator **LV\_STYLE\_MAX\_HEIGHT**  
enumerator **LV\_STYLE\_X**  
enumerator **LV\_STYLE\_Y**  
enumerator **LV\_STYLE\_ALIGN**  
enumerator **LV\_STYLE\_TRANSFORM\_WIDTH**  
enumerator **LV\_STYLE\_TRANSFORM\_HEIGHT**  
enumerator **LV\_STYLE\_TRANSLATE\_X**  
enumerator **LV\_STYLE\_TRANSLATE\_Y**  
enumerator **LV\_STYLE\_TRANSFORM\_ZOOM**  
enumerator **LV\_STYLE\_TRANSFORM\_ANGLE**  
enumerator **LV\_STYLE\_PAD\_TOP**

enumerator **LV\_STYLE\_PAD\_BOTTOM**  
enumerator **LV\_STYLE\_PAD\_LEFT**  
enumerator **LV\_STYLE\_PAD\_RIGHT**  
enumerator **LV\_STYLE\_PAD\_ROW**  
enumerator **LV\_STYLE\_PAD\_COLUMN**  
enumerator **LV\_STYLE\_BG\_COLOR**  
enumerator **LV\_STYLE\_BG\_COLOR\_FILTERED**  
enumerator **LV\_STYLE\_BG\_OPA**  
enumerator **LV\_STYLE\_BG\_GRAD\_COLOR**  
enumerator **LV\_STYLE\_BG\_GRAD\_COLOR\_FILTERED**  
enumerator **LV\_STYLE\_BG\_GRAD\_DIR**  
enumerator **LV\_STYLE\_BG\_MAIN\_STOP**  
enumerator **LV\_STYLE\_BG\_GRAD\_STOP**  
enumerator **LV\_STYLE\_BG\_IMG\_SRC**  
enumerator **LV\_STYLE\_BG\_IMG\_OPA**  
enumerator **LV\_STYLE\_BG\_IMG\_RECOLOR**  
enumerator **LV\_STYLE\_BG\_IMG\_RECOLOR\_FILTERED**  
enumerator **LV\_STYLE\_BG\_IMG\_RECOLOR\_OPA**  
enumerator **LV\_STYLE\_BG\_IMG\_TILED**  
enumerator **LV\_STYLE\_BORDER\_COLOR**  
enumerator **LV\_STYLE\_BORDER\_COLOR\_FILTERED**  
enumerator **LV\_STYLE\_BORDER\_OPA**  
enumerator **LV\_STYLE\_BORDER\_WIDTH**  
enumerator **LV\_STYLE\_BORDER\_SIDE**  
enumerator **LV\_STYLE\_BORDER\_POST**  
enumerator **LV\_STYLE\_OUTLINE\_WIDTH**  
enumerator **LV\_STYLE\_OUTLINE\_COLOR**  
enumerator **LV\_STYLE\_OUTLINE\_COLOR\_FILTERED**  
enumerator **LV\_STYLE\_OUTLINE\_OPA**  
enumerator **LV\_STYLE\_OUTLINE\_PAD**  
enumerator **LV\_STYLE\_SHADOW\_WIDTH**  
enumerator **LV\_STYLE\_SHADOW\_OFS\_X**  
enumerator **LV\_STYLE\_SHADOW\_OFS\_Y**  
enumerator **LV\_STYLE\_SHADOW\_SPREAD**  
enumerator **LV\_STYLE\_SHADOW\_COLOR**  
enumerator **LV\_STYLE\_SHADOW\_COLOR\_FILTERED**

enumerator **LV\_STYLE\_SHADOW\_OPA**  
enumerator **LV\_STYLE\_IMG\_OPA**  
enumerator **LV\_STYLE\_IMG\_RECOLOR**  
enumerator **LV\_STYLE\_IMG\_RECOLOR\_FILTERED**  
enumerator **LV\_STYLE\_IMG\_RECOLOR\_OPA**  
enumerator **LV\_STYLE\_LINE\_WIDTH**  
enumerator **LV\_STYLE\_LINE\_DASH\_WIDTH**  
enumerator **LV\_STYLE\_LINE\_DASH\_GAP**  
enumerator **LV\_STYLE\_LINE\_ROUNDED**  
enumerator **LV\_STYLE\_LINE\_COLOR**  
enumerator **LV\_STYLE\_LINE\_COLOR\_FILTERED**  
enumerator **LV\_STYLE\_LINE\_OPA**  
enumerator **LV\_STYLE\_ARC\_WIDTH**  
enumerator **LV\_STYLE\_ARC\_ROUNDED**  
enumerator **LV\_STYLE\_ARC\_COLOR**  
enumerator **LV\_STYLE\_ARC\_COLOR\_FILTERED**  
enumerator **LV\_STYLE\_ARC\_OPA**  
enumerator **LV\_STYLE\_ARC\_IMG\_SRC**  
enumerator **LV\_STYLE\_TEXT\_COLOR**  
enumerator **LV\_STYLE\_TEXT\_COLOR\_FILTERED**  
enumerator **LV\_STYLE\_TEXT\_OPA**  
enumerator **LV\_STYLE\_TEXT\_FONT**  
enumerator **LV\_STYLE\_TEXT\_LETTER\_SPACE**  
enumerator **LV\_STYLE\_TEXT\_LINE\_SPACE**  
enumerator **LV\_STYLE\_TEXT\_DECOR**  
enumerator **LV\_STYLE\_TEXT\_ALIGN**  
enumerator **LV\_STYLE\_RADIUS**  
enumerator **LV\_STYLE\_CLIP\_CORNER**  
enumerator **LV\_STYLE\_OPA**  
enumerator **LV\_STYLE\_COLOR\_FILTER\_DSC**  
enumerator **LV\_STYLE\_COLOR\_FILTER\_OPA**  
enumerator **LV\_STYLE\_ANIM\_TIME**  
enumerator **LV\_STYLE\_ANIM\_SPEED**  
enumerator **LV\_STYLE\_TRANSITION**  
enumerator **LV\_STYLE\_BLEND\_MODE**  
enumerator **LV\_STYLE\_LAYOUT**

enumerator **LV\_STYLE\_BASE\_DIR**  
 enumerator **\_LV\_STYLE\_LAST\_BUILT\_IN\_PROP**  
 enumerator **LV\_STYLE\_PROP\_ANY**

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_IMG\_ZOOM\_NONE)

void **lv\_style\_init**(*lv\_style\_t* \*style)  
 Initialize a style

---

**Note:** Do not call `lv_style_init` on styles that already have some properties because this function won't free the used memory just set a default state for the style. In other words be sure to initialize styles only once!

---

**Parameters** **style** -- pointer to a style to initialize

void **lv\_style\_reset**(*lv\_style\_t* \*style)  
 Clear all properties from a style and free all allocated memories.

**Parameters** **style** -- pointer to a style

*lv\_style\_prop\_t* **lv\_style\_register\_prop**(void)

bool **lv\_style\_remove\_prop**(*lv\_style\_t* \*style, *lv\_style\_prop\_t* prop)  
 Remove a property from a style

**Parameters**

- **style** -- pointer to a style
- **prop** -- a style property ORed with a state.

**Returns** true: the property was found and removed; false: the property wasn't found

void **lv\_style\_set\_prop**(*lv\_style\_t* \*style, *lv\_style\_prop\_t* prop, *lv\_style\_value\_t* value)  
 Set the value of property in a style. This function shouldn't be used directly by the user. Instead use `lv_style_set_<prop_name>()`. E.g. `lv_style_set_bg_color()`

**Parameters**

- **style** -- pointer to style
- **prop** -- the ID of a property (e.g. `LV_STLYE_BG_COLOR`)
- **value** -- *lv\_style\_value\_t* variable in which a field is set according to the type of prop

*lv\_res\_t* **lv\_style\_get\_prop**(*lv\_style\_t* \*style, *lv\_style\_prop\_t* prop, *lv\_style\_value\_t* \*value)  
 Get the value of a property

---

**Note:** For performance reasons there are no sanity check on **style**

---

**Parameters**

- **style** -- pointer to a style
- **prop** -- the ID of a property
- **value** -- pointer to a *lv\_style\_value\_t* variable to store the value

**Returns** LV\_RES\_INV: the property wasn't found in the style (*value* is unchanged) LV\_RES\_OK: the property was found, and *value* is set accordingly

```
static inline lv_res_t lv_style_get_prop_inlined(lv_style_t *style, lv_style_prop_t prop, lv_style_value_t *value)
```

Get the value of a property

---

**Note:** For performance reasons there are no sanity check on *style*

---



---

**Note:** This function is the same as *lv\_style\_get\_prop* but inlined. Use it only on performance critical places

---

#### Parameters

- **style** -- pointer to a style
- **prop** -- the ID of a property
- **value** -- pointer to a *lv\_style\_value\_t* variable to store the value

**Returns** LV\_RES\_INV: the property wasn't found in the style (*value* is unchanged) LV\_RES\_OK: the property was found, and *value* is set accordingly

```
void lv_style_transition_dsc_init(lv_style_transition_dsc_t *tr, const lv_style_prop_t props[],
 lv_anim_path_cb_t path_cb, uint32_t time, uint32_t delay, void
 *user_data)
```

```
lv_style_value_t lv_style_prop_get_default(lv_style_prop_t prop)
```

Get the default value of a property

**Parameters** *prop* -- the ID of a property

**Returns** the default value

```
bool lv_style_is_empty(const lv_style_t *style)
```

Checks if a style is empty (has no properties)

**Parameters** *style* -- pointer to a style

**Returns**

```
uint8_t lv_style_get_prop_group(lv_style_prop_t prop)
```

Tell the group of a property. If the a property from a group is set in a style the (1 << group) bit of *style->has\_group* is set. It allows early skipping the style if the property is not exists in the style at all.

**Parameters** *prop* -- a style property

**Returns** the group [0..7] 7 means all the custom properties with index > 112

```
static inline void lv_style_set_pad_all(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_pad_hor(lv_style_t *style, lv_coord_t value)
```



static inline void **lv\_style\_set\_pad\_ver**(*lv\_style\_t* \*style, lv\_coord\_t value)

static inline void **lv\_style\_set\_pad\_gap**(*lv\_style\_t* \*style, lv\_coord\_t value)

static inline void **lv\_style\_set\_size**(*lv\_style\_t* \*style, lv\_coord\_t value)

union **lv\_style\_value\_t**

*#include <lv\_style.h>* A common type to handle all the property types in the same way.

### Public Members

int32\_t **num**

Number integer number (opacity, enums, booleans or "normal" numbers)

const void \***ptr**

Constant pointers (font, cone text, etc)

lv\_color\_t **color**

Colors

struct **lv\_style\_transiton\_t**

*#include <lv\_style.h>* Descriptor for style transitions

### Public Members

const *lv\_style\_prop\_t* \***props**

An array with the properties to animate.

void \***user\_data**

A custom user data that will be passed to the animation's user\_data

*lv\_anim\_path\_cb\_t* **path\_xcb**

A path for the animation.

uint32\_t **time**

Duration of the transition in [ms]

uint32\_t **delay**

Delay before the transition in [ms]

struct **lv\_style\_const\_prop\_t**

*#include <lv\_style.h>* Descriptor of a constant style property.

## Public Members

*lv\_style\_prop\_t* **prop**  
*lv\_style\_value\_t* **value**

struct **\_lv\_style\_t**  
*#include <lv\_style.h>* Descriptor of a style (a collection of properties and values).

## Public Members

uint32\_t **sentinel**  
*lv\_style\_value\_t* **value1**  
 uint8\_t \***values\_and\_props**  
 const *lv\_style\_const\_prop\_t* \***const\_props**  
 union *\_lv\_style\_t::*[anonymous] **v\_p**  
 uint16\_t **prop1**  
 uint16\_t **is\_const**  
 uint8\_t **has\_group**  
 uint8\_t **prop\_cnt**

## Typedefs

typedef void (\***lv\_theme\_apply\_cb\_t**)(struct *\_lv\_theme\_t*\*, *lv\_obj\_t*\*)  
 typedef struct *\_lv\_theme\_t* **lv\_theme\_t**

## Functions

*lv\_theme\_t* \***lv\_theme\_get\_from\_obj**(*lv\_obj\_t* \*obj)  
 Get the theme assigned to the display of the object

**Parameters** **obj** -- pointer to object

**Returns** the theme of the object's display (can be NULL)

void **lv\_theme\_apply**(*lv\_obj\_t* \*obj)  
 Apply the active theme on an object

**Parameters** **obj** -- pointer to an object

void **lv\_theme\_set\_parent**(*lv\_theme\_t* \*new\_theme, *lv\_theme\_t* \*parent)  
 Set a base theme for a theme. The styles from the base them will be added before the styles of the current theme.  
 Arbitrary long chain of themes can be created by setting base themes.

**Parameters**

- **new\_theme** -- pointer to theme which base should be set
- **parent** -- pointer to the base theme

void **lv\_theme\_set\_apply\_cb**(*lv\_theme\_t* \*theme, *lv\_theme\_apply\_cb\_t* apply\_cb)

Set an apply callback for a theme. The apply callback is used to add styles to different objects

#### Parameters

- **theme** -- pointer to theme which callback should be set
- **apply\_cb** -- pointer to the callback

const *lv\_font\_t* \***lv\_theme\_get\_font\_small**(*lv\_obj\_t* \*obj)

Get the small font of the theme

**Returns** pointer to the font

const *lv\_font\_t* \***lv\_theme\_get\_font\_normal**(*lv\_obj\_t* \*obj)

Get the normal font of the theme

**Returns** pointer to the font

const *lv\_font\_t* \***lv\_theme\_get\_font\_large**(*lv\_obj\_t* \*obj)

Get the subtitle font of the theme

**Returns** pointer to the font

*lv\_color\_t* **lv\_theme\_get\_color\_primary**(*lv\_obj\_t* \*obj)

Get the primary color of the theme

**Returns** the color

*lv\_color\_t* **lv\_theme\_get\_color\_secondary**(*lv\_obj\_t* \*obj)

Get the secondary color of the theme

**Returns** the color

struct **\_lv\_theme\_t**

#### Public Members

*lv\_theme\_apply\_cb\_t* **apply\_cb**

struct *\_lv\_theme\_t* \***parent**

Apply the current theme's style on top of this theme.

void \***user\_data**

struct *\_lv\_disp\_t* \***disp**

*lv\_color\_t* **color\_primary**

*lv\_color\_t* **color\_secondary**

const *lv\_font\_t* \***font\_small**

const *lv\_font\_t* \***font\_normal**

const *lv\_font\_t* \***font\_large**

uint32\_t **flags**

## Functions

```
static inline lv_coord_t lv_obj_get_style_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_min_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_max_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_height(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_min_height(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_max_height(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_x(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_y(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_align_t lv_obj_get_style_align(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_transform_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_transform_height(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_translate_x(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_translate_y(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_transform_zoom(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_transform_angle(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_pad_top(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_pad_bottom(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_pad_left(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_pad_right(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_pad_row(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_pad_column(const struct _lv_obj_t *obj, uint32_t part)
```

```

static inline lv_coord_t lv_obj_get_style_radius(const struct _lv_obj_t *obj, uint32_t part)

static inline bool lv_obj_get_style_clip_corner(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_opa_t lv_obj_get_style_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline const lv_color_filter_dsc_t *lv_obj_get_style_color_filter_dsc(const struct _lv_obj_t *obj,
 uint32_t part)

static inline lv_opa_t lv_obj_get_style_color_filter_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline uint32_t lv_obj_get_style_anim_time(const struct _lv_obj_t *obj, uint32_t part)

static inline uint32_t lv_obj_get_style_anim_speed(const struct _lv_obj_t *obj, uint32_t part)

static inline const lv_style_transition_dsc_t *lv_obj_get_style_transition(const struct _lv_obj_t *obj,
 uint32_t part)

static inline lv_blend_mode_t lv_obj_get_style_blend_mode(const struct _lv_obj_t *obj, uint32_t part)

static inline uint16_t lv_obj_get_style_layout(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_base_dir_t lv_obj_get_style_base_dir(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_bg_color(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_bg_color_filtered(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_opa_t lv_obj_get_style_bg_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_bg_grad_color(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_bg_grad_color_filtered(const struct _lv_obj_t *obj,
 uint32_t part)

static inline lv_grad_dir_t lv_obj_get_style_bg_grad_dir(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_bg_main_stop(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_bg_grad_stop(const struct _lv_obj_t *obj, uint32_t part)

static inline const void *lv_obj_get_style_bg_img_src(const struct _lv_obj_t *obj, uint32_t part)

```

```

static inline lv_opa_t lv_obj_get_style_bg_img_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_bg_img_recolor(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_bg_img_recolor_filtered(const struct _lv_obj_t *obj,
 uint32_t part)

static inline lv_opa_t lv_obj_get_style_bg_img_recolor_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline bool lv_obj_get_style_bg_img_tiled(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_border_color(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_border_color_filtered(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_opa_t lv_obj_get_style_border_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_border_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_border_side_t lv_obj_get_style_border_side(const struct _lv_obj_t *obj, uint32_t part)

static inline bool lv_obj_get_style_border_post(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_text_color(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_text_color_filtered(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_opa_t lv_obj_get_style_text_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline const lv_font_t *lv_obj_get_style_text_font(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_text_letter_space(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_text_line_space(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_text_decor_t lv_obj_get_style_text_decor(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_text_align_t lv_obj_get_style_text_align(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_opa_t lv_obj_get_style_img_opa(const struct _lv_obj_t *obj, uint32_t part)

```

```

static inline lv_color_t lv_obj_get_style_img_recolor(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_img_recolor_filtered(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_opa_t lv_obj_get_style_img_recolor_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_outline_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_outline_color(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_outline_color_filtered(const struct _lv_obj_t *obj,
 uint32_t part)

static inline lv_opa_t lv_obj_get_style_outline_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_outline_pad(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_shadow_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_shadow_ofs_x(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_shadow_ofs_y(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_shadow_spread(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_shadow_color(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_shadow_color_filtered(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_opa_t lv_obj_get_style_shadow_opa(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_line_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_line_dash_width(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_line_dash_gap(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_line_rounded(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_color_t lv_obj_get_style_line_color(const struct _lv_obj_t *obj, uint32_t part)

```

```
static inline lv_color_t lv_obj_get_style_line_color_filtered(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline lv_opa_t lv_obj_get_style_line_opa(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline lv_coord_t lv_obj_get_style_arc_width(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline lv_coord_t lv_obj_get_style_arc_rounded(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline lv_color_t lv_obj_get_style_arc_color(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline lv_color_t lv_obj_get_style_arc_color_filtered(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline lv_opa_t lv_obj_get_style_arc_opa(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline const void *lv_obj_get_style_arc_img_src(const struct _lv_obj_t *obj, uint32_t part)
```

```
static inline void lv_obj_set_style_width(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_min_width(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_max_width(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_height(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_min_height(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_max_height(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_x(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_y(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_align(struct _lv_obj_t *obj, lv_align_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_transform_width(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t selector)
```



```
static inline void lv_obj_set_style_transform_height(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_translate_x(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_translate_y(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_transform_zoom(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_transform_angle(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_pad_top(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_pad_bottom(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_pad_left(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_pad_right(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_pad_row(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_pad_column(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_radius(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_clip_corner(struct _lv_obj_t *obj, bool value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_opa(struct _lv_obj_t *obj, lv_opa_t value, lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_color_filter_dsc(struct _lv_obj_t *obj, const lv_color_filter_dsc_t
*value, lv_style_selector_t selector)
```

```

static inline void lv_obj_set_style_color_filter_opa(struct _lv_obj_t *obj, lv_opa_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_anim_time(struct _lv_obj_t *obj, uint32_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_anim_speed(struct _lv_obj_t *obj, uint32_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_transition(struct _lv_obj_t *obj, const lv_style_transition_dsc_t *value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_blend_mode(struct _lv_obj_t *obj, lv_blend_mode_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_layout(struct _lv_obj_t *obj, uint16_t value, lv_style_selector_t selector)

static inline void lv_obj_set_style_base_dir(struct _lv_obj_t *obj, lv_base_dir_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_bg_color(struct _lv_obj_t *obj, lv_color_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_bg_color_filtered(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_opa(struct _lv_obj_t *obj, lv_opa_t value, lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_grad_color(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_grad_color_filtered(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_grad_dir(struct _lv_obj_t *obj, lv_grad_dir_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_main_stop(struct _lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_grad_stop(struct _lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_img_src(struct _lv_obj_t *obj, const void *value, lv_style_selector_t
 selector)

```

```

static inline void lv_obj_set_style_bg_img_opa(struct _lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_bg_img_recolor(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_img_recolor_filtered(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_img_recolor_opa(struct _lv_obj_t *obj, lv_opa_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_bg_img_tiled(struct _lv_obj_t *obj, bool value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_border_color(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_border_color_filtered(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_border_opa(struct _lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_border_width(struct _lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_border_side(struct _lv_obj_t *obj, lv_border_side_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_border_post(struct _lv_obj_t *obj, bool value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_text_color(struct _lv_obj_t *obj, lv_color_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_text_color_filtered(struct _lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_text_opa(struct _lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_text_font(struct _lv_obj_t *obj, const lv_font_t *value,
 lv_style_selector_t selector)

```

```
static inline void lv_obj_set_style_text_letter_space(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_text_line_space(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_text_decor(struct _lv_obj_t *obj, lv_text_decor_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_text_align(struct _lv_obj_t *obj, lv_text_align_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_img_opa(struct _lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_img_recolor(struct _lv_obj_t *obj, lv_color_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_img_recolor_filtered(struct _lv_obj_t *obj, lv_color_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_img_recolor_opa(struct _lv_obj_t *obj, lv_opa_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_outline_width(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_outline_color(struct _lv_obj_t *obj, lv_color_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_outline_color_filtered(struct _lv_obj_t *obj, lv_color_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_outline_opa(struct _lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_outline_pad(struct _lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_shadow_width(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_shadow_ofs_x(struct _lv_obj_t *obj, lv_coord_t value,
lv_style_selector_t selector)
```

---

```
static inline void lv_obj_set_style_shadow_ofs_y(struct lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_shadow_spread(struct lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_shadow_color(struct lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_shadow_color_filtered(struct lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_shadow_opa(struct lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_line_width(struct lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_line_dash_width(struct lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_line_dash_gap(struct lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_line_rounded(struct lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_line_color(struct lv_obj_t *obj, lv_color_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_line_color_filtered(struct lv_obj_t *obj, lv_color_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_line_opa(struct lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_arc_width(struct lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_arc_rounded(struct lv_obj_t *obj, lv_coord_t value, lv_style_selector_t
 selector)

static inline void lv_obj_set_style_arc_color(struct lv_obj_t *obj, lv_color_t value, lv_style_selector_t
 selector)
```

```
static inline void lv_obj_set_style_arc_color_filtered(struct lv_obj_t *obj, lv_color_t value,
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_arc_opa(struct lv_obj_t *obj, lv_opa_t value, lv_style_selector_t
selector)
```

```
static inline void lv_obj_set_style_arc_img_src(struct lv_obj_t *obj, const void *value,
lv_style_selector_t selector)
```

## Functions

```
static inline void lv_style_set_width(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_min_width(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_max_width(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_height(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_min_height(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_max_height(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_x(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_y(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_align(lv_style_t *style, lv_align_t value)
```

```
static inline void lv_style_set_transform_width(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_transform_height(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_translate_x(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_translate_y(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_transform_zoom(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_transform_angle(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_pad_top(lv_style_t *style, lv_coord_t value)
```

---

```
static inline void lv_style_set_pad_bottom(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_pad_left(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_pad_right(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_pad_row(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_pad_column(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_radius(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_clip_corner(lv_style_t *style, bool value)

static inline void lv_style_set_opa(lv_style_t *style, lv_opa_t value)

static inline void lv_style_set_color_filter_dsc(lv_style_t *style, const lv_color_filter_dsc_t *value)

static inline void lv_style_set_color_filter_opa(lv_style_t *style, lv_opa_t value)

static inline void lv_style_set_anim_time(lv_style_t *style, uint32_t value)

static inline void lv_style_set_anim_speed(lv_style_t *style, uint32_t value)

static inline void lv_style_set_transition(lv_style_t *style, const lv_style_transition_dsc_t *value)

static inline void lv_style_set_blend_mode(lv_style_t *style, lv_blend_mode_t value)

static inline void lv_style_set_layout(lv_style_t *style, uint16_t value)

static inline void lv_style_set_base_dir(lv_style_t *style, lv_base_dir_t value)

static inline void lv_style_set_bg_color(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_bg_color_filtered(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_bg_opa(lv_style_t *style, lv_opa_t value)

static inline void lv_style_set_bg_grad_color(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_bg_grad_color_filtered(lv_style_t *style, lv_color_t value)
```

```
static inline void lv_style_set_bg_grad_dir(lv_style_t *style, lv_grad_dir_t value)

static inline void lv_style_set_bg_main_stop(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_bg_grad_stop(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_bg_img_src(lv_style_t *style, const void *value)

static inline void lv_style_set_bg_img_opa(lv_style_t *style, lv_opa_t value)

static inline void lv_style_set_bg_img_recolor(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_bg_img_recolor_filtered(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_bg_img_recolor_opa(lv_style_t *style, lv_opa_t value)

static inline void lv_style_set_bg_img_tiled(lv_style_t *style, bool value)

static inline void lv_style_set_border_color(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_border_color_filtered(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_border_opa(lv_style_t *style, lv_opa_t value)

static inline void lv_style_set_border_width(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_border_side(lv_style_t *style, lv_border_side_t value)

static inline void lv_style_set_border_post(lv_style_t *style, bool value)

static inline void lv_style_set_text_color(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_text_color_filtered(lv_style_t *style, lv_color_t value)

static inline void lv_style_set_text_opa(lv_style_t *style, lv_opa_t value)

static inline void lv_style_set_text_font(lv_style_t *style, const lv_font_t *value)

static inline void lv_style_set_text_letter_space(lv_style_t *style, lv_coord_t value)

static inline void lv_style_set_text_line_space(lv_style_t *style, lv_coord_t value)
```



static inline void **lv\_style\_set\_text\_decor**(*lv\_style\_t* \*style, *lv\_text\_decor\_t* value)

static inline void **lv\_style\_set\_text\_align**(*lv\_style\_t* \*style, *lv\_text\_align\_t* value)

static inline void **lv\_style\_set\_img\_opa**(*lv\_style\_t* \*style, *lv\_opa\_t* value)

static inline void **lv\_style\_set\_img\_recolor**(*lv\_style\_t* \*style, *lv\_color\_t* value)

static inline void **lv\_style\_set\_img\_recolor\_filtered**(*lv\_style\_t* \*style, *lv\_color\_t* value)

static inline void **lv\_style\_set\_img\_recolor\_opa**(*lv\_style\_t* \*style, *lv\_opa\_t* value)

static inline void **lv\_style\_set\_outline\_width**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_outline\_color**(*lv\_style\_t* \*style, *lv\_color\_t* value)

static inline void **lv\_style\_set\_outline\_color\_filtered**(*lv\_style\_t* \*style, *lv\_color\_t* value)

static inline void **lv\_style\_set\_outline\_opa**(*lv\_style\_t* \*style, *lv\_opa\_t* value)

static inline void **lv\_style\_set\_outline\_pad**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_shadow\_width**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_shadow\_ofs\_x**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_shadow\_ofs\_y**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_shadow\_spread**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_shadow\_color**(*lv\_style\_t* \*style, *lv\_color\_t* value)

static inline void **lv\_style\_set\_shadow\_color\_filtered**(*lv\_style\_t* \*style, *lv\_color\_t* value)

static inline void **lv\_style\_set\_shadow\_opa**(*lv\_style\_t* \*style, *lv\_opa\_t* value)

static inline void **lv\_style\_set\_line\_width**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_line\_dash\_width**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

static inline void **lv\_style\_set\_line\_dash\_gap**(*lv\_style\_t* \*style, *lv\_coord\_t* value)

```
static inline void lv_style_set_line_rounded(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_line_color(lv_style_t *style, lv_color_t value)
```

```
static inline void lv_style_set_line_color_filtered(lv_style_t *style, lv_color_t value)
```

```
static inline void lv_style_set_line_opa(lv_style_t *style, lv_opa_t value)
```

```
static inline void lv_style_set_arc_width(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_arc_rounded(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_arc_color(lv_style_t *style, lv_color_t value)
```

```
static inline void lv_style_set_arc_color_filtered(lv_style_t *style, lv_color_t value)
```

```
static inline void lv_style_set_arc_opa(lv_style_t *style, lv_opa_t value)
```

```
static inline void lv_style_set_arc_img_src(lv_style_t *style, const void *value)
```

## 4.4 Style properties

### 4.4.1 Size and position

TODO

#### **width**

Sets the width of object. Pixel, percentage and LV\_SIZE\_CONTENT values can be used. Percentage values are relative to the width of the parent's content area.

#### **min\_width**

Sets a minimal width. Pixel and percentage values can be used. Percentage values are relative to the width of the parent's content area.

**max\_width**

Sets a maximal width. Pixel and percentage values can be used. Percentage values are relative to the width of the parent's content area.

**height**

Sets the height of object. Pixel, percentage and `LV_SIZE_CONTENT` can be used. Percentage values are relative to the height of the parent's content area.

**min\_height**

Sets a minimal height. Pixel and percentage values can be used. Percentage values are relative to the width of the parent's content area.

**max\_height**

Sets a maximal height. Pixel and percentage values can be used. Percentage values are relative to the height of the parent's content area.

**x**

Set the X coordinate of the object considering the set `align`. Pixel and percentage values can be used. Percentage values are relative to the width of the parent's content area.

**y**

Set the Y coordinate of the object considering the set `align`. Pixel and percentage values can be used. Percentage values are relative to the height of the parent's content area.

**align**

Set the alignment which tells from which point of the parent the X and Y coordinates should be interpreted. The possible values are: `LV_ALIGN_TOP_LEFT/MID/RIGHT`, `LV_ALIGN_BOTTOM_LEFT/MID/RIGHT`, `LV_ALIGN_LEFT/RIGHT_MID`, `LV_ALIGN_CENTER`

**transform\_width**

Make the object wider on both sides with this value. Pixel and percentage (with `lv_pct(x)`) values can be used. Percentage values are relative to the object's width.

**transform\_height**

Make the object higher on both sides with this value. Pixel and percentage (with `lv_pct(x)`) values can be used. Percentage values are relative to the object's height.

**translate\_x**

Move the object with this value in X direction. Applied after layouts, aligns and other positioning. Pixel and percentage (with `lv_pct(x)`) values can be used. Percentage values are relative to the object's width.

**translate\_y**

Move the object with this value in Y direction. Applied after layouts, aligns and other positioning. Pixel and percentage (with `lv_pct(x)`) values can be used. Percentage values are relative to the object's height.

**transform\_zoom**

Zoom image-like objects. Multiplied with the zoom set on the object. The value 256 (or `LV_IMG_ZOOM_NONE`) means normal size, 128 half size, 512 double size, and so on

**transform\_angle**

Rotate image-like objects. Added to the rotation set on the object. The value is interpreted in 0.1 degree unit. E.g. 45 deg. = 450

## 4.4.2 Padding

TODO

**pad\_top**

Sets the padding on the top. It makes the content area smaller in this direction.

**pad\_bottom**

Sets the padding on the bottom. It makes the content area smaller in this direction.

**pad\_left**

Sets the padding on the left. It makes the content area smaller in this direction.

**pad\_right**

Sets the padding on the right. It makes the content area smaller in this direction.

**pad\_row**

Sets the padding between the rows. Used by the layouts.

**pad\_column**

Sets the padding between the columns. Used by the layouts.

### 4.4.3 Miscellaneous

TODO

**radius**

Set the radius on every corner. The value is interpreted in pixel ( $\geq 0$ ) or LV\_RADIUS\_CIRCLE for max. radius

**clip\_corner**

Enable to clip the overflowed content on the rounded corner. Can be `true` or `false`.

**opa**

Scale down all opacity values of the object by this factor. Value 0, LV\_OPA\_0 or LV\_OPA\_TRANSP means fully transparent, 256, LV\_OPA\_100 or LV\_OPA\_COVER means fully covering, other values or LV\_OPA\_10, LV\_OPA\_20, etc means semi transparency.

**color\_filter\_dsc**

Mix a color to all colors of the object.

**color\_filter\_opa**

The intensity of mixing of color filter.

**anim\_time**

The animation time in milliseconds. It's meaning is widget specific. E.g. blink time of the cursor on the text area or scroll time of a roller. See the widgets' documentation to learn more.

**anim\_speed**

The animation speed in pixel/sec. It's meaning is widget specific. E.g. scroll speed of label. See the widgets' documentation to learn more.

**transition**

An initialized `lv_style_transition_dsc_t` to describe a transition.

**blend\_mode**

Describes how to blend the colors to the background. The possible values are `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE`

**layout**

Set the layout of the object. The children will be repositioned and resized according to the policies set for the layout. For the possible values see the documentation of the layouts.

**base\_dir**

Set the base direction of the object. The possible values are `LV_BIDI_DIR_LTR/RTL/AUTO`.

## 4.4.4 Background

TODO

**bg\_color**

Set the background color of the object.

**bg\_opa**

Set the opacity of the background. Value 0, `LV_OPA_0` or `LV_OPA_TRANSP` means fully transparent, 256, `LV_OPA_100` or `LV_OPA_COVER` means fully covering, other values or `LV_OPA_10`, `LV_OPA_20`, etc means semi transparency.

**bg\_grad\_color**

Set the gradient color of the background. Used only if `grad_dir` is not `LV_GRAD_DIR_NONE`

**bg\_grad\_dir**

Set the direction of the gradient of the background. The possible values are `LV_GRAD_DIR_NONE/HOR/VER`.

**bg\_main\_stop**

Set the point from which the background color should start for gradients. 0 means to top/left side, 255 the bottom/right side, 128 the center, and so on

**bg\_grad\_stop**

Set the point from which the background's gradient color should start. 0 means to top/left side, 255 the bottom/right side, 128 the center, and so on

**bg\_img\_src**

Set a background image. Can be a pointer to `lv_img_dsc_t`, a path to a file or an `LV_SYMBOL_...`

**bg\_img\_opa**

Set the opacity of the background image. Value 0, `LV_OPA_0` or `LV_OPA_TRANSP` means fully transparent, 256, `LV_OPA_100` or `LV_OPA_COVER` means fully covering, other values or `LV_OPA_10`, `LV_OPA_20`, etc means semi transparency.

**bg\_img\_recolor**

Set a color to mix to the background image.

**bg\_img\_recolor\_opa**

Set the intensity of background image recoloring. Value 0, `LV_OPA_0` or `LV_OPA_TRANSP` means no mixing, 256, `LV_OPA_100` or `LV_OPA_COVER` means full recoloring, other values or `LV_OPA_10`, `LV_OPA_20`, etc are interpreted proportionally.

**bg\_img\_tiled**

If enabled the background image will be tiled. The possible values are `true` or `false`.

### 4.4.5 Border

TODO

#### **border\_color**

Set the color of the border

#### **border\_opa**

Set the opacity of the border. Value 0, `LV_OPA_0` or `LV_OPA_TRANSP` means fully transparent, 255, `LV_OPA_100` or `LV_OPA_COVER` means fully covering, other values or `LV_OPA_10`, `LV_OPA_20`, etc means semi transparency.

#### **border\_width**

Set the width of the border. Only pixel values can be used.

#### **border\_side**

Set on which side(s) the border should be drawn. The possible values are `LV_BORDER_SIDE_NONE/TOP/BOTTOM/LEFT/RIGHT/INTERNAL`. OR-ed values can be used as well, e.g. `LV_BORDER_SIDE_TOP | LV_BORDER_SIDE_LEFT`.

#### **border\_post**

Sets whether the border should be drawn before or after the children are drawn. `true`: after children, `false`: before children

### 4.4.6 Text

TODO

#### **text\_color**

Sets the color of the text.

#### **text\_opa**

Set the opacity of the text. Value 0, `LV_OPA_0` or `LV_OPA_TRANSP` means fully transparent, 255, `LV_OPA_100` or `LV_OPA_COVER` means fully covering, other values or `LV_OPA_10`, `LV_OPA_20`, etc means semi transparency.



**text\_font**

Set the font of the text (a pointer `lv_font_t *`).

**text\_letter\_space**

Set the letter space in pixels

**text\_line\_space**

Set the line space in pixels.

**text\_decor**

Set decoration for the text. The possible values are `LV_TEXT_DECOR_NONE/UNDERLINE/STRIKETHROUGH`. OR-ed values can be used as well.

**text\_align**

Set how to align the lines of the text. Note that it doesn't align the object itself, only the lines inside the object. The possible values are `LV_TEXT_ALIGN_LEFT/CENTER/RIGHT/AUTO`. `LV_TEXT_ALIGN_AUTO` detect the text base direction and uses left or right alignment accordingly

## 4.4.7 Image

TODO

**img\_opa**

Set the opacity of an image. Value 0, `LV_OPA_0` or `LV_OPA_TRANSP` means fully transparent, 256, `LV_OPA_100` or `LV_OPA_COVER` means fully covering, other values or `LV_OPA_10`, `LV_OPA_20`, etc means semi transparency.

**img\_recolor**

Set color to mix to the image.

**img\_recolor\_opa**

Set the intensity of the color mixing. Value 0, `LV_OPA_0` or `LV_OPA_TRANSP` means fully transparent, 256, `LV_OPA_100` or `LV_OPA_COVER` means fully covering, other values or `LV_OPA_10`, `LV_OPA_20`, etc means semi transparency.

### 4.4.8 Outline

TODO

#### **outline\_width**

Set the width of the outline in pixels.

#### **outline\_color**

Set the color of the outline.

#### **outline\_opa**

Set the opacity of the outline. Value 0, LV\_OPA\_0 or LV\_OPA\_TRANSP means fully transparent, 256, LV\_OPA\_100 or LV\_OPA\_COVER means fully covering, other values or LV\_OPA\_10, LV\_OPA\_20, etc means semi transparency.

#### **outline\_pad**

Set the padding of the outline, i.e. the gap between object and the outline.

### 4.4.9 Shadow

TODO

#### **shadow\_width**

Set the width of the shadow in pixels. The value should be  $\geq 0$ .

#### **shadow\_ofs\_x**

Set an offset on the shadow in pixels in X direction.

#### **shadow\_ofs\_y**

Set an offset on the shadow in pixels in Y direction.

#### **shadow\_spread**

Make the shadow calculation to use a larger or smaller rectangle as base. The value can be in pixel t make the area larger/smaller

**shadow\_color**

Set the color of the shadow

**shadow\_opa**

Set the opacity of the shadow. Value 0, LV\_OPA\_0 or LV\_OPA\_TRANSP means fully transparent, 256, LV\_OPA\_100 or LV\_OPA\_COVER means fully covering, other values or LV\_OPA\_10, LV\_OPA\_20, etc means semi transparency.

**4.4.10 Line**

TODO

**line\_width**

Set the width of the lines in pixel.

**line\_dash\_width**

Set the width of dashes in pixel. Note that dash works only on horizontal and vertical lines

**line\_dash\_gap**

Set the gap between dashes in pixel. Note that dash works only on horizontal and vertical lines

**line\_rounded**

Make the end points of the lines rounded. **true**: rounded, **false**: perpendicular line ending

**line\_color**

Set the color for the lines.

**line\_opa**

Set the opacity of the lines.

**4.4.11 Arc**

TODO

**arc\_width**

Set the width (thickness) of the arcs in pixel.

**arc\_rounded**

Make the end points of the arcs rounded. **true**: rounded, **false**: perpendicular line ending

**arc\_color**

Set the color of the arc.

**arc\_opa**

Set the opacity of the arcs.

**arc\_img\_src**

Set an image from which the arc will be masked out. It's useful to display complex effects on the arcs. Can be a pointer to `lv_img_dsc_t` or a path to a file

## 4.5 Scroll

### 4.5.1 Overview

In LVGL scrolling works very intuitively: if an object is out of its parent content area (the size without paddings), the parent becomes scrollable and scrollbar(s) will appear. That's it.

Any object can be scrollable including `lv_obj_t`, `lv_img`, `lv_btn`, `lv_meter`, etc

The object can be scrolled either horizontally or vertically at a time, that is diagonal scrolling is not possible.

#### Scrollbar

##### Mode

The scrollbars are displayed according to the set **mode**. The following **modes** exist:

- `LV_SCROLLBAR_MODE_OFF` Never show the scrollbars
- `LV_SCROLLBAR_MODE_ON` Always show the scrollbars
- `LV_SCROLLBAR_MODE_ACTIVE` Show scroll bars while object is being scrolled
- `LV_SCROLLBAR_MODE_AUTO` Show scroll bars when the content is large enough to be scrolled

`lv_obj_set_scrollbar_mode(obj, LV_SCROLLBAR_MODE_...)` set the scrollbar mode on an object.

## Styling

The scrollbars have its own dedicated part, called `LV_PART_SCROLLBAR`. For example a scrollbar can be turned to red like this:

```
static lv_style_t style_red;
lv_style_init(&style_red);
lv_style_set_bg_color(&style_red, lv_color_red());

...

lv_obj_add_style(obj, &style_red, LV_PART_SCROLLBAR);
```

The object goes to `LV_STATE_SCROLLLED` state while it's being scrolled. It allows adding different style to the scrollbar or the object itself when scrolled. This code makes the scrollbar blue when the object is scrolled:

```
static lv_style_t style_blue;
lv_style_init(&style_blue);
lv_style_set_bg_color(&style_red, lv_color_blue());

...

lv_obj_add_style(obj, &style_blue, LV_STATE_SCROLLLED | LV_PART_SCROLLBAR);
```

## Events

The following events are related to scrolling:

- `LV_EVENT_SCROLL_BEGIN` Scrolling begins
- `LV_EVENT_SCROLL_END` Scrolling ends
- `LV_EVENT_SCROLL` Scroll happened. Triggered on every position change. Scroll events

### 4.5.2 Basic example

TODO

### 4.5.3 Features of scrolling

Besides managing "normal" scrolling there are many interesting and useful additional features too.

#### Scrollable

It's possible to make an object non-scrollable with `lv_obj_clear_flag(obj, LV_OBJ_FLAG_SCROLLABLE)`.

Non-scrollable object can still propagate the scrolling (chain) to the parents.

The direction in which scrolling can happen can be controlled by `lv_obj_set_scroll_dir(obj, LV_DIR_...)`. The following values are possible for the direction:

- `LV_DIR_TOP` only scroll up
- `LV_DIR_LEFT` only scroll left

- `LV_DIR_BOTTOM` only scroll down
- `LV_DIR_RIGHT` only scroll right
- `LV_DIR_HOR` only scroll horizontally
- `LV_DIR_TOP` only scroll vertically
- `LV_DIR_ALL` scroll any directions

OR-ed values are also possible. E.g. `LV_DIR_TOP | LV_DIR_LEFT`.

### Scroll chain

If an object can't be scrolled further (e.g. it's content has reached the bottom most position) the scrolling is propagated to it's parent. If the parent can be scrolled in that direction than it will be scrolled instead. It goes to the grand parent and grandparents too.

The propagation on scrolling is called "scroll chaining" and it can be enabled/disabled with the `LV_OBJ_FLAG_SCROLL_CHAIN` flag. If chaining is disabled the propagation stops on the object and the parent(s) won't be scrolled.

### Scroll momentum

When the user scrolls an object and releases it LVGL can emulate a momentum for the scrolling. It's like to object were thrown and the scrolling slows down smoothly.

The scroll momentum can be enabled/disabled with the `LV_OBJ_FLAG_SCROLL_MOMENTUM` flag.

### Elastic scroll

Normally the content can't be scrolled inside the object. That is the top side of the content can't be below the top side of the object.

However, with `LV_OBJ_FLAG_SCROLL_ELASTIC` a fancy effect can be added when the user "over-scrolls" the content. The scrolling slows down, and the content can be scrolled inside the object. When the object is releases the content is scrolled in it will be animated back to the valid position.

### Snaping

The children of an object can be snapped according to specific rules when scrolling ends. Children can be made snapable individually with the `LV_OBJ_FLAG_SNAPABLE` flag. The object can align the snapped children in 4 ways:

- `LV_SCROLL_SNAP_NONE` Snapping is disabled. (default)
- `LV_SCROLL_SNAP_START` Align the children to the left/top side of the scrolled object
- `LV_SCROLL_SNAP_END` Align the children to the right/bottom side of the scrolled object
- `LV_SCROLL_SNAP_CENTER` Align the children to the center of the scrolled object

The alignment can be set with `lv_obj_set_scroll_snap_x/y(obj, LV_SCROLL_SNAP_...)`:

Under the hood the followings happen

1. User scrolls an object and releases the screen
2. LVGL calculates where would the scroll end considering scroll momentum

3. LVGL finds the nearest scroll point
4. LVGL scrolls the snap point with an animation

### Scroll one

The "scroll one" feature tells LVGL to allow scrolling only one snapable children at a time. So it requires to make the children snapable and set a scroll snap alignment different from `LV_SCROLL_SNAP_NONE`.

This feature can be enabled by the `LV_OBJ_FLAG_SCROLL_ONE` flag.

### Scroll on focus

Imagine that there a lot of objects in a group that are on scrollable object. Pressing the "Tab" button focuses the next object but it might be out of the visible area of the scrollable object. If the "scroll on focus" features is enabled LVGL will automatically scroll to the objects to bring the children into the view. The scrolling happens recursively therefore even nested scrollable object are handled properly. The object will be scrolled to the view even if it's on a different page of a tabview.

## 4.5.4 Scroll manually

The following API functions allow to manually scroll objects:

- `lv_obj_scroll_by(obj, x, y, LV_ANIM_ON/OFF)` scroll by x and y values
- `lv_obj_scroll_to(obj, x, y, LV_ANIM_ON/OFF)` scroll to bring the given coordinate to the top left corner
- `lv_obj_scroll_to_x(obj, x, LV_ANIM_ON/OFF)` scroll to bring the given coordinate to the left side
- `lv_obj_scroll_to_y(obj, y, LV_ANIM_ON/OFF)` scroll to bring the given coordinate to the left side

## 4.5.5 Self size

Self size is a property of an object. Normally, the user shouldn't use this parameter but if a custom widget is created it might be useful.

In short, self size tell the size of the content. To understand it better take the example of a table. Let's say it has 10 rows each with 50 px height. So the total height of the content is 500 px. In other words the "self height" is 500 px. If the user sets only 200 px height for the table LVGL will see that the self size is larger and make the table scrollable.

It means not only the children can make an object scrollable but a larger self size too.

LVGL uses the `LV_EVENT_GET_SELF_SIZE` event to get the self size of an object. Here is an example to see how to handle the event

```
if(event_code == LV_EVENT_GET_SELF_SIZE) {
 lv_point_t * p = lv_event_get_param(e);

 //If x or y < 0 then it doesn't need to be calculated now
 if(p->x >= 0) {
 p->x = 200; //Set or calculate the self width
 }

 if(p->y >= 0) {
```

(continues on next page)

(continued from previous page)

```

 p->y = 50; //Set or calculate the self height
 }
}

```


## 4.5.6 Examples

# 4.6 Layers

## 4.6.1 Order of creation

By default, LVGL draws old objects on the background and new objects on the foreground.

For example, assume we added a button to a parent object named button1 and then another button named button2. Then button1 (with its child object(s)) will be in the background and can be covered by button2 and its children.

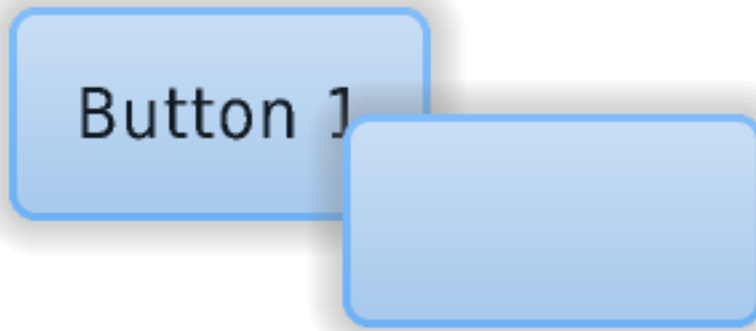

```

/*Create a screen*/
lv_obj_t * scr = lv_obj_create(NULL, NULL);
lv_scr_load(scr); /*Load the screen*/

/*Create 2 buttons*/
lv_obj_t * btn1 = lv_btn_create(scr, NULL); /*Create a button on the screen*/
lv_btn_set_fit(btn1, true, true); /*Enable to automatically set the
↪size according to the content*/
lv_obj_set_pos(btn1, 60, 40); /*Set the position of the
↪button*/

lv_obj_t * btn2 = lv_btn_create(scr, btn1); /*Copy the first button*/
lv_obj_set_pos(btn2, 180, 80); /*Set the position of the button*/

/*Add labels to the buttons*/
lv_obj_t * label1 = lv_label_create(btn1, NULL); /*Create a label on the first
↪button*/

```

(continues on next page)



(continued from previous page)

```

lv_label_set_text(label1, "Button 1"); /*Set the text of the label*/

lv_obj_t * label2 = lv_label_create(btn2, NULL); /*Create a label on the
↪second button*/
lv_label_set_text(label2, "Button 2"); /*Set the text of the
↪label*/

/*Delete the second label*/
lv_obj_del(label2);

```

## 4.6.2 Bring to the foreground

There are several ways to bring an object to the foreground:

- Use `lv_obj_set_top(obj, true)`. If `obj` or any of its children is clicked, then LVGL will automatically bring the object to the foreground. It works similarly to a typical GUI on a PC. When a window in the background is clicked, it will come to the foreground automatically.
- Use `lv_obj_move_foreground(obj)` to explicitly tell the library to bring an object to the foreground. Similarly, use `lv_obj_move_background(obj)` to move to the background.
- When `lv_obj_set_parent(obj, new_parent)` is used, `obj` will be on the foreground on the `new_parent`.

## 4.6.3 Top and sys layers

LVGL uses two special layers named as `layer_top` and `layer_sys`. Both are visible and common on all screens of a display. **They are not, however, shared among multiple physical displays.** The `layer_top` is always on top of the default screen (`lv_scr_act()`), and `layer_sys` is on top of `layer_top`.

The `layer_top` can be used by the user to create some content visible everywhere. For example, a menu bar, a pop-up, etc. If the `click` attribute is enabled, then `layer_top` will absorb all user click and acts as a modal.

```
lv_obj_set_click(lv_layer_top(), true);
```

The `layer_sys` is also used for a similar purpose on LVGL. For example, it places the mouse cursor above all layers to be sure it's always visible.

## 4.7 Events

Events are triggered in LVGL when something happens which might be interesting to the user, e.g. if an object:

- is clicked
- is scrolled
- its value has changed
- redrawn, etc.

### 4.7.1 Add events to the object

The user can assign callback functions to an object to see its events. In practice, it looks like this:

```
lv_obj_t * btn = lv_btn_create(lv_scr_act());
lv_obj_add_event_cb(btn, my_event_cb, LV_EVENT_CLICKED, NULL); /*Assign an event_
↳callback*/

...

static void my_event_cb(lv_event_t * event)
{
 printf("Clicked\n");
}
```

In the example `LV_EVENT_CLICKED` means that only the click event will call `my_event_cb`. See the [list of event codes](#) for all the options. `LV_EVENT_ALL` can be used to receive all the events.

The last parameter of `lv_obj_add_event_cb` is a pointer to any custom data that will be available in the event. It will be described later in more detail.

More events can be added to an object, like this:

```
lv_obj_add_event_cb(obj, my_event_cb_1, LV_EVENT_CLICKED, NULL);
lv_obj_add_event_cb(obj, my_event_cb_2, LV_EVENT_PRESSED, NULL);
lv_obj_add_event_cb(obj, my_event_cb_3, LV_EVENT_ALL, NULL); /*No_
↳filtering, receive all events*/
```

Even the same event callback can be used on an object with different `user_data`. For example:

```
lv_obj_add_event_cb(obj, increment_on_click, LV_EVENT_CLICKED, &num1);
lv_obj_add_event_cb(obj, increment_on_click, LV_EVENT_CLICKED, &num2);
```

The events will be called in the order as they were added.

More objects can use the same *event callback*.

### 4.7.2 Remove event(s) from an object

Events can be removed from an object with the `lv_obj_remove_event_cb(obj, event_cb)` function or `lv_obj_remove_event_dsc(obj, event_dsc)`. `event_dsc` is a pointer returned by `lv_obj_add_event_cb`.

### 4.7.3 Event codes

The event codes can be grouped into these categories:

- Input device events
- Drawing events
- Other events
- Special events
- Custom events

All objects (such as Buttons/Labels/Sliders etc.) regardless their type receive the *Input device*, *Drawing* and *Other* events. However the *Special events* are specific to a particular widget type. See the [widgets' documentation](#) to learn when they are sent,

*Custom events* are added by the user and therefore these are never sent by LVGL.

The following event codes exist:

### Input device events

- **LV\_EVENT\_PRESSED** The object has been pressed
- **LV\_EVENT\_PRESSING** The object is being pressed (called continuously while pressing)
- **LV\_EVENT\_PRESS\_LOST** The object is still being pressed but slid cursor/finger off of the object
- **LV\_EVENT\_SHORT\_CLICKED** The object was pressed for a short period of time, then released it. Not called if scrolled.
- **LV\_EVENT\_LONG\_PRESSED** Object has been pressed for at least the `long_press_time` specified in the input device driver. Not called if scrolled.
- **LV\_EVENT\_LONG\_PRESSED\_REPEAT** Called after `long_press_time` in every `long_press_repeat_time` ms. Not called if scrolled.
- **LV\_EVENT\_CLICKED** Called on release if the object not scrolled (regardless to long press)
- **LV\_EVENT\_RELEASED** Called in every cases when the object has been released
- **LV\_EVENT\_SCROLL\_BEGIN** Scrolling begins
- **LV\_EVENT\_SCROLL\_END** Scrolling ends
- **LV\_EVENT\_SCROLL** The object was scrolled
- **LV\_EVENT\_GESTURE** A gesture is detected. Get the gesture with `lv_indev_get_gesture_dir(lv_indev_get_act());`
- **LV\_EVENT\_KEY** A key is sent to the object. Get the key with `lv_indev_get_key(lv_indev_get_act());`
- **LV\_EVENT\_FOCUSED** The object is focused
- **LV\_EVENT\_DEFOCUSED** The object is defocused
- **LV\_EVENT\_LEAVE** The object is defocused but still selected
- **LV\_EVENT\_HIT\_TEST** Perform advanced hit-testing. Use `lv_hit_test_info_t * a = lv_event_get_hit_test_info(e)` and check if `a->point` can click the object or not. If not set `a->res = false`

### Drawing events

- **LV\_EVENT\_COVER\_CHECK** Check if the object fully covers an area. The event parameter is `lv_cover_check_info_t *`.
- **LV\_EVENT\_REFR\_EXT\_DRAW\_SIZE** Get the required extra draw area around the object (e.g. for shadow). The event parameter is `lv_coord_t *` to store the size. Overwrite it only with a larger value.
- **LV\_EVENT\_DRAW\_MAIN\_BEGIN** Starting the main drawing phase.
- **LV\_EVENT\_DRAW\_MAIN** Perform the main drawing

- `LV_EVENT_DRAW_MAIN_END` Finishing the main drawing phase
- `LV_EVENT_DRAW_POST_BEGIN` Starting the post draw phase (when all children are drawn)
- `LV_EVENT_DRAW_POST` Perform the post draw phase (when all children are drawn)
- `LV_EVENT_DRAW_POST_END` Finishing the post draw phase (when all children are drawn)
- `LV_EVENT_DRAW_PART_BEGIN` Starting to draw a part. The event parameter is `lv_obj_draw_dsc_t *`. Learn more [here](#).
- `LV_EVENT_DRAW_PART_END` Finishing to draw a part. The event parameter is `lv_obj_draw_dsc_t *`. Learn more [here](#).

### Other events

- `LV_EVENT_DELETE` Object is being deleted
- `LV_EVENT_CHILD_CHANGED` Child was removed/added
- `LV_EVENT_SIZE_CHANGED` Object coordinates/size have changed
- `LV_EVENT_STYLE_CHANGED` Object's style has changed
- `LV_EVENT_BASE_DIR_CHANGED` The base dir has changed
- `LV_EVENT_GET_SELF_SIZE` Get the internal size of a widget

### Special events

- `LV_EVENT_VALUE_CHANGED` The object's value has changed (i.e. slider moved)
- `LV_EVENT_INSERT` A text is being inserted to the object. The event data is `char *` being inserted.
- `LV_EVENT_REFRESH` Notify the object to refresh something on it (for the user)
- `LV_EVENT_READY` A process has finished
- `LV_EVENT_CANCEL` A process has been canceled

### Custom events

Any custom event codes can be registered by `uint32_t MY_EVENT_1 = lv_event_register_id();`  
And can be sent to any object with `lv_event_send(obj, MY_EVENT_1, &some_data)`

#### 4.7.4 Sending events

To manually send events to an object, use `lv_event_send(obj, <EVENT_CODE> &some_data)`.

For example, it can be used to manually close a message box by simulating a button press (although there are simpler ways of doing this):

```
/*Simulate the press of the first button (indexes start from zero)*/
uint32_t btn_id = 0;
lv_event_send(mbox, LV_EVENT_VALUE_CHANGED, &btn_id);
```

## Refresh event

LV\_EVENT\_REFRESH is special event because it's designed to be used by the user to notify an object to refresh itself. Some examples:

- notify a label to refresh its text according to one or more variables (e.g. current time)
- refresh a label when the language changes
- enable a button if some conditions are met (e.g. the correct PIN is entered)
- add/remove styles to/from an object if a limit is exceeded, etc

### 4.7.5 Fields of lv\_event\_t

lv\_event\_t is the only parameter passed to event callback and it contains all the data about the event. The following values can be get from it:

- lv\_event\_get\_code(e) get the event code
- lv\_event\_get\_target(e) get the object to which the event is sent
- lv\_event\_get\_original\_target(e) get the object to which the event is sent originally sent (different from lv\_event\_get\_target if *event bubbling* is enabled)
- lv\_event\_get\_user\_data(e) get the pointer passed as the last parameter of lv\_obj\_add\_event\_cb.
- lv\_event\_get\_param(e) get the parameter passed as the last parameter of lv\_event\_send

### 4.7.6 Event bubbling

If lv\_obj\_add\_flag(obj, LV\_OBJ\_FLAG\_EVENT\_BUBBLE) is enabled all events will be sent to the object's parent too. If the parent also has LV\_OBJ\_FLAG\_EVENT\_BUBBLE enabled the event will be sent to its parent too, and so on.

The *target* parameter of the event is always the current target object, not the original object. To get the original target call lv\_event\_get\_original\_target(e) in the event handler.

## 4.8 Input devices

An input device usually means:

- Pointer-like input device like touchpad or mouse
- Keypads like a normal keyboard or simple numeric keypad
- Encoders with left/right turn and push options
- External hardware buttons which are assigned to specific points on the screen

---

**Important:** Before reading further, please read the [Porting](/porting/indev) section of Input devices

---

### 4.8.1 Pointers

Pointer input devices can have a cursor. (typically for mouses)

```
...
lv_indev_t * mouse_indev = lv_indev_drv_register(&indev_drv);

LV_IMG_DECLARE(mouse_cursor_icon); /*Declare the image file.
↪*/
lv_obj_t * cursor_obj = lv_img_create(lv_scr_act(), NULL); /*Create an image object ↪
↪for the cursor */
lv_img_set_src(cursor_obj, &mouse_cursor_icon); /*Set the image source*/
lv_indev_set_cursor(mouse_indev, cursor_obj); /*Connect the image ↪
↪object to the driver*/
```

Note that the cursor object should have `lv_obj_set_click(cursor_obj, false)`. For images, *clicking* is disabled by default.

### 4.8.2 Keypad and encoder

You can fully control the user interface without touchpad or mouse using a keypad or encoder(s). It works similar to the *TAB* key on the PC to select the element in an application or a web page.

#### Groups

The objects, you want to control with keypad or encoder, needs to be added to a *Group*. In every group, there is exactly one focused object which receives the pressed keys or the encoder actions. For example, if a *Text area* is focused and you press some letter on a keyboard, the keys will be sent and inserted into the text area. Similarly, if a *Slider* is focused and you press the left or right arrows, the slider's value will be changed.

You need to associate an input device with a group. An input device can send the keys to only one group but, a group can receive data from more than one input device too.

To create a group use `lv_group_t * g = lv_group_create()` and to add an object to the group use `lv_group_add_obj(g, obj)`.

To associate a group with an input device use `lv_indev_set_group(indev, g)`, where `indev` is the return value of `lv_indev_drv_register()`

#### Keys

There are some predefined keys which have special meaning:

- **LV\_KEY\_NEXT** Focus on the next object
- **LV\_KEY\_PREV** Focus on the previous object
- **LV\_KEY\_ENTER** Triggers `LV_EVENT_PRESSED/CLICKED/LONG_PRESSED` etc. events
- **LV\_KEY\_UP** Increase value or move upwards
- **LV\_KEY\_DOWN** Decrease value or move downwards
- **LV\_KEY\_RIGHT** Increase value or move the the right
- **LV\_KEY\_LEFT** Decrease value or move the the left
- **LV\_KEY\_ESC** Close or exit (E.g. close a *Drop down list*)

- **LV\_KEY\_DEL** Delete (E.g. a character on the right in a *Text area*)
- **LV\_KEY\_BACKSPACE** Delete a character on the left (E.g. in a *Text area*)
- **LV\_KEY\_HOME** Go to the beginning/top (E.g. in a *Text area*)
- **LV\_KEY\_END** Go to the end (E.g. in a *Text area*)

The most important special keys are LV\_KEY\_NEXT/PREV, LV\_KEY\_ENTER and LV\_KEY\_UP/DOWN/LEFT/RIGHT. In your `read_cb` function, you should translate some of your keys to these special keys to navigate in the group and interact with the selected object.

Usually, it's enough to use only LV\_KEY\_LEFT/RIGHT because most of the objects can be fully controlled with them.

With an encoder, you should use only LV\_KEY\_LEFT, LV\_KEY\_RIGHT, and LV\_KEY\_ENTER.

## Edit and navigate mode

Since a keypad has plenty of keys, it's easy to navigate between the objects and edit them using the keypad. But, the encoders have a limited number of "keys" hence, it is difficult to navigate using the default options. *Navigate* and *Edit* are created to avoid this problem with the encoders.

In *Navigate* mode, the encoders LV\_KEY\_LEFT/RIGHT is translated to LV\_KEY\_NEXT/PREV. Therefore the next or previous object will be selected by turning the encoder. Pressing LV\_KEY\_ENTER will change to *Edit* mode.

In *Edit* mode, LV\_KEY\_NEXT/PREV is usually used to edit the object. Depending on the object's type, a short or long press of LV\_KEY\_ENTER changes back to *Navigate* mode. Usually, an object which can not be pressed (like a *Slider*) leaves *Edit* mode on short click. But with objects where short click has meaning (e.g. *Button*), a long press is required.

## Styling

If an object is focused either by clicking it via touchpad, or focused via an encoder or keypad it goes to LV\_STATE\_FOCUSED. Hence focused styles will be applied on it.

If the object goes to edit mode it goes to LV\_STATE\_FOCUSED | LV\_STATE\_EDITED state so these style properties will be shown.

For a more detailed description read the *Style* section.

## 4.8.3 API

### Input device

#### Functions

void **lv\_indev\_read\_timer\_cb**(*lv\_timer\_t* \*timer)

Called periodically to read the input devices

**Parameters** *param* -- pointer to and input device to read

void **lv\_indev\_enable**(*lv\_indev\_t* \*indev, bool en)

*lv\_indev\_t* \***lv\_indev\_get\_act**(void)

Get the currently processed input device. Can be used in action functions too.

**Returns** pointer to the currently processed input device or NULL if no input device processing right now

*lv\_indev\_type\_t* **lv\_indev\_get\_type**(const *lv\_indev\_t* \*indev)

Get the type of an input device

**Parameters** *indev* -- pointer to an input device

**Returns** the type of the input device from *lv\_hal\_indev\_type\_t* (LV\_INDEV\_TYPE\_...)

void **lv\_indev\_reset**(*lv\_indev\_t* \*indev, *lv\_obj\_t* \*obj)

Reset one or all input devices

**Parameters**

- **indev** -- pointer to an input device to reset or NULL to reset all of them
- **obj** -- pointer to an object which triggers the reset.

void **lv\_indev\_reset\_long\_press**(*lv\_indev\_t* \*indev)

Reset the long press state of an input device

**Parameters** *indev* -- pointer to an input device

void **lv\_indev\_set\_cursor**(*lv\_indev\_t* \*indev, *lv\_obj\_t* \*cur\_obj)

Set a cursor for a pointer input device (for LV\_INPUT\_TYPE\_POINTER and LV\_INPUT\_TYPE\_BUTTON)

**Parameters**

- **indev** -- pointer to an input device
- **cur\_obj** -- pointer to an object to be used as cursor

void **lv\_indev\_set\_group**(*lv\_indev\_t* \*indev, *lv\_group\_t* \*group)

Set a destination group for a keypad input device (for LV\_INDEV\_TYPE\_KEYPAD)

**Parameters**

- **indev** -- pointer to an input device
- **group** -- point to a group

void **lv\_indev\_set\_button\_points**(*lv\_indev\_t* \*indev, const *lv\_point\_t* points[])

Set the an array of points for LV\_INDEV\_TYPE\_BUTTON. These points will be assigned to the buttons to press a specific point on the screen

**Parameters**

- **indev** -- pointer to an input device
- **group** -- point to a group

void **lv\_indev\_get\_point**(const *lv\_indev\_t* \*indev, *lv\_point\_t* \*point)

Get the last point of an input device (for LV\_INDEV\_TYPE\_POINTER and LV\_INDEV\_TYPE\_BUTTON)

**Parameters**

- **indev** -- pointer to an input device
- **point** -- pointer to a point to store the result

*lv\_dir\_t* **lv\_indev\_get\_gesture\_dir**(const *lv\_indev\_t* \*indev)

Get the current gesture direct

**Parameters** *indev* -- pointer to an input device

**Returns** current gesture direct

uint32\_t **lv\_indev\_get\_key**(const *lv\_indev\_t* \*indev)

Get the last pressed key of an input device (for LV\_INDEV\_TYPE\_KEYPAD)



**Parameters** **indev** -- pointer to an input device

**Returns** the last pressed key (0 on error)

`lv_dir_t` **lv\_indev\_get\_scroll\_dir**(const `lv_indev_t` \*indev)

Check the current scroll direction of an input device (for LV\_INDEV\_TYPE\_POINTER and LV\_INDEV\_TYPE\_BUTTON)

**Parameters** **indev** -- pointer to an input device

**Returns** LV\_DIR\_NONE: no scrolling now LV\_DIR\_HOR/VER

`lv_obj_t` \***lv\_indev\_get\_scroll\_obj**(const `lv_indev_t` \*indev)

Get the currently scrolled object (for LV\_INDEV\_TYPE\_POINTER and LV\_INDEV\_TYPE\_BUTTON)

**Parameters** **indev** -- pointer to an input device

**Returns** pointer to the currently scrolled object or NULL if no scrolling by this indev

void **lv\_indev\_get\_vect**(const `lv_indev_t` \*indev, `lv_point_t` \*point)

Get the movement vector of an input device (for LV\_INDEV\_TYPE\_POINTER and LV\_INDEV\_TYPE\_BUTTON)

**Parameters**

- **indev** -- pointer to an input device
- **point** -- pointer to a point to store the types.pointer.vector

void **lv\_indev\_wait\_release**(`lv_indev_t` \*indev)

Do nothing until the next release

**Parameters** **indev** -- pointer to an input device

`lv_obj_t` \***lv\_indev\_get\_obj\_act**(void)

Gets a pointer to the currently active object in the currently processed input device.

**Returns** pointer to currently active object or NULL if no active object

`lv_timer_t` \***lv\_indev\_get\_read\_timer**(`lv_disp_t` \*indev)

Get a pointer to the indev read timer to modify its parameters with `lv_timer_...` functions.

**Parameters** **indev** -- pointer to an input device

**Returns** pointer to the indev read refresher timer. (NULL on error)

`lv_obj_t` \***lv\_indev\_search\_obj**(`lv_obj_t` \*obj, `lv_point_t` \*point)

Search the most top, clickable object by a point

**Parameters**

- **obj** -- pointer to a start object, typically the screen
- **point** -- pointer to a point for searching the most top child

**Returns** pointer to the found object or NULL if there was no suitable object

## Groups

### Typedefs

```
typedef uint8_t lv_key_t
```

```
typedef void (*lv_group_focus_cb_t)(struct _lv_group_t*)
```

```
typedef struct _lv_group_t lv_group_t
```

Groups can be used to logically hold objects so that they can be individually focused. They are NOT for laying out objects on a screen (try `lv_cont` for that).

```
typedef _lv_group_t lv_group_t
```

### Enums

```
enum [anonymous]
```

*Values:*

```
enumerator LV_KEY_UP
```

```
enumerator LV_KEY_DOWN
```

```
enumerator LV_KEY_RIGHT
```

```
enumerator LV_KEY_LEFT
```

```
enumerator LV_KEY_ESC
```

```
enumerator LV_KEY_DEL
```

```
enumerator LV_KEY_BACKSPACE
```

```
enumerator LV_KEY_ENTER
```

```
enumerator LV_KEY_NEXT
```

```
enumerator LV_KEY_PREV
```

```
enumerator LV_KEY_HOME
```

```
enumerator LV_KEY_END
```

```
enum lv_group_refocus_policy_t
```

*Values:*

```
enumerator LV_GROUP_REFOCUS_POLICY_NEXT
```

```
enumerator LV_GROUP_REFOCUS_POLICY_PREV
```

## Functions

void **\_lv\_group\_init**(void)

Init. the group module

**Remark** Internal function, do not call directly.

*lv\_group\_t* \***lv\_group\_create**(void)

Create a new object group

**Returns** pointer to the new object group

void **lv\_group\_del**(*lv\_group\_t* \*group)

Delete a group object

**Parameters** **group** -- pointer to a group

void **lv\_group\_set\_default**(*lv\_group\_t* \*group)

Set a default group. New object are added to this group if it's enabled in their class with `add_to_def_group = true`

**Parameters** **group** -- pointer to a group (can be NULL)

*lv\_group\_t* \***lv\_group\_get\_default**(void)

Get the default group

**Returns** pointer to the default group

void **lv\_group\_add\_obj**(*lv\_group\_t* \*group, struct *\_lv\_obj\_t* \*obj)

Add an object to a group

**Parameters**

- **group** -- pointer to a group
- **obj** -- pointer to an object to add

void **lv\_group\_remove\_obj**(struct *\_lv\_obj\_t* \*obj)

Remove an object from its group

**Parameters** **obj** -- pointer to an object to remove

void **lv\_group\_remove\_all\_objs**(*lv\_group\_t* \*group)

Remove all objects from a group

**Parameters** **group** -- pointer to a group

void **lv\_group\_focus\_obj**(struct *\_lv\_obj\_t* \*obj)

Focus on an object (defocus the current)

**Parameters** **obj** -- pointer to an object to focus on

void **lv\_group\_focus\_next**(*lv\_group\_t* \*group)

Focus the next object in a group (defocus the current)

**Parameters** **group** -- pointer to a group

void **lv\_group\_focus\_prev**(*lv\_group\_t* \*group)

Focus the previous object in a group (defocus the current)

**Parameters** **group** -- pointer to a group

void **lv\_group\_focus\_freeze**(*lv\_group\_t* \*group, bool en)

Do not let to change the focus from the current object

**Parameters**

- **group** -- pointer to a group
- **en** -- true: freeze, false: release freezing (normal mode)

lv\_res\_t **lv\_group\_send\_data**(lv\_group\_t \*group, uint32\_t c)

Send a control character to the focuses object of a group

#### Parameters

- **group** -- pointer to a group
- **c** -- a character (use LV\_KEY\_.. to navigate)

**Returns** result of focused object in group.

void **lv\_group\_set\_focus\_cb**(lv\_group\_t \*group, lv\_group\_focus\_cb\_t focus\_cb)

Set a function for a group which will be called when a new object is focused

#### Parameters

- **group** -- pointer to a group
- **focus\_cb** -- the call back function or NULL if unused

void **lv\_group\_set\_refocus\_policy**(lv\_group\_t \*group, lv\_group\_refocus\_policy\_t policy)

Set whether the next or previous item in a group is focused if the currently focused obj is deleted.

#### Parameters

- **group** -- pointer to a group
- **policy** -- new refocus policy enum

void **lv\_group\_set\_editing**(lv\_group\_t \*group, bool edit)

Manually set the current mode (edit or navigate).

#### Parameters

- **group** -- pointer to group
- **edit** -- true: edit mode; false: navigate mode

void **lv\_group\_set\_wrap**(lv\_group\_t \*group, bool en)

Set whether focus next/prev will allow wrapping from first->last or last->first object.

#### Parameters

- **group** -- pointer to group
- **en** -- true: wrapping enabled; false: wrapping disabled

struct \_lv\_obj\_t \***lv\_group\_get\_focused**(const lv\_group\_t \*group)

Get the focused object or NULL if there isn't one

**Parameters** **group** -- pointer to a group

**Returns** pointer to the focused object

lv\_group\_focus\_cb\_t **lv\_group\_get\_focus\_cb**(const lv\_group\_t \*group)

Get the focus callback function of a group

**Parameters** **group** -- pointer to a group

**Returns** the call back function or NULL if not set

bool **lv\_group\_get\_editing**(const lv\_group\_t \*group)

Get the current mode (edit or navigate).

**Parameters** **group** -- pointer to group

**Returns** true: edit mode; false: navigate mode

bool **lv\_group\_get\_wrap**(*lv\_group\_t* \*group)

Get whether focus next/prev will allow wrapping from first->last or last->first object.

**Parameters**

- **group** -- pointer to group
- **en** -- true: wrapping enabled; false: wrapping disabled

uint32\_t **lv\_group\_get\_obj\_count**(*lv\_group\_t* \*group)

Get the number of object in the group

**Parameters** **group** -- pointer to a group

**Returns** number of objects in the group

struct **\_lv\_group\_t**

*#include <lv\_group.h>* Groups can be used to logically hold objects so that they can be individually focused. They are NOT for laying out objects on a screen (try **lv\_cont** for that).

## Public Members

*lv\_ll\_t* **obj\_ll**

Linked list to store the objects in the group

struct *\_lv\_obj\_t* \*\***obj\_focus**

The object in focus

*lv\_group\_focus\_cb\_t* **focus\_cb**

A function to call when a new object is focused (optional)

void \***user\_data**

uint8\_t **frozen**

1: can't focus to new object

uint8\_t **editing**

1: Edit mode, 0: Navigate mode

uint8\_t **refocus\_policy**

1: Focus prev if focused on deletion. 0: Focus next if focused on deletion.

uint8\_t **wrap**

1: Focus next/prev can wrap at end of list. 0: Focus next/prev stops at end of list.

## 4.9 Displays

---

**Important:** The basic concept of *display* in LVGL is explained in the [Porting](/porting/display) section. So before reading further, please read the [Porting](/porting/display) section first.

---

### 4.9.1 Multiple display support

In LVGL, you can have multiple displays, each with their own driver and objects. The only limitation is that every display needs to have same color depth (as defined in `LV_COLOR_DEPTH`). If the displays are different in this regard the rendered image can be converted to the correct format in the drivers `flush_cb`.

Creating more displays is easy: just initialize more display buffers and register another driver for every display. When you create the UI, use `lv_disp_set_default(dis)` to tell the library on which display to create objects.

Why would you want multi-display support? Here are some examples:

- Have a "normal" TFT display with local UI and create "virtual" screens on VNC on demand. (You need to add your VNC driver).
- Have a large TFT display and a small monochrome display.
- Have some smaller and simple displays in a large instrument or technology.
- Have two large TFT displays: one for a customer and one for the shop assistant.

#### Using only one display

Using more displays can be useful, but in most cases, it's not required. Therefore, the whole concept of multi-display is completely hidden if you register only one display. By default, the lastly created (the only one) display is used as default.

`lv_scr_act()`, `lv_scr_load(scr)`, `lv_layer_top()`, `lv_layer_sys()`, `LV_HOR_RES` and `LV_VER_RES` are always applied on the lastly created (default) screen. If you pass `NULL` as `disp` parameter to display related function, usually the default display will be used. E.g. `lv_disp_trig_activity(NULL)` will trigger a user activity on the default screen. (See below in *Inactivity*).

#### Mirror display

To mirror the image of the display to another display, you don't need to use the multi-display support. Just transfer the buffer received in `drv.flush_cb` to another display too.

#### Split image

You can create a larger display from smaller ones. You can create it as below:

1. Set the resolution of the displays to the large display's resolution.
2. In `drv.flush_cb`, truncate and modify the `area` parameter for each display.
3. Send the buffer's content to each display with the truncated area.

## 4.9.2 Screens

Every display has each set of **Screens** and the object on the screens.

Be sure not to confuse displays and screens:

- **Displays** are the physical hardware drawing the pixels.
- **Screens** are the high-level root objects associated with a particular display. One display can have multiple screens associated with it, but not vice versa.

Screens can be considered the highest level containers which have no parent. The screen's size is always equal to its display and size their position is (0;0). Therefore, the screens coordinates can't be changed, i.e. `lv_obj_set_pos()`, `lv_obj_set_size()` or similar functions can't be used on screens.

A screen can be created from any object type but, the two most typical types are the *Base object* and the *Image* (to create a wallpaper).

To create a screen, use `lv_obj_t * scr = lv_<type>_create(NULL, copy)`. `copy` can be an other screen to copy it.

To load a screen, use `lv_scr_load(scr)`. To get the active screen, use `lv_scr_act()`. These functions works on the default display. If you want to specify which display to work on, use `lv_disp_get_scr_act(display)` and `lv_disp_load_scr(display, scr)`. Screen can be loaded with animations too. Read more [here](#).

Screens can be deleted with `lv_obj_del(scr)`, but ensure that you do not delete the currently loaded screen.

### Transparent screens

Usually, the opacity of the screen is `LV_OPA_COVER` to provide a solid background for its children. If it's not the case (opacity < 100%) the display's background color or image will be visible. See the *Display background* section for more details. If the display's background opacity is also not `LV_OPA_COVER` LVGL has no solid background to draw.

This configuration (transparent screen and display) could be used to create for example OSD menus where a video is played to lower layer, and menu is created on an upper layer.

To handle transparent displays special (slower) color mixing algorithms needs to be used by LVGL so this feature needs to be enabled with `LV_COLOR_SCREEN_TRANSP` in `lv_conf.h`. As this mode operates on the Alpha channel of the pixels `LV_COLOR_DEPTH = 32` is also required. The Alpha channel of 32-bit colors will be 0 where there are no objects and will be 255 where there are solid objects.

In summary, to enable transparent screen and displays to create OSD menu-like UIs:

- Enable `LV_COLOR_SCREEN_TRANSP` in `lv_conf.h`
- Be sure to use `LV_COLOR_DEPTH 32`
- Set the screens opacity to `LV_OPA_TRANSP` e.g. with `lv_obj_set_style_local_bg_opa(lv_scr_act(), LV_OBMASK_PART_MAIN, LV_STATE_DEFAULT, LV_OPA_TRANSP)`
- Set the display opacity to `LV_OPA_TRANSP` with `lv_disp_set_bg_opa(NULL, LV_OPA_TRANSP);`

### 4.9.3 Features of displays

#### Inactivity

The user's inactivity is measured on each display. Every use of an *Input device* (if associated with the display) counts as an activity. To get time elapsed since the last activity, use `lv_disp_get_inactive_time(dispatch)`. If NULL is passed, the overall smallest inactivity time will be returned from all displays (**not the default display**).

You can manually trigger an activity using `lv_disp_trig_activity(dispatch)`. If `dispatch` is NULL, the default screen will be used (**and not all displays**).

#### Background

Every display has background color, a background image and background opacity properties. They become visible when the current screen is transparent or not positioned to cover the whole display.

Background color is a simple color to fill the display. It can be adjusted with `lv_disp_set_bg_color(dispatch, color);`

Background image is path to file or pointer to an `lv_img_dsc_t` variable (converted image) to be used as wallpaper. It can be set with `lv_disp_set_bg_image(dispatch, &my_img);` If the background image is set (not NULL) the background won't filled with `bg_color`.

The opacity of the background color or image can be adjusted with `lv_disp_set_bg_opa(dispatch, opa)`.

The `dispatch` parameter of these functions can be NULL to refer it to the default display.

### 4.9.4 Colors

The color module handles all color-related functions like changing color depth, creating colors from hex code, converting between color depths, mixing colors, etc.

The following variable types are defined by the color module:

- **lv\_color1\_t** Store monochrome color. For compatibility, it also has R, G, B fields but they are always the same value (1 byte)
- **lv\_color8\_t** A structure to store R (3 bit),G (3 bit),B (2 bit) components for 8-bit colors (1 byte)
- **lv\_color16\_t** A structure to store R (5 bit),G (6 bit),B (5 bit) components for 16-bit colors (2 byte)
- **lv\_color32\_t** A structure to store R (8 bit),G (8 bit), B (8 bit) components for 24-bit colors (4 byte)
- **lv\_color\_t** Equal to `lv_color1/8/16/24_t` according to color depth settings
- **lv\_color\_int\_t** `uint8_t`, `uint16_t` or `uint32_t` according to color depth setting. Used to build color arrays from plain numbers.
- **lv\_opa\_t** A simple `uint8_t` type to describe opacity.

The `lv_color_t`, `lv_color1_t`, `lv_color8_t`, `lv_color16_t` and `lv_color32_t` types have got four fields:

- **ch.red** red channel
- **ch.green** green channel
- **ch.blue** blue channel
- **full** red + green + blue as one number



You can set the current color depth in *lv\_conf.h*, by setting the `LV_COLOR_DEPTH` define to 1 (monochrome), 8, 16 or 32.

## Convert color

You can convert a color from the current color depth to another. The converter functions return with a number, so you have to use the `full` field:

```
lv_color_t c;
c.red = 0x38;
c.green = 0x70;
c.blue = 0xCC;

lv_color1_t c1;
c1.full = lv_color_to1(c); /*Return 1 for light colors, 0 for dark colors*/

lv_color8_t c8;
c8.full = lv_color_to8(c); /*Give a 8 bit number with the converted color*/

lv_color16_t c16;
c16.full = lv_color_to16(c); /*Give a 16 bit number with the converted color*/

lv_color32_t c24;
c32.full = lv_color_to32(c); /*Give a 32 bit number with the converted color*/
```

## Swap 16 colors

You may set `LV_COLOR_16_SWAP` in *lv\_conf.h* to swap the bytes of *RGB565* colors. It's useful if you send the 16-bit colors via a byte-oriented interface like SPI.

As 16-bit numbers are stored in Little Endian format (lower byte on the lower address), the interface will send the lower byte first. However, displays usually need the higher byte first. A mismatch in the byte order will result in highly distorted colors.

## Create and mix colors

You can create colors with the current color depth using the `LV_COLOR_MAKE` macro. It takes 3 arguments (red, green, blue) as 8-bit numbers. For example to create light red color: `my_color = COLOR_MAKE(0xFF,0x80,0x80)`.

Colors can be created from HEX codes too: `my_color = lv_color_hex(0x288ACF)` or `my_color = lv_color_hex3(0x28C)`.

Mixing two colors is possible with `mixed_color = lv_color_mix(color1, color2, ratio)`. Ratio can be 0..255. 0 results fully color2, 255 result fully color1.

Colors can be created with from HSV space too using `lv_color_hsv_to_rgb(hue, saturation, value)`. `hue` should be in 0..360 range, `saturation` and `value` in 0..100 range.

## Opacity

To describe opacity the `lv_opa_t` type is created as a wrapper to `uint8_t`. Some defines are also introduced:

- **LV\_OPA\_TRANSP** Value: 0, means the opacity makes the color completely transparent
- **LV\_OPA\_10** Value: 25, means the color covers only a little
- **LV\_OPA\_20 ... OPA\_80** come logically
- **LV\_OPA\_90** Value: 229, means the color near completely covers
- **LV\_OPA\_COVER** Value: 255, means the color completely covers

You can also use the `LV_OPA_*` defines in `lv_color_mix()` as a *ratio*.

## 4.9.5 API

### Display

#### Enums

enum **lv\_scr\_load\_anim\_t**

*Values:*

```

enumerator LV_SCR_LOAD_ANIM_NONE
enumerator LV_SCR_LOAD_ANIM_OVER_LEFT
enumerator LV_SCR_LOAD_ANIM_OVER_RIGHT
enumerator LV_SCR_LOAD_ANIM_OVER_TOP
enumerator LV_SCR_LOAD_ANIM_OVER_BOTTOM
enumerator LV_SCR_LOAD_ANIM_MOVE_LEFT
enumerator LV_SCR_LOAD_ANIM_MOVE_RIGHT
enumerator LV_SCR_LOAD_ANIM_MOVE_TOP
enumerator LV_SCR_LOAD_ANIM_MOVE_BOTTOM
enumerator LV_SCR_LOAD_ANIM_FADE_ON

```

#### Functions

*lv\_obj\_t* \***lv\_disp\_get\_scr\_act**(*lv\_disp\_t* \*disp)

Return with a pointer to the active screen

**Parameters** **disp** -- pointer to display which active screen should be get. (NULL to use the default screen)

**Returns** pointer to the active screen object (loaded by 'lv\_scr\_load()')

*lv\_obj\_t* \***lv\_disp\_get\_scr\_prev**(*lv\_disp\_t* \*disp)

Return with a pointer to the previous screen. Only used during screen transitions.

**Parameters** **disp** -- pointer to display which previous screen should be get. (NULL to use the default screen)

**Returns** pointer to the previous screen object or NULL if not used now

void **lv\_disp\_load\_scr**(*lv\_obj\_t* \*scr)

Make a screen active

**Parameters** **scr** -- pointer to a screen

*lv\_obj\_t* \***lv\_disp\_get\_layer\_top**(*lv\_disp\_t* \*disp)

Return with the top layer. (Same on every screen and it is above the normal screen layer)

**Parameters** **disp** -- pointer to display which top layer should be get. (NULL to use the default screen)

**Returns** pointer to the top layer object (transparent screen sized lv\_obj)

*lv\_obj\_t* \***lv\_disp\_get\_layer\_sys**(*lv\_disp\_t* \*disp)

Return with the sys. layer. (Same on every screen and it is above the normal screen and the top layer)

**Parameters** **disp** -- pointer to display which sys. layer should be get. (NULL to use the default screen)

**Returns** pointer to the sys layer object (transparent screen sized lv\_obj)

void **lv\_disp\_set\_theme**(*lv\_disp\_t* \*disp, *lv\_theme\_t* \*th)

Get the theme of a display

**Parameters** **disp** -- pointer to a display

**Returns** the display's theme (can be NULL)

*lv\_theme\_t* \***lv\_disp\_get\_theme**(*lv\_disp\_t* \*disp)

Get the theme of a display

**Parameters** **disp** -- pointer to a display

**Returns** the display's theme (can be NULL)

void **lv\_disp\_set\_bg\_color**(*lv\_disp\_t* \*disp, lv\_color\_t color)

Set the background color of a display

**Parameters**

- **disp** -- pointer to a display
- **color** -- color of the background

void **lv\_disp\_set\_bg\_image**(*lv\_disp\_t* \*disp, const void \*img\_src)

Set the background image of a display

**Parameters**

- **disp** -- pointer to a display
- **img\_src** -- path to file or pointer to an *lv\_img\_dsc\_t* variable

void **lv\_disp\_set\_bg\_opa**(*lv\_disp\_t* \*disp, lv\_opa\_t opa)

Opacity of the background

**Parameters**

- **disp** -- pointer to a display
- **opa** -- opacity (0..255)

void **lv\_scr\_load\_anim**(*lv\_obj\_t* \*scr, *lv\_scr\_load\_anim\_t* anim\_type, uint32\_t time, uint32\_t delay, bool auto\_del)

Switch screen with animation

**Parameters**

- **scr** -- pointer to the new screen to load
- **anim\_type** -- type of the animation from `lv_scr_load_anim_t`. E.g. `LV_SCR_LOAD_ANIM_MOVE_LEFT`
- **time** -- time of the animation
- **delay** -- delay before the transition
- **auto\_del** -- true: automatically delete the old screen

uint32\_t **lv\_disp\_get\_inactive\_time**(const lv\_disp\_t \*disp)

Get elapsed time since last user activity on a display (e.g. click)

**Parameters** **disp** -- pointer to an display (NULL to get the overall smallest inactivity)

**Returns** elapsed ticks (milliseconds) since the last activity

void **lv\_disp\_trig\_activity**(lv\_disp\_t \*disp)

Manually trigger an activity on a display

**Parameters** **disp** -- pointer to an display (NULL to use the default display)

void **lv\_disp\_clean\_dcache**(lv\_disp\_t \*disp)

Clean any CPU cache that is related to the display.

**Parameters** **disp** -- pointer to an display (NULL to use the default display)

lv\_timer\_t \* **lv\_disp\_get\_refr\_timer**(lv\_disp\_t \*disp)

Get a pointer to the screen refresher timer to modify its parameters with `lv_timer_...` functions.

**Parameters** **disp** -- pointer to a display

**Returns** pointer to the display refresher timer. (NULL on error)

static inline lv\_obj\_t \* **lv\_scr\_act**(void)

Get the active screen of the default display

**Returns** pointer to the active screen

static inline lv\_obj\_t \* **lv\_layer\_top**(void)

Get the top layer of the default display

**Returns** pointer to the top layer

static inline lv\_obj\_t \* **lv\_layer\_sys**(void)

Get the active screen of the default display

**Returns** pointer to the sys layer

static inline void **lv\_scr\_load**(lv\_obj\_t \*scr)

static inline lv\_coord\_t **lv\_dpx**(lv\_coord\_t n)

Scale the given number of pixels (a distance or size) relative to a 160 DPI display considering the DPI of the default display. It ensures that e.g. `lv_dpx(100)` will have the same physical size regardless to the DPI of the display.

**Parameters** **n** -- the number of pixels to scale

**Returns**  $n \times \text{current\_dpi} / 160$

static inline lv\_coord\_t **lv\_disp\_dpx**(const lv\_disp\_t \*disp, lv\_coord\_t n)

Scale the given number of pixels (a distance or size) relative to a 160 DPI display considering the DPI of the given display. It ensures that e.g. `lv_dpx(100)` will have the same physical size regardless to the DPI of the display.

**Parameters**

- **obj** -- an display whose dpi should be considered
- **n** -- the number of pixels to scale

**Returns**  $n \times \text{current\_dpi} / 160$

## Colors

### Typedefs

```
typedef lv_color_t (*lv_color_filter_cb_t)(const struct _lv_color_filter_dsc_t*, lv_color_t, lv_opa_t)
```

```
typedef struct _lv_color_filter_dsc_t lv_color_filter_dsc_t
```

### Enums

```
enum [anonymous]
 Opacity percentages.
```

*Values:*

```
enumerator LV_OPA_TRANSP
```

```
enumerator LV_OPA_0
```

```
enumerator LV_OPA_10
```

```
enumerator LV_OPA_20
```

```
enumerator LV_OPA_30
```

```
enumerator LV_OPA_40
```

```
enumerator LV_OPA_50
```

```
enumerator LV_OPA_60
```

```
enumerator LV_OPA_70
```

```
enumerator LV_OPA_80
```

```
enumerator LV_OPA_90
```

```
enumerator LV_OPA_100
```

```
enumerator LV_OPA_COVER
```

```
enum lv_palette_t
```

*Values:*

```
enumerator LV_PALETTE_RED
```

```
enumerator LV_PALETTE_PINK
```

```
enumerator LV_PALETTE_PURPLE
```

```
enumerator LV_PALETTE_DEEP_PURPLE
```

```
enumerator LV_PALETTE_INDIGO
```

```
enumerator LV_PALETTE_BLUE
```

```

enumerator LV_PALETTE_LIGHT_BLUE
enumerator LV_PALETTE_CYAN
enumerator LV_PALETTE_TEAL
enumerator LV_PALETTE_GREEN
enumerator LV_PALETTE_LIGHT_GREEN
enumerator LV_PALETTE_LIME
enumerator LV_PALETTE_YELLOW
enumerator LV_PALETTE_AMBER
enumerator LV_PALETTE_ORANGE
enumerator LV_PALETTE_DEEP_ORANGE
enumerator LV_PALETTE_BROWN
enumerator LV_PALETTE_BLUE_GREY
enumerator LV_PALETTE_GREY
enumerator _LV_PALETTE_LAST
enumerator LV_PALETTE_NONE

```

## Functions

```

typedef LV_CONCAT3 (uint, LV_COLOR_SIZE, _t) lv_color_int_t
typedef LV_CONCAT3 (lv_color, LV_COLOR_DEPTH, _t) lv_color_t
static inline uint8_t lv_color_to1(lv_color_t color)

static inline uint8_t lv_color_to8(lv_color_t color)

static inline uint16_t lv_color_to16(lv_color_t color)

static inline uint32_t lv_color_to32(lv_color_t color)

static inline uint8_t lv_color_brightness(lv_color_t color)
 Get the brightness of a color

 Parameters color -- a color

 Returns the brightness [0..255]

static inline lv_color_t lv_color_make(uint8_t r, uint8_t g, uint8_t b)

static inline lv_color_t lv_color_hex(uint32_t c)

static inline lv_color_t lv_color_hex3(uint32_t c)

```

static inline void **lv\_color\_filter\_dsc\_init**(*lv\_color\_filter\_dsc\_t* \*dsc, *lv\_color\_filter\_cb\_t* cb)

*lv\_color\_t* **lv\_color\_lighten**(*lv\_color\_t* c, *lv\_opa\_t* lvl)

*lv\_color\_t* **lv\_color\_darken**(*lv\_color\_t* c, *lv\_opa\_t* lvl)

*lv\_color\_t* **lv\_color\_change\_lightness**(*lv\_color\_t* c, *lv\_opa\_t* lvl)

*lv\_color\_t* **lv\_color\_hsv\_to\_rgb**(uint16\_t h, uint8\_t s, uint8\_t v)

Convert a HSV color to RGB

**Parameters**

- **h** -- hue [0..359]
- **s** -- saturation [0..100]
- **v** -- value [0..100]

**Returns** the given RGB color in RGB (with LV\_COLOR\_DEPTH depth)

*lv\_color\_hsv\_t* **lv\_color\_rgb\_to\_hsv**(uint8\_t r8, uint8\_t g8, uint8\_t b8)

Convert a 32-bit RGB color to HSV

**Parameters**

- **r8** -- 8-bit red
- **g8** -- 8-bit green
- **b8** -- 8-bit blue

**Returns** the given RGB color in HSV

*lv\_color\_hsv\_t* **lv\_color\_to\_hsv**(*lv\_color\_t* color)

Convert a color to HSV

**Parameters** **color** -- color

**Returns** the given color in HSV

static inline *lv\_color\_t* **lv\_color\_chroma\_key**(void)

Just a wrapper around LV\_COLOR\_CHROMA\_KEY because it might be more convenient to use a function in some cases

**Returns** LV\_COLOR\_CHROMA\_KEY

*lv\_color\_t* **lv\_palette\_main**(*lv\_palette\_t* p)

static inline *lv\_color\_t* **lv\_color\_white**(void)

static inline *lv\_color\_t* **lv\_color\_black**(void)

*lv\_color\_t* **lv\_palette\_lighten**(*lv\_palette\_t* p, uint8\_t lvl)

*lv\_color\_t* **lv\_palette\_darken**(*lv\_palette\_t* p, uint8\_t lvl)

union **lv\_color1\_t**

#### Public Members

uint8\_t **full**

uint8\_t **blue**

uint8\_t **green**

uint8\_t **red**

union *lv\_color1\_t*::[anonymous] **ch**

union **lv\_color8\_t**

#### Public Members

uint8\_t **blue**

uint8\_t **green**

uint8\_t **red**

struct *lv\_color8\_t*::[anonymous] **ch**

uint8\_t **full**

union **lv\_color16\_t**

#### Public Members

uint16\_t **blue**

uint16\_t **green**

uint16\_t **red**

uint16\_t **green\_h**

uint16\_t **green\_l**

struct *lv\_color16\_t*::[anonymous] **ch**

uint16\_t **full**

union **lv\_color32\_t**



### Public Members

```

uint8_t blue
uint8_t green
uint8_t red
uint8_t alpha
struct lv_color32_t::[anonymous] ch
uint32_t full
struct lv_color_hsv_t

```

### Public Members

```

uint16_t h
uint8_t s
uint8_t v
struct _lv_color_filter_dsc_t

```

### Public Members

```

lv_color_filter_cb_t filter_cb
void *user_data

```

## 4.10 Fonts

In LVGL fonts are collections of bitmaps and other information required to render the images of the letters (glyph). A font is stored in a `lv_font_t` variable and can be set in style's *text\_font* field. For example:

```
lv_style_set_text_font(&my_style, LV_STATE_DEFAULT, &lv_font_montserrat_28); /*Set a ↵
↪ larger font*/
```

The fonts have a **bpp (bits per pixel)** property. It shows how many bits are used to describe a pixel in the font. The value stored for a pixel determines the pixel's opacity. This way, with higher *bpp*, the edges of the letter can be smoother. The possible *bpp* values are 1, 2, 4 and 8 (higher value means better quality).

The *bpp* also affects the required memory size to store the font. For example, *bpp* = 4 makes the font nearly 4 times greater compared to *bpp* = 1.

### 4.10.1 Unicode support

LVGL supports **UTF-8** encoded Unicode characters. Your editor needs to be configured to save your code/text as UTF-8 (usually this the default) and be sure that, `LV_TXT_ENC` is set to `LV_TXT_ENC_UTF8` in `lv_conf.h`. (This is the default value)

To test it try

```
lv_obj_t * label1 = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label1, LV_SYMBOL_OK);
```

If all works well, a ✓ character should be displayed.

### 4.10.2 Built-in fonts

There are several built-in fonts in different sizes, which can be enabled in `lv_conf.h` by `LV_FONT_...` defines.

#### Normal fonts

Containing all the ASCII characters, the degree symbol (U+00B0), the bullet symbol (U+2022) and the build in symbols (see below).

- `LV_FONT_MONTERRAT_12` 12 px font
- `LV_FONT_MONTERRAT_14` 14 px font
- `LV_FONT_MONTERRAT_16` 16 px font
- `LV_FONT_MONTERRAT_18` 18 px font
- `LV_FONT_MONTERRAT_20` 20 px font
- `LV_FONT_MONTERRAT_22` 22 px font
- `LV_FONT_MONTERRAT_24` 24 px font
- `LV_FONT_MONTERRAT_26` 26 px font
- `LV_FONT_MONTERRAT_28` 28 px font
- `LV_FONT_MONTERRAT_30` 30 px font
- `LV_FONT_MONTERRAT_32` 32 px font
- `LV_FONT_MONTERRAT_34` 34 px font
- `LV_FONT_MONTERRAT_36` 36 px font
- `LV_FONT_MONTERRAT_38` 38 px font
- `LV_FONT_MONTERRAT_40` 40 px font
- `LV_FONT_MONTERRAT_42` 42 px font
- `LV_FONT_MONTERRAT_44` 44 px font
- `LV_FONT_MONTERRAT_46` 46 px font
- `LV_FONT_MONTERRAT_48` 48 px font

## Special fonts

- `LV_FONT_MONTERRAT_12_SUBPX` Same as normal 12 px font but with *subpixel rendering*
- `LV_FONT_MONTERRAT_28_COMPRESSED` Same as normal 28 px font but *compressed font* with 3 bpp
- `LV_FONT_DEJAVU_16_PERSIAN_HEBREW` 16 px font with normal range + Hebrew, Arabic, Persian letters and all their forms
- `LV_FONT_SIMSUN_16_CJK` 16 px font with normal range + 1000 most common CJK radicals
- `LV_FONT_UNSCII_8` 8 px pixel perfect font with only ASCII characters
- `LV_FONT_UNSCII_16` 16 px pixel perfect font with only ASCII characters

The built-in fonts are **global variables** with names like `lv_font_montserrat_16` for 16 px high font. To use them in a style, just add a pointer to a font variable like shown above.

The built-in fonts have *bpp* = 4, contains the ASCII characters and uses the [Montserrat](#) font.

In addition to the ASCII range, the following symbols are also added to the built-in fonts from the [FontAwesome](#) font.

	LV_SYMBOL_AUDIO		LV_SYMBOL_WARNING
	LV_SYMBOL_VIDEO		LV_SYMBOL_SHUFFLE
	LV_SYMBOL_LIST		LV_SYMBOL_UP
	LV_SYMBOL_OK		LV_SYMBOL_DOWN
	LV_SYMBOL_CLOSE		LV_SYMBOL_LOOP
	LV_SYMBOL_POWER		LV_SYMBOL_DIRECTORY
	LV_SYMBOL_SETTINGS		LV_SYMBOL_UPLOAD
	LV_SYMBOL_TRASH		LV_SYMBOL_CALL
	LV_SYMBOL_HOME		LV_SYMBOL_CUT
	LV_SYMBOL_DOWNLOAD		LV_SYMBOL_COPY
	LV_SYMBOL_DRIVE		LV_SYMBOL_SAVE
	LV_SYMBOL_REFRESH		LV_SYMBOL_CHARGE
	LV_SYMBOL_MUTE		LV_SYMBOL_PASTE
	LV_SYMBOL_VOLUME_MID		LV_SYMBOL_BELL
	LV_SYMBOL_VOLUME_MAX		LV_SYMBOL_KEYBOARD
	LV_SYMBOL_IMAGE		LV_SYMBOL_GPS
	LV_SYMBOL_EDIT		LV_SYMBOL_FILE
	LV_SYMBOL_PREV		LV_SYMBOL_WIFI
	LV_SYMBOL_PLAY		LV_SYMBOL_BATTERY_FULL
	LV_SYMBOL_PAUSE		LV_SYMBOL_BATTERY_3
	LV_SYMBOL_STOP		LV_SYMBOL_BATTERY_2
	LV_SYMBOL_NEXT		LV_SYMBOL_BATTERY_1
	LV_SYMBOL_EJECT		LV_SYMBOL_BATTERY_EMPTY
	LV_SYMBOL_LEFT		LV_SYMBOL_USB
	LV_SYMBOL_RIGHT		LV_SYMBOL_BLUETOOTH
	LV_SYMBOL_PLUS		LV_SYMBOL_BACKSPACE
	LV_SYMBOL_MINUS		LV_SYMBOL_SD_CARD
	LV_SYMBOL_EYE_OPEN		LV_SYMBOL_NEW_LINE
	LV_SYMBOL_EYE_CLOSE		

The symbols can be used as:

```
lv_label_set_text(my_label, LV_SYMBOL_OK);
```

Or with together with strings:

```
lv_label_set_text(my_label, LV_SYMBOL_OK "Apply");
```

Or more symbols together:

```
lv_label_set_text(my_label, LV_SYMBOL_OK LV_SYMBOL_WIFI LV_SYMBOL_PLAY);
```

### 4.10.3 Special features

#### Bidirectional support

Most of the languages use Left-to-Right (LTR for short) writing direction, however some languages (such as Hebrew, Persian or Arabic) uses Right-to-Left (RTL for short) direction.

LVGL not only supports RTL texts but supports mixed (a.k.a. bidirectional, BiDi) text rendering too. Some examples:

The names of these states in Arabic  
are مصر, البحرين and الكويت respectively.

The title is مفتاح معايير الويب! in Arabic.

The BiDi support can be enabled by `LV_USE_BIDI` in *lv\_conf.h*

All texts have a base direction (LTR or RTL) which determines some rendering rules and the default alignment of the text (Left or Right). However, in LVGL, base direction is applied not only for labels. It's a general property which can be set for every object. If unset then it will be inherited from the parent. So it's enough to set the base direction of the screen and every object will inherit it.

The default base direction of screen can be set by `LV_BIDI_BASE_DIR_DEF` in *lv\_conf.h* and other objects inherit the base direction from their parent.

To set an object's base direction use `lv_obj_set_base_dir(obj, base_dir)`. The possible base direction are:

- `LV_BIDI_DIR_LTR`: Left to Right base direction
- `LV_BIDI_DIR_RTL`: Right to Left base direction
- `LV_BIDI_DIR_AUTO`: Auto detect base direction
- `LV_BIDI_DIR_INHERIT`: Inherit the base direction from the parent (default for non-screen objects)

This list summarizes the effect of RTL base direction on objects:

- Create objects by default on the right
- `lv_tabview`: displays tabs from right to left
- `lv_checkbox`: Show the box on the right
- `lv_btnmatrix`: Show buttons from right to left
- `lv_list`: Show the icon on the right
- `lv_dropdown`: Align the options to the right
- The texts in `lv_table`, `lv_btnmatrix`, `lv_keyboard`, `lv_tabview`, `lv_dropdown`, `lv_roller` are "BiDi processed" to be displayed correctly

## Arabic and Persian support

There are some special rules to display Arabic and Persian characters: the *form* of the character depends on their position in the text. A different form of the same letter needs to be used if it is isolated, start, middle or end position. Besides these some conjunction rules also should be taken into account.

LVGL supports to apply these rules if `LV_USE_ARABIC_PERSIAN_CHARS` is enabled.

However, there are some limitations:

- Only displaying texts is supported (e.g. on labels), text inputs (e.g. text area) doesn't support this feature
- Static text (i.e. const) are not processed. E.g. texts set by `lv_label_set_text()` will "Arabic processed" but `lv_label_set_text_static()` won't.
- Text get functions (e.g. `lv_label_get_text()`) will return the processed text.

## Subpixel rendering

Subpixel rendering means to triple the horizontal resolution by rendering on Red, Green and Blue channel instead of pixel level. It takes advantage of the position of physical color channels of each pixel. It results in higher quality letter anti-aliasing. Learn more [here](#).

Subpixel rendering requires to generate the fonts with special settings:

- In the online converter tick the **Subpixel** box
- In the command line tool use `--lcd` flag. Note that the generated font needs about 3 times more memory.

Subpixel rendering works only if the color channels of the pixels have a horizontal layout. That is the R, G, B channels are next to each other and not above each other. The order of color channels also needs to match with the library settings. By default the LVGL assumes RGB order, however it can be swapped by setting `LV_SUBPX_BGR 1` in `lv_conf.h`.

## Compress fonts

The bitmaps of the fonts can be compressed by

- ticking the **Compressed** check box in the online converter
- not passing `--no-compress` flag to the offline converter (applies compression by default)

The compression is more effective with larger fonts and higher bpp. However, it's about 30% slower to render the compressed fonts. Therefore it's recommended to compress only the largest fonts of user interface, because

- they need the most memory
- they can be compressed better
- and probably they are used less frequently than the medium sized fonts. (so performance cost is smaller)

#### 4.10.4 Add new font

There are several ways to add a new font to your project:

1. The simplest method is to use the [Online font converter](#). Just set the parameters, click the *Convert* button, copy the font to your project and use it. **Be sure to carefully read the steps provided on that site or you will get an error while converting.**
2. Use the [Offline font converter](#). (Requires Node.js to be installed)
3. If you want to create something like the built-in fonts (Roboto font and symbols) but in different size and/or ranges, you can use the `built_in_font_gen.py` script in `lvgl/scripts/built_in_font` folder. (It requires Python and `lv_font_conv` to be installed)

To declare the font in a file, use `LV_FONT_DECLARE(my_font_name)`.

To make the fonts globally available (like the builtin fonts), add them to `LV_FONT_CUSTOM_DECLARE` in `lv_conf.h`.

#### 4.10.5 Add new symbols

The built-in symbols are created from [FontAwesome](#) font.

1. Search symbol on <https://fontawesome.com>. For example the [USB symbol](#). Copy it's Unicode ID which is `0xf287` in this case.
2. Open the [Online font converter](#). Add `FontAwesome.woff`.
3. Set the parameters such as Name, Size, BPP. You'll use this name to declare and use the font in your code.
4. Add the Unicode ID of the symbol to the range field. E.g. `0xf287` for the USB symbol. More symbols can be enumerated with `,`.
5. Convert the font and copy it to your project. Make sure to compile the `.c` file of your font.
6. Declare the font using `extern lv_font_t my_font_name;` or simply `LV_FONT_DECLARE(my_font_name);`.

##### Using the symbol

1. Convert the Unicode value to UTF8. You can do it e.g on [this site](#). For `0xf287` the *Hex UTF-8 bytes* are `EF 8A 87`.
2. Create a `define` from the UTF8 values: `#define MY_USB_SYMBOL "\xEF\x8A\x87"`
3. Create a label and set the text. Eg. `lv_label_set_text(label, MY_USB_SYMBOL)`

Note - `lv_label_set_text(label, MY_USB_SYMBOL)` searches for this symbol in the font defined in `style.text.font` properties. To use the symbol you may need to change it. Eg `style.text.font = my_font_name`

#### 4.10.6 Load font in run-time

`lv_font_load` can be used to load a font from a file. The font to load needs to have a special binary format. (Not TTF or WOFF). Use `lv_font_conv` with `--format bin` option to generate an LVGL compatible font file.

Note that to load a font [LVGL's filesystem](#) needs to be enabled and a driver needs to be added.

Example

```
lv_font_t * my_font;
my_font = lv_font_load(X/path/to/my_font.bin);

/*Use the font*/

/*Free the font if not required anymore*/
lv_font_free(my_font);
```

#### 4.10.7 Add a new font engine

LVGL's font interface is designed to be very flexible. You don't need to use LVGL's internal font engine but, you can add your own. For example, use [FreeType](#) to real-time render glyphs from TTF fonts or use an external flash to store the font's bitmap and read them when the library needs them.

A ready to use FreeType can be found in [lv\\_freetype](#) repository.

To do this a custom `lv_font_t` variable needs to be created:

```
/*Describe the properties of a font*/
lv_font_t my_font;
my_font.get_glyph_dsc = my_get_glyph_dsc_cb; /*Set a callback to get info_
↳about glyphs*/
my_font.get_glyph_bitmap = my_get_glyph_bitmap_cb; /*Set a callback to get bitmap of_
↳a glyph*/
my_font.line_height = height; /*The real line height where any_
↳text fits*/
my_font.base_line = base_line; /*Base line measured from the top_
↳of line_height*/
my_font.dsc = something_required; /*Store any implementation_
↳specific data here*/
my_font.user_data = user_data; /*Optionally some extra user_
↳data*/

...

/* Get info about glyph of `unicode_letter` in `font` font.
 * Store the result in `dsc_out`.
 * The next letter (`unicode_letter_next`) might be used to calculate the width_
↳required by this glyph (kerning)
 */
bool my_get_glyph_dsc_cb(const lv_font_t * font, lv_font_glyph_dsc_t * dsc_out,
↳uint32_t unicode_letter, uint32_t unicode_letter_next)
{
 /*Your code here*/

 /* Store the result.
 * For example ...
 */
 dsc_out->adv_w = 12; /*Horizontal space required by the glyph in [px]*/
 dsc_out->box_h = 8; /*Height of the bitmap in [px]*/
 dsc_out->box_w = 6; /*Width of the bitmap in [px]*/
 dsc_out->ofs_x = 0; /*X offset of the bitmap in [pf]*/
 dsc_out->ofs_y = 3; /*Y offset of the bitmap measured from the as line*/
 dsc_out->bpp = 2; /*Bits per pixel: 1/2/4/8*/

 return true; /*true: glyph found; false: glyph was not found*/
```

(continues on next page)



(continued from previous page)

```

}

/* Get the bitmap of `unicode_letter` from `font`. */
const uint8_t * my_get_glyph_bitmap_cb(const lv_font_t * font, uint32_t unicode_
↪letter)
{
 /* Your code here */

 /* The bitmap should be a continuous bitstream where
 * each pixel is represented by `bpp` bits */

 return bitmap; /*Or NULL if not found*/
}

```

## 4.11 Images

An image can be a file or variable which stores the bitmap itself and some metadata.

### 4.11.1 Store images

You can store images in two places

- as a variable in the internal memory (RAM or ROM)
- as a file

#### Variables

The images stored internally in a variable is composed mainly of an `lv_img_dsc_t` structure with the following fields:

- **header**
  - *cf* Color format. See *below*
  - *w* width in pixels ( $\leq 2048$ )
  - *h* height in pixels ( $\leq 2048$ )
  - *always zero* 3 bits which need to be always zero
  - *reserved* reserved for future use
- **data** pointer to an array where the image itself is stored
- **data\_size** length of **data** in bytes

These are usually stored within a project as C files. They are linked into the resulting executable like any other constant data.

## Files

To deal with files you need to add a *Drive* to LVGL. In short, a *Drive* is a collection of functions (*open*, *read*, *close*, etc.) registered in LVGL to make file operations. You can add an interface to a standard file system (FAT32 on SD card) or you create your simple file system to read data from an SPI Flash memory. In every case, a *Drive* is just an abstraction to read and/or write data to a memory. See the [File system](#) section to learn more.

Images stored as files are not linked into the resulting executable, and must be read to RAM before being drawn. As a result, they are not as resource-friendly as variable images. However, they are easier to replace without needing to recompile the main program.

### 4.11.2 Color formats

Various built-in color formats are supported:

- **LV\_IMG\_CF\_TRUE\_COLOR** Simply stores the RGB colors (in whatever color depth LVGL is configured for).
- **LV\_IMG\_CF\_TRUE\_COLOR\_ALPHA** Like LV\_IMG\_CF\_TRUE\_COLOR but it also adds an alpha (transparency) byte for every pixel.
- **LV\_IMG\_CF\_TRUE\_COLOR\_CHROMA\_KEYED** Like LV\_IMG\_CF\_TRUE\_COLOR but if a pixel has LV\_COLOR\_TRANSP (set in *lv\_conf.h*) color the pixel will be transparent.
- **LV\_IMG\_CF\_INDEXED\_1/2/4/8BIT** Uses a palette with 2, 4, 16 or 256 colors and stores each pixel in 1, 2, 4 or 8 bits.
- **LV\_IMG\_CF\_ALPHA\_1/2/4/8BIT** Only stores the Alpha value on 1, 2, 4 or 8 bits. The pixels take the color of `style.image.color` and the set opacity. The source image has to be an alpha channel. This is ideal for bitmaps similar to fonts (where the whole image is one color but you'd like to be able to change it).

The bytes of the LV\_IMG\_CF\_TRUE\_COLOR images are stored in the following order.

For 32-bit color depth:

- Byte 0: Blue
- Byte 1: Green
- Byte 2: Red
- Byte 3: Alpha

For 16-bit color depth:

- Byte 0: Green 3 lower bit, Blue 5 bit
- Byte 1: Red 5 bit, Green 3 higher bit
- Byte 2: Alpha byte (only with LV\_IMG\_CF\_TRUE\_COLOR\_ALPHA)

For 8-bit color depth:

- Byte 0: Red 3 bit, Green 3 bit, Blue 2 bit
- Byte 2: Alpha byte (only with LV\_IMG\_CF\_TRUE\_COLOR\_ALPHA)

You can store images in a *Raw* format to indicate that, it's not a built-in color format and an external [Image decoder](#) needs to be used to decode the image.

- **LV\_IMG\_CF\_RAW** Indicates a basic raw image (e.g. a PNG or JPG image).
- **LV\_IMG\_CF\_RAW\_ALPHA** Indicates that the image has alpha and an alpha byte is added for every pixel.

- **LV\_IMG\_CF\_RAW\_CHROME\_KEYED** Indicates that the image is chrome keyed as described in **LV\_IMG\_CF\_TRUE\_COLOR\_CHROMA\_KEYED** above.

### 4.11.3 Add and use images

You can add images to LVGL in two ways:

- using the online converter
- manually create images

#### Online converter

The online Image converter is available here: <https://lvgl.io/tools/imageconverter>

Adding an image to LVGL via online converter is easy.

1. You need to select a *BMP*, *PNG* or *JPG* image first.
2. Give the image a name that will be used within LVGL.
3. Select the *Color format*.
4. Select the type of image you want. Choosing a binary will generate a `.bin` file that must be stored separately and read using the *file support*. Choosing a variable will generate a standard C file that can be linked into your project.
5. Hit the *Convert* button. Once the conversion is finished, your browser will automatically download the resulting file.

In the converter C arrays (variables), the bitmaps for all the color depths (1, 8, 16 or 32) are included in the C file, but only the color depth that matches **LV\_COLOR\_DEPTH** in *lv\_conf.h* will actually be linked into the resulting executable.

In case of binary files, you need to specify the color format you want:

- RGB332 for 8-bit color depth
- RGB565 for 16-bit color depth
- RGB565 Swap for 16-bit color depth (two bytes are swapped)
- RGB888 for 32-bit color depth

#### Manually create an image

If you are generating an image at run-time, you can craft an image variable to display it using LVGL. For example:

```
uint8_t my_img_data[] = {0x00, 0x01, 0x02, ...};

static lv_img_dsc_t my_img_dsc = {
 .header.always_zero = 0,
 .header.w = 80,
 .header.h = 60,
 .data_size = 80 * 60 * LV_COLOR_DEPTH / 8,
 .header.cf = LV_IMG_CF_TRUE_COLOR, /*Set the color format*/
 .data = my_img_data,
};
```

If the color format is `LV_IMG_CF_TRUE_COLOR_ALPHA` you can set `data_size` like `80 * 60 * LV_IMG_PX_SIZE_ALPHA_BYTE`.

Another (possibly simpler) option to create and display an image at run-time is to use the *Canvas* object.

## Use images

The simplest way to use an image in LVGL is to display it with an *lv\_img* object:

```
lv_obj_t * icon = lv_img_create(lv_scr_act(), NULL);

/*From variable*/
lv_img_set_src(icon, &my_icon_dsc);

/*From file*/
lv_img_set_src(icon, "S:my_icon.bin");
```

If the image was converted with the online converter, you should use `LV_IMG_DECLARE(my_icon_dsc)` to declare the image in the file where you want to use it.

### 4.11.4 Image decoder

As you can see in the *Color formats* section, LVGL supports several built-in image formats. In many cases, these will be all you need. LVGL doesn't directly support, however, generic image formats like PNG or JPG.

To handle non-built-in image formats, you need to use external libraries and attach them to LVGL via the *Image decoder* interface.

The image decoder consists of 4 callbacks:

- **info** get some basic info about the image (width, height and color format).
- **open** open the image: either store the decoded image or set it to `NULL` to indicate the image can be read line-by-line.
- **read** if *open* didn't fully open the image this function should give some decoded data (max 1 line) from a given position.
- **close** close the opened image, free the allocated resources.

You can add any number of image decoders. When an image needs to be drawn, the library will try all the registered image decoder until finding one which can open the image, i.e. knowing that format.

The `LV_IMG_CF_TRUE_COLOR_...`, `LV_IMG_INDEXED_...` and `LV_IMG_ALPHA_...` formats (essentially, all non-RAW formats) are understood by the built-in decoder.

## Custom image formats

The easiest way to create a custom image is to use the online image converter and set `Raw`, `Raw with alpha` or `Raw with chrome keyed` format. It will just take every byte of the binary file you uploaded and write it as the image "bitmap". You then need to attach an image decoder that will parse that bitmap and generate the real, renderable bitmap.

`header.cf` will be `LV_IMG_CF_RAW`, `LV_IMG_CF_RAW_ALPHA` or `LV_IMG_CF_RAW_CHROME_KEYED` accordingly. You should choose the correct format according to your needs: fully opaque image, use alpha channel or use chroma keying.

After decoding, the *raw* formats are considered *True color* by the library. In other words, the image decoder must decode the *Raw* images to *True color* according to the format described in `[#color-formats](Color formats)` section.

If you want to create a custom image, you should use `LV_IMG_CF_USER_ENCODED_0..7` color formats. However, the library can draw the images only in *True color* format (or *Raw* but finally it's supposed to be in *True color* format). So the `LV_IMG_CF_USER_ENCODED_...` formats are not known by the library, therefore, they should be decoded to one of the known formats from [\[#color-formats\]\(Color formats\)](#) section. It's possible to decode the image to a non-true color format first, for example, `LV_IMG_INDEXED_4BITS`, and then call the built-in decoder functions to convert it to *True color*.

With *User encoded* formats, the color format in the open function (`dsc->header.cf`) should be changed according to the new format.

## Register an image decoder

Here's an example of getting LVGL to work with PNG images.

First, you need to create a new image decoder and set some functions to open/close the PNG files. It should look like this:

```
/*Create a new decoder and register functions */
lv_img_decoder_t * dec = lv_img_decoder_create();
lv_img_decoder_set_info_cb(dec, decoder_info);
lv_img_decoder_set_open_cb(dec, decoder_open);
lv_img_decoder_set_close_cb(dec, decoder_close);

/**
 * Get info about a PNG image
 * @param decoder pointer to the decoder where this function belongs
 * @param src can be file name or pointer to a C array
 * @param header store the info here
 * @return LV_RES_OK: no error; LV_RES_INV: can't get the info
 */
static lv_res_t decoder_info(lv_img_decoder_t * decoder, const void * src, lv_img_header_t * header)
{
 /*Check whether the type `src` is known by the decoder*/
 if(is_png(src) == false) return LV_RES_INV;

 /* Read the PNG header and find `width` and `height` */
 ...

 header->cf = LV_IMG_CF_RAW_ALPHA;
 header->w = width;
 header->h = height;
}

/**
 * Open a PNG image and return the decoded image
 * @param decoder pointer to the decoder where this function belongs
 * @param dsc pointer to a descriptor which describes this decoding session
 * @return LV_RES_OK: no error; LV_RES_INV: can't get the info
 */
static lv_res_t decoder_open(lv_img_decoder_t * decoder, lv_img_decoder_dsc_t * dsc)
{
 /*Check whether the type `src` is known by the decoder*/
 if(is_png(src) == false) return LV_RES_INV;
```

(continues on next page)

(continued from previous page)

```

/*Decode and store the image. If `dsc->img_data` is `NULL`, the `read_line`
↳function will be called to get the image data line-by-line*/
dsc->img_data = my_png_decoder(src);

/*Change the color format if required. For PNG usually 'Raw' is fine*/
dsc->header.cf = LV_IMG_CF_...

/*Call a built in decoder function if required. It's not required if `my_png_
↳decoder` opened the image in true color format.*/
lv_res_t res = lv_img_decoder_built_in_open(decoder, dsc);

return res;
}

/**
 * Decode `len` pixels starting from the given `x`, `y` coordinates and store them in
↳`buf`.
 * Required only if the "open" function can't open the whole decoded pixel array.
↳(dsc->img_data == NULL)
 * @param decoder pointer to the decoder the function associated with
 * @param dsc pointer to decoder descriptor
 * @param x start x coordinate
 * @param y start y coordinate
 * @param len number of pixels to decode
 * @param buf a buffer to store the decoded pixels
 * @return LV_RES_OK: ok; LV_RES_INV: failed
 */
lv_res_t decoder_built_in_read_line(lv_img_decoder_t * decoder, lv_img_decoder_dsc_t
↳* dsc, lv_coord_t x,
 lv_coord_t y, lv_coord_t len, uint8_
↳t * buf)
{
 /*With PNG it's usually not required*/

 /*Copy `len` pixels from `x` and `y` coordinates in True color format to `buf` */
}

/**
 * Free the allocated resources
 * @param decoder pointer to the decoder where this function belongs
 * @param dsc pointer to a descriptor which describes this decoding session
 */
static void decoder_close(lv_img_decoder_t * decoder, lv_img_decoder_dsc_t * dsc)
{
 /*Free all allocated data*/

 /*Call the built-in close function if the built-in open/read_line was used*/
 lv_img_decoder_built_in_close(decoder, dsc);
}

```

So in summary:

- In `decoder_info`, you should collect some basic information about the image and store it in `header`.
- In `decoder_open`, you should try to open the image source pointed by `dsc->src`. Its type is already in `dsc->src_type == LV_IMG_SRC_FILE/VARIABLE`. If this format/type is not supported by the decoder, return

LV\_RES\_INV. However, if you can open the image, a pointer to the decoded *True color* image should be set in `dsc->img_data`. If the format is known but, you don't want to decode while image (e.g. no memory for it) set `dsc->img_data = NULL` to call `read_line` to get the pixels.

- In `decoder_close` you should free all the allocated resources.
- `decoder_read` is optional. Decoding the whole image requires extra memory and some computational overhead. However, if can decode one line of the image without decoding the whole image, you can save memory and time. To indicate that, the *line read* function should be used, set `dsc->img_data = NULL` in the open function.

### Manually use an image decoder

LVGL will use the registered image decoder automatically if you try and draw a raw image (i.e. using the `lv_img` object) but you can use them manually too. Create a `lv_img_decoder_dsc_t` variable to describe the decoding session and call `lv_img_decoder_open()`.

```
lv_res_t res;
lv_img_decoder_dsc_t dsc;
res = lv_img_decoder_open(&dsc, &my_img_dsc, LV_COLOR_WHITE);

if(res == LV_RES_OK) {
 /*Do something with `dsc->img_data`*/
 lv_img_decoder_close(&dsc);
}
```

## 4.11.5 Image caching

Sometimes it takes a lot of time to open an image. Continuously decoding a PNG image or loading images from a slow external memory would be inefficient and detrimental to the user experience.

Therefore, LVGL caches a given number of images. Caching means some images will be left open, hence LVGL can quickly access them from `dsc->img_data` instead of needing to decode them again.

Of course, caching images is resource-intensive as it uses more RAM (to store the decoded image). LVGL tries to optimize the process as much as possible (see below), but you will still need to evaluate if this would be beneficial for your platform or not. If you have a deeply embedded target which decodes small images from a relatively fast storage medium, image caching may not be worth it.

### Cache size

The number of cache entries can be defined in `LV_IMG_CACHE_DEF_SIZE` in `lv_conf.h`. The default value is 1 so only the most recently used image will be left open.

The size of the cache can be changed at run-time with `lv_img_cache_set_size(entry_num)`.

## Value of images

When you use more images than cache entries, LVGL can't cache all of the images. Instead, the library will close one of the cached images (to free space).

To decide which image to close, LVGL uses a measurement it previously made of how long it took to open the image. Cache entries that hold slower-to-open images are considered more valuable and are kept in the cache as long as possible.

If you want or need to override LVGL's measurement, you can manually set the *time to open* value in the decoder open function in `dsc->time_to_open = time_ms` to give a higher or lower value. (Leave it unchanged to let LVGL set it.)

Every cache entry has a *"life"* value. Every time an image opening happens through the cache, the *life* of all entries are decreased to make them older. When a cached image is used, its *life* is increased by the *time to open* value to make it more alive.

If there is no more space in the cache, always the entry with the smallest life will be closed.

## Memory usage

Note that, the cached image might continuously consume memory. For example, if 3 PNG images are cached, they will consume memory while they are opened.

Therefore, it's the user's responsibility to be sure there is enough RAM to cache, even the largest images at the same time.

## Clean the cache

Let's say you have loaded a PNG image into a `lv_img_dsc_t my_png` variable and use it in an `lv_img` object. If the image is already cached and you then change the underlying PNG file, you need to notify LVGL to cache the image again. Otherwise, there is no easy way of detecting that the underlying file changed and LVGL will still draw the old image.

To do this, use `lv_img_cache_invalidate_src(&my_png)`. If `NULL` is passed as a parameter, the whole cache will be cleaned.

### 4.11.6 API

#### Image buffer

#### Typedefs

```
typedef uint8_t lv_img_cf_t
typedef _lv_img_transform_dsc_t lv_img_transform_dsc_t
```



## Enums

enum **[anonymous]**

*Values:*

enumerator **LV\_IMG\_CF\_UNKNOWN**

enumerator **LV\_IMG\_CF\_RAW**

Contains the file as it is. Needs custom decoder function

enumerator **LV\_IMG\_CF\_RAW\_ALPHA**

Contains the file as it is. The image has alpha. Needs custom decoder function

enumerator **LV\_IMG\_CF\_RAW\_CHROMA\_KEYED**

Contains the file as it is. The image is chroma keyed. Needs custom decoder function

enumerator **LV\_IMG\_CF\_TRUE\_COLOR**

Color format and depth should match with LV\_COLOR settings

enumerator **LV\_IMG\_CF\_TRUE\_COLOR\_ALPHA**

Same as LV\_IMG\_CF\_TRUE\_COLOR but every pixel has an alpha byte

enumerator **LV\_IMG\_CF\_TRUE\_COLOR\_CHROMA\_KEYED**

Same as LV\_IMG\_CF\_TRUE\_COLOR but LV\_COLOR\_TRANSP pixels will be transparent

enumerator **LV\_IMG\_CF\_INDEXED\_1BIT**

Can have 2 different colors in a palette (always chroma keyed)

enumerator **LV\_IMG\_CF\_INDEXED\_2BIT**

Can have 4 different colors in a palette (always chroma keyed)

enumerator **LV\_IMG\_CF\_INDEXED\_4BIT**

Can have 16 different colors in a palette (always chroma keyed)

enumerator **LV\_IMG\_CF\_INDEXED\_8BIT**

Can have 256 different colors in a palette (always chroma keyed)

enumerator **LV\_IMG\_CF\_ALPHA\_1BIT**

Can have one color and it can be drawn or not

enumerator **LV\_IMG\_CF\_ALPHA\_2BIT**

Can have one color but 4 different alpha value

enumerator **LV\_IMG\_CF\_ALPHA\_4BIT**

Can have one color but 16 different alpha value

enumerator **LV\_IMG\_CF\_ALPHA\_8BIT**

Can have one color but 256 different alpha value

enumerator **LV\_IMG\_CF\_RESERVED\_15**

Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_16**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_17**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_18**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_19**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_20**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_21**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_22**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_RESERVED\_23**  
Reserved for further use.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_0**  
User holder encoding format.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_1**  
User holder encoding format.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_2**  
User holder encoding format.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_3**  
User holder encoding format.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_4**  
User holder encoding format.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_5**  
User holder encoding format.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_6**  
User holder encoding format.

enumerator **LV\_IMG\_CF\_USER\_ENCODED\_7**  
User holder encoding format.

## Functions

*lv\_img\_dsc\_t* \***lv\_img\_buf\_alloc**(*lv\_coord\_t* w, *lv\_coord\_t* h, *lv\_img\_cf\_t* cf)

Allocate an image buffer in RAM

### Parameters

- **w** -- width of image
- **h** -- height of image
- **cf** -- a color format (LV\_IMG\_CF\_...)

**Returns** an allocated image, or NULL on failure

*lv\_color\_t* **lv\_img\_buf\_get\_px\_color**(*lv\_img\_dsc\_t* \*dsc, *lv\_coord\_t* x, *lv\_coord\_t* y, *lv\_color\_t* color)

Get the color of an image's pixel

### Parameters

- **dsc** -- an image descriptor
- **x** -- x coordinate of the point to get
- **y** -- x coordinate of the point to get
- **color** -- the color of the image. In case of LV\_IMG\_CF\_ALPHA\_1/2/4/8 this color is used. Not used in other cases.
- **safe** -- true: check out of bounds

**Returns** color of the point

*lv\_opa\_t* **lv\_img\_buf\_get\_px\_alpha**(*lv\_img\_dsc\_t* \*dsc, *lv\_coord\_t* x, *lv\_coord\_t* y)

Get the alpha value of an image's pixel

### Parameters

- **dsc** -- pointer to an image descriptor
- **x** -- x coordinate of the point to set
- **y** -- x coordinate of the point to set
- **safe** -- true: check out of bounds

**Returns** alpha value of the point

void **lv\_img\_buf\_set\_px\_color**(*lv\_img\_dsc\_t* \*dsc, *lv\_coord\_t* x, *lv\_coord\_t* y, *lv\_color\_t* c)

Set the color of a pixel of an image. The alpha channel won't be affected.

### Parameters

- **dsc** -- pointer to an image descriptor
- **x** -- x coordinate of the point to set
- **y** -- x coordinate of the point to set
- **c** -- color of the point
- **safe** -- true: check out of bounds

void **lv\_img\_buf\_set\_px\_alpha**(*lv\_img\_dsc\_t* \*dsc, *lv\_coord\_t* x, *lv\_coord\_t* y, *lv\_opa\_t* opa)

Set the alpha value of a pixel of an image. The color won't be affected

### Parameters

- **dsc** -- pointer to an image descriptor

- **x** -- x coordinate of the point to set
- **y** -- x coordinate of the point to set
- **opa** -- the desired opacity
- **safe** -- true: check out of bounds

void **lv\_img\_buf\_set\_palette**(*lv\_img\_dsc\_t* \*dsc, uint8\_t id, lv\_color\_t c)

Set the palette color of an indexed image. Valid only for LV\_IMG\_CF\_INDEXED1/2/4/8

#### Parameters

- **dsc** -- pointer to an image descriptor
- **id** -- the palette color to set:
  - for LV\_IMG\_CF\_INDEXED1: 0..1
  - for LV\_IMG\_CF\_INDEXED2: 0..3
  - for LV\_IMG\_CF\_INDEXED4: 0..15
  - for LV\_IMG\_CF\_INDEXED8: 0..255
- **c** -- the color to set

void **lv\_img\_buf\_free**(*lv\_img\_dsc\_t* \*dsc)

Free an allocated image buffer

**Parameters** **dsc** -- image buffer to free

uint32\_t **lv\_img\_buf\_get\_img\_size**(lv\_coord\_t w, lv\_coord\_t h, *lv\_img\_cf\_t* cf)

Get the memory consumption of a raw bitmap, given color format and dimensions.

#### Parameters

- **w** -- width
- **h** -- height
- **cf** -- color format

**Returns** size in bytes

void **\_lv\_img\_buf\_transform\_init**(*\_lv\_img\_transform\_dsc\_t* \*dsc)

Initialize a descriptor to rotate an image

**Parameters** **dsc** -- pointer to an *lv\_img\_transform\_dsc\_t* variable whose *cfg* field is initialized

bool **\_lv\_img\_buf\_transform\_anti\_alias**(*\_lv\_img\_transform\_dsc\_t* \*dsc)

Continue transformation by taking the neighbors into account

**Parameters** **dsc** -- pointer to the transformation descriptor

bool **\_lv\_img\_buf\_transform**(*\_lv\_img\_transform\_dsc\_t* \*dsc, lv\_coord\_t x, lv\_coord\_t y)

Get which color and opa would come to a pixel if it were rotated

---

**Note:** the result is written back to *dsc->res\_color* and *dsc->res\_opa*

---

#### Parameters

- **dsc** -- a descriptor initialized by *lv\_img\_buf\_rotate\_init*
- **x** -- the coordinate which color and opa should be get

- **y** -- the coordinate which color and opa should be get

**Returns** true: there is valid pixel on these x/y coordinates; false: the rotated pixel was out of the image

```
void _lv_img_buf_get_transformed_area(lv_area_t *res, lv_coord_t w, lv_coord_t h, int16_t angle,
 uint16_t zoom, const lv_point_t *pivot)
```

Get the area of a rectangle if its rotated and scaled

#### Parameters

- **res** -- store the coordinates here
- **w** -- width of the rectangle to transform
- **h** -- height of the rectangle to transform
- **angle** -- angle of rotation
- **zoom** -- zoom, (256 no zoom)
- **pivot** -- x,y pivot coordinates of rotation

```
struct lv_img_header_t
```

*#include <lv\_img\_buf.h>* The first 8 bit is very important to distinguish the different source types. For more info see `lv_img_get_src_type()` in `lv_img.c` On big endian systems the order is reversed so `cf` and `always_zero` must be at the end of the struct.

#### Public Members

uint32\_t **h**

uint32\_t **w**

uint32\_t **reserved**

uint32\_t **always\_zero**

uint32\_t **cf**

```
struct lv_img_header_t
```

*#include <lv\_img\_buf.h>* The first 8 bit is very important to distinguish the different source types. For more info see `lv_img_get_src_type()` in `lv_img.c` On big endian systems the order is reversed so `cf` and `always_zero` must be at the end of the struct.

#### Public Members

uint32\_t **h**

uint32\_t **w**

uint32\_t **reserved**

uint32\_t **always\_zero**

uint32\_t **cf**

```
struct lv_img_dsc_t
```

*#include <lv\_img\_buf.h>* Image header it is compatible with the result from image converter utility

## Public Members

### *lv\_img\_header\_t* **header**

A header describing the basics of the image

### uint32\_t **data\_size**

Size of the image in bytes

### const uint8\_t \***data**

Pointer to the data of the image

### struct **\_lv\_img\_transform\_dsc\_t**

## Public Members

### const void \***src**

### lv\_coord\_t **src\_w**

### lv\_coord\_t **src\_h**

### lv\_coord\_t **pivot\_x**

### lv\_coord\_t **pivot\_y**

### int16\_t **angle**

### uint16\_t **zoom**

### lv\_color\_t **color**

### *lv\_img\_cf\_t* **cf**

### bool **antialias**

### struct *\_lv\_img\_transform\_dsc\_t*::[anonymous] **cfg**

### lv\_opa\_t **opa**

### struct *\_lv\_img\_transform\_dsc\_t*::[anonymous] **res**

### *lv\_img\_dsc\_t* **img\_dsc**

### int32\_t **pivot\_x\_256**

### int32\_t **pivot\_y\_256**

### int32\_t **sinma**

### int32\_t **cosma**

### uint8\_t **chroma\_keyed**

### uint8\_t **has\_alpha**

### uint8\_t **native\_color**

### uint32\_t **zoom\_inv**

### lv\_coord\_t **xs**

### lv\_coord\_t **ys**

```

lv_coord_t xs_int
lv_coord_t ys_int
uint32_t pxi
uint8_t px_size
struct _lv_img_transform_dsc_t::[anonymous] tmp

```

## 4.12 File system

LVGL has a 'File system' abstraction module that enables you to attach any type of file systems. The file system is identified by a drive letter. For example, if the SD card is associated with the letter 'S', a file can be reached like "S:path/to/file.txt".

### 4.12.1 Add a driver

To add a driver, `lv_fs_drv_t` needs to be initialized like this:

```

lv_fs_drv_t drv;
lv_fs_drv_init(&drv); /*Basic initialization*/

drv.letter = 'S'; /*An uppercase letter to identify the drive_
↪*/
drv.file_size = sizeof(my_file_object); /*Size required to store a file object*/
drv.rddir_size = sizeof(my_dir_object); /*Size required to store a directory object_
↪(used by dir_open/close/read)*/
drv.ready_cb = my_ready_cb; /*Callback to tell if the drive is ready to_
↪use */
drv.open_cb = my_open_cb; /*Callback to open a file */
drv.close_cb = my_close_cb; /*Callback to close a file */
drv.read_cb = my_read_cb; /*Callback to read a file */
drv.write_cb = my_write_cb; /*Callback to write a file */
drv.seek_cb = my_seek_cb; /*Callback to seek in a file (Move cursor)_
↪*/
drv.tell_cb = my_tell_cb; /*Callback to tell the cursor position */
drv.trunc_cb = my_trunc_cb; /*Callback to delete a file */
drv.size_cb = my_size_cb; /*Callback to tell a file's size */
drv.rename_cb = my_rename_cb; /*Callback to rename a file */

drv.dir_open_cb = my_dir_open_cb; /*Callback to open directory to read its_
↪content */
drv.dir_read_cb = my_dir_read_cb; /*Callback to read a directory's content */
drv.dir_close_cb = my_dir_close_cb; /*Callback to close a directory */

drv.free_space_cb = my_free_space_cb; /*Callback to tell free space on the drive_
↪*/

drv.user_data = my_user_data; /*Any custom data if required*/

lv_fs_drv_register(&drv); /*Finally register the drive*/

```

Any of the callbacks can be `NULL` to indicate that operation is not supported.

As an example of how the callbacks are used, if you use `lv_fs_open(&file, "S:/folder/file.txt", LV_FS_MODE_WR)`, LVGL:

1. Verifies that a registered drive exists with the letter 'S'.
2. Checks if it's `open_cb` is implemented (not `NULL`).
3. Calls the set `open_cb` with "folder/file.txt" path.

### 4.12.2 Usage example

The example below shows how to read from a file:

```
lv_fs_file_t f;
lv_fs_res_t res;
res = lv_fs_open(&f, "S:/folder/file.txt", LV_FS_MODE_RD);
if(res != LV_FS_RES_OK) my_error_handling();

uint32_t read_num;
uint8_t buf[8];
res = lv_fs_read(&f, buf, 8, &read_num);
if(res != LV_FS_RES_OK || read_num != 8) my_error_handling();

lv_fs_close(&f);
```

*The mode in `lv_fs_open` can be `LV_FS_MODE_WR` to open for write or `LV_FS_MODE_RD` | `LV_FS_MODE_WR` for both*

This example shows how to read a directory's content. It's up to the driver how to mark the directories, but it can be a good practice to insert a '/' in front of the directory name.

```
lv_fs_dir_t dir;
lv_fs_res_t res;
res = lv_fs_dir_open(&dir, "S:/folder");
if(res != LV_FS_RES_OK) my_error_handling();

char fn[256];
while(1) {
 res = lv_fs_dir_read(&dir, fn);
 if(res != LV_FS_RES_OK) {
 my_error_handling();
 break;
 }

 /*fn is empty, if not more files to read*/
 if(strlen(fn) == 0) {
 break;
 }

 printf("%s\n", fn);
}

lv_fs_dir_close(&dir);
```



### 4.12.3 Use drivers for images

*Image* objects can be opened from files too (besides variables stored in the flash).

To initialize the image, the following callbacks are required:

- open
- close
- read
- seek
- tell

### 4.12.4 API

#### Typedefs

```
typedef uint8_t lv_fs_res_t
typedef uint8_t lv_fs_mode_t
typedef uint8_t lv_fs_whence_t
typedef struct _lv_fs_drv_t lv_fs_drv_t
```

#### Enums

enum **[anonymous]**

Errors in the file system module.

*Values:*

```
enumerator LV_FS_RES_OK
enumerator LV_FS_RES_HW_ERR
enumerator LV_FS_RES_FS_ERR
enumerator LV_FS_RES_NOT_EX
enumerator LV_FS_RES_FULL
enumerator LV_FS_RES_LOCKED
enumerator LV_FS_RES_DENIED
enumerator LV_FS_RES_BUSY
enumerator LV_FS_RES_TOUT
enumerator LV_FS_RES_NOT_IMP
enumerator LV_FS_RES_OUT_OF_MEM
enumerator LV_FS_RES_INV_PARAM
enumerator LV_FS_RES_UNKNOWN
```

enum **[anonymous]**

File open mode.

*Values:*

enumerator **LV\_FS\_MODE\_WR**

enumerator **LV\_FS\_MODE\_RD**

enum **[anonymous]**

Seek modes.

*Values:*

enumerator **LV\_FS\_SEEK\_SET**

enumerator **LV\_FS\_SEEK\_CUR**

enumerator **LV\_FS\_SEEK\_END**

## Functions

void **\_lv\_fs\_init**(void)

Initialize the File system interface

void **lv\_fs\_drv\_init**(*lv\_fs\_drv\_t* \*drv)

Initialize a file system driver with default values. It is used to surly have known values in the fields ant not memory junk. After it you can set the fields.

**Parameters** **drv** -- pointer to driver variable to initialize

void **lv\_fs\_drv\_register**(*lv\_fs\_drv\_t* \*drv\_p)

Add a new drive

**Parameters** **drv\_p** -- pointer to an *lv\_fs\_drv\_t* structure which is inited with the corresponding function pointers. Only pointer is saved, so the driver should be static or dynamically allocated.

*lv\_fs\_drv\_t* \***lv\_fs\_get\_drv**(char letter)

Give a pointer to a driver from its letter

**Parameters** **letter** -- the driver letter

**Returns** pointer to a driver or NULL if not found

bool **lv\_fs\_is\_ready**(char letter)

Test if a drive is ready or not. If the **ready** function was not initialized **true** will be returned.

**Parameters** **letter** -- letter of the drive

**Returns** true: drive is ready; false: drive is not ready

*lv\_fs\_res\_t* **lv\_fs\_open**(*lv\_fs\_file\_t* \*file\_p, const char \*path, *lv\_fs\_mode\_t* mode)

Open a file

**Parameters**

- **file\_p** -- pointer to a *lv\_fs\_file\_t* variable
- **path** -- path to the file beginning with the driver letter (e.g. S:/folder/file.txt)
- **mode** -- read: **FS\_MODE\_RD**, write: **FS\_MODE\_WR**, both: **FS\_MODE\_RD | FS\_MODE\_WR**

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

*lv\_fs\_res\_t* **lv\_fs\_close**(*lv\_fs\_file\_t* \*file\_p)

Close an already opened file

**Parameters** **file\_p** -- pointer to a *lv\_fs\_file\_t* variable

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

*lv\_fs\_res\_t* **lv\_fs\_read**(*lv\_fs\_file\_t* \*file\_p, void \*buf, uint32\_t btr, uint32\_t \*br)

Read from a file

**Parameters**

- **file\_p** -- pointer to a *lv\_fs\_file\_t* variable
- **buf** -- pointer to a buffer where the read bytes are stored
- **btr** -- Bytes To Read
- **br** -- the number of real read bytes (Bytes Read). NULL if unused.

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

*lv\_fs\_res\_t* **lv\_fs\_write**(*lv\_fs\_file\_t* \*file\_p, const void \*buf, uint32\_t btw, uint32\_t \*bw)

Write into a file

**Parameters**

- **file\_p** -- pointer to a *lv\_fs\_file\_t* variable
- **buf** -- pointer to a buffer with the bytes to write
- **btr** -- Bytes To Write
- **br** -- the number of real written bytes (Bytes Written). NULL if unused.

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

*lv\_fs\_res\_t* **lv\_fs\_seek**(*lv\_fs\_file\_t* \*file\_p, uint32\_t pos, *lv\_fs\_whence\_t* whence)

Set the position of the 'cursor' (read write pointer) in a file

**Parameters**

- **file\_p** -- pointer to a *lv\_fs\_file\_t* variable
- **pos** -- the new position expressed in bytes index (0: start of file)

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

*lv\_fs\_res\_t* **lv\_fs\_tell**(*lv\_fs\_file\_t* \*file\_p, uint32\_t \*pos)

Give the position of the read write pointer

**Parameters**

- **file\_p** -- pointer to a *lv\_fs\_file\_t* variable
- **pos\_p** -- pointer to store the position of the read write pointer

**Returns** LV\_FS\_RES\_OK or any error from 'fs\_res\_t'

*lv\_fs\_res\_t* **lv\_fs\_dir\_open**(*lv\_fs\_dir\_t* \*rddir\_p, const char \*path)

Initialize a 'fs\_dir\_t' variable for directory reading

**Parameters**

- **rddir\_p** -- pointer to a '*lv\_fs\_dir\_t*' variable
- **path** -- path to a directory

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

*lv\_fs\_res\_t* **lv\_fs\_dir\_read**(*lv\_fs\_dir\_t* \*rddir\_p, char \*fn)

Read the next filename form a directory. The name of the directories will begin with '/'

**Parameters**

- **rddir\_p** -- pointer to an initialized 'fs\_dir\_t' variable
- **fn** -- pointer to a buffer to store the filename

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

*lv\_fs\_res\_t* **lv\_fs\_dir\_close**(*lv\_fs\_dir\_t* \*rddir\_p)

Close the directory reading

**Parameters** **rddir\_p** -- pointer to an initialized 'fs\_dir\_t' variable

**Returns** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

char \***lv\_fs\_get\_letters**(char \*buf)

Fill a buffer with the letters of existing drivers

**Parameters** **buf** -- buffer to store the letters ('\0' added after the last letter)

**Returns** the buffer

const char \***lv\_fs\_get\_ext**(const char \*fn)

Return with the extension of the filename

**Parameters** **fn** -- string with a filename

**Returns** pointer to the beginning extension or empty string if no extension

char \***lv\_fs\_up**(char \*path)

Step up one level

**Parameters** **path** -- pointer to a file name

**Returns** the truncated file name

const char \***lv\_fs\_get\_last**(const char \*path)

Get the last element of a path (e.g. U:/folder/file -> file)

**Parameters** **path** -- pointer to a file name

**Returns** pointer to the beginning of the last element in the path

struct **\_lv\_fs\_drv\_t**

## Public Members

char **letter**

bool (\***ready\_cb**)(struct *\_lv\_fs\_drv\_t* \*drv)

void (\***open\_cb**)(struct *\_lv\_fs\_drv\_t* \*drv, const char \*path, *lv\_fs\_mode\_t* mode)

*lv\_fs\_res\_t* (\***close\_cb**)(struct *\_lv\_fs\_drv\_t* \*drv, void \*file\_p)

*lv\_fs\_res\_t* (\***read\_cb**)(struct *\_lv\_fs\_drv\_t* \*drv, void \*file\_p, void \*buf, uint32\_t btr, uint32\_t \*br)

*lv\_fs\_res\_t* (\***write\_cb**)(struct *\_lv\_fs\_drv\_t* \*drv, void \*file\_p, const void \*buf, uint32\_t btw, uint32\_t \*bw)

*lv\_fs\_res\_t* (\***seek\_cb**)(struct *\_lv\_fs\_drv\_t* \*drv, void \*file\_p, uint32\_t pos, *lv\_fs\_whence\_t* whence)

```

lv_fs_res_t (*tell_cb)(struct _lv_fs_drv_t *drv, void *file_p, uint32_t *pos_p)
void (*dir_open_cb)(struct _lv_fs_drv_t *drv, const char *path)
lv_fs_res_t (*dir_read_cb)(struct _lv_fs_drv_t *drv, void *rddir_p, char *fn)
lv_fs_res_t (*dir_close_cb)(struct _lv_fs_drv_t *drv, void *rddir_p)
void *user_data
 Custom file user data

```

```
struct lv_fs_file_t
```

### Public Members

```

void *file_d
 lv_fs_drv_t *drv
struct lv_fs_dir_t

```

### Public Members

```

void *dir_d
 lv_fs_drv_t *drv

```

## 4.13 Animations

You can automatically change the value of a variable between a start and an end value using animations. The animation will happen by the periodical call of an "animator" function with the corresponding value parameter.

The *animator* functions has the following prototype:

```
void func(void * var, lv_anim_var_t value);
```

This prototype is compatible with the majority of the *set* function of LVGL. For example `lv_obj_set_x(obj, value)` or `lv_obj_set_width(obj, value)`

### 4.13.1 Create an animation

To create an animation an `lv_anim_t` variable has to be initialized and configured with `lv_anim_set_...()` functions.

```

/* INITIALIZE AN ANIMATION
 -----/

lv_anim_t a;
lv_anim_init(&a);

/* MANDATORY SETTINGS

```

(continues on next page)

(continued from previous page)

```

-----/

/*Set the "animator" function*/
lv_anim_set_exec_cb(&a, (lv_anim_exec_xcb_t) lv_obj_set_x);

/*Set the "animator" function*/
lv_anim_set_var(&a, obj);

/*Length of the animation [ms]*/
lv_anim_set_time(&a, duration);

/*Set start and end values. E.g. 0, 150*/
lv_anim_set_values(&a, start, end);

/* OPTIONAL SETTINGS
-----/

/*Time to wait before starting the animation [ms]*/
lv_anim_set_delay(&a, delay);

/*Set path (curve). Default is linear*/
lv_anim_set_path(&a, &path);

/*Set a callback to call when animation is ready.*/
lv_anim_set_ready_cb(&a, ready_cb);

/*Set a callback to call when animation is started (after delay).*/
lv_anim_set_start_cb(&a, start_cb);

/*Play the animation backward too with this duration. Default is 0 (disabled) [ms]*/
lv_anim_set_playback_time(&a, wait_time);

/*Delay before playback. Default is 0 (disabled) [ms]*/
lv_anim_set_playback_delay(&a, wait_time);

/*Number of repetitions. Default is 1. LV_ANIM_REPEAT_INFINIT for infinite
↳repetition*/
lv_anim_set_repeat_count(&a, wait_time);

/*Delay before repeat. Default is 0 (disabled) [ms]*/
lv_anim_set_repeat_delay(&a, wait_time);

/*true (default): apply the start vale immediately, false: apply start vale after
↳delay when then anim. really starts. */
lv_anim_set_early_apply(&a, true/false);

/* START THE ANIMATION
-----/
lv_anim_start(&a); /*Start the animation*/

```

You can apply **multiple different animations** on the same variable at the same time. For example, animate the x and y coordinates with `lv_obj_set_x` and `lv_obj_set_y`. However, only one animation can exist with a given variable and function pair. Therefore `lv_anim_start()` will delete the already existing variable-function animations.

### 4.13.2 Animation path

You can determinate the **path of animation**. In the most simple case, it is linear, which means the current value between *start* and *end* is changed linearly. A *path* is mainly a function which calculates the next value to set based on the current state of the animation. Currently, there are the following built-in paths functions:

- **lv\_anim\_path\_linear** linear animation
- **lv\_anim\_path\_step** change in one step at the end
- **lv\_anim\_path\_ease\_in** slow at the beginning
- **lv\_anim\_path\_ease\_out** slow at the end
- **lv\_anim\_path\_ease\_in\_out** slow at the beginning and end too
- **lv\_anim\_path\_overshoot** overshoot the end value
- **lv\_anim\_path\_bounce** bounce back a little from the end value (like hitting a wall)

A path can be initialized like this:

```
lv_anim_path_t path;
lv_anim_path_init(&path);
lv_anim_path_set_cb(&path, lv_anim_path_overshoot);
lv_anim_path_set_user_data(&path, &foo); /*Optional for custom functions*/

/*Set the path in an animation*/
lv_anim_set_path(&a, &path);
```

### 4.13.3 Speed vs time

By default, you can set the animation time. But, in some cases, the **animation speed** is more practical.

The `lv_anim_speed_to_time(speed, start, end)` function calculates the required time in milliseconds to reach the end value from a start value with the given speed. The speed is interpreted in *unit/sec* dimension. For example, `lv_anim_speed_to_time(20,0,100)` will give 5000 milliseconds. For example, in case of `lv_obj_set_x` *unit* is pixels so 20 means 20 *px/sec* speed.

### 4.13.4 Delete animations

You can **delete an animation** by `lv_anim_del(var, func)` by providing the animated variable and its animator function.

### 4.13.5 API

#### Input device

#### Typedefs

```
typedef int32_t (*lv_anim_path_cb_t)(const struct _lv_anim_t*)
 Get the current value during an animation
```

```
typedef void (*lv_anim_exec_xcb_t)(void*, int32_t)
```

Generic prototype of "animator" functions. First parameter is the variable to animate. Second parameter is the value to set. Compatible with `lv_xxx_set_yyy(obj, value)` functions The x in `_xcb_t` means its not a fully generic prototype because it doesn't receive `lv_anim_t *` as its first argument

```
typedef void (*lv_anim_custom_exec_cb_t)(struct _lv_anim_t*, int32_t)
```

Same as `lv_anim_exec_xcb_t` but receives `lv_anim_t *` as the first parameter. It's more consistent but less convenient. Might be used by binding generator functions.

```
typedef void (*lv_anim_ready_cb_t)(struct _lv_anim_t*)
```

Callback to call when the animation is ready

```
typedef void (*lv_anim_start_cb_t)(struct _lv_anim_t*)
```

Callback to call when the animation really stars (considering delay)

```
typedef int32_t (*lv_anim_get_value_cb_t)(struct _lv_anim_t*)
```

Callback used when the animation values are relative to get the current value

```
typedef struct _lv_anim_t lv_anim_t
```

Describes an animation

```
typedef _lv_anim_t lv_anim_t
```

## Enums

```
enum lv_anim_enable_t
```

Can be used to indicate if animations are enabled or disabled in a case

*Values:*

```
enumerator LV_ANIM_OFF
```

```
enumerator LV_ANIM_ON
```

## Functions

```
LV_EXPORT_CONST_INT(LV_ANIM_REPEAT_INFINITE)
```

```
void _lv_anim_core_init(void)
```

Init. the animation module

```
void lv_anim_init(lv_anim_t *a)
```

Initialize an animation variable. E.g.: `lv_anim_t a; lv_anim_init(&a); lv_anim_set...(&a);`

**Parameters** `a` -- pointer to an `lv_anim_t` variable to initialize

```
static inline void lv_anim_set_var(lv_anim_t *a, void *var)
```

Set a variable to animate

**Parameters**

- `a` -- pointer to an initialized `lv_anim_t` variable



- **var** -- pointer to a variable to animate

static inline void **lv\_anim\_set\_exec\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_exec\_xcb\_t* exec\_cb)  
Set a function to animate **var**

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **exec\_cb** -- a function to execute during animation LittlevGL's built-in functions can be used.  
E.g. *lv\_obj\_set\_x*

static inline void **lv\_anim\_set\_time**(*lv\_anim\_t* \*a, uint32\_t duration)  
Set the duration of an animation

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **duration** -- duration of the animation in milliseconds

static inline void **lv\_anim\_set\_delay**(*lv\_anim\_t* \*a, uint32\_t delay)  
Set a delay before starting the animation

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **delay** -- delay before the animation in milliseconds

static inline void **lv\_anim\_set\_values**(*lv\_anim\_t* \*a, int32\_t start, int32\_t end)  
Set the start and end values of an animation

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **start** -- the start value
- **end** -- the end value

static inline void **lv\_anim\_set\_custom\_exec\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_custom\_exec\_cb\_t* exec\_cb)  
Similar to *lv\_anim\_set\_exec\_cb* but *lv\_anim\_custom\_exec\_cb\_t* receives *lv\_anim\_t* \* as its first parameter instead of *void \**. This function might be used when LVGL is binded to other languages because it's more consistent to have *lv\_anim\_t* \* as first parameter. The variable to animate can be stored in the animation's *user\_sata*

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **exec\_cb** -- a function to execute.

static inline void **lv\_anim\_set\_path\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_path\_cb\_t* path\_cb)  
Set the path (curve) of the animation.

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **path\_cb** -- a function the get the current value of the animation.

static inline void **lv\_anim\_set\_start\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_ready\_cb\_t* start\_cb)  
Set a function call when the animation really starts (considering **delay**)

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable

- **start\_cb** -- a function call when the animation starts

static inline void **lv\_anim\_set\_get\_value\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_get\_value\_cb\_t* get\_value\_cb)

Set a function to use the current value of the variable and make start and end value relative the the returned current value.

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **get\_value\_cb** -- a function call when the animation starts

static inline void **lv\_anim\_set\_ready\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_ready\_cb\_t* ready\_cb)

Set a function call when the animation is ready

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **ready\_cb** -- a function call when the animation is ready

static inline void **lv\_anim\_set\_playback\_time**(*lv\_anim\_t* \*a, uint32\_t time)

Make the animation to play back to when the forward direction is ready

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **time** -- the duration of the playback animation in in milliseconds. 0: disable playback

static inline void **lv\_anim\_set\_playback\_delay**(*lv\_anim\_t* \*a, uint32\_t delay)

Make the animation to play back to when the forward direction is ready

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **delay** -- delay in milliseconds before starting the playback animation.

static inline void **lv\_anim\_set\_repeat\_count**(*lv\_anim\_t* \*a, uint16\_t cnt)

Make the animation repeat itself.

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **cnt** -- repeat count or *LV\_ANIM\_REPEAT\_INFINITE* for infinite repetition. 0: to disable repetition.

static inline void **lv\_anim\_set\_repeat\_delay**(*lv\_anim\_t* \*a, uint32\_t delay)

Set a delay before repeating the animation.

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **delay** -- delay in milliseconds before repeating the animation.

static inline void **lv\_anim\_set\_early\_apply**(*lv\_anim\_t* \*a, bool en)

Set a whether the animation's should be applied immediately or only when the delay expired.

#### Parameters

- **a** -- pointer to an initialized *lv\_anim\_t* variable
- **en** -- true: apply the start value immediately in *lv\_anim\_start*; false: apply the start value only when **delay** ms is elapsed and the animations really starts

void **lv\_anim\_start**(*lv\_anim\_t* \*a)

Create an animation

**Parameters** **a** -- an initialized 'anim\_t' variable. Not required after call.

static inline uint32\_t **lv\_anim\_get\_delay**(*lv\_anim\_t* \*a)

Get a delay before starting the animation

**Parameters** **a** -- pointer to an initialized *lv\_anim\_t* variable

**Returns** delay before the animation in milliseconds

bool **lv\_anim\_del**(void \*var, *lv\_anim\_exec\_xcb\_t* exec\_cb)

Delete an animation of a variable with a given animator function

**Parameters**

- **var** -- pointer to variable
- **exec\_cb** -- a function pointer which is animating 'var', or NULL to ignore it and delete all the animations of 'var'

**Returns** true: at least 1 animation is deleted, false: no animation is deleted

void **lv\_anim\_del\_all**(void)

Delete all the animations animation

*lv\_anim\_t* \***lv\_anim\_get**(void \*var, *lv\_anim\_exec\_xcb\_t* exec\_cb)

Get the animation of a variable and its **exec\_cb**.

**Parameters**

- **var** -- pointer to variable
- **exec\_cb** -- a function pointer which is animating 'var', or NULL to delete all the animations of 'var'

**Returns** pointer to the animation.

static inline bool **lv\_anim\_custom\_del**(*lv\_anim\_t* \*a, *lv\_anim\_custom\_exec\_cb\_t* exec\_cb)

Delete an animation by getting the animated variable from **a**. Only animations with **exec\_cb** will be deleted. This function exists because it's logical that all anim. functions receives an *lv\_anim\_t* as their first parameter. It's not practical in C but might make the API more consequent and makes easier to generate bindings.

**Parameters**

- **a** -- pointer to an animation.
- **exec\_cb** -- a function pointer which is animating 'var', or NULL to ignore it and delete all the animations of 'var'

**Returns** true: at least 1 animation is deleted, false: no animation is deleted

uint16\_t **lv\_anim\_count\_running**(void)

Get the number of currently running animations

**Returns** the number of running animations

uint32\_t **lv\_anim\_speed\_to\_time**(uint32\_t speed, int32\_t start, int32\_t end)

Calculate the time of an animation with a given speed and the start and end values

**Parameters**

- **speed** -- speed of animation in unit/sec
- **start** -- start value of the animation

- **end** -- end value of the animation

**Returns** the required time [ms] for the animation with the given parameters

void **lv\_anim\_refr\_now**(void)

Manually refresh the state of the animations. Useful to make the animations running in a blocking process where `lv_timer_handler` can't run for a while. Shouldn't be used directly because it is called in `lv_refr_now()`.

int32\_t **lv\_anim\_path\_linear**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation applying linear characteristic

**Parameters** **a** -- pointer to an animation

**Returns** the current value to set

int32\_t **lv\_anim\_path\_ease\_in**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation slowing down the start phase

**Parameters** **a** -- pointer to an animation

**Returns** the current value to set

int32\_t **lv\_anim\_path\_ease\_out**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation slowing down the end phase

**Parameters** **a** -- pointer to an animation

**Returns** the current value to set

int32\_t **lv\_anim\_path\_ease\_in\_out**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation applying an "S" characteristic (cosine)

**Parameters** **a** -- pointer to an animation

**Returns** the current value to set

int32\_t **lv\_anim\_path\_overshoot**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation with overshoot at the end

**Parameters** **a** -- pointer to an animation

**Returns** the current value to set

int32\_t **lv\_anim\_path\_bounce**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation with 3 bounces

**Parameters** **a** -- pointer to an animation

**Returns** the current value to set

int32\_t **lv\_anim\_path\_step**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation applying step characteristic. (Set end value on the end of the animation)

**Parameters** **a** -- pointer to an animation

**Returns** the current value to set

struct **lv\_anim\_t**

*#include <lv\_anim.h>* Describes an animation

## Public Members

void **\*var**

Variable to animate

*lv\_anim\_exec\_xcb\_t* **exec\_cb**

Function to execute to animate

*lv\_anim\_start\_cb\_t* **start\_cb**

Call it when the animation is starts (considering delay)

*lv\_anim\_ready\_cb\_t* **ready\_cb**

Call it when the animation is ready

*lv\_anim\_get\_value\_cb\_t* **get\_value\_cb**

Get the current value in relative mode

void **\*user\_data**

Custom user data

*lv\_anim\_path\_cb\_t* **path\_cb**

Describe the path (curve) of animations

int32\_t **start\_value**

Start value

int32\_t **current\_value**

Current value

int32\_t **end\_value**

End value

int32\_t **time**

Animation time in ms

int32\_t **act\_time**

Current time in animation. Set to negative to make delay.

uint32\_t **playback\_delay**

Wait before play back

uint32\_t **playback\_time**

Duration of playback animation

uint32\_t **repeat\_delay**

Wait before repeat

uint16\_t **repeat\_cnt**

Repeat count for the animation

uint8\_t **early\_apply**

1: Apply start value immediately even if there is **delay**

uint8\_t **playback\_now**

Play back is in progress

uint8\_t **run\_round**

Indicates the animation has run in this round

uint8\_t **start\_cb\_called**

Indicates that the **start\_cb** was already called

uint32\_t **time\_orig**

## 4.14 Timers

LVGL has a built-in timer system. You can register a function to have it be called periodically. The timers are handled and called in `lv_timer_handler()`, which needs to be called periodically every few milliseconds. See [Porting](#) for more information.

The timers are non-preemptive, which means a timer cannot interrupt another timer. Therefore, you can call any LVGL related function in a timer.

### 4.14.1 Create a timer

To create a new timer, use `lv_timer_create(timer_cb, period_ms, user_data)`. It will create an `lv_timer_t *` variable, which can be used later to modify the parameters of the timer. `lv_timer_create_basic()` can also be used. It allows you to create a new timer without specifying any parameters.

A timer callback should have `void (*lv_timer_cb_t)(lv_timer_t *)`; prototype.

For example:

```
void my_timer(lv_timer_t * timer)
{
 /*Use the user_data*/
 uint32_t * user_data = timer->user_data;
 printf("my_timer called with user data: %d\n", *user_data);

 /*Do something with LVGL*/
 if(something_happened) {
 something_happened = false;
 lv_btn_create(lv_scr_act(), NULL);
 }
}

...

static uint32_t user_data = 10;
lv_timer_t * timer = lv_timer_create(my_timer, 500, &user_data);
```

### 4.14.2 Ready and Reset

`lv_timer_ready(timer)` makes the timer run on the next call of `lv_timer_handler()`.

`lv_timer_reset(timer)` resets the period of a timer. It will be called again after the defined period of milliseconds has elapsed.

### 4.14.3 Set parameters

You can modify some parameters of the timers later:

- `lv_timer_set_cb(timer, new_cb)`
- `lv_timer_set_period(timer, new_period)`

### 4.14.4 Repeat count

You can make a timer repeat only a given times with `lv_timer_set_repeat_count(timer, count)`. The timer will automatically be deleted after being called the defined times. Set the count to `-1` to repeat infinitely.

### 4.14.5 Measure idle time

You can get the idle percentage time of `lv_timer_handler` with `lv_timer_get_idle()`. Note that, it doesn't measure the idle time of the overall system, only `lv_timer_handler`. It can be misleading if you use an operating system and call `lv_timer_handler` in a timer, as it won't actually measure the time the OS spends in an idle thread.

### 4.14.6 Asynchronous calls

In some cases, you can't do an action immediately. For example, you can't delete an object because something else is still using it or you don't want to block the execution now. For these cases, `lv_async_call(my_function, data_p)` can be used to make `my_function` be called on the next call of `lv_timer_handler`. `data_p` will be passed to function when it's called. Note that, only the pointer of the data is saved so you need to ensure that the variable will be "alive" while the function is called. It can be *static*, global or dynamically allocated data.

For example:

```
void my_screen_clean_up(void * scr)
{
 /*Free some resources related to `scr`*/

 /*Finally delete the screen*/
 lv_obj_del(scr);
}

...

/*Do somethings with the object on the current screen*/

/*Delete screen on next call of `lv_timer_handler`, so not now.*/
lv_async_call(my_screen_clean_up, lv_scr_act());

/*The screen is still valid so you can do other things with it*/
```

If you just want to delete an object, and don't need to clean anything up in `my_screen_cleanup`, you could just use `lv_obj_del_async`, which will delete the object on the next call to `lv_timer_handler`.

#### 4.14.7 API

##### Typedefs

```
typedef void (*lv_timer_cb_t)(struct _lv_timer_t*)
 Timers execute this type of functions.
```

```
typedef struct _lv_timer_t lv_timer_t
 Descriptor of a lv_timer
```

```
typedef _lv_timer_t lv_timer_t
```

##### Functions

```
void _lv_timer_core_init(void)
 Init the lv_timer module
```

```
lv_timer_t *lv_timer_create_basic(void)
 Create an "empty" timer. It needs to be initialized with at least lv_timer_set_cb and
 lv_timer_set_period
```

**Returns** pointer to the created timer

```
lv_timer_t *lv_timer_create(lv_timer_cb_t timer_xcb, uint32_t period, void *user_data)
 Create a new lv_timer
```

##### Parameters

- **timer\_xcb** -- a callback to call periodically. (the 'x' in the argument name indicates that it's not a fully generic function because it does not follow the `func_name(object, callback, ...)` convention)
- **period** -- call period in ms unit
- **user\_data** -- custom parameter

**Returns** pointer to the new timer

```
void lv_timer_del(lv_timer_t *timer)
 Delete a lv_timer
```

**Parameters** **timer** -- pointer to an lv\_timer

```
void lv_timer_pause(lv_timer_t *timer)
 Pause/resume a timer.
```

##### Parameters

- **timer** -- pointer to an lv\_timer
- **pause** -- true: pause the timer; false: resume

```
void lv_timer_resume(lv_timer_t *timer)
```



void **lv\_timer\_set\_cb**(*lv\_timer\_t* \*timer, *lv\_timer\_cb\_t* timer\_cb)  
Set the callback the timer (the function to call periodically)

**Parameters**

- **timer** -- pointer to a timer
- **timer\_cb** -- the function to call periodically

void **lv\_timer\_set\_period**(*lv\_timer\_t* \*timer, uint32\_t period)  
Set new period for a lv\_timer

**Parameters**

- **timer** -- pointer to a lv\_timer
- **period** -- the new period

void **lv\_timer\_ready**(*lv\_timer\_t* \*timer)  
Make a lv\_timer ready. It will not wait its period.

**Parameters** **timer** -- pointer to a lv\_timer.

void **lv\_timer\_set\_repeat\_count**(*lv\_timer\_t* \*timer, int32\_t repeat\_count)  
Set the number of times a timer will repeat.

**Parameters**

- **timer** -- pointer to a lv\_timer.
- **repeat\_count** -- -1 : infinity; 0 : stop ; n>0: residual times

void **lv\_timer\_reset**(*lv\_timer\_t* \*timer)  
Reset a lv\_timer. It will be called the previously set period milliseconds later.

**Parameters** **timer** -- pointer to a lv\_timer.

void **lv\_timer\_enable**(bool en)  
Enable or disable the whole lv\_timer handling

**Parameters** **en** -- true: lv\_timer handling is running, false: lv\_timer handling is suspended

uint8\_t **lv\_timer\_get\_idle**(void)  
Get idle percentage

**Returns** the lv\_timer idle in percentage

*lv\_timer\_t* \***lv\_timer\_get\_next**(*lv\_timer\_t* \*timer)  
Iterate through the timers

**Parameters** **timer** -- NULL to start iteration or the previous return value to get the next timer

**Returns** the next timer or NULL if there is no more timer

struct **lv\_timer\_t**  
*#include <lv\_timer.h>* Descriptor of a lv\_timer

## Public Members

uint32\_t **period**

How often the timer should run

uint32\_t **last\_run**

Last time the timer ran

*lv\_timer\_cb\_t* **timer\_cb**

Timer function

void \***user\_data**

Custom user data

int32\_t **repeat\_count**

1: One time; -1 : infinity; n>0: residual times

uint32\_t **paused**

## Typedefs

typedef void (\***lv\_async\_cb\_t**)(void\*)

Type for async callback.

## Functions

lv\_res\_t **lv\_async\_call**(*lv\_async\_cb\_t* async\_xcb, void \*user\_data)

Call an asynchronous function the next time lv\_timer\_handler() is run. This function is likely to return **before** the call actually happens!

### Parameters

- **async\_xcb** -- a callback which is the task itself. (the 'x' in the argument name indicates that its not a fully generic function because it not follows the `func_name(object, callback, ...)` convention)
- **user\_data** -- custom parameter

## 4.15 Drawing

With LVGL, you don't need to draw anything manually. Just create objects (like buttons, labels, arc, etc), move and change them, and LVGL will refresh and redraw what is required.

However, it might be useful to have a basic understanding of how drawing happens in LVGL to add customization, make it easier to find bugs or just out of curiosity.

The basic concept is to not draw directly to the screen, but draw to an internal draw buffer first. When drawing (rendering) is ready copy that buffer to the screen.

The draw buffer can be smaller than the screen's size. LVGL will simply render in "tiles" that fit into the given draw buffer.

This approach has two main advantages compared to directly drawing to the screen:

1. It avoids flickering while the layers of the UI are drawn. For example, if LVGL drawn directly into the display, when drawing a *background* + *button* + *text*, each "stage" would be visible for a short time .
2. It's faster to modify a buffer in internal RAM and finally write one pixel only once than reading/writing the display directly on each pixel access. (e.g. via a display controller with SPI interface).

Note that, this concept is different from "traditional" double buffering where there are 2 screen sized frame buffers: one holds the current image to show on the display, and rendering happens to the other (inactive) frame buffer, and they are swapped when the rendering is finished. The main difference is that with LVGL you don't have to store 2 frame buffers (which usually requires external RAM) but only smaller draw buffer(s) that can easily fit into the internal RAM too.

#### 4.15.1 Mechanism of screen refreshing

Be sure to get familiar with the *Buffering modes of LVGL* first.

LVGL refreshes the screen in the following steps:

1. Something happens on the UI which requires redrawing. For example, a button is pressed, a chart is changed or an animation happened, etc.
2. LVGL saves the changed object's old and new area into a buffer, called an *Invalid area buffer*. For optimization, in some cases, objects are not added to the buffer:
  - Hidden objects are not added.
  - Objects completely out of their parent are not added.
  - Areas partially out of the parent are cropped to the parent's area.
  - The objects on other screens are not added.
3. In every `LV_DISP_DEF_REFR_PERIOD` (set in `lv_conf.h`) the followings happen:
  - LVGL checks the invalid areas and joins the adjacent or intersecting areas.
  - Takes the first joined area, if it's smaller than the *draw buffer*, then simply render the area's content into the *draw buffer*. If the area doesn't fit into the buffer, draw as many lines as possible to the *draw buffer*.
  - When the area is rendered, call `flush_cb` from the display driver to refresh the display.
  - If the area was larger than the buffer, render the remaining parts too.
  - Do the same with all the joined areas.

When an area is redrawn, the library searches the top most object which covers that area, and starts drawing from that object. For example, if a button's label has changed, the library will see that it's enough to draw the button under the text, and it's not required to draw the screen under the button too.

The difference between buffering modes regarding the drawing mechanism is the following:

1. **One buffer** - LVGL needs to wait for `lv_disp_flush_ready()` (called from `flush_cb`) before starting to redraw the next part.
2. **Two buffers** - LVGL can immediately draw to the second buffer when the first is sent to `flush_cb` because the flushing should be done by DMA (or similar hardware) in the background.
3. **Double buffering** - `flush_cb` should only swap the address of the frame buffer.

### 4.15.2 Masking

*Masking* is the basic concept of LVGL's draw engine. To use LVGL it's not required to know about the mechanisms described here, you might find interesting to know how drawing works under hood. Knowing about mask comes in handy if you want to customize drawing.

To learn masking let's learn the steps of drawing first. LVGL performs the following steps to render any shape, image or text. It can be considered as a drawing pipeline.

1. **Prepare the draw descriptors** Create a draw descriptor from an object's styles (e.g. `lv_draw_rect_dsc_t`). It tells the parameters of drawing, for example the colors, widths, opacity, fonts, radius, etc.
2. **Call the draw function** Call the draw function with the draw descriptor and some other parameters (e.g. `lv_draw_rect()`). It renders the primitive shape to the current draw buffer.
3. **Create masks** If the shape is very simple and doesn't require masks go to #5. Else create the required masks (e.g. a rounded rectangle mask)
4. **Calculate all the added mask.** It creates 0..255 values into a *mask buffer* with the "shape" of the created masks. E.g. in case of a "line mask" according to the parameters of the mask, keep one side of the buffer as it is (255 by default) and set the rest to 0 to indicate that this side should be removed.
5. **Blend a color or image** During blending masks (make some pixels transparent or opaque), blending modes (additive, subtractive, etc), opacity are handled.

LVGL has the following built-in mask types which can be calculated and applied real-time:

- **LV\_DRAW\_MASK\_TYPE\_LINE** Removes a side from a line (top, bottom, left or right). `lv_draw_line` uses 4 of it. Essentially, every (skew) line is bounded with 4 line masks by forming a rectangle.
- **LV\_DRAW\_MASK\_TYPE\_RADIUS** Removes the inner or outer parts of a rectangle which can have radius. It's also used to create circles by setting the radius to large value (`LV_RADIUS_CIRCLE`)
- **LV\_DRAW\_MASK\_TYPE\_ANGLE** Removes a circle sector. It is used by `lv_draw_arc` to remove the "empty" sector.
- **LV\_DRAW\_MASK\_TYPE\_FADE** Create a vertical fade (change opacity)
- **LV\_DRAW\_MASK\_TYPE\_MAP** The mask is stored in an array and the necessary parts are applied

Masks are used to create almost every basic primitives:

- **letters** Create a mask from the letter and draw a rectangle with the letter's color considering the mask.
- **line** Created from 4 "line masks", to mask out the left, right, top and bottom part of the line to get perfectly perpendicular line ending.
- **rounded rectangle** A mask is created real-time to add radius to the corners.
- **clip corner** To clip to overflowing content (usually children) on the rounded corners also a rounded rectangle mask is applied.
- **rectangle border** Same as a rounded rectangle, but inner part is masked out too.
- **arc drawing** A circle border is drawn, but an arc mask is applied too.
- **ARGB images** The alpha channel is separated into a mask and the image is drawn as a normal RGB image.

### 4.15.3 Hook drawing

Although widgets can be very well customized by styles there might be cases when something really custom is required. To ensure a great level of flexibility LVGL sends a lot of events during drawing with parameters that tell what LVGL is about to draw. Some fields of these parameters can be modified to draw something else or any custom drawing can be added manually.

A good use case for it is the *Button matrix* widget. By default its buttons can be styled in different states but you can't style the buttons one by one. However, an event is sent for every button and you can tell LVGL for example to use different colors on specific buttons or manually draw an image on some buttons.

Below each related event is described in detail.

#### Main drawing

These events are related to the actual drawing of the object. E.g. drawing of buttons, texts, etc happens here.

`lv_event_get_clip_area(event)` can be used to get the current clip area. The clip area is required in draw functions to make them draw only on a limited area.

#### LV\_EVENT\_DRAW\_MAIN\_BEGIN

Sent before starting to draw an object. It's a good place to add masks manually. E.g. add a line mask that "removes" the right side of an object.

#### LV\_EVENT\_DRAW\_MAIN

The actual drawing of the object happens in this event. E.g. a rectangle for a button is drawn here. First, the widget's internal events are called to perform drawing and after that you can draw anything on top of them. For example you can add a custom text or an image.

#### LV\_EVENT\_DRAW\_MAIN\_END

Called when the main drawing is finished. You can draw anything here as well and it's also a good place to remove the masks created in `LV_EVENT_DRAW_MAIN_BEGIN`.

#### Post drawing

Post drawing events are called when all the children of an object are drawn. For example LVGL uses the post drawing phase to draw the scrollbars because they should be above all the children.

`lv_event_get_clip_area(event)` can be used to get the current clip area.

## LV\_EVENT\_DRAW\_POST\_BEGIN

Sent before starting the post draw phase. Masks can be added here too to mask out the post drawn content.

## LV\_EVENT\_DRAW\_POST

The actual drawing should happens here.

## LV\_EVENT\_DRAW\_POST\_END

Called when post drawing has finished. If the masks were not removed in LV\_EVENT\_DRAW\_MAIN\_END they should be removed here.

## Part drawing

When LVGL draws a part of an object (e.g. a slider's indicator, a table's cell or a button matrix's button) it sends events before and after drawing that part with some context of the drawing. It allows changing the parts on a very low level with masks, extra drawing, or changing the parameters the LVGL is planning to use for drawing.

In these events an `lv_obj_draw_part_t` structure is used to describe the context of the drawing. Not all fields are set for every part and widget. To see which fields are set for a widget see the widget's documentation.

`lv_obj_draw_part_t` has the following fields:

```

// Always set
const lv_area_t * clip_area; // The current clip area, required if you need to
↳draw something in the event
uint32_t part; // The current part for which the event is sent
uint32_t id; // The index of the part. E.g. a button's index
↳on button matrix or table cell index.

// Draw descriptors, set only if related
lv_draw_rect_dsc_t * rect_dsc; // A draw descriptor that can be modified to
↳changed what LVGL will draw. Set only for rectangle-like parts
lv_draw_label_dsc_t * label_dsc; // A draw descriptor that can be modified to
↳changed what LVGL will draw. Set only for text-like parts
lv_draw_line_dsc_t * line_dsc; // A draw descriptor that can be modified to
↳changed what LVGL will draw. Set only for line-like parts
lv_draw_img_dsc_t * img_dsc; // A draw descriptor that can be modified to
↳changed what LVGL will draw. Set only for image-like parts
lv_draw_arc_dsc_t * arc_dsc; // A draw descriptor that can be modified to
↳changed what LVGL will draw. Set only for arc-like parts

// Other parameters
lv_area_t * draw_area; // The area of the part being drawn
const lv_point_t * p1; // A point calculated during drawing. E.g. a
↳point of chart or the center of an arc.
const lv_point_t * p2; // A point calculated during drawing. E.g. a
↳point of chart.
char text[16]; // A text calculated during drawing. Can be
↳modified. E.g. tick labels on a chart axis.
lv_coord_t radius; // E.g. the radius of an arc (not the corner
↳radius).

```

(continues on next page)

(continued from previous page)

```

int32_t value; // A value calculated during drawing. E.g. Chart
↪ 's tick line value.
const void * sub_part_ptr; // A pointer the identifies something in the part.
↪ E.g. chart series.

```

`lv_event_get_draw_part_dsc(event)` can be used to get a pointer to `lv_obj_draw_part_t`.

## LV\_EVENT\_DRAW\_PART\_BEGIN

Start the drawing of a part. It's good place to modify the draw descriptors (e.g. `rect_dsc`), or add masks.

## LV\_EVENT\_DRAW\_PART\_END

Finish the drawing of a part. It's a good place to draw extra content on the part, or remove the masks added in `LV_EVENT_DRAW_PART_BEGIN`.

## Others

## LV\_EVENT\_COVER\_CHECK

This event is used to check whether an object fully covers an area or not.

`lv_event_get_cover_area(event)` returns a pointer to an area to check and `lv_event_set_cover_res(event, res)` can be used to set one of these results:

- `LV_COVER_RES_COVER` the area is fully covered by the object
- `LV_COVER_RES_NOT_COVER` the area is not covered by the object
- `LV_COVER_RES_MASKED` there is a mask on the object so it can not cover the area

Here are some cases why can't an object fully cover an area:

- It's simply not fully on the that area
- It has radius
- It has not 100% background opacity
- It's an ARGB or chroma keyed image
- It has not normal blending mode. In this case LVGL needs to know the colors under the object to make the blending properly
- It's a text, etc

In short if for any reason the the area below the object is visible than it doesn't cover that area.

Before sending this event LVGL checks if at least the widget's coordinates fully cover the area or not. If not the event is not called.

You need to check only the drawing you have added. The existing properties known by widget are handled in the widget's internal events. E.g. if a widget has `> 0` radius it might not cover an area but you need to handle `radius` only if you will modify it and widget can't know about it.

## LV\_EVENT\_REFR\_EXT\_DRAW\_SIZE

If you need to draw outside of a widget LVGL needs to know about it to provide the extra space for drawing. Let's say you create an event the writes the current value of a slider above its knob. In this case LVGL needs to know that the slider's draw area should be larger with the size required for the text.

You can simple set the required draw area with `lv_event_set_ext_draw_size(e, size)`.

## 4.16 New widget



## WIDGETS

### 5.1 Base object (lv\_obj)

#### 5.1.1 Overview

The 'Base Object' implements the basic properties of widgets on a screen, such as:

- coordinates
- parent object
- children
- contains the styles
- attributes like *Clickable*, *Scrollable*, etc.

In object-oriented thinking, it is the base class from which all other objects in LVGL are inherited.

The functions and functionalities of Base object can be used with other widgets too. For example `lv_obj_set_width(slider, 100)`

The Base object can be directly used as a simple widgets. It nothing else than a rectangle. Or from the the HTML world it's like a `<div>`.

#### Coordinates

Here only a small subset of coordinate settings is described. To see all the features of LVGL (padding, coordinates in styles, layouts, etc) visit the [Coordinates](#) page.

#### Size

The object size can be modified on individual axes with `lv_obj_set_width(obj, new_width)` and `lv_obj_set_height(obj, new_height)`, or both axes can be modified at the same time with `lv_obj_set_size(obj, new_width, new_height)`.

## Position

You can set the x and y coordinates relative to the parent with `lv_obj_set_x(obj, new_x)` and `lv_obj_set_y(obj, new_y)`, or both at the same time with `lv_obj_set_pos(obj, new_x, new_y)`.

## Alignment


You can align the object on its parent with `lv_obj_set_align(obj, LV_ALIGN_...)`. After this every x and y settings will be relative to the set alignment mode. For example, this will shift the object by 10;20 px from the center of its parent.

```
lv_obj_set_align(obj, LV_ALIGN_CENTER);
lv_obj_set_pos(obj, 10, 20);

//Or in one function
lv_obj_align(obj, LV_ALIGN_CENTER, 10, 20);
```

To align an object to another use `lv_obj_align_to(obj_to_align, obj_reference, LV_ALIGN_..., x, y)`.

For example, to align a text below an image: `lv_obj_align(text, image, LV_ALIGN_OUT_BOTTOM_MID, 0, 10)`.

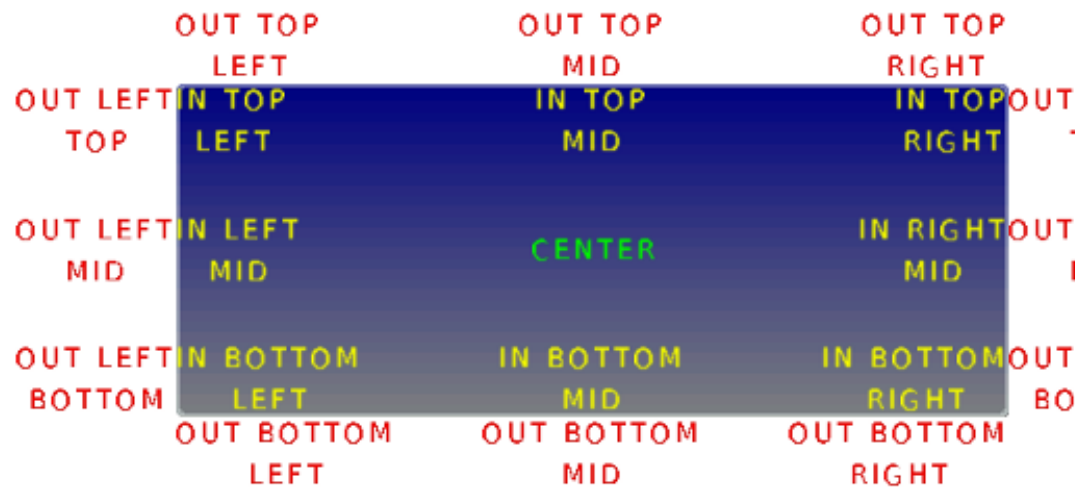

The following align types exist:

## Parents and children

You can set a new parent for an object with `lv_obj_set_parent(obj, new_parent)`. To get the current parent, use `lv_obj_get_parent(obj)`.

To get a specific child of a parent use `lv_obj_get_child(parent, idx)`. Some examples for `idx`:

- 0 get the firstly (youngest) created child
- 1 get the secondly created child
- -1 get the lastly (youngest) created child

The children can be iterated like this

```
uint32_t i;
for(i = 0; i < lv_obj_get_child_cnt(parent); i++) {
 lv_obj_t * child = lv_obj_get_child(parent, i);
 /*Do something with child*/
}
```

`lv_obj_get_child_id(obj)` tells the index of the object. That is how many younger children its parent has.

You can bring an object to the foreground or send it to the background with `lv_obj_move_foreground(obj)` and `lv_obj_move_background(obj)`.

## Screens

When you have created a screen like `lv_obj_t * screen = lv_obj_create(NULL)`, you can load it with `lv_scr_load(screen)`. The `lv_scr_act()` function gives you a pointer to the current screen.

If you have more display then it's important to know that these functions operate on the lastly created or the explicitly selected (with `lv_disp_set_default`) display.

To get an object's screen use the `lv_obj_get_screen(obj)` function.

## Events

To set an event callback for an object, use `lv_obj_add_event_cb(obj, event_cb, LV_EVENT_..., user_data)`,

To manually send an event to an object, use `lv_event_send(obj, LV_EVENT_..., param)`

Read the [Event overview](#) to learn more about the events.

## Styles

Be sure to read the [Style overview](#). Here only the most essential functions are described.

A new style can be added to an object with `lv_obj_add_style(obj, &new_style, selector)` function. `selector` is a combination of part and state(s). E.g. `LV_PART_SCROLLBAR | LV_STATE_PRESSED`.

The Base object use `LV_PART_MAIN` style properties and `LV_PART_SCROLLBAR` with the typical background style properties.

## Flags

There are some attributes which can be enabled/disabled by `lv_obj_add/clear_flag(obj, LV_OBJ_FLAG_...)`:

- `LV_OBJ_FLAG_HIDDEN` Make the object hidden. (Like it wasn't there at all)
- `LV_OBJ_FLAG_CLICKABLE` Make the object clickable by the input devices
- `LV_OBJ_FLAG_CLICK_FOCUSABLE` Add focused state to the object when clicked
- `LV_OBJ_FLAG_CHECKABLE` Toggle checked state when the object is clicked
- `LV_OBJ_FLAG_SCROLLABLE` Make the object scrollable
- `LV_OBJ_FLAG_SCROLL_ELASTIC` Allow scrolling inside but with slower speed

- `LV_OBJ_FLAG_SCROLL_MOMENTUM` Make the object scroll further when "thrown"
- `LV_OBJ_FLAG_SCROLL_ONE` Allow scrolling only one snapable children
- `LV_OBJ_FLAG_SCROLL_CHAIN` Allow propagating the scroll to a parent
- `LV_OBJ_FLAG_SCROLL_ON_FOCUS` Automatically scroll object to make it visible when focused
- `LV_OBJ_FLAG_SNAPABLE` If scroll snap is enabled on the parent it can snap to this object
- `LV_OBJ_FLAG_PRESS_LOCK` Keep the object pressed even if the press slid from the object
- `LV_OBJ_FLAG_EVENT_BUBBLE` Propagate the events to the parent too
- `LV_OBJ_FLAG_GESTURE_BUBBLE` Propagate the gestures to the parent
- `LV_OBJ_FLAG_ADV_HITTEST` Allow performing more accurate hit (click) test. E.g. consider rounded corners.
- `LV_OBJ_FLAG_IGNORE_LAYOUT` Make the object position-able by the layouts
- `LV_OBJ_FLAG_FLOATING` Do not scroll the object when the parent scrolls and ignore layout
- `LV_OBJ_FLAG_LAYOUT_1` Custom flag, free to use by layouts
- `LV_OBJ_FLAG_LAYOUT_2` Custom flag, free to use by layouts
- `LV_OBJ_FLAG_WIDGET_1` Custom flag, free to use by widget
- `LV_OBJ_FLAG_WIDGET_2` Custom flag, free to use by widget
- `LV_OBJ_FLAG_USER_1` Custom flag, free to use by user
- `LV_OBJ_FLAG_USER_2` Custom flag, free to use by user
- `LV_OBJ_FLAG_USER_3` Custom flag, free to use by user
- `LV_OBJ_FLAG_USER_4` Custom flag, free to use by usersection.

Some examples:

```
/*Hide on object*/
lv_obj_add_flag(obj, LV_OBJ_FLAG_HIDDEN);

/*Make an obejct non-clickable*/
lv_obj_clear_flag(obj, LV_OBJ_FLAG_CLICKABLE);
```

## Groups

Read the *Input devices overview* to learn more about the *Groups*.

Once, an object is added to *group* with `lv_group_add_obj(group, obj)` the object's current group can be get with `lv_obj_get_group(obj)`.

`lv_obj_is_focused(obj)` tells if the object is currently focused on its group or not. If the object is not added to a group, `false` will be returned.

## Extended click area

By default, the objects can be clicked only on their coordinates, however, this area can be extended with `lv_obj_set_ext_click_area(obj, size)`.

### 5.1.2 Events

- `LV_EVENT_VALUE_CHANGED` when the `LV_OBJ_FLAG_CHECKABLE` flag is enabled and the object clicked (on transition to/from the checked state)

Learn more about [Events](#).

### 5.1.3 Keys

If `LV_OBJ_FLAG_CHECKABLE` is enabled `LV_KEY_RIGHT` and `LV_KEY_UP` makes the object checked, and `LV_KEY_LEFT` and `LV_KEY_DOWN` makes it unchecked.

Learn more about [Keys](#).

### 5.1.4 Example

### 5.1.5 API

#### Typedefs

```
typedef uint16_t lv_state_t
typedef uint32_t lv_part_t
typedef uint32_t lv_obj_flag_t
typedef struct _lv_obj_t lv_obj_t
typedef _lv_obj_t lv_obj_t
```

#### Enums

enum **[anonymous]**  
Possible states of a widget. OR-ed values are possible

*Values:*

```
enumerator LV_STATE_DEFAULT
enumerator LV_STATE_CHECKED
enumerator LV_STATE_FOCUSED
enumerator LV_STATE_FOCUS_KEY
enumerator LV_STATE_EDITED
enumerator LV_STATE_HOVERED
enumerator LV_STATE_PRESSED
```

enumerator **LV\_STATE\_SCROLLLED**

enumerator **LV\_STATE\_DISABLED**

enumerator **LV\_STATE\_USER\_1**

enumerator **LV\_STATE\_USER\_2**

enumerator **LV\_STATE\_USER\_3**

enumerator **LV\_STATE\_USER\_4**

enumerator **LV\_STATE\_ANY**

Special value can be used in some functions to target all states

enum **[anonymous]**

The possible parts of widgets. The parts can be considered as the internal building block of the widgets. E.g. slider = background + indicator + knob Note every part is used by every widget

*Values:*

enumerator **LV\_PART\_MAIN**

A background like rectangle

enumerator **LV\_PART\_SCROLLBAR**

The scrollbar(s)

enumerator **LV\_PART\_INDICATOR**

Indicator, e.g. for slider, bar, switch, or the tick box of the checkbox

enumerator **LV\_PART\_KNOB**

Like handle to grab to adjust the value

enumerator **LV\_PART\_SELECTED**

Indicate the currently selected option or section

enumerator **LV\_PART\_ITEMS**

Used if the widget has multiple similar elements (e.g. tabel cells)

enumerator **LV\_PART\_TICKS**

Ticks on scale e.g. for a chart or meter

enumerator **LV\_PART\_CURSOR**

Mark a specific place e.g. for text area's cursor or on a chart

enumerator **LV\_PART\_CUSTOM\_FIRST**

Extension point for custom widgets

enumerator **LV\_PART\_ANY**

Special value can be used in some functions to target all parts

enum **[anonymous]**

On/Off features controlling the object's behavior. OR-ed values are possible

*Values:*

- enumerator **LV\_OBJ\_FLAG\_HIDDEN**  
Make the object hidden. (Like it wasn't there at all)
- enumerator **LV\_OBJ\_FLAG\_CLICKABLE**  
Make the object clickable by the input devices
- enumerator **LV\_OBJ\_FLAG\_CLICK\_FOCUSABLE**  
Add focused state to the object when clicked
- enumerator **LV\_OBJ\_FLAG\_CHECKABLE**  
Toggle checked state when the object is clicked
- enumerator **LV\_OBJ\_FLAG\_SCROLLABLE**  
Make the object scrollable
- enumerator **LV\_OBJ\_FLAG\_SCROLL\_ELASTIC**  
Allow scrolling inside but with slower speed
- enumerator **LV\_OBJ\_FLAG\_SCROLL\_MOMENTUM**  
Make the object scroll further when "thrown"
- enumerator **LV\_OBJ\_FLAG\_SCROLL\_ONE**  
Allow scrolling only one snapable children
- enumerator **LV\_OBJ\_FLAG\_SCROLL\_CHAIN**  
Allow propagating the scroll to a parent
- enumerator **LV\_OBJ\_FLAG\_SCROLL\_ON\_FOCUS**  
Automatically scroll object to make it visible when focused
- enumerator **LV\_OBJ\_FLAG\_SNAPABLE**  
If scroll snap is enabled on the parent it can snap to this object
- enumerator **LV\_OBJ\_FLAG\_PRESS\_LOCK**  
Keep the object pressed even if the press slid from the object
- enumerator **LV\_OBJ\_FLAG\_EVENT\_BUBBLE**  
Propagate the events to the parent too
- enumerator **LV\_OBJ\_FLAG\_GESTURE\_BUBBLE**  
Propagate the gestures to the parent
- enumerator **LV\_OBJ\_FLAG\_ADV\_HITTEST**  
Allow performing more accurate hit (click) test. E.g. consider rounded corners.
- enumerator **LV\_OBJ\_FLAG\_IGNORE\_LAYOUT**  
Make the object position-able by the layouts
- enumerator **LV\_OBJ\_FLAG\_FLOATING**  
Do not scroll the object when the parent scrolls and ignore layout

enumerator **LV\_OBJ\_FLAG\_LAYOUT\_1**

enumerator **LV\_OBJ\_FLAG\_LAYOUT\_2**  
Custom flag, free to use by layouts

enumerator **LV\_OBJ\_FLAG\_WIDGET\_1**  
Custom flag, free to use by layouts

enumerator **LV\_OBJ\_FLAG\_WIDGET\_2**  
Custom flag, free to use by widget

enumerator **LV\_OBJ\_FLAG\_USER\_1**  
Custom flag, free to use by widget

enumerator **LV\_OBJ\_FLAG\_USER\_2**  
Custom flag, free to use by user

enumerator **LV\_OBJ\_FLAG\_USER\_3**  
Custom flag, free to use by user

enumerator **LV\_OBJ\_FLAG\_USER\_4**  
Custom flag, free to use by user

## Functions

void **lv\_init**(void)

Initialize LVGL library. Should be called before any other LVGL related function.

void **lv\_deinit**(void)

Deinit the 'lv' library. Currently only implemented when not using custom allocators, or GC is enabled.

*lv\_obj\_t* \***lv\_obj\_create**(*lv\_obj\_t* \*parent)

Create a base object (a rectangle)

**Parameters** **parent** -- pointer to a parent object. If NULL then a screen will be created.

**Returns** pointer to the new object

void **lv\_obj\_add\_flag**(*lv\_obj\_t* \*obj, *lv\_obj\_flag\_t* f)

Set one or more flags

**Parameters**

- **obj** -- pointer to an object
- **f** -- R-ed values from *lv\_obj\_flag\_t* to set.

void **lv\_obj\_clear\_flag**(*lv\_obj\_t* \*obj, *lv\_obj\_flag\_t* f)

Clear one or more flags

**Parameters**

- **obj** -- pointer to an object
- **f** -- OR-ed values from *lv\_obj\_flag\_t* to set.

void **lv\_obj\_add\_state**(*lv\_obj\_t* \*obj, *lv\_state\_t* state)

Add one or more states to the object. The other state bits will remain unchanged. If specified in the styles, transition animation will be started from the previous state to the current.



**Parameters**

- **obj** -- pointer to an object
- **state** -- the states to add. E.g LV\_STATE\_PRESSED | LV\_STATE\_FOCUSED

void **lv\_obj\_clear\_state**(*lv\_obj\_t* \*obj, *lv\_state\_t* state)

Remove one or more states to the object. The other state bits will remain unchanged. If specified in the styles, transition animation will be started from the previous state to the current.

**Parameters**

- **obj** -- pointer to an object
- **state** -- the states to add. E.g LV\_STATE\_PRESSED | LV\_STATE\_FOCUSED

static inline void **lv\_obj\_set\_user\_data**(*lv\_obj\_t* \*obj, void \*user\_data)

Set the user\_data field of the object

**Parameters**

- **obj** -- pointer to an object
- **user\_data** -- pointer to the new user\_data.

bool **lv\_obj\_has\_flag**(const *lv\_obj\_t* \*obj, *lv\_obj\_flag\_t* f)

Check if a given flag or all the given flags are set on an object.

**Parameters**

- **obj** -- pointer to an object
- **f** -- the flag(s) to check (OR-ed values can be used)

**Returns** true: all flags are set; false: not all flags are set

bool **lv\_obj\_has\_flag\_any**(const *lv\_obj\_t* \*obj, *lv\_obj\_flag\_t* f)

Check if a given flag or any of the flags are set on an object.

**Parameters**

- **obj** -- pointer to an object
- **f** -- the flag(s) to check (OR-ed values can be used)

**Returns** true: at least one flag flag is set; false: none of the flags are set

*lv\_state\_t* **lv\_obj\_get\_state**(const *lv\_obj\_t* \*obj)

Get the state of an object

**Parameters** **obj** -- pointer to an object

**Returns** the state (OR-ed values from *lv\_state\_t*)

bool **lv\_obj\_has\_state**(const *lv\_obj\_t* \*obj, *lv\_state\_t* state)

Check if the object is in a given state or not.

**Parameters**

- **obj** -- pointer to an object
- **state** -- a state or combination of states to check

**Returns** true: obj is in state; false: obj is not in state

void \***lv\_obj\_get\_group**(const *lv\_obj\_t* \*obj)

Get the group of the object

**Parameters** **obj** -- pointer to an object

**Returns** the pointer to group of the object

static inline void \***lv\_obj\_get\_user\_data**(*lv\_obj\_t* \*obj)  
Get the user\_data field of the object

**Parameters** **obj** -- pointer to an object

**Returns** the pointer to the user\_data of the object

void **lv\_obj\_allocate\_spec\_attr**(*lv\_obj\_t* \*obj)  
Allocate special data for an object if not allocated yet.

**Parameters** **obj** -- pointer to an object

bool **lv\_obj\_check\_type**(const *lv\_obj\_t* \*obj, const lv\_obj\_class\_t \*class\_p)  
Get object's and its ancestors type. Put their name in **type\_buf** starting with the current type. E.g. buf.type[0]="lv\_btn", buf.type[1]="lv\_cont", buf.type[2]="lv\_obj"

**Parameters**

- **obj** -- pointer to an object which type should be get
- **buf** -- pointer to an lv\_obj\_type\_t buffer to store the types

bool **lv\_obj\_has\_class**(const *lv\_obj\_t* \*obj, const lv\_obj\_class\_t \*class\_p)  
Check if any object has a given class (type). It checks the ancestor classes too.

**Parameters**

- **obj** -- pointer to an object
- **class\_p** -- a class to check (e.g. lv\_slider\_class)

**Returns** true: obj has the given class

const lv\_obj\_class\_t \***lv\_obj\_get\_class**(const *lv\_obj\_t* \*obj)  
Get the class (type) of the object

**Parameters** **obj** -- pointer to an object

**Returns** the class (type) of the object

bool **lv\_obj\_is\_valid**(const *lv\_obj\_t* \*obj)  
Check if any object is still "alive", and part of the hierarchy

**Parameters**

- **obj** -- pointer to an object
- **obj\_type** -- type of the object. (e.g. "lv\_btn")

**Returns** true: valid

static inline lv\_coord\_t **lv\_obj\_dpx**(const *lv\_obj\_t* \*obj, lv\_coord\_t n)  
Scale the given number of pixels (a distance or size) relative to a 160 DPI display considering the DPI of the obj's display. It ensures that e.g. lv\_dpx(100) will have the same physical size regardless to the DPI of the display.

**Parameters**

- **obj** -- an object whose display's dpi should be considered
- **n** -- the number of pixels to scale

**Returns** n × current\_dpi/160

## Variables

const lv\_obj\_class\_t **lv\_obj\_class**

Make the base object's class publicly available.

struct **\_lv\_obj\_spec\_attr\_t**

*#include <lv\_obj.h>* Special, rarely used attributes. They are allocated automatically if any elements is set.

## Public Members

struct *\_lv\_obj\_t* **\*\*children**

Store the pointer of the children in an array.

uint32\_t **child\_cnt**

Number of children

*lv\_group\_t* **\*group\_p**

struct *\_lv\_event\_dsc\_t* **\*event\_dsc**

Dynamically allocated event callback and user data array

lv\_point\_t **scroll**

The current X/Y scroll offset

lv\_coord\_t **ext\_click\_pad**

Extra click padding in all direction

lv\_coord\_t **ext\_draw\_size**

EXTend the size in every direction for drawing.

lv\_scrollbar\_mode\_t **scrollbar\_mode**

How to display scrollbars

lv\_scroll\_snap\_t **scroll\_snap\_x**

Where to align the snapable children horizontally

lv\_scroll\_snap\_t **scroll\_snap\_y**

Where to align the snapable children horizontally

lv\_dir\_t **scroll\_dir**

The allowed scroll direction(s)

uint8\_t **event\_dsc\_cnt**

Number of event callabcks stored in `event_cb` array

struct **\_lv\_obj\_t**

## Public Members

```

const lv_obj_class_t *class_p
struct lv_obj_t *parent
lv_obj_spec_attr_t *spec_attr
lv_obj_style_t *styles
void *user_data
lv_area_t coords
lv_obj_flag_t flags
lv_state_t state
uint16_t layout_inv
uint16_t scr_layout_inv
uint16_t skip_trans
uint16_t style_cnt
uint16_t h_layout
uint16_t w_layout

```

## 5.2 Core widgets

### 5.2.1 Arc (lv\_arc)

#### Overview

The Arc are consists of a background and a foreground arc. The foreground (indicator) arc can be adjusted by finger.

#### Parts and Styles

- **LV\_PART\_MAIN** It draws a background using the typical background style properties and an arc using the arc style properties. The arc's size and position will respect the *padding* style properties.
- **LV\_PART\_INDICATOR** It draws an other arc using the *arc* style properties. It's padding values are interpreted relative to the background arc.
- **LV\_PART\_KNOB** It draws a handle on the end of the indicator. It uses all background properties and padding values. With zero padding the knob size is the same as the indicator's width. Larger padding makes it larger, smaller padding makes it smaller.

## Usage

### Value and range

A new value can be set by `lv_arc_set_value(arc, new_value)`. The value is interpreted in a range (minimum and maximum values) which can be modified with `lv_arc_set_range(arc, min, max)`. The default range is 1..100.

The indicator arc is drawn on the main part's arc. That is if the value is set to maximum the indicator arc will cover the entire "background" arc. To set the start and end angle of the background arc use the `lv_arc_set_bg_angles(arc, start_angle, end_angle)` function or `lv_arc_set_bg_start/end_angle(arc, start_angle)`.

Zero degree is at the middle right (3 o'clock) of the object and the degrees are increasing in clockwise direction. The angles should be in [0;360] range.

### Rotation

An offset to the 0 degree position can be added with `lv_arc_set_rotation(arc, deg)`.

### Mode

The arc can be one of the following modes:

- `LV_ARC_MODE_NORMAL` The indicator arc is drawn from the minimum value to the current.
- `LV_ARC_MODE_REVERSE` The indicator arc is drawn counter clockwise from the maximum value to the current.
- `LV_ARC_MODE_SYMMETRICAL` The indicator arc is drawn from the middle point to the current value.

The mode can be set by `lv_arc_set_mode(arc, LV_ARC_MODE_...)` and used only if the angle is set by `lv_arc_set_value()` or the arc is adjusted by finger.

### Change rate

If the arc is pressed the current value will be set with a limited speed according to the set *change rate*. The change rate is defined in degree/second unit and can be set with `lv_arc_set_change_rate(arc, rate)`.

### Setting the indicator manually

It is also possible to set the angles of the indicator arc directly with `lv_arc_set_angles(arc, start_angle, end_angle)` function or `lv_arc_set_start/end_angle(arc, start_angle)` sets the angles of the indicator arc. In this case the set "value" and "mode" is ignored.

In other words, settings angles and values are independent. You should use either value and angle settings. Mixing the two might result in unintended behavior.

To make the arc non-adjustable remove the style of the knob and make the object non-clickable:

```
lv_obj_remove_style(arc, NULL, LV_PART_KNOB);
lv_obj_clear_flag(arc, LV_OBJ_FLAG_CLICKABLE);
```

## Events

- `LV_EVENT_VALUE_CHANGED` sent when the arc is pressed/dragged to set a new value.
- `LV_EVENT_DRAW_PART_BEGIN` and `LV_EVENT_DRAW_PART_END` are sent for the background rectangle, the background arc, the foreground arc and the knob to allow hooking the drawing. For more detail on the background rectangle part see the [Base object's](#) documentation. The fields of `lv_obj_draw_dsc_t` is set like the followings:
  - For both arcs: `clip_area`, `p1` (center of the arc), `radius`, `arc_dsc`, `part`.
  - For the knob: `clip_area`, `draw_area`, `rect_dsc`, `part`.

Learn more about [Events](#).

## Keys

- `LV_KEY_RIGHT/UP` Increases the value by one.
- `LV_KEY_LEFT/DOWN` Decreases the value by one.

Learn more about [Keys](#).

## Example

### C

#### Simple Arc

code

```
#include "../../lv_examples.h"

#if LV_USE_ARC && LV_BUILD_EXAMPLES

void lv_example_arc_1(void)
{
 /*Create an Arc*/
 lv_obj_t * arc = lv_arc_create(lv_scr_act());
 lv_obj_set_size(arc, 150, 150);
 lv_arc_set_rotation(arc, 135);
 lv_arc_set_bg_angles(arc, 0, 270);
 lv_arc_set_value(arc, 40);
 lv_obj_center(arc);
}

#endif
```

## Loader with Arc

code

```
#include "../../lv_examples.h"

#if LV_USE_ARC && LV_BUILD_EXAMPLES

static void set_angle(void * obj, int32_t v)
{
 lv_arc_set_value(obj, v);
}

/**
 * Create an arc which acts as a loader.
 */
void lv_example_arc_2(void)
{
 /*Create an Arc*/
 lv_obj_t * arc = lv_arc_create(lv_scr_act());
 lv_arc_set_rotation(arc, 270);
 lv_arc_set_bg_angles(arc, 0, 360);
 lv_obj_remove_style(arc, NULL, LV_PART_KNOB); /*Be sure the knob is not_
 ↪displayed*/
 lv_obj_clear_flag(arc, LV_OBJ_FLAG_CLICKABLE); /*To not allow adjusting by click*/
 lv_obj_center(arc);

 lv_anim_t a;
 lv_anim_init(&a);
 lv_anim_set_var(&a, arc);
 lv_anim_set_exec_cb(&a, set_angle);
 lv_anim_set_time(&a, 1000);
 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE); /*Just for the demo*/
 lv_anim_set_repeat_delay(&a, 500);
 lv_anim_set_values(&a, 0, 100);
 lv_anim_start(&a);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_arc_mode_t
```

```
typedef lv_obj_t lv_arc_t
```

### Enums

```
enum [anonymous]
```

*Values:*

```
enumerator LV_ARC_MODE_NORMAL
```

```
enumerator LV_ARC_MODE_SYMMETRICAL
```

```
enumerator LV_ARC_MODE_REVERSE
```

### Functions

```
lv_obj_t *lv_arc_create(lv_obj_t *parent)
```

Create a arc objects

**Parameters** **par** -- pointer to an object, it will be the parent of the new arc

**Returns** pointer to the created arc

```
void lv_arc_set_start_angle(lv_obj_t *arc, uint16_t start)
```

Set the start angle of an arc. 0 deg: right, 90 bottom, etc.

**Parameters**

- **arc** -- pointer to an arc object
- **start** -- the start angle

```
void lv_arc_set_end_angle(lv_obj_t *arc, uint16_t end)
```

Set the end angle of an arc. 0 deg: right, 90 bottom, etc.

**Parameters**

- **arc** -- pointer to an arc object
- **end** -- the end angle

```
void lv_arc_set_angles(lv_obj_t *arc, uint16_t start, uint16_t end)
```

Set the start and end angles

**Parameters**

- **arc** -- pointer to an arc object
- **start** -- the start angle
- **end** -- the end angle

```
void lv_arc_set_bg_start_angle(lv_obj_t *arc, uint16_t start)
```

Set the start angle of an arc background. 0 deg: right, 90 bottom, etc.

**Parameters**



- **arc** -- pointer to an arc object
- **start** -- the start angle

void **lv\_arc\_set\_bg\_end\_angle**(*lv\_obj\_t* \*arc, uint16\_t end)

Set the start angle of an arc background. 0 deg: right, 90 bottom etc.

#### Parameters

- **arc** -- pointer to an arc object
- **end** -- the end angle

void **lv\_arc\_set\_bg\_angles**(*lv\_obj\_t* \*arc, uint16\_t start, uint16\_t end)

Set the start and end angles of the arc background

#### Parameters

- **arc** -- pointer to an arc object
- **start** -- the start angle
- **end** -- the end angle

void **lv\_arc\_set\_rotation**(*lv\_obj\_t* \*arc, uint16\_t rotation)

Set the rotation for the whole arc

#### Parameters

- **arc** -- pointer to an arc object
- **rotation** -- rotation angle

void **lv\_arc\_set\_mode**(*lv\_obj\_t* \*arc, *lv\_arc\_mode\_t* type)

Set the type of arc.

#### Parameters

- **arc** -- pointer to arc object
- **mode** -- arc's mode

void **lv\_arc\_set\_value**(*lv\_obj\_t* \*arc, int16\_t value)

Set a new value on the arc

#### Parameters

- **arc** -- pointer to a arc object
- **value** -- new value

void **lv\_arc\_set\_range**(*lv\_obj\_t* \*arc, int16\_t min, int16\_t max)

Set minimum and the maximum values of a arc

#### Parameters

- **arc** -- pointer to the arc object
- **min** -- minimum value
- **max** -- maximum value

void **lv\_arc\_set\_change\_rate**(*lv\_obj\_t* \*arc, uint16\_t rate)

Set a change rate to limit the speed how fast the arc should reach the pressed point.

#### Parameters

- **arc** -- pointer to a arc object

- **rate** -- the change rate

uint16\_t **lv\_arc\_get\_angle\_start**(lv\_obj\_t \*obj)

Get the start angle of an arc.

**Parameters** **arc** -- pointer to an arc object

**Returns** the start angle [0..360]

uint16\_t **lv\_arc\_get\_angle\_end**(lv\_obj\_t \*obj)

Get the end angle of an arc.

**Parameters** **arc** -- pointer to an arc object

**Returns** the end angle [0..360]

uint16\_t **lv\_arc\_get\_bg\_angle\_start**(lv\_obj\_t \*obj)

Get the start angle of an arc background.

**Parameters** **arc** -- pointer to an arc object

**Returns** the start angle [0..360]

uint16\_t **lv\_arc\_get\_bg\_angle\_end**(lv\_obj\_t \*obj)

Get the end angle of an arc background.

**Parameters** **arc** -- pointer to an arc object

**Returns** the end angle [0..360]

int16\_t **lv\_arc\_get\_value**(const lv\_obj\_t \*obj)

Get the value of a arc

**Parameters** **arc** -- pointer to a arc object

**Returns** the value of the arc

int16\_t **lv\_arc\_get\_min\_value**(const lv\_obj\_t \*obj)

Get the minimum value of a arc

**Parameters** **arc** -- pointer to a arc object

**Returns** the minimum value of the arc

int16\_t **lv\_arc\_get\_max\_value**(const lv\_obj\_t \*obj)

Get the maximum value of a arc

**Parameters** **arc** -- pointer to a arc object

**Returns** the maximum value of the arc

lv\_arc\_mode\_t **lv\_arc\_get\_mode**(const lv\_obj\_t \*obj)

Get whether the arc is type or not.

**Parameters** **arc** -- pointer to a arc object

**Returns** arc's mode

## Variables

```
const lv_obj_class_t lv_arc_class
struct _lv_arc_t
```

### Public Members

```
lv_obj_t obj
uint16_t rotation
uint16_t indic_angle_start
uint16_t indic_angle_end
uint16_t bg_angle_start
uint16_t bg_angle_end
int16_t value
int16_t min_value
int16_t max_value
uint16_t dragging
uint16_t type
uint16_t min_close
uint16_t chg_rate
uint32_t last_tick
int16_t last_angle
```

## 5.2.2 Bar (lv\_bar)

### Overview

The bar object has a background and an indicator on it. The width of the indicator is set according to the current value of the bar.

Vertical bars can be created if the width of the object is smaller than its height.

Not only the end, but the start value of the bar can be set which changes the start position of the indicator.

## Parts and Styles

- **LV\_PART\_MAIN** The background of the bar and it uses the typical background style properties. Adding padding makes the indicator smaller or larger. The `anim_time` style property sets the animation time if the values set with `LV_ANIM_ON`.
- **LV\_PART\_INDICATOR** The indicator and it also also uses all the typical background properties.

## Usage

### Value and range

A new value can be set by `lv_bar_set_value(bar, new_value, LV_ANIM_ON/OFF)`. The value is interpreted in a range (minimum and maximum values) which can be modified with `lv_bar_set_range(bar, min, max)`. The default range is 1..100.

The new value in `lv_bar_set_value` can be set with or without an animation depending on the last parameter (`LV_ANIM_ON/OFF`).

## Modes

The bar can be one the following modes:

- **LV\_BAR\_MODE\_NORMAL** A normal bar as described above
- **LV\_BAR\_SYMMETRICAL** Draw the indicator form the zero value to current value. Requires negaitve minimum range and positive maximum range.
- **LV\_BAR\_RANGE** Allows setting the start value too by `lv_bar_set_start_value(bar, new_value, LV_ANIM_ON/OFF)`. The start value has to be always smaller than the end value.

## Events

- **LV\_EVENT\_DRAW\_PART\_BEGIN** and **LV\_EVENT\_DRAW\_PART\_END** are sent for both main and indicator parts to allow hooking the drawing. The for more detail on the main part see the [Base object's](#) documentation. For the indicator the following fields are used: `clip_area`, `draw_area`, `rect_dsc`, `part`.

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Simple Bar

code

```
#include "../../lv_examples.h"
#if LV_USE_BAR && LV_BUILD_EXAMPLES

void lv_example_bar_1(void)
{
 lv_obj_t * bar1 = lv_bar_create(lv_scr_act());
 lv_obj_set_size(bar1, 200, 20);
 lv_obj_center(bar1);
 lv_bar_set_value(bar1, 70, LV_ANIM_OFF);
}

#endif
```

#### Styling a bar

code

```
#include "../../lv_examples.h"
#if LV_USE_BAR && LV_BUILD_EXAMPLES

/**
 * Example of styling the bar
 */
void lv_example_bar_2(void)
{
 static lv_style_t style_bg;
 static lv_style_t style_indic;

 lv_style_init(&style_bg);
 lv_style_set_border_color(&style_bg, lv_palette_main(LV_PALETTE_BLUE));
 lv_style_set_border_width(&style_bg, 2);
 lv_style_set_pad_all(&style_bg, 6); /*To make the indicator smaller*/
 lv_style_set_radius(&style_bg, 6);
 lv_style_set_anim_time(&style_bg, 1000);

 lv_style_init(&style_indic);
 lv_style_set_bg_opa(&style_indic, LV_OPA_COVER);
 lv_style_set_bg_color(&style_indic, lv_palette_main(LV_PALETTE_BLUE));
 lv_style_set_radius(&style_indic, 3);

 lv_obj_t * bar = lv_bar_create(lv_scr_act());
 lv_obj_remove_style_all(bar); /*To have a clean start*/
 lv_obj_add_style(bar, &style_bg, 0);
 lv_obj_add_style(bar, &style_indic, LV_PART_INDICATOR);

 lv_obj_set_size(bar, 200, 20);
 lv_obj_center(bar);
}
```

(continues on next page)

(continued from previous page)

```

 lv_bar_set_value(bar, 100, LV_ANIM_ON);
}

#endif

```

## Temperature meter

code

```

#include "../../lv_examples.h"
#if LV_USE_BAR && LV_BUILD_EXAMPLES

static void set_temp(void * bar, int32_t temp)
{
 lv_bar_set_value(bar, temp, LV_ANIM_ON);
}

/**
 * A temperature meter example
 */
void lv_example_bar_3(void)
{
 static lv_style_t style_indic;

 lv_style_init(&style_indic);
 lv_style_set_bg_opa(&style_indic, LV_OPA_COVER);
 lv_style_set_bg_color(&style_indic, lv_palette_main(LV_PALETTE_RED));
 lv_style_set_bg_grad_color(&style_indic, lv_palette_main(LV_PALETTE_BLUE));
 lv_style_set_bg_grad_dir(&style_indic, LV_GRAD_DIR_VER);

 lv_obj_t * bar = lv_bar_create(lv_scr_act());
 lv_obj_add_style(bar, &style_indic, LV_PART_INDICATOR);
 lv_obj_set_size(bar, 20, 200);
 lv_obj_center(bar);
 lv_bar_set_range(bar, -20, 40);

 lv_anim_t a;
 lv_anim_init(&a);
 lv_anim_set_exec_cb(&a, set_temp);
 lv_anim_set_time(&a, 3000);
 lv_anim_set_playback_time(&a, 3000);
 lv_anim_set_var(&a, bar);
 lv_anim_set_values(&a, -20, 40);
 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);
 lv_anim_start(&a);
}

#endif

```

## Stripe pattern and range value

code

```
#include "../../lv_examples.h"
#if LV_USE_BAR && LV_BUILD_EXAMPLES

/**
 * Bar with stripe pattern and ranged value
 */
void lv_example_bar_4(void)
{
 LV_IMG_DECLARE(img_skew_strip);
 static lv_style_t style_indic;

 lv_style_init(&style_indic);
 lv_style_set_bg_img_src(&style_indic, &img_skew_strip);
 lv_style_set_bg_img_tiled(&style_indic, true);
 lv_style_set_bg_img_opa(&style_indic, LV_OPA_30);

 lv_obj_t * bar = lv_bar_create(lv_scr_act());
 lv_obj_add_style(bar, &style_indic, LV_PART_INDICATOR);

 lv_obj_set_size(bar, 260, 20);
 lv_obj_center(bar);
 lv_bar_set_mode(bar, LV_BAR_MODE_RANGE);
 lv_bar_set_value(bar, 90, LV_ANIM_OFF);
 lv_bar_set_start_value(bar, 20, LV_ANIM_OFF);
}

#endif
```

## Bar with RTL and RTL base direction

code

```
#include "../../lv_examples.h"
#if LV_USE_BAR && LV_BUILD_EXAMPLES

/**
 * Bar with LTR and RTL base direction
 */
void lv_example_bar_5(void)
{
 lv_obj_t * label;

 lv_obj_t * bar_ltr = lv_bar_create(lv_scr_act());
 lv_obj_set_size(bar_ltr, 200, 20);
 lv_bar_set_value(bar_ltr, 70, LV_ANIM_OFF);
 lv_obj_align(bar_ltr, LV_ALIGN_CENTER, 0, -30);

 label = lv_label_create(lv_scr_act());
 lv_label_set_text(label, "Left to Right base direction");
 lv_obj_align_to(label, bar_ltr, LV_ALIGN_OUT_TOP_MID, 0, -5);
}
```

(continues on next page)

(continued from previous page)

```

lv_obj_t * bar_rtl = lv_bar_create(lv_scr_act());
lv_obj_set_style_base_dir(bar_rtl, LV_BASE_DIR_RTL, 0);
lv_obj_set_size(bar_rtl, 200, 20);
lv_bar_set_value(bar_rtl, 70, LV_ANIM_OFF);
lv_obj_align(bar_rtl, LV_ALIGN_CENTER, 0, 30);

label = lv_label_create(lv_scr_act());
lv_label_set_text(label, "Right to Left base direction");
lv_obj_align_to(label, bar_rtl, LV_ALIGN_OUT_TOP_MID, 0, -5);
}

#endif

```

### Custom draw to show the current value

code

```

#include "../lv_examples.h"
#if LV_USE_BAR && LV_BUILD_EXAMPLES

static void set_value(void *bar, int32_t v)
{
 lv_bar_set_value(bar, v, LV_ANIM_OFF);
}

static void event_cb(lv_event_t * e)
{
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_param(e);
 if(dsc->part != LV_PART_INDICATOR) return;

 lv_obj_t * obj = lv_event_get_target(e);

 lv_draw_label_dsc_t label_dsc;
 lv_draw_label_dsc_init(&label_dsc);
 label_dsc.font = LV_FONT_DEFAULT;

 char buf[8];
 lv_snprintf(buf, sizeof(buf), "%d", lv_bar_get_value(obj));

 lv_point_t txt_size;
 lv_txt_get_size(&txt_size, buf, label_dsc.font, label_dsc.letter_space, label_dsc.
↪line_space, LV_COORD_MAX, label_dsc.flag);

 lv_area_t txt_area;
 /*If the indicator is long enough put the text inside on the right*/
 if(lv_area_get_width(dsc->draw_area) > txt_size.x + 20) {
 txt_area.x2 = dsc->draw_area->x2 - 5;
 txt_area.x1 = txt_area.x2 - txt_size.x + 1;
 label_dsc.color = lv_color_white();
 }
 /*If the indicator is still short put the text out of it on the right*/
 else {
 txt_area.x1 = dsc->draw_area->x2 + 5;
 txt_area.x2 = txt_area.x1 + txt_size.x - 1;
 label_dsc.color = lv_color_black();
 }
}

```

(continues on next page)



(continued from previous page)

```

 }

 txt_area.y1 = dsc->draw_area->y1 + (lv_area_get_height(dsc->draw_area) - txt_size.
↪y) / 2;
 txt_area.y2 = txt_area.y1 + txt_size.y - 1;

 lv_draw_label(&txt_area, dsc->clip_area, &label_dsc, buf, NULL);
}

/**
 * Custom drawer on the bar to display the current value
 */
void lv_example_bar_6(void)
{
 lv_obj_t * bar = lv_bar_create(lv_scr_act());
 lv_obj_add_event_cb(bar, event_cb, LV_EVENT_DRAW_PART_END, NULL);
 lv_obj_set_size(bar, 200, 20);
 lv_obj_center(bar);

 lv_anim_t a;
 lv_anim_init(&a);
 lv_anim_set_var(&a, bar);
 lv_anim_set_values(&a, 0, 100);
 lv_anim_set_exec_cb(&a, set_value);
 lv_anim_set_time(&a, 2000);
 lv_anim_set_playback_time(&a, 2000);
 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);
 lv_anim_start(&a);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_bar_mode_t
```

```
typedef _lv_bar_t lv_bar_t
```

## Enums

enum **[anonymous]**

*Values:*

enumerator **LV\_BAR\_MODE\_NORMAL**

enumerator **LV\_BAR\_MODE\_SYMMETRICAL**

enumerator **LV\_BAR\_MODE\_RANGE**

## Functions

*lv\_obj\_t* \***lv\_bar\_create**(*lv\_obj\_t* \*parent)

Create a bar objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new bar

**Returns** pointer to the created bar

void **lv\_bar\_set\_value**(*lv\_obj\_t* \*obj, int32\_t value, *lv\_anim\_enable\_t* anim)

Set a new value on the bar

**Parameters**

- **bar** -- pointer to a bar object
- **value** -- new value
- **anim** -- LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

void **lv\_bar\_set\_start\_value**(*lv\_obj\_t* \*obj, int32\_t start\_value, *lv\_anim\_enable\_t* anim)

Set a new start value on the bar

**Parameters**

- **obj** -- pointer to a bar object
- **value** -- new start value
- **anim** -- LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

void **lv\_bar\_set\_range**(*lv\_obj\_t* \*obj, int32\_t min, int32\_t max)

Set minimum and the maximum values of a bar

**Parameters**

- **obj** -- pointer to the bar object
- **min** -- minimum value
- **max** -- maximum value

void **lv\_bar\_set\_mode**(*lv\_obj\_t* \*obj, *lv\_bar\_mode\_t* mode)

Set the type of bar.

**Parameters**

- **obj** -- pointer to bar object
- **mode** -- bar type from ::lv\_bar\_mode\_t

```
int32_t lv_bar_get_value(const lv_obj_t *obj)
```

Get the value of a bar

**Parameters** `obj` -- pointer to a bar object

**Returns** the value of the bar

```
int32_t lv_bar_get_start_value(const lv_obj_t *obj)
```

Get the start value of a bar

**Parameters** `obj` -- pointer to a bar object

**Returns** the start value of the bar

```
int32_t lv_bar_get_min_value(const lv_obj_t *obj)
```

Get the minimum value of a bar

**Parameters** `obj` -- pointer to a bar object

**Returns** the minimum value of the bar

```
int32_t lv_bar_get_max_value(const lv_obj_t *obj)
```

Get the maximum value of a bar

**Parameters** `obj` -- pointer to a bar object

**Returns** the maximum value of the bar

```
lv_bar_mode_t lv_bar_get_mode(lv_obj_t *obj)
```

Get the type of bar.

**Parameters** `obj` -- pointer to bar object

**Returns** bar type from `::lv_bar_mode_t`

## Variables

```
const lv_obj_class_t lv_bar_class
```

```
struct _lv_bar_anim_t
```

## Public Members

```
lv_obj_t *bar
```

```
int32_t anim_start
```

```
int32_t anim_end
```

```
int32_t anim_state
```

```
struct _lv_bar_t
```

## Public Members

*lv\_obj\_t* **obj**

int32\_t **cur\_value**  
Current value of the bar

int32\_t **min\_value**  
Minimum value of the bar

int32\_t **max\_value**  
Maximum value of the bar

int32\_t **start\_value**  
Start value of the bar

lv\_area\_t **indic\_area**  
Save the indicator area. Might be used by derived types

*\_lv\_bar\_anim\_t* **cur\_value\_anim**

*\_lv\_bar\_anim\_t* **start\_value\_anim**

*lv\_bar\_mode\_t* **mode**  
Type of bar

## 5.2.3 Button (lv\_btn)

### Overview

Buttons has no new features compared to the *Base object*. It is useful for semantic purposes and has slightly different default settings.

Buttons differ from Base object in the following points by default:

- Not scrollable
- Added to the default group
- Its default height and width is LV\_SIZE\_CONTENT

### Parts and Styles

- LV\_PART\_MAIN The background of the button. It uses the typical background style properties.

## Usage

There are no new features compared to *Base object*.

## Events

- `LV_EVENT_VALUE_CHANGED` when the `LV_OBJ_FLAG_CHECKABLE` flag is enabled and the object clicked (on transition to/from the checked state)

Learn more about *Events*.

## Keys

If `LV_OBJ_FLAG_CHECKABLE` is enabled `LV_KEY_RIGHT` and `LV_KEY_UP` makes the object checked, and `LV_KEY_LEFT` and `LV_KEY_DOWN` makes it unchecked.

Note that, the state of `LV_KEY_ENTER` is translated to `LV_EVENT_PRESSED/PRESSING/RELEASED` etc.

Learn more about *Keys*.

## Example

### C

#### Simple Buttons

code

```
#include "../../lv_examples.h"
#if LV_USE_BTN && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);

 if(code == LV_EVENT_CLICKED) {
 LV_LOG_USER("Clicked");
 }
 else if(code == LV_EVENT_VALUE_CHANGED) {
 LV_LOG_USER("Toggled");
 }
}

void lv_example_btn_1(void)
{
 lv_obj_t * label;

 lv_obj_t * btn1 = lv_btn_create(lv_scr_act());
 lv_obj_add_event_cb(btn1, event_handler, LV_EVENT_ALL, NULL);
 lv_obj_align(btn1, LV_ALIGN_CENTER, 0, -40);

 label = lv_label_create(btn1);
 lv_label_set_text(label, "Button");
 lv_obj_center(label);
}
```

(continues on next page)

(continued from previous page)

```

lv_obj_t * btn2 = lv_btn_create(lv_scr_act());
lv_obj_add_event_cb(btn2, event_handler, LV_EVENT_ALL, NULL);
lv_obj_align(btn2, LV_ALIGN_CENTER, 0, 40);
lv_obj_add_flag(btn2, LV_OBJ_FLAG_CHECKABLE);
lv_obj_set_height(btn2, LV_SIZE_CONTENT);

label = lv_label_create(btn2);
lv_label_set_text(label, "Toggle");
lv_obj_center(label);
}
#endif

```

## Styling buttons

code

```

#include "../lv_examples.h"
#if LV_USE_BTN && LV_BUILD_EXAMPLES

/**
 * Style a button from scratch
 */
void lv_example_btn_2(void)
{
 /*Init the style for the default state*/
 static lv_style_t style;
 lv_style_init(&style);

 lv_style_set_radius(&style, 3);

 lv_style_set_bg_opa(&style, LV_OPA_100);
 lv_style_set_bg_color(&style, lv_palette_main(LV_PALETTE_BLUE));
 lv_style_set_bg_grad_color(&style, lv_palette_darken(LV_PALETTE_BLUE, 2));
 lv_style_set_bg_grad_dir(&style, LV_GRAD_DIR_VER);

 lv_style_set_border_opa(&style, LV_OPA_40);
 lv_style_set_border_width(&style, 2);
 lv_style_set_border_color(&style, lv_palette_main(LV_PALETTE_GREY));

 lv_style_set_shadow_width(&style, 8);
 lv_style_set_shadow_color(&style, lv_palette_main(LV_PALETTE_GREY));
 lv_style_set_shadow_ofs_y(&style, 8);

 lv_style_set_outline_opa(&style, LV_OPA_COVER);
 lv_style_set_outline_color(&style, lv_palette_main(LV_PALETTE_BLUE));

 lv_style_set_text_color(&style, lv_color_white());
 lv_style_set_pad_all(&style, 10);

 /*Init the pressed style*/
 static lv_style_t style_pr;
 lv_style_init(&style_pr);

 /*Ad a large outline when pressed*/

```

(continues on next page)

(continued from previous page)

```

lv_style_set_outline_width(&style_pr, 30);
lv_style_set_outline_opa(&style_pr, LV_OPA_TRANSP);

lv_style_set_translate_y(&style_pr, 5);
lv_style_set_shadow_ofs_y(&style_pr, 3);
lv_style_set_bg_color(&style_pr, lv_palette_darken(LV_PALETTE_BLUE, 2));
lv_style_set_bg_grad_color(&style_pr, lv_palette_darken(LV_PALETTE_BLUE, 4));

/*Add a transition to the the outline*/
static lv_style_transition_dsc_t trans;
static lv_style_prop_t props[] = {LV_STYLE_OUTLINE_WIDTH, LV_STYLE_OUTLINE_OPA, 0}
↪;
lv_style_transition_dsc_init(&trans, props, lv_anim_path_linear, 300, 0, NULL);

lv_style_set_transition(&style_pr, &trans);

lv_obj_t * btn1 = lv_btn_create(lv_scr_act());
lv_obj_remove_style_all(btn1); /*Remove the style coming ↪
↪from the theme*/
lv_obj_add_style(btn1, &style, 0);
lv_obj_add_style(btn1, &style_pr, LV_STATE_PRESSED);
lv_obj_set_size(btn1, LV_SIZE_CONTENT, LV_SIZE_CONTENT);
lv_obj_center(btn1);

lv_obj_t * label = lv_label_create(btn1);
lv_label_set_text(label, "Button");
lv_obj_center(label);
}
#endif

```

## Gummy button

code

```

#include "../lv_examples.h"
#if LV_BUILD_EXAMPLES && LV_USE_BTN

/**
 * Create a style transition on a button to act like a gum when clicked
 */
void lv_example_btn_3(void)
{
 /*Properties to transition*/
 static lv_style_prop_t props[] = {
 LV_STYLE_TRANSFORM_WIDTH, LV_STYLE_TRANSFORM_HEIGHT, LV_STYLE_TEXT_LETTER_
↪SPACE, 0
 };

 /*Transition descriptor when going back to the default state.
 *Add some delay to be sure the press transition is visible even if the press was ↪
↪very short*/
 static lv_style_transition_dsc_t transition_dsc_def;
 lv_style_transition_dsc_init(&transition_dsc_def, props, lv_anim_path_overshoot, ↪
↪250, 100, NULL);

```

(continues on next page)

(continued from previous page)

```

 /*Transition descriptor when going to pressed state.
 No delay, go to presses state immediately/
 static lv_style_transition_dsc_t transition_dsc_pr;
 lv_style_transition_dsc_init(&transition_dsc_pr, props, lv_anim_path_ease_in_out,
↪250, 0, NULL);

 /*Add only the new transition to the default state*/
 static lv_style_t style_def;
 lv_style_init(&style_def);
 lv_style_set_transition(&style_def, &transition_dsc_def);

 /*Add the transition and some transformation to the presses state.*/
 static lv_style_t style_pr;
 lv_style_init(&style_pr);
 lv_style_set_transform_width(&style_pr, 10);
 lv_style_set_transform_height(&style_pr, -10);
 lv_style_set_text_letter_space(&style_pr, 10);
 lv_style_set_transition(&style_pr, &transition_dsc_pr);

 lv_obj_t * btn1 = lv_btn_create(lv_scr_act());
 lv_obj_align(btn1, LV_ALIGN_CENTER, 0, -80);
 lv_obj_add_style(btn1, &style_pr, LV_STATE_PRESSED);
 lv_obj_add_style(btn1, &style_def, 0);

 lv_obj_t * label = lv_label_create(btn1);
 lv_label_set_text(label, "Gum");
}
#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef _lv_btn_t lv_btn_t
```

### Functions

```
lv_obj_t *lv_btn_create(lv_obj_t *parent)
```

Create a button object

**Parameters** **parent** -- pointer to an object, it will be the parent of the new button

**Returns** pointer to the created button



## Variables

```
const lv_obj_class_t lv_btn_class
struct _lv_btn_t
```

## Public Members

*lv\_obj\_t* **obj**

## 5.2.4 Button matrix (lv\_btnmatrix)

### Overview

The Button Matrix objects can display multiple buttons in rows and columns.

The Button matrix object is very light weighted because the buttons are not created just virtually drawn on the fly. This way, 1 button use only 8 extra bytes instead of the ~100-150 byte size of a normal *Button* object and other ~100 byte for the size of the *Label* object.

The Button matrix is added to the default group (if it is set). Besides the Button matrix is an editable object to allow selecting and clicking the buttons with encoder navigation too.

### Parts and Styles

- **LV\_PART\_MAIN** The background of the button matrix. It uses the typical background style properties. **pad\_row** and **pad\_column** sets the space between the buttons.
- **LV\_PART\_ITEMS** The buttons and they all use the text and typical background style properties expect translations and transformations.

### Usage

#### Button's text

There is a text on each button. To specify them a descriptor string array, called *map*, needs to be used. The map can be set with `lv_btnmatrix_set_map(btnm, my_map)`. The declaration of a map should look like `const char * map[] = {"btn1", "btn2", "btn3", NULL}`. Note that, the last element has to be **NULL** or an empty string ("")!

Use `"\n"` in the map to make **line break**. E.g. `{"btn1", "btn2", "\n", "btn3", ""}`. Each line's buttons have their width calculated automatically. So in the example the first row will have 2 buttons each with 50% width and a second row with 1 button having 100% width.

## Control buttons

The buttons' width can be set relative to the other button in the same row with `lv_btnmatrix_set_btn_width(btm, btn_id, width)` E.g. in a line with two buttons: *btnA*, *width = 1* and *btnB*, *width = 2*, *btnA* will have 33 % width and *btnB* will have 66 % width. It's similar to how the `flex-grow` property works in CSS. The width's value must be in the [1..7] range and the default width is 1.

In addition to the width, each button can be customized with the following parameters:

- `LV_BTNMATRIX_CTRL_HIDDEN` Makes a button hidden (hidden buttons still take up space in the layout, they are just not visible or clickable)
- `LV_BTNMATRIX_CTRL_NO_REPEAT` Disable repeating when the button is long pressed
- `LV_BTNMATRIX_CTRL_DISABLED` Makes a button disabled Like `LV_STATE_DISABLED` on normal objects
- `LV_BTNMATRIX_CTRL_CHECKABLE` Enable toggling of a button. I.e. `LV_STATE_CHECKED` will be added/removed as the button is clicked
- `LV_BTNMATRIX_CTRL_CHECKED` Make the button checked. It will use the `LV_STATE_CHECKED` styles.
- `LV_BTNMATRIX_CTRL_CLICK_TRIG` Enabled: send `LV_EVENT_VALUE_CHANGE` on `CLICK`, Disabled: send `LV_EVENT_VALUE_CHANGE` on `PRESS*`
- `LV_BTNMATRIX_CTRL_RECOLOR` Enable recoloring of button texts with #. E.g. "It's #ff0000 red#"
- `LV_BTNMATRIX_CTRL_CUSTOM_1` Custom free to use flag
- `LV_BTNMATRIX_CTRL_CUSTOM_2` Custom free to use flag

By default all flags are disabled.

To set or clear a button's control attribute, use `lv_btnmatrix_set_btn_ctrl(btm, btn_id, LV_BTNMATRIX_CTRL_...)` and `lv_btnmatrix_clear_btn_ctrl(btm, btn_id, LV_BTNMATRIX_CTRL_...)` respectively. More `LV_BTNMATRIX_CTRL_...` values can be OR-ed

To set/clear the same control attribute for all buttons of a button matrix, use `lv_btnmatrix_set_btn_ctrl_all(btm, btn_id, LV_BTNMATRIX_CTRL_...)` and `lv_btnmatrix_clear_btn_ctrl_all(btm, btn_id, LV_BTNMATRIX_CTRL_...)`.

To set a control map for a button matrix (similarly to the map for the text), use `lv_btnmatrix_set_ctrl_map(btm, ctrl_map)`. An element of `ctrl_map` should look like `ctrl_map[0] = width | LV_BTNMATRIX_CTRL_NO_REPEAT | LV_BTNMATRIX_CTRL_CHECKABLE`. The number of elements should be equal to the number of buttons (excluding newlines characters).

## One check

The "One check" feature can be enabled with `lv_btnmatrix_set_one_check(btm, true)` to allow only one button to be checked at once.

## Events

- **LV\_EVENT\_VALUE\_CHANGED** Sent when a button is pressed/released or repeated after long press. The event paramter is set to the ID of the pressed/released button.
- **LV\_EVENT\_DRAW\_PART\_BEGIN** and **LV\_EVENT\_DRAW\_PART\_END** are sent for both the main and the items (buttons) parts to allow hooking the drawing. The for more detail on the main part see the [Base object's](#) documentation. For the buttons the following fields are used: **clip\_area**, **draw\_area**, **rect\_dsc**, **rect\_dsc**, **part**, **id** (index of the button being drawn).

**lv\_btnmatrix\_get\_selected\_btn(btnm)** returns the index of the lastly pressed, released or focused button or **LV\_BTNMATRIX\_BTN\_NONE** if no such button.

**lv\_btnmatrix\_get\_btn\_text(btnm, btn\_id)** returns a pointer to the text of **btn\_id**th button.

Learn more about [Events](#).

## Keys

- **LV\_KEY\_RIGHT/UP/LEFT/RIGHT** To navigate among the buttons to select one
- **LV\_KEY\_ENTER** To press/release the selected button

Learn more about [Keys](#).

## Example

### C

#### Simple Button matrix

code

```
#include "../lv_examples.h"
#if LV_USE_BTNMATRIX && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);
 if(code == LV_EVENT_VALUE_CHANGED) {
 uint32_t id = lv_btnmatrix_get_selected_btn(obj);
 const char * txt = lv_btnmatrix_get_btn_text(obj, id);

 LV_LOG_USER("%s was pressed\n", txt);
 }
}

static const char * btnm_map[] = {"1", "2", "3", "4", "5", "\n",
 "6", "7", "8", "9", "0", "\n",
 "Action1", "Action2", ""};

void lv_example_btnmatrix_1(void)
{
 lv_obj_t * btnm1 = lv_btnmatrix_create(lv_scr_act());
```

(continues on next page)

(continued from previous page)

```

lv_btnmatrix_set_map(btnm1, btnm_map);
lv_btnmatrix_set_btn_width(btnm1, 10, 2); /*Make "Action1" twice as wide_
↪as "Action2"*/
lv_btnmatrix_set_btn_ctrl(btnm1, 10, LV_BTNMATRIX_CTRL_CHECKABLE);
lv_btnmatrix_set_btn_ctrl(btnm1, 11, LV_BTNMATRIX_CTRL_CHECKED);
lv_obj_align(btnm1, LV_ALIGN_CENTER, 0, 0);
lv_obj_add_event_cb(btnm1, event_handler, LV_EVENT_ALL, NULL);
}

#endif

```

## Custom buttons

code

```

#include "../lv_examples.h"
#if LV_USE_BTNMATRIX && LV_BUILD_EXAMPLES

static void event_cb(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);
 if(code == LV_EVENT_DRAW_PART_BEGIN) {
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_param(e);

 /*Change the draw descriptor the 2nd button*/
 if(dsc->id == 1) {
 dsc->rect_dsc->radius = 0;
 if(lv_btnmatrix_get_selected_btn(obj) == dsc->id) dsc->rect_dsc->bg_
↪color = lv_palette_darken(LV_PALETTE_BLUE, 3);
 else dsc->rect_dsc->bg_color = lv_palette_main(LV_PALETTE_BLUE);

 dsc->rect_dsc->shadow_width = 6;
 dsc->rect_dsc->shadow_ofs_x = 3;
 dsc->rect_dsc->shadow_ofs_y = 3;
 dsc->label_dsc->color = lv_color_white();
 }
 /*Change the draw descriptor the 3rd button*/
 else if(dsc->id == 2) {
 dsc->rect_dsc->radius = LV_RADIUS_CIRCLE;
 if(lv_btnmatrix_get_selected_btn(obj) == dsc->id) dsc->rect_dsc->bg_
↪color = lv_palette_darken(LV_PALETTE_RED, 3);
 else dsc->rect_dsc->bg_color = lv_palette_main(LV_PALETTE_RED);

 dsc->label_dsc->color = lv_color_white();
 }
 else if(dsc->id == 3) {
 dsc->label_dsc->opa = LV_OPA_TRANSP; /*Hide the text if any*/
 }
 }
 if(code == LV_EVENT_DRAW_PART_END) {
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_param(e);
 }
}

```

(continues on next page)

(continued from previous page)

```

 /*Add custom content to the 4th button when the button itself was drawn*/
 if(dsc->id == 3) {
 LV_IMG_DECLARE(img_star);
 lv_img_header_t header;
 lv_res_t res = lv_img_decoder_get_info(&img_star, &header);
 if(res != LV_RES_OK) return;

 lv_area_t a;
 a.x1 = dsc->draw_area->x1 + (lv_area_get_width(dsc->draw_area) - header.
↪w) / 2;
 a.x2 = a.x1 + header.w - 1;
 a.y1 = dsc->draw_area->y1 + (lv_area_get_height(dsc->draw_area) - header.
↪h) / 2;
 a.y2 = a.y1 + header.h - 1;

 lv_draw_img_dsc_t img_draw_dsc;
 lv_draw_img_dsc_init(&img_draw_dsc);
 img_draw_dsc.recolor = lv_color_black();
 if(lv_btnmatrix_get_selected_btn(obj) == dsc->id) img_draw_dsc.recolor_
↪opa = LV_OPA_30;

 lv_draw_img(&a, dsc->clip_area, &img_star, &img_draw_dsc);
 }
}

/**
 * Add custom drawer to the button matrix to customize buttons one by one
 */
void lv_example_btnmatrix_2(void)
{
 lv_obj_t * btnm = lv_btnmatrix_create(lv_scr_act());
 lv_obj_add_event_cb(btnm, event_cb, LV_EVENT_ALL, NULL);
 lv_obj_center(btnm);
}

#endif

```

## Pagination

code

```

#include "../lv_examples.h"
#if LV_USE_BTNMATRIX && LV_BUILD_EXAMPLES

static void event_cb(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_target(e);
 uint32_t id = lv_btnmatrix_get_selected_btn(obj);
 bool prev = id == 0 ? true : false;
 bool next = id == 6 ? true : false;
 if(prev || next) {
 /*Find the checked button*/
 uint32_t i;
 for(i = 1; i < 7; i++) {

```

(continues on next page)

(continued from previous page)

```

 if(lv_btnmatrix_has_btn_ctrl(obj, i, LV_BTNMATRIX_CTRL_CHECKED)) break;
 }

 if(prev && i > 1) i--;
 else if(next && i < 5) i++;

 lv_btnmatrix_set_btn_ctrl(obj, i, LV_BTNMATRIX_CTRL_CHECKED);
}

}

/**
 * Make a button group (pagination)
 */
void lv_example_btnmatrix_3(void)
{
 static lv_style_t style_bg;
 lv_style_init(&style_bg);
 lv_style_set_pad_all(&style_bg, 0);
 lv_style_set_pad_gap(&style_bg, 0);
 lv_style_set_clip_corner(&style_bg, true);
 lv_style_set_radius(&style_bg, LV_RADIUS_CIRCLE);
 lv_style_set_border_width(&style_bg, 0);

 static lv_style_t style_btn;
 lv_style_init(&style_btn);
 lv_style_set_radius(&style_btn, 0);
 lv_style_set_border_width(&style_btn, 1);
 lv_style_set_border_opa(&style_btn, LV_OPA_50);
 lv_style_set_border_color(&style_btn, lv_palette_main(LV_PALETTE_GREY));
 lv_style_set_border_side(&style_btn, LV_BORDER_SIDE_INTERNAL);
 lv_style_set_radius(&style_btn, 0);

 static const char * map[] = {LV_SYMBOL_LEFT, "1", "2", "3", "4", "5", LV_SYMBOL_
↵RIGHT, ""};

 lv_obj_t * btnm = lv_btnmatrix_create(lv_scr_act());
 lv_btnmatrix_set_map(btnm, map);
 lv_obj_add_style(btnm, &style_bg, 0);
 lv_obj_add_style(btnm, &style_btn, LV_PART_ITEMS);
 lv_obj_add_event_cb(btnm, event_cb, LV_EVENT_VALUE_CHANGED, NULL);
 lv_obj_set_size(btnm, 225, 35);

 /*Allow selecting on one number at time*/
 lv_btnmatrix_set_btn_ctrl_all(btnm, LV_BTNMATRIX_CTRL_CHECKABLE);
 lv_btnmatrix_clear_btn_ctrl(btnm, 0, LV_BTNMATRIX_CTRL_CHECKABLE);
 lv_btnmatrix_clear_btn_ctrl(btnm, 6, LV_BTNMATRIX_CTRL_CHECKABLE);

 lv_btnmatrix_set_one_checked(btnm, true);
 lv_btnmatrix_set_btn_ctrl(btnm, 1, LV_BTNMATRIX_CTRL_CHECKED);

 lv_obj_center(btnm);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint16_t lv_btnmatrix_ctrl_t

typedef bool (*lv_btnmatrix_btn_draw_cb_t)(lv_obj_t *btnm, uint32_t btn_id, const lv_area_t *draw_area,
const lv_area_t *clip_area)

typedef lv_btnmatrix_t lv_btnmatrix_t
```

### Enums

#### enum [anonymous]

Type to store button control bits (disabled, hidden etc.) The first 3 bits are used to store the width

*Values:*

enumerator **\_LV\_BTNMATRIX\_WIDTH**

Reserved to store the size units

enumerator **LV\_BTNMATRIX\_CTRL\_HIDDEN**

Button hidden

enumerator **LV\_BTNMATRIX\_CTRL\_NO\_REPEAT**

Do not repeat press this button.

enumerator **LV\_BTNMATRIX\_CTRL\_DISABLED**

Disable this button.

enumerator **LV\_BTNMATRIX\_CTRL\_CHECKABLE**

The button can be toggled.

enumerator **LV\_BTNMATRIX\_CTRL\_CHECKED**

Button is currently toggled (e.g. checked).

enumerator **LV\_BTNMATRIX\_CTRL\_CLICK\_TRIG**

1: Send LV\_EVENT\_VALUE\_CHANGE on CLICK, 0: Send LV\_EVENT\_VALUE\_CHANGE on PRESS

enumerator **LV\_BTNMATRIX\_CTRL\_RECOLOR**

Enable text recoloring with #color

enumerator **\_LV\_BTNMATRIX\_CTRL\_RESERVED**

Reserved for later use

enumerator **LV\_BTNMATRIX\_CTRL\_CUSTOM\_1**  
Custom free to use flag

enumerator **LV\_BTNMATRIX\_CTRL\_CUSTOM\_2**  
Custom free to use flag

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_BTNMATRIX\_BTN\_NONE)

*lv\_obj\_t* \***lv\_btnmatrix\_create**(*lv\_obj\_t* \*parent)  
Create a button matrix objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new button matrix

**Returns** pointer to the created button matrix

void **lv\_btnmatrix\_set\_map**(*lv\_obj\_t* \*obj, const char \*map[])

Set a new map. Buttons will be created/deleted according to the map. The button matrix keeps a reference to the map and so the string array must not be deallocated during the life of the matrix.

**Parameters**

- **obj** -- pointer to a button matrix object
- **map** -- pointer a string array. The last string has to be: "". Use "\n" to make a line break.

void **lv\_btnmatrix\_set\_ctrl\_map**(*lv\_obj\_t* \*obj, const *lv\_btnmatrix\_ctrl\_t* ctrl\_map[])

Set the button control map (hidden, disabled etc.) for a button matrix. The control map array will be copied and so may be deallocated after this function returns.

**Parameters**

- **obj** -- pointer to a button matrix object
- **ctrl\_map** -- pointer to an array of *lv\_btn\_ctrl\_t* control bytes. The length of the array and position of the elements must match the number and order of the individual buttons (i.e. excludes newline entries). An element of the map should look like e.g.: `ctrl_map[0] = width | LV_BTNMATRIX_CTRL_NO_REPEAT | LV_BTNMATRIX_CTRL_TGL_ENABLE`

void **lv\_btnmatrix\_set\_selected\_btn**(*lv\_obj\_t* \*obj, uint16\_t btn\_id)

Set the selected buttons

**Parameters**

- **obj** -- pointer to button matrix object
- **btn\_id** -- 0 based index of the button to modify. (Not counting new lines)

void **lv\_btnmatrix\_set\_btn\_ctrl**(*lv\_obj\_t* \*obj, uint16\_t btn\_id, *lv\_btnmatrix\_ctrl\_t* ctrl)

Set the attributes of a button of the button matrix

**Parameters**

- **obj** -- pointer to button matrix object
- **btn\_id** -- 0 based index of the button to modify. (Not counting new lines)
- **ctrl** -- OR-ed attributs. E.g. `LV_BTNMATRIX_CTRL_NO_REPEAT | LV_BTNMATRIX_CTRL_CHECKABLE`



void **lv\_btnmatrix\_clear\_btn\_ctrl**(const *lv\_obj\_t* \*obj, uint16\_t btn\_id, *lv\_btnmatrix\_ctrl\_t* ctrl)  
Clear the attributes of a button of the button matrix

#### Parameters

- **obj** -- pointer to button matrix object
- **btn\_id** -- 0 based index of the button to modify. (Not counting new lines)
- **ctrl** -- OR-ed attributs. E.g. LV\_BTNMATRIX\_CTRL\_NO\_REPEAT | LV\_BTNMATRIX\_CTRL\_CHECKABLE

void **lv\_btnmatrix\_set\_btn\_ctrl\_all**(*lv\_obj\_t* \*obj, *lv\_btnmatrix\_ctrl\_t* ctrl)  
Set attributes of all buttons of a button matrix

#### Parameters

- **obj** -- pointer to a button matrix object
- **ctrl** -- attribute(s) to set from *lv\_btnmatrix\_ctrl\_t*. Values can be ORed.

void **lv\_btnmatrix\_clear\_btn\_ctrl\_all**(*lv\_obj\_t* \*obj, *lv\_btnmatrix\_ctrl\_t* ctrl)  
Clear the attributes of all buttons of a button matrix

#### Parameters

- **obj** -- pointer to a button matrix object
- **ctrl** -- attribute(s) to set from *lv\_btnmatrix\_ctrl\_t*. Values can be ORed.
- **en** -- true: set the attributes; false: clear the attributes

void **lv\_btnmatrix\_set\_btn\_width**(*lv\_obj\_t* \*obj, uint16\_t btn\_id, uint8\_t width)  
Set a single button's relative width. This method will cause the matrix be regenerated and is a relatively expensive operation. It is recommended that initial width be specified using *lv\_btnmatrix\_set\_ctrl\_map* and this method only be used for dynamic changes.

#### Parameters

- **obj** -- pointer to button matrix object
- **btn\_id** -- 0 based index of the button to modify.
- **width** -- relative width compared to the buttons in the same row. [1..7]

void **lv\_btnmatrix\_set\_one\_checked**(*lv\_obj\_t* \*obj, bool en)  
Make the button matrix like a selector widget (only one button may be checked at a time). LV\_BTNMATRIX\_CTRL\_CHECKABLE must be enabled on the buttons to be selected using *lv\_btnmatrix\_set\_ctrl()* or *lv\_btnmatrix\_set\_btn\_ctrl\_all()*.

#### Parameters

- **obj** -- pointer to a button matrix object
- **en** -- whether "one check" mode is enabled

const char \*\***lv\_btnmatrix\_get\_map**(const *lv\_obj\_t* \*obj)  
Get the current map of a button matrix

**Parameters** **obj** -- pointer to a button matrix object

**Returns** the current map

uint16\_t **lv\_btnmatrix\_get\_selected\_btn**(const *lv\_obj\_t* \*obj)  
Get the index of the lastly "activated" button by the user (pressed, released, focused etc) Useful in the *event\_cb* to get the text of the button, check if hidden etc.

**Parameters** **obj** -- pointer to button matrix object

**Returns** index of the last released button (LV\_BTNMATRIX\_BTN\_NONE: if unset)

const char \***lv\_btnmatrix\_get\_btn\_text**(const *lv\_obj\_t* \*obj, uint16\_t btn\_id)  
Get the button's text

**Parameters**

- **obj** -- pointer to button matrix object
- **btn\_id** -- the index a button not counting new line characters.

**Returns** text of btn\_index` button

bool **lv\_btnmatrix\_has\_btn\_ctrl**(*lv\_obj\_t* \*obj, uint16\_t btn\_id, *lv\_btnmatrix\_ctrl\_t* ctrl)  
Get the whether a control value is enabled or disabled for button of a button matrix

**Parameters**

- **obj** -- pointer to a button matrix object
- **btn\_id** -- the index of a button not counting new line characters.
- **ctrl** -- control values to check (ORed value can be used)

**Returns** true: the control attribute is enabled false: disabled

bool **lv\_btnmatrix\_get\_one\_checked**(const *lv\_obj\_t* \*obj)  
Tell whether "one check" mode is enabled or not.

**Parameters** **obj** -- Button matrix object

**Returns** true: "one check" mode is enabled; false: disabled

## Variables

const lv\_obj\_class\_t **lv\_btnmatrix\_class**  
struct **\_lv\_btnmatrix\_t**

### Public Members

*lv\_obj\_t* **obj**  
const char \*\***map\_p**  
*lv\_area\_t* \***button\_areas**  
*lv\_btnmatrix\_ctrl\_t* \***ctrl\_bits**  
uint16\_t **btn\_cnt**  
uint16\_t **btn\_id\_sel**  
uint8\_t **one\_check**

## 5.2.5 Canvas (lv\_canvas)

### Overview

A Canvas inherits from *Image* where the user can draw anything. Rectangles, texts, images, lines, arcs can be drawn here using lvgl's drawing engine. Besides some "effects" can be applied as well like rotation, zoom and blur.

### Parts and Styles

LV\_PART\_MAIN Uses the typical rectangle style properties and image style properties.

### Usage

#### Buffer

The Canvas needs a buffer which stores the drawn image. To assign a buffer to a Canvas, use `lv_canvas_set_buffer(canvas, buffer, width, height, LV_IMG_CF_...)`. Where `buffer` is a static buffer (not just a local variable) to hold the image of the canvas. For example, `static lv_color_t buffer[LV_CANVAS_BUF_SIZE_TRUE_COLOR(width, height)]`. `LV_CANVAS_BUF_SIZE_...` macros help to determine the size of the buffer with different color formats.

The canvas supports all the built-in color formats like `LV_IMG_CF_TRUE_COLOR` or `LV_IMG_CF_INDEXED_2BIT`. See the full list in the [Color formats](#) section.

#### Indexed colors

For `LV_IMG_CF_INDEXED_1/2/4/8` color formats a palette needs to be initialized with `lv_canvas_set_palette(canvas, 3, LV_COLOR_RED)`. It sets pixels with `index=3` to red.

#### Drawing

To set a pixel on the canvas, use `lv_canvas_set_px(canvas, x, y, LV_COLOR_RED)`. With `LV_IMG_CF_INDEXED_...` or `LV_IMG_CF_ALPHA_...`, the index of the color or the alpha value needs to be passed as color. E.g. `lv_color_t c; c.full = 3;`

`lv_canvas_fill_bg(canvas, LV_COLOR_BLUE, LV_OPA_50)` fills the whole canvas to blue with 50% opacity. Note that, if the current color format doesn't support colors (e.g. `LV_IMG_CF_ALPHA_2BIT`) the color will be ignored. Similarly, if opacity is not supported (e.g. `LV_IMG_CF_TRUE_COLOR`) it will be ignored.

An array of pixels can be copied to the canvas with `lv_canvas_copy_buf(canvas, buffer_to_copy, x, y, width, height)`. The color format of the buffer and the canvas need to match.

To draw something to the canvas use

- `lv_canvas_draw_rect(canvas, x, y, width, height, &draw_dsc)`
- `lv_canvas_draw_text(canvas, x, y, max_width, &draw_dsc, txt)`
- `lv_canvas_draw_img(canvas, x, y, &img_src, &draw_dsc)`
- `lv_canvas_draw_line(canvas, point_array, point_cnt, &draw_dsc)`
- `lv_canvas_draw_polygon(canvas, points_array, point_cnt, &draw_dsc)`
- `lv_canvas_draw_arc(canvas, x, y, radius, start_angle, end_angle, &draw_dsc)`

`draw_dsc` is a `lv_draw_rect/label/img/line/arc_dsc_t` variable which should be first initialized with `lv_draw_rect/label/img/line/arc_dsc_init()` function and then its fields should be modified with the desired colors and other values.

The draw function can draw to any color format. For example, it's possible to draw a text to an `LV_IMG_VF_ALPHA_8BIT` canvas and use the result image as a *draw mask* later.

## Transformations

`lv_canvas_transform()` can be used to rotate and/or scale the image of an image and store the result on the canvas. The function needs the following parameters:

- `canvas` pointer to a canvas object to store the result of the transformation.
- `img` pointer to an image descriptor to transform. Can be the image descriptor of an other canvas too (`lv_canvas_get_img()`).
- `angle` the angle of rotation (0..3600), 0.1 deg resolution
- `zoom` zoom factor (256 no zoom, 512 double size, 128 half size);
- `offset_x` offset X to tell where to put the result data on destination canvas
- `offset_y` offset Y to tell where to put the result data on destination canvas
- `pivot_x` pivot X of rotation. Relative to the source canvas. Set to `source width / 2` to rotate around the center
- `pivot_y` pivot Y of rotation. Relative to the source canvas. Set to `source height / 2` to rotate around the center
- `antialias` true: apply anti-aliasing during the transformation. Looks better but slower.

Note that a canvas can't be rotated on itself. You need a source and destination canvas or image.

## Blur

A given area of the canvas can be blurred horizontally with `lv_canvas_blur_hor(canvas, &area, r)` or vertically with `lv_canvas_blur_ver(canvas, &area, r)`. `r` is the radius of the blur (greater value means more intensive blurring). `area` is the area where the blur should be applied (interpreted relative to the canvas)

## Events

The same events are sent than for the *Images*.

Learn more about *Events*.

## Keys

No *Keys* are processed by the object type.

Learn more about *Keys*.

## Example

### C

#### Drawing on the Canvas and rotate

code

```
#include "../lv_examples.h"
#if LV_USE_CANVAS && LV_BUILD_EXAMPLES

#define CANVAS_WIDTH 200
#define CANVAS_HEIGHT 150

void lv_example_canvas_1(void)
{
 lv_draw_rect_dsc_t rect_dsc;
 lv_draw_rect_dsc_init(&rect_dsc);
 rect_dsc.radius = 10;
 rect_dsc.bg_opa = LV_OPA_COVER;
 rect_dsc.bg_grad_dir = LV_GRAD_DIR_HOR;
 rect_dsc.bg_color = lv_palette_main(LV_PALETTE_RED);
 rect_dsc.bg_grad_color = lv_palette_main(LV_PALETTE_BLUE);
 rect_dsc.border_width = 2;
 rect_dsc.border_opa = LV_OPA_90;
 rect_dsc.border_color = lv_color_white();
 rect_dsc.shadow_width = 5;
 rect_dsc.shadow_ofs_x = 5;
 rect_dsc.shadow_ofs_y = 5;

 lv_draw_label_dsc_t label_dsc;
 lv_draw_label_dsc_init(&label_dsc);
 label_dsc.color = lv_palette_main(LV_PALETTE_YELLOW);

 static lv_color_t cbuf[LV_CANVAS_BUF_SIZE_TRUE_COLOR(CANVAS_WIDTH, CANVAS_
↪HEIGHT)];

 lv_obj_t * canvas = lv_canvas_create(lv_scr_act());
 lv_canvas_set_buffer(canvas, cbuf, CANVAS_WIDTH, CANVAS_HEIGHT, LV_IMG_CF_TRUE_
↪COLOR);
 lv_obj_center(canvas);
 lv_canvas_fill_bg(canvas, lv_palette_lighten(LV_PALETTE_GREY, 3), LV_OPA_COVER);

 lv_canvas_draw_rect(canvas, 70, 60, 100, 70, &rect_dsc);

 lv_canvas_draw_text(canvas, 40, 20, 100, &label_dsc, "Some text on text canvas");

 /*Test the rotation. It requires an other buffer where the original image is ↵
↪stored.
```

(continues on next page)

(continued from previous page)

```

 So copy the current image to buffer and rotate it to the canvas/
 static lv_color_t cbuf_tmp[CANVAS_WIDTH * CANVAS_HEIGHT];
 memcpy(cbuf_tmp, cbuf, sizeof(cbuf_tmp));
 lv_img_dsc_t img;
 img.data = (void *)cbuf_tmp;
 img.header.cf = LV_IMG_CF_TRUE_COLOR;
 img.header.w = CANVAS_WIDTH;
 img.header.h = CANVAS_HEIGHT;

 lv_canvas_fill_bg(canvas, lv_palette_lighten(LV_PALETTE_GREY, 3), LV_OPA_COVER);
 lv_canvas_transform(canvas, &img, 30, LV_IMG_ZOOM_NONE, 0, 0, CANVAS_WIDTH / 2,
↪CANVAS_HEIGHT / 2, true);
}

#endif

```

## Transparent Canvas with chroma keying

code

```

#include "../lv_examples.h"
#if LV_USE_CANVAS && LV_BUILD_EXAMPLES

#define CANVAS_WIDTH 50
#define CANVAS_HEIGHT 50

/**
 * Create a transparent canvas with Chroma keying and indexed color format (palette).
 */
void lv_example_canvas_2(void)
{
 /*Create a button to better see the transparency*/
 lv_btn_create(lv_scr_act());

 /*Create a buffer for the canvas*/
 static lv_color_t cbuf[LV_CANVAS_BUF_SIZE_INDEXED_1BIT(CANVAS_WIDTH, CANVAS_
↪HEIGHT)];

 /*Create a canvas and initialize its the palette*/
 lv_obj_t * canvas = lv_canvas_create(lv_scr_act());
 lv_canvas_set_buffer(canvas, cbuf, CANVAS_WIDTH, CANVAS_HEIGHT, LV_IMG_CF_INDEXED_
↪1BIT);
 lv_canvas_set_palette(canvas, 0, LV_COLOR_CHROMA_KEY);
 lv_canvas_set_palette(canvas, 1, lv_palette_main(LV_PALETTE_RED));

 /*Create colors with the indices of the palette*/
 lv_color_t c0;
 lv_color_t c1;

 c0.full = 0;
 c1.full = 1;

 /*Red background (There is no dedicated alpha channel in indexed images so LV_OPA_
↪COVER is ignored)*/
 lv_canvas_fill_bg(canvas, c1, LV_OPA_COVER);
}

```

(continues on next page)

(continued from previous page)

```

/*Create hole on the canvas*/
uint32_t x;
uint32_t y;
for(y = 10; y < 30; y++) {
 for(x = 5; x < 20; x++) {
 lv_canvas_set_px(canvas, x, y, c0);
 }
}
}
#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_canvas_t lv_canvas_t
```

### Functions

*lv\_obj\_t* \***lv\_canvas\_create**(*lv\_obj\_t* \*parent)

Create a canvas object

**Parameters** **parent** -- pointer to an object, it will be the parent of the new canvas

**Returns** pointer to the created canvas

void **lv\_canvas\_set\_buffer**(*lv\_obj\_t* \*canvas, void \*buf, lv\_coord\_t w, lv\_coord\_t h, *lv\_img\_cf\_t* cf)

Set a buffer for the canvas.

**Parameters**

- **buf** -- a buffer where the content of the canvas will be. The required size is (lv\_img\_color\_format\_get\_px\_size(cf) \* w) / 8 \* h) It can be allocated with `lv_mem_alloc()` or it can be statically allocated array (e.g. static lv\_color\_t buf[100\*50]) or it can be an address in RAM or external SRAM
- **canvas** -- pointer to a canvas object
- **w** -- width of the canvas
- **h** -- height of the canvas
- **cf** -- color format. LV\_IMG\_CF\_...

void **lv\_canvas\_set\_px**(*lv\_obj\_t* \*canvas, lv\_coord\_t x, lv\_coord\_t y, lv\_color\_t c)

Set the color of a pixel on the canvas

**Parameters**

- **canvas** --

- **x** -- x coordinate of the point to set
- **y** -- x coordinate of the point to set
- **c** -- color of the point

void **lv\_canvas\_set\_palette**(*lv\_obj\_t* \*canvas, uint8\_t id, lv\_color\_t c)

Set the palette color of a canvas with index format. Valid only for LV\_IMG\_CF\_INDEXED1/2/4/8

#### Parameters

- **canvas** -- pointer to canvas object
- **id** -- the palette color to set:
  - for LV\_IMG\_CF\_INDEXED1: 0..1
  - for LV\_IMG\_CF\_INDEXED2: 0..3
  - for LV\_IMG\_CF\_INDEXED4: 0..15
  - for LV\_IMG\_CF\_INDEXED8: 0..255
- **c** -- the color to set

lv\_color\_t **lv\_canvas\_get\_px**(*lv\_obj\_t* \*canvas, lv\_coord\_t x, lv\_coord\_t y)

Get the color of a pixel on the canvas

#### Parameters

- **canvas** --
- **x** -- x coordinate of the point to set
- **y** -- x coordinate of the point to set

**Returns** color of the point

*lv\_img\_dsc\_t* \***lv\_canvas\_get\_img**(*lv\_obj\_t* \*canvas)

Get the image of the canvas as a pointer to an *lv\_img\_dsc\_t* variable.

**Parameters** **canvas** -- pointer to a canvas object

**Returns** pointer to the image descriptor.

void **lv\_canvas\_copy\_buf**(*lv\_obj\_t* \*canvas, const void \*to\_copy, lv\_coord\_t x, lv\_coord\_t y, lv\_coord\_t w, lv\_coord\_t h)

Copy a buffer to the canvas

#### Parameters

- **canvas** -- pointer to a canvas object
- **to\_copy** -- buffer to copy. The color format has to match with the canvas's buffer color format
- **x** -- left side of the destination position
- **y** -- top side of the destination position
- **w** -- width of the buffer to copy
- **h** -- height of the buffer to copy

void **lv\_canvas\_transform**(*lv\_obj\_t* \*canvas, *lv\_img\_dsc\_t* \*img, int16\_t angle, uint16\_t zoom, lv\_coord\_t offset\_x, lv\_coord\_t offset\_y, int32\_t pivot\_x, int32\_t pivot\_y, bool antialias)

Transform and image and store the result on a canvas.

#### Parameters



- **canvas** -- pointer to a canvas object to store the result of the transformation.
- **img** -- pointer to an image descriptor to transform. Can be the image descriptor of an other canvas too (`lv_canvas_get_img()`).
- **angle** -- the angle of rotation (0..3600), 0.1 deg resolution
- **zoom** -- zoom factor (256 no zoom);
- **offset\_x** -- offset X to tell where to put the result data on destination canvas
- **offset\_y** -- offset Y to tell where to put the result data on destination canvas
- **pivot\_x** -- pivot X of rotation. Relative to the source canvas Set to `source width / 2` to rotate around the center
- **pivot\_y** -- pivot Y of rotation. Relative to the source canvas Set to `source height / 2` to rotate around the center
- **antialias** -- apply anti-aliasing during the transformation. Looks better but slower.

void **lv\_canvas\_blur\_hor**(*lv\_obj\_t* \*canvas, const lv\_area\_t \*area, uint16\_t r)  
Apply horizontal blur on the canvas

#### Parameters

- **canvas** -- pointer to a canvas object
- **area** -- the area to blur. If NULL the whole canvas will be blurred.
- **r** -- radius of the blur

void **lv\_canvas\_blur\_ver**(*lv\_obj\_t* \*canvas, const lv\_area\_t \*area, uint16\_t r)  
Apply vertical blur on the canvas

#### Parameters

- **canvas** -- pointer to a canvas object
- **area** -- the area to blur. If NULL the whole canvas will be blurred.
- **r** -- radius of the blur

void **lv\_canvas\_fill\_bg**(*lv\_obj\_t* \*canvas, lv\_color\_t color, lv\_opa\_t opa)  
Fill the canvas with color

#### Parameters

- **canvas** -- pointer to a canvas
- **color** -- the background color
- **opa** -- the desired opacity

void **lv\_canvas\_draw\_rect**(*lv\_obj\_t* \*canvas, lv\_coord\_t x, lv\_coord\_t y, lv\_coord\_t w, lv\_coord\_t h, const lv\_draw\_rect\_dsc\_t \*draw\_dsc)  
Draw a rectangle on the canvas

#### Parameters

- **canvas** -- pointer to a canvas object
- **x** -- left coordinate of the rectangle
- **y** -- top coordinate of the rectangle
- **w** -- width of the rectangle
- **h** -- height of the rectangle

- **draw\_dsc** -- descriptor of the rectangle

```
void lv_canvas_draw_text(lv_obj_t *canvas, lv_coord_t x, lv_coord_t y, lv_coord_t max_w,
 lv_draw_label_dsc_t *draw_dsc, const char *txt)
```

Draw a text on the canvas.

#### Parameters

- **canvas** -- pointer to a canvas object
- **x** -- left coordinate of the text
- **y** -- top coordinate of the text
- **max\_w** -- max width of the text. The text will be wrapped to fit into this size
- **draw\_dsc** -- pointer to a valid label descriptor `lv_draw_label_dsc_t`
- **txt** -- text to display

```
void lv_canvas_draw_img(lv_obj_t *canvas, lv_coord_t x, lv_coord_t y, const void *src, const
 lv_draw_img_dsc_t *draw_dsc)
```

Draw an image on the canvas

#### Parameters

- **canvas** -- pointer to a canvas object
- **x** -- left coordinate of the image
- **y** -- top coordinate of the image
- **src** -- image source. Can be a pointer an `lv_img_dsc_t` variable or a path an image.
- **draw\_dsc** -- pointer to a valid label descriptor `lv_draw_img_dsc_t`

```
void lv_canvas_draw_line(lv_obj_t *canvas, const lv_point_t points[], uint32_t point_cnt, const
 lv_draw_line_dsc_t *draw_dsc)
```

Draw a line on the canvas

#### Parameters

- **canvas** -- pointer to a canvas object
- **points** -- point of the line
- **point\_cnt** -- number of points
- **draw\_dsc** -- pointer to an initialized `lv_draw_line_dsc_t` variable

```
void lv_canvas_draw_polygon(lv_obj_t *canvas, const lv_point_t points[], uint32_t point_cnt, const
 lv_draw_rect_dsc_t *draw_dsc)
```

Draw a polygon on the canvas

#### Parameters

- **canvas** -- pointer to a canvas object
- **points** -- point of the polygon
- **point\_cnt** -- number of points
- **draw\_dsc** -- pointer to an initialized `lv_draw_rect_dsc_t` variable

```
void lv_canvas_draw_arc(lv_obj_t *canvas, lv_coord_t x, lv_coord_t y, lv_coord_t r, int32_t start_angle,
 int32_t end_angle, const lv_draw_arc_dsc_t *draw_dsc)
```

Draw an arc on the canvas

**Parameters**

- **canvas** -- pointer to a canvas object
- **x** -- origo x of the arc
- **y** -- origo y of the arc
- **r** -- radius of the arc
- **start\_angle** -- start angle in degrees
- **end\_angle** -- end angle in degrees
- **draw\_dsc** -- pointer to an initialized `lv_draw_line_dsc_t` variable

```
struct _lv_canvas_t
```

**Public Members**

```
lv_img_t img
```

```
lv_img_dsc_t dsc
```

## 5.2.6 Checkbox (`lv_checkbox`)

**Overview**

The Checkbox object is created from a "tick box" and a label. When the Checkbox is clicked the tick box is toggled.

**Parts and Styles**

- **LV\_PART\_MAIN** The is the background of the Checkbox and it uses the text and all the typical background style properties. `pad_column` adjusts the spacing between the tickbox and the label
- **LV\_PART\_INDICATOR** The "tick box" is a square the uses all the typical background style properties. By default its size is equal to the height of the main part's font. Padding properties makes the tick box larger in the respective directions.

The Checkbox is added to the default group (if it is set).

**Usage****Text**

The text can be modified by the `lv_checkbox_set_text(cb, "New text")` function. It will dynamically allocate the text.

To set a static text, use `lv_checkbox_set_static_text(cb, txt)`. This way, only a pointer of `txt` will be stored and it shouldn't be deallocated while the checkbox exists.

## Check, uncheck, disable

You can manually check, un-check, and disable the Checkbox by using the common state add/clear function:

```
lv_obj_add_state(cb, LV_STATE_CHECKED); /*Make the chekbox checked*/
lv_obj_clear_state(cb, LV_STATE_CHECKED); /*MAke the checkbox unchecked*/
lv_obj_add_state(cb, LV_STATE_CHECKED | LV_STATE_DISABLED); /*Make the checkbox
↪checked and disabled*/
```

## Events

- LV\_EVENT\_VALUE\_CHANGED Sent when the checkbox is toggled.
- LV\_EVENT\_DRAW\_PART\_BEGIN and LV\_EVENT\_DRAW\_PART\_END are sent for both main and indicator parts to allow hooking the drawing. The for more detail on the main part see the [Base object](#)'s documentation. For the indicator the following fields are used: clip\_area, draw\_area, rect\_dsc, part.

Learn more about [Events](#).

## Keys

The following *Keys* are processed by the 'Buttons':

- LV\_KEY\_RIGHT/UP Go to toggled state if toggling is enabled
- LV\_KEY\_LEFT/DOWN Go to non-toggled state if toggling is enabled
- LV\_KEY\_ENTER Clicks the checkbox and toggles it

Note that, as usual, the state of LV\_KEY\_ENTER is translated to LV\_EVENT\_PRESSED/PRESSING/RELEASED etc.

Learn more about [Keys](#).

## Example

### C

#### Simple Checkboxes

code

```
#include "../lv_examples.h"
#if LV_USE_CHECKBOX && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);
 if(code == LV_EVENT_VALUE_CHANGED) {
 const char * txt = lv_checkbox_get_text(obj);
 const char * state = lv_obj_get_state(obj) & LV_STATE_CHECKED ? "Checked" :
↪"Unchecked";
 LV_LOG_USER("%s: %s", txt, state);
 }
}
```

(continues on next page)

(continued from previous page)

```

}

void lv_example_checkbox_1(void)
{
 lv_obj_set_flex_flow(lv_scr_act(), LV_FLEX_FLOW_COLUMN);
 lv_obj_set_flex_align(lv_scr_act(), LV_FLEX_ALIGN_CENTER, LV_FLEX_ALIGN_START, LV_
↪ FLEX_ALIGN_CENTER);

 lv_obj_t * cb;
 cb = lv_checkbox_create(lv_scr_act());
 lv_checkbox_set_text(cb, "Apple");
 lv_obj_add_event_cb(cb, event_handler, LV_EVENT_ALL, NULL);

 cb = lv_checkbox_create(lv_scr_act());
 lv_checkbox_set_text(cb, "Banana");
 lv_obj_add_state(cb, LV_STATE_CHECKED);
 lv_obj_add_event_cb(cb, event_handler, LV_EVENT_ALL, NULL);

 cb = lv_checkbox_create(lv_scr_act());
 lv_checkbox_set_text(cb, "Lemon");
 lv_obj_add_state(cb, LV_STATE_DISABLED);
 lv_obj_add_event_cb(cb, event_handler, LV_EVENT_ALL, NULL);

 cb = lv_checkbox_create(lv_scr_act());
 lv_obj_add_state(cb, LV_STATE_CHECKED | LV_STATE_DISABLED);
 lv_checkbox_set_text(cb, "Melon\nand a new line");
 lv_obj_add_event_cb(cb, event_handler, LV_EVENT_ALL, NULL);

 lv_obj_update_layout(cb);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_checkbox_t lv_checkbox_t
```

## Functions

*lv\_obj\_t* \***lv\_checkbox\_create**(*lv\_obj\_t* \*parent)

Create a check box object

**Parameters** **parent** -- pointer to an object, it will be the parent of the new button

**Returns** pointer to the created check box

void **lv\_checkbox\_set\_text**(*lv\_obj\_t* \*obj, const char \*txt)

Set the text of a check box. **txt** will be copied and may be deallocated after this function returns.

**Parameters**

- **cb** -- pointer to a check box
- **txt** -- the text of the check box. NULL to refresh with the current text.

void **lv\_checkbox\_set\_text\_static**(*lv\_obj\_t* \*obj, const char \*txt)

Set the text of a check box. **txt** must not be deallocated during the life of this checkbox.

**Parameters**

- **cb** -- pointer to a check box
- **txt** -- the text of the check box. NULL to refresh with the current text.

const char \***lv\_checkbox\_get\_text**(const *lv\_obj\_t* \*obj)

Get the text of a check box

**Parameters** **cb** -- pointer to check box object

**Returns** pointer to the text of the check box

## Variables

const lv\_obj\_class\_t **lv\_checkbox\_class**

struct **\_lv\_checkbox\_t**

### Public Members

*lv\_obj\_t* **obj**

char \***txt**

uint32\_t **static\_txt**

## 5.2.7 Drop-down list (lv\_dropdown)

### Overview

The drop-down list allows the user to select one value from a list.

The drop-down list is closed by default and displays a single value or a predefined text. When activated (by click on the drop-down list), a list is created from which the user may select one option. When the user selects a new value, the list is deleted.

The Drop-down list is added to the default group (if it is set). Besides the Drop-down list is an editable object to allow selecting an option with encoder navigation too.

## Parts and Styles

The Dropdown widget is built from the elements: a "button" and a "list" (they are not related to the button and list widgets)

### Button

- **LV\_PART\_MAIN** The background of the button. It uses the typical background properties and text properties for the text on it.
- **LV\_PART\_INDICATOR** Typically an arrow symbol that can be an image or a text (**LV\_SYMBOL**).

The button goes to **LV\_STATE\_CHECKED** when it is opened.

### List

- **LV\_PART\_MAIN** The list itself and it uses the typical background properties. **max\_height** can be used to limit the height of the list.
- **LV\_PART\_SCROLLBAR** The scrollbar the background, border, shadow properties and width (for its width) and right padding for the spacing on the right.
- **LV\_PART\_SELECTED** Refers to the currently pressed, checked or pressed+checked option. It also uses the typical background properties.

As the list does not exist when the drop-down list is closed it's not possible to simply add styles to it. Instead the following should be done:

1. Add an event handler to the button for **LV\_EVENT\_VALUE\_CHANGED** (triggered when the list is opened/closed)
2. Use `lv_obj_t * list = lv_dropdown_get_list(dropdown)`
3. `if(list != NULL) { /*Add the styles to the list*/ }`

Alternatively the theme can be extended with the new styles.

## Usage

### Overview

### Set options

The options are passed to the drop-down list as a string with `lv_dropdown_set_options(dropdown, options)`. The options should be separated by `\n`. For example: "First\nSecond\nThird". The string will be saved in the drop-down list, so it can be in a local variable too.

The `lv_dropdown_add_option(dropdown, "New option", pos)` function inserts a new option to **pos** index.

To save memory the options can be set from a static(constant) string too with `lv_dropdown_set_static_options(dropdown, options)`. In this case the options string should be alive while the drop-down list exists and `lv_dropdown_add_option` can't be used.

You can select an option manually with `lv_dropdown_set_selected(dropdown, id)`, where `id` is the index of an option.

### Get selected option

To get the currently selected option, use `lv_dropdown_get_selected(dropdown)`. It will return the *index* of the selected option.

`lv_dropdown_get_selected_str(dropdown, buf, buf_size)` copies the name of the selected option to a `buf`.

### Direction

The list can be created on any side. The default `LV_DIR_BOTTOM` can be modified by `lv_dropdown_set_dir(dropdown, LV_DIR_LEFT/RIGHT/UP/BOTTOM)` function.

If the list would be vertically out of the screen, it will align to the edge.

### Symbol

A symbol (typically an arrow) can be added to the drop down list with `lv_dropdown_set_symbol(dropdown, LV_SYMBOL_...)`

If the direction of the drop-down list is `LV_DIR_LEFT` the symbol will be shown on the left, else on the right.

### Show selected

The main part can either show the selected option or a static text. If a static is set with `lv_dropdown_set_text(dropdown, "Some text")` it will be shown regardless to the selected option. If the text is `NULL` the selected option is displayed on the button.

### Manually open/close

To manually open or close the drop-down list the `lv_dropdown_open/close(dropdown)` function can be used.

### Events

Besides the [Generic events](#), the following [Special events](#) are sent by the drop-down list:

- `LV_EVENT_VALUE_CHANGED` Sent when the new option is selected or the list is opened/closed.

Learn more about [Events](#).



## Keys

- LV\_KEY\_RIGHT/DOWN Select the next option.
- LV\_KEY\_LEFT/UP Select the previous option.
- LV\_KEY\_ENTER Apply the selected option (Send LV\_EVENT\_VALUE\_CHANGED event and close the drop-down list).

Learn more about [Keys](#).

## Example

### C

#### Simple Drop down list

code

```
#include "../lv_examples.h"
#if LV_USE_DROPDOWN && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);
 if(code == LV_EVENT_VALUE_CHANGED) {
 char buf[32];
 lv_dropdown_get_selected_str(obj, buf, sizeof(buf));
 LV_LOG_USER("Option: %s", buf);
 }
}

void lv_example_dropdown_1(void)
{
 /*Create a normal drop down list*/
 lv_obj_t * dd = lv_dropdown_create(lv_scr_act());
 lv_dropdown_set_options(dd, "Apple\n"
 "Banana\n"
 "Orange\n"
 "Cherry\n"
 "Grape\n"
 "Raspberry\n"
 "Melon\n"
 "Orange\n"
 "Lemon\n"
 "Nuts");

 lv_obj_align(dd, LV_ALIGN_TOP_MID, 0, 20);
 lv_obj_add_event_cb(dd, event_handler, LV_EVENT_ALL, NULL);
}

#endif
```

## Drop down in four directions

code

```
#include "../../lv_examples.h"
#if LV_USE_DROPDOWN && LV_BUILD_EXAMPLES

/**
 * Create a drop down, up, left and right menus
 */
void lv_example_dropdown_2(void)
{
 static const char * opts = "Apple\n"
 "Banana\n"
 "Orange\n"
 "Melon\n"
 "Grape\n"
 "Raspberry";

 lv_obj_t * dd;
 dd = lv_dropdown_create(lv_scr_act());
 lv_dropdown_set_options_static(dd, opts);
 lv_obj_align(dd, LV_ALIGN_TOP_MID, 0, 10);

 dd = lv_dropdown_create(lv_scr_act());
 lv_dropdown_set_options_static(dd, opts);
 lv_dropdown_set_dir(dd, LV_DIR_BOTTOM);
 lv_dropdown_set_symbol(dd, LV_SYMBOL_UP);
 lv_obj_align(dd, LV_ALIGN_BOTTOM_MID, 0, -10);

 dd = lv_dropdown_create(lv_scr_act());
 lv_dropdown_set_options_static(dd, opts);
 lv_dropdown_set_dir(dd, LV_DIR_RIGHT);
 lv_dropdown_set_symbol(dd, LV_SYMBOL_RIGHT);
 lv_obj_align(dd, LV_ALIGN_LEFT_MID, 10, 0);

 dd = lv_dropdown_create(lv_scr_act());
 lv_dropdown_set_options_static(dd, opts);
 lv_dropdown_set_dir(dd, LV_DIR_LEFT);
 lv_dropdown_set_symbol(dd, LV_SYMBOL_LEFT);
 lv_obj_align(dd, LV_ALIGN_RIGHT_MID, -10, 0);
}

#endif
```

## Menu

code

```
#include "../../lv_examples.h"
#if LV_USE_DROPDOWN && LV_BUILD_EXAMPLES

static void event_cb(lv_event_t * e)
{
 lv_obj_t * dropdown = lv_event_get_target(e);
```

(continues on next page)

(continued from previous page)

```

 char buf[64];
 lv_dropdown_get_selected_str(dropdown, buf, sizeof(buf));
 LV_LOG_USER("%s' is selected", buf);
}

/**
 * Create a menu from a drop-down list and show some drop-down list features and
 * styling
 */
void lv_example_dropdown_3(void)
{
 /*Create a drop down list*/
 lv_obj_t * dropdown = lv_dropdown_create(lv_scr_act());
 lv_obj_align(dropdown, LV_ALIGN_TOP_LEFT, 10, 10);
 lv_dropdown_set_options(dropdown, "New project\n"
 "New file\n"
 "Open project\n"
 "Recent projects\n"
 "Preferences\n"
 "Exit");

 /*Set a fixed text to display on the button of the drop-down list*/
 lv_dropdown_set_text(dropdown, "Menu");

 /*Use a custom image as down icon and flip it when the list is opened*/
 LV_IMG_DECLARE(img_caret_down)
 lv_dropdown_set_symbol(dropdown, &img_caret_down);
 lv_obj_set_style_transform_angle(dropdown, 1800, LV_PART_INDICATOR | LV_STATE_
 ↪CHECKED);

 /*In a menu we don't need to show the last clicked item*/
 lv_dropdown_set_selected_highlight(dropdown, false);

 lv_obj_add_event_cb(dropdown, event_cb, LV_EVENT_VALUE_CHANGED, NULL);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```

typedef _lv_dropdown_t lv_dropdown_t
typedef _lv_dropdown_list_t lv_dropdown_list_t

```

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_DROPDOWN\_POS\_LAST)

*lv\_obj\_t* \***lv\_dropdown\_create**(*lv\_obj\_t* \*parent)

Create a drop-down list objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new drop-down list

**Returns** pointer to the created drop-down list

void **lv\_dropdown\_set\_text**(*lv\_obj\_t* \*obj, const char \*txt)

Set text of the drop-down list's button. If set to **NULL** the selected option's text will be displayed on the button. If set to a specific text then that text will be shown regardless the selected option.

**Parameters**

- **obj** -- pointer to a drop-down list object
- **txt** -- the text as a string (Only it's pointer is saved)

void **lv\_dropdown\_set\_options**(*lv\_obj\_t* \*obj, const char \*options)

Set the options in a drop-down list from a string. The options will be copied and saved in the object so the **options** can be destroyed after calling this function

**Parameters**

- **obj** -- pointer to drop-down list object
- **options** -- a string with '  
' separated options. E.g. "One\nTwo\nThree"

void **lv\_dropdown\_set\_options\_static**(*lv\_obj\_t* \*obj, const char \*options)

Set the options in a drop-down list from a static string (global, static or dynamically allocated). Only the pointer of the option string will be saved.

**Parameters**

- **obj** -- pointer to drop-down list object
- **options** -- a static string with '  
' separated options. E.g. "One\nTwo\nThree"

void **lv\_dropdown\_add\_option**(*lv\_obj\_t* \*obj, const char \*option, uint32\_t pos)

Add an options to a drop-down list from a string. Only works for non-static options.

**Parameters**

- **obj** -- pointer to drop-down list object
- **option** -- a string without '  
' . E.g. "Four"
- **pos** -- the insert position, indexed from 0, LV\_DROPDOWN\_POS\_LAST = end of string

void **lv\_dropdown\_clear\_options**(*lv\_obj\_t* \*obj)

Clear all options in a drop-down list. Works with both static and dynamic options.

**Parameters** **obj** -- pointer to drop-down list object

void **lv\_dropdown\_set\_selected**(*lv\_obj\_t* \*obj, uint16\_t sel\_opt)

Set the selected option

**Parameters**

- **obj** -- pointer to drop-down list object
- **sel\_opt** -- id of the selected option (0 ... number of option - 1);

void **lv\_dropdown\_set\_dir**(*lv\_obj\_t* \*obj, lv\_dir\_t dir)

Set the direction of the a drop-down list

**Parameters**

- **obj** -- pointer to a drop-down list object
- **dir** -- LV\_DIR\_LEFT/RIGHT/TOP/BOTTOM

void **lv\_dropdown\_set\_symbol**(*lv\_obj\_t* \*obj, const void \*symbol)

Set an arrow or other symbol to display when on drop-down list's button. Typically a down caret or arrow.

---

**Note:** angle and zoom transformation can be applied if the symbol is an image. E.g. when drop down is checked (opened) rotate the symbol by 180 degree

---

**Parameters**

- **obj** -- pointer to drop-down list object
- **symbol** -- a text like LV\_SYMBOL\_DOWN, an image (pointer or path) or NULL to not draw symbol icon

void **lv\_dropdown\_set\_selected\_highlight**(*lv\_obj\_t* \*obj, bool en)

Set whether the selected option in the list should be highlighted or not

**Parameters**

- **obj** -- pointer to drop-down list object
- **en** -- true: highlight enabled; false: disabled

*lv\_obj\_t* \***lv\_dropdown\_get\_list**(*lv\_obj\_t* \*obj)

Get the list of a drop-down to allow styling or other modifications

**Parameters** **obj** -- pointer to a drop-down list object

**Returns** pointer to the list of the drop-down

const char \***lv\_dropdown\_get\_text**(*lv\_obj\_t* \*obj)

Get text of the drop-down list's button.

**Parameters** **obj** -- pointer to a drop-down list object

**Returns** the text as string, NULL if no text

const char \***lv\_dropdown\_get\_options**(const *lv\_obj\_t* \*obj)

Get the options of a drop-down list

**Parameters** **obj** -- pointer to drop-down list object

**Returns**

the options separated by '

'-s (E.g. "Option1\nOption2\nOption3")

uint16\_t **lv\_dropdown\_get\_selected**(const *lv\_obj\_t* \*obj)

Get the index of the selected option

**Parameters** **obj** -- pointer to drop-down list object

**Returns** index of the selected option (0 ... number of option - 1);

uint16\_t **lv\_dropdown\_get\_option\_cnt**(const lv\_obj\_t \*obj)

Get the total number of options

**Parameters** **obj** -- pointer to drop-down list object

**Returns** the total number of options in the list

void **lv\_dropdown\_get\_selected\_str**(const lv\_obj\_t \*obj, char \*buf, uint32\_t buf\_size)

Get the current selected option as a string

**Parameters**

- **obj** -- pointer to drop-down object
- **buf** -- pointer to an array to store the string
- **buf\_size** -- size of buf in bytes. 0: to ignore it.

const char \***lv\_dropdown\_get\_symbol**(lv\_obj\_t \*obj)

Get the symbol on the drop-down list. Typically a down caret or arrow.

**Parameters** **obj** -- pointer to drop-down list object

**Returns** the symbol or NULL if not enabled

bool **lv\_dropdown\_get\_selected\_highlight**(lv\_obj\_t \*obj)

Get whether the selected option in the list should be highlighted or not

**Parameters** **obj** -- pointer to drop-down list object

**Returns** true: highlight enabled; false: disabled

lv\_dir\_t **lv\_dropdown\_get\_dir**(const lv\_obj\_t \*obj)

Get the direction of the drop-down list

**Parameters** **obj** -- pointer to a drop-down list object

**Returns** LV\_DIR\_LEF/RIGHT/TOP/BOTTOM

void **lv\_dropdown\_open**(lv\_obj\_t \*dropdown\_obj)

Open the drop-down list

**Parameters** **obj** -- pointer to drop-down list object

void **lv\_dropdown\_close**(lv\_obj\_t \*obj)

Close (Collapse) the drop-down list

**Parameters** **obj** -- pointer to drop-down list object

## Variables

const lv\_obj\_class\_t **lv\_dropdown\_class**

const lv\_obj\_class\_t **lv\_dropdownlist\_class**

struct **\_lv\_dropdown\_t**

## Public Members

*lv\_obj\_t* **obj**

*lv\_obj\_t* \***list**

The dropped down list

const char \***text**

Text to display on the dropdown's button

const void \***symbol**

Arrow or other icon when the drop-down list is closed

char \***options**

Options in a a '

' separated list

uint16\_t **option\_cnt**

Number of options

uint16\_t **sel\_opt\_id**

Index of the currently selected option

uint16\_t **sel\_opt\_id\_orig**

Store the original index on focus

uint16\_t **pr\_opt\_id**

Index of the currently pressed option

lv\_dir\_t **dir**

Direction in which the list should open

uint8\_t **static\_txt**

1: Only a pointer is saved in **options**

uint8\_t **selected\_highlight**

1: Make the selected option highlighted in the list

struct **\_lv\_dropdown\_list\_t**

## Public Members

*lv\_obj\_t* **obj**

*lv\_obj\_t* \***dropdown**

## 5.2.8 Image (lv\_img)

### Overview

Images are the basic object to display images from the flash (as arrays) or externally as files. Images can display symbols (LV\_SYMBOL\_...) too.

Using the [Image decoder interface](#) custom image formats can be supported as well.

### Parts and Styles

- LV\_PART\_MAIN A background rectangle that uses the typical background style properties and the image itself using the image style properties.

### Usage

#### Image source

To provide maximum flexibility, the source of the image can be:

- a variable in the code (a C array with the pixels).
- a file stored externally (like on an SD card).
- a text with *Symbols*.

To set the source of an image, use `lv_img_set_src(img, src)`.

To generate a pixel array from a PNG, JPG or BMP image, use the [Online image converter tool](#) and set the converted image with its pointer: `lv_img_set_src(img1, &converted_img_var)`; To make the variable visible in the C file, you need to declare it with `LV_IMG_DECLARE(converted_img_var)`.

To use external files, you also need to convert the image files using the online converter tool but now you should select the binary output format. You also need to use LVGL's file system module and register a driver with some functions for the basic file operation. Go to the [File system](#) to learn more. To set an image sourced from a file, use `lv_img_set_src(img, "S:folder1/my_img.bin")`.

You can set a symbol similarly to [Labels](#). In this case, the image will be rendered as text according to the *font* specified in the style. It enables to use of light-weighted mono-color "letters" instead of real images. You can set symbol like `lv_img_set_src(img1, LV_SYMBOL_OK)`.

#### Label as an image

Images and labels are sometimes used to convey the same thing. For example, to describe what a button does. Therefore, images and labels are somewhat interchangeable, that is the images can display texts by using `LV_SYMBOL_DUMMY` as the prefix of the text. For example, `lv_img_set_src(img, LV_SYMBOL_DUMMY "Some text")`.



## Transparency

The internal (variable) and external images support 2 transparency handling methods:

- **Chrome keying** - Pixels with LV\_COLOR\_CHROMA\_KEY (*lv\_conf.h*) color will be transparent.
- **Alpha byte** - An alpha byte is added to every pixel that contains the pixel's opacity

## Palette and Alpha index

Besides *True color* (RGB) color format, the following formats are also supported:

- **Indexed** - Image has a palette.
- **Alpha indexed** - Only alpha values are stored.

These options can be selected in the image converter. To learn more about the color formats, read the [Images](#) section.

## Recolor

A color can be mixed to every pixel of an image with a given intensity. It is very useful to show different states (checked, inactive, pressed, etc.) of an image without storing more versions of the same image. This feature can be enabled in the style by setting `img_recolor_opa` between LV\_OPA\_TRANSP (no recolor, value: 0) and LV\_OPA\_COVER (full recolor, value: 255). The default value is LV\_OPA\_TRANSP so this feature is disabled.

The color to mix is set by `img_recolor`.

## Auto-size

If the width or height of the image object is set to LV\_SIZE\_CONTENT the object's size will be set according to the size of image source in the respective direction.

## Mosaic

If the object's size is greater than the image size in any directions, then the image will be repeated like a mosaic. It's a very useful feature to create a large image from only a very narrow source. For example, you can have a 300 x 5 image with a special gradient and set it as a wallpaper using the mosaic feature.

## Offset

With `lv_img_set_offset_x(img, x_ofs)` and `lv_img_set_offset_y(img, y_ofs)`, you can add some offset to the displayed image. It is useful if the object size is smaller than the image source size. Using the offset parameter a [Texture atlas](#) or a "running image" effect can be created by [Animating](#) the x or y offset.

## Transformations

Using the `lv_img_set_zoom(img, factor)` the images will be zoomed. Set `factor` to 256 or `LV_IMG_ZOOM_NONE` to disable zooming. A larger value enlarges the images (e.g. 512 double size), a smaller value shrinks it (e.g. 128 half size). Fractional scale works as well. E.g. 281 for 10% enlargement.

To rotate the image use `lv_img_set_angle(img, angle)`. Angle has 0.1 degree precision, so for 45.8° set 458.

The `transform_zoom` and `transform_angle` style properties are also used to determine the final zoom and angle.

By default, the pivot point of the rotation is the center of the image. It can be changed with `lv_img_set_pivot(img, pivot_x, pivot_y)`. 0;0 is the top left corner.

The quality of the transformation can be adjusted with `lv_img_set_antialias(img, true/false)`. With enabled anti-aliasing the transformations have a higher quality but they are slower.

The transformations require the whole image to be available. Therefore indexed images (`LV_IMG_CF_INDEXED_1..8`), alpha only images (`LV_IMG_CF_ALPHA_1..8`) or images from files can not be transformed. In other words transformations work only on true color images stored as C array, or if a custom [Image decoder](#) returns the whole image.

Note that, the real coordinates of image object won't change during transformation. That is `lv_obj_get_width/height/x/y()` will return the original, non-zoomed coordinates.

## Events

No special events are sent by the image objects.

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Image from variable and symbol

code

```
#include "../../lv_examples.h"
#if LV_USE_IMG && LV_BUILD_EXAMPLES

void lv_example_img_1(void)
{
 LV_IMG_DECLARE(img_cogwheel_argb);
 lv_obj_t * img1 = lv_img_create(lv_scr_act());
 lv_img_set_src(img1, &img_cogwheel_argb);
 lv_obj_align(img1, LV_ALIGN_CENTER, 0, -20);
 lv_obj_set_size(img1, 200, 200);
}
```

(continues on next page)

(continued from previous page)

```

lv_obj_t * img2 = lv_img_create(lv_scr_act());
lv_img_set_src(img2, LV_SYMBOL_OK "Accept");
lv_obj_align_to(img2, img1, LV_ALIGN_OUT_BOTTOM_MID, 0, 20);
}

#endif

```

## Image recoloring

code

```

#include "../lv_examples.h"
#if LV_USE_IMG && LV_USE_SLIDER && LV_BUILD_EXAMPLES

static lv_obj_t * create_slider(lv_color_t color);
static void slider_event_cb(lv_event_t * e);

static lv_obj_t * red_slider, * green_slider, * blue_slider, * intense_slider;
static lv_obj_t * img1;

/**
 * Demonstrate runtime image re-coloring
 */
void lv_example_img_2(void)
{
 /*Create 4 sliders to adjust RGB color and re-color intensity*/
 red_slider = create_slider(lv_palette_main(LV_PALETTE_RED));
 green_slider = create_slider(lv_palette_main(LV_PALETTE_GREEN));
 blue_slider = create_slider(lv_palette_main(LV_PALETTE_BLUE));
 intense_slider = create_slider(lv_palette_main(LV_PALETTE_GREY));

 lv_slider_set_value(red_slider, LV_OPA_20, LV_ANIM_OFF);
 lv_slider_set_value(green_slider, LV_OPA_90, LV_ANIM_OFF);
 lv_slider_set_value(blue_slider, LV_OPA_60, LV_ANIM_OFF);
 lv_slider_set_value(intense_slider, LV_OPA_50, LV_ANIM_OFF);

 lv_obj_align(red_slider, LV_ALIGN_LEFT_MID, 25, 0);
 lv_obj_align_to(green_slider, red_slider, LV_ALIGN_OUT_RIGHT_MID, 25, 0);
 lv_obj_align_to(blue_slider, green_slider, LV_ALIGN_OUT_RIGHT_MID, 25, 0);
 lv_obj_align_to(intense_slider, blue_slider, LV_ALIGN_OUT_RIGHT_MID, 25, 0);

 /*Now create the actual image*/
 LV_IMG_DECLARE(img_cogwheel_argb)
 img1 = lv_img_create(lv_scr_act());
 lv_img_set_src(img1, &img_cogwheel_argb);
 lv_obj_align(img1, LV_ALIGN_RIGHT_MID, -20, 0);

 lv_event_send(intense_slider, LV_EVENT_VALUE_CHANGED, NULL);
}

static void slider_event_cb(lv_event_t * e)
{
 LV_UNUSED(e);
}

```

(continues on next page)

(continued from previous page)

```

 /*Recolor the image based on the sliders' values*/
 lv_color_t color = lv_color_make(lv_slider_get_value(red_slider), lv_slider_get_
↪value(green_slider), lv_slider_get_value(blue_slider));
 lv_opa_t intense = lv_slider_get_value(intense_slider);
 lv_obj_set_style_img_recolor_opa(img1, intense, 0);
 lv_obj_set_style_img_recolor(img1, color, 0);
}

static lv_obj_t * create_slider(lv_color_t color)
{
 lv_obj_t * slider = lv_slider_create(lv_scr_act());
 lv_slider_set_range(slider, 0, 255);
 lv_obj_set_size(slider, 10, 200);
 lv_obj_set_style_bg_color(slider, color, LV_PART_KNOB);
 lv_obj_set_style_bg_color(slider, lv_color_darken(color, LV_OPA_40), LV_PART_
↪INDICATOR);
 lv_obj_add_event_cb(slider, slider_event_cb, LV_EVENT_VALUE_CHANGED, NULL);
 return slider;
}

#endif

```

## Rotate and zoom

code

```

#include "../lv_examples.h"
#if LV_USE_IMG && LV_BUILD_EXAMPLES

static void set_angle(void * img, int32_t v)
{
 lv_img_set_angle(img, v);
}

static void set_zoom(void * img, int32_t v)
{
 lv_img_set_zoom(img, v);
}

/**
 * Show transformations (zoom and rotation) using a pivot point.
 */
void lv_example_img_3(void)
{
 LV_IMG_DECLARE(img_cogwheel_argb);

 /*Now create the actual image*/
 lv_obj_t * img = lv_img_create(lv_scr_act());
 lv_img_set_src(img, &img_cogwheel_argb);
 lv_obj_align(img, LV_ALIGN_CENTER, 50, 50);
 lv_img_set_pivot(img, 0, 0); /*Rotate around the top left corner*/

 lv_anim_t a;
 lv_anim_init(&a);

```

(continues on next page)

(continued from previous page)

```

 lv_anim_set_var(&a, img);
 lv_anim_set_exec_cb(&a, set_angle);
 lv_anim_set_values(&a, 0, 3600);
 lv_anim_set_time(&a, 5000);
 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);
 lv_anim_start(&a);

 lv_anim_set_exec_cb(&a, set_zoom);
 lv_anim_set_values(&a, 128, 256);
 lv_anim_set_playback_time(&a, 3000);
 lv_anim_start(&a);
}

#endif

```

## Image offset and styling

code

```

#include "../../lv_examples.h"
#if LV_USE_IMG && LV_BUILD_EXAMPLES

static void ofs_y_anim(void * img, int32_t v)
{
 lv_img_set_offset_y(img, v);
}

/**
 * Image styling and offset
 */
void lv_example_img_4(void)
{
 LV_IMG_DECLARE(img_skew_strip);

 static lv_style_t style;
 lv_style_init(&style);
 lv_style_set_bg_color(&style, lv_palette_main(LV_PALETTE_YELLOW));
 lv_style_set_bg_opa(&style, LV_OPA_COVER);
 lv_style_set_img_recolor_opa(&style, LV_OPA_COVER);
 lv_style_set_img_recolor(&style, lv_color_black());

 lv_obj_t * img = lv_img_create(lv_scr_act());
 lv_obj_add_style(img, &style, 0);
 lv_img_set_src(img, &img_skew_strip);
 lv_obj_set_size(img, 150, 100);
 lv_obj_center(img);

 lv_anim_t a;
 lv_anim_init(&a);
 lv_anim_set_var(&a, img);
 lv_anim_set_exec_cb(&a, ofs_y_anim);
 lv_anim_set_values(&a, 0, 100);
 lv_anim_set_time(&a, 3000);
 lv_anim_set_playback_time(&a, 500);
}

```

(continues on next page)

(continued from previous page)

```

 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);
 lv_anim_start(&a);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_img_t lv_img_t
```

### Functions

*lv\_obj\_t* \***lv\_img\_create**(*lv\_obj\_t* \*parent)

Create a image objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new image

**Returns** pointer to the created image

void **lv\_img\_set\_src**(*lv\_obj\_t* \*obj, const void \*src)

Set the image data to display on the the object

**Parameters**

- **obj** -- pointer to an image object
- **src\_img** -- 1) pointer to an *lv\_img\_dsc\_t* descriptor (converted by LVGL's image converter) (e.g. &my\_img) or 2) path to an image file (e.g. "S:/dir/img.bin") or 3) a SYMBOL (e.g. LV\_SYMBOL\_OK)

void **lv\_img\_set\_offset\_x**(*lv\_obj\_t* \*obj, lv\_coord\_t x)

Set an offset for the source of an image so the image will be displayed from the new origin.

**Parameters**

- **obj** -- pointer to an image
- **x** -- the new offset along x axis.

void **lv\_img\_set\_offset\_y**(*lv\_obj\_t* \*obj, lv\_coord\_t y)

Set an offset for the source of an image. so the image will be displayed from the new origin.

**Parameters**

- **obj** -- pointer to an image
- **y** -- the new offset along y axis.

void **lv\_img\_set\_angle**(*lv\_obj\_t* \*obj, int16\_t angle)

Set the rotation angle of the image. The image will be rotated around the set pivot set by *lv\_img\_set\_pivot()*

**Parameters**

- **obj** -- pointer to an image object
- **angle** -- rotation angle in degree with 0.1 degree resolution (0..3600: clock wise)

void **lv\_img\_set\_pivot**(*lv\_obj\_t* \*obj, lv\_coord\_t x, lv\_coord\_t y)

Set the rotation center of the image. The image will be rotated around this point

**Parameters**

- **obj** -- pointer to an image object
- **x** -- rotation center x of the image
- **y** -- rotation center y of the image

void **lv\_img\_set\_zoom**(*lv\_obj\_t* \*obj, uint16\_t zoom)

void **lv\_img\_set\_antialias**(*lv\_obj\_t* \*obj, bool antialias)

Enable/disable anti-aliasing for the transformations (rotate, zoom) or not. The quality is better with anti-aliasing looks better but slower.

**Parameters**

- **obj** -- pointer to an image object
- **antialias** -- true: anti-aliased; false: not anti-aliased

const void \***lv\_img\_get\_src**(*lv\_obj\_t* \*obj)

Get the source of the image

**Parameters** **obj** -- pointer to an image object

**Returns** the image source (symbol, file name or ::lv\_img\_dsc\_t for C arrays)

lv\_coord\_t **lv\_img\_get\_offset\_x**(*lv\_obj\_t* \*obj)

Get the offset's x attribute of the image object.

**Parameters** **img** -- pointer to an image

**Returns** offset X value.

lv\_coord\_t **lv\_img\_get\_offset\_y**(*lv\_obj\_t* \*obj)

Get the offset's y attribute of the image object.

**Parameters** **obj** -- pointer to an image

**Returns** offset Y value.

uint16\_t **lv\_img\_get\_angle**(*lv\_obj\_t* \*obj)

Get the rotation angle of the image.

**Parameters** **obj** -- pointer to an image object

**Returns** rotation angle in 0.1 degrees (0..3600)

void **lv\_img\_get\_pivot**(*lv\_obj\_t* \*obj, lv\_point\_t \*pivot)

Get the pivot (rotation center) of the image.

**Parameters**

- **img** -- pointer to an image object
- **pivot** -- store the rotation center here

```
uint16_t lv_img_get_zoom(lv_obj_t *obj)
```

Get the zoom factor of the image.

**Parameters** **obj** -- pointer to an image object

**Returns** zoom factor (256: no zoom)

```
bool lv_img_get_antialias(lv_obj_t *obj)
```

Get whether the transformations (rotate, zoom) are anti-aliased or not

**Parameters** **obj** -- pointer to an image object

**Returns** true: anti-aliased; false: not anti-aliased

## Variables

```
const lv_obj_class_t lv_img_class
```

```
struct _lv_img_t
```

### Public Members

*lv\_obj\_t* **obj**

const void \***src**

lv\_point\_t **offset**

lv\_coord\_t **w**

lv\_coord\_t **h**

uint16\_t **angle**

lv\_point\_t **pivot**

uint16\_t **zoom**

uint8\_t **src\_type**

uint8\_t **cf**

uint8\_t **antialias**

## 5.2.9 Label (lv\_label)

### Overview

A label is the basic object type that is used to display text.



## Parts and Styles

- **LV\_PART\_MAIN** Uses all the typical background properties and the text properties. The padding values can be used to add space between the text and the background.
- **LV\_PART\_SCROLLBAR** The scrollbar that is shown when the text is larger than the widget's size.
- **LV\_PART\_SELECTED** Tells the style of the *selected text*. Only `text_color` and `bg_color` style properties can be used.

## Usage

### Set text

You can set the text on a label at runtime with `lv_label_set_text(label, "New text")`. It will allocate a buffer dynamically, and the provided string will be copied into that buffer. Therefore, you don't need to keep the text you pass to `lv_label_set_text` in scope after that function returns.

With `lv_label_set_text_fmt(label, "Value: %d", 15)` printf formatting can be used to set the text.

Labels are able to show text from a static character buffer. To do so, use `lv_label_set_text_static(label, "Text")`. In this case, the text is not stored in the dynamic memory and the given buffer is used directly instead. This means that the array can't be a local variable which goes out of scope when the function exits. Constant strings are safe to use with `lv_label_set_text_static` (except when used with `LV_LABEL_LONG_DOT`, as it modifies the buffer in-place), as they are stored in ROM memory, which is always accessible.

### New line

New line characters are handled automatically by the label object. You can use `\n` to make a line break. For example: `"line1\nline2\n\nline4"`

### Long modes

By default, the width and height of the label is set to `LV_SIZE_CONTENT` therefore the size of the label is automatically expands to the text size. Otherwise, if the width or height is explicitly set (using e.g. `lv_obj_set_width` or a layout), the lines wider than the label's width can be manipulated according to several long mode policies. Similarly, the policies can be applied if the height of the text is greater than the height of the label.

- **LV\_LABEL\_LONG\_WRAP** Wrap too long lines. If the height is `LV_SIZE_CONTENT` the label's height will be expanded, else the text will be clipped. (Default)
- **LV\_LABEL\_LONG\_DOT** Replaces the last 3 characters from bottom right corner of the label with dots (.)
- **LV\_LABEL\_LONG\_SCROLL** If the text is wider than the label scroll it horizontally back and forth. If it's higher, scroll vertically. Only one direction is scrolled and horizontal scrolling has higher precedence.
- **LV\_LABEL\_LONG\_SCROLL\_CIRCULAR** If the text is wider than the label scroll it horizontally continuously. If it's higher, scroll vertically. Only one direction is scrolled and horizontal scrolling has higher precedence.
- **LV\_LABEL\_LONG\_CLIP** Simply clip the parts of the text outside of the label.

You can specify the long mode with `lv_label_set_long_mode(label, LV_LABEL_LONG_...)`

Note that `LV_LABEL_LONG_DOT` manipulates the text buffer in-place in order to add/remove the dots. When `lv_label_set_text` or `lv_label_set_array_text` are used, a separate buffer is allocated and this implementation detail is unnoticed. This is not the case with `lv_label_set_text_static`. The buffer you pass to `lv_label_set_text_static` must be writable if you plan to use `LV_LABEL_LONG_DOT`.

## Text recolor

In the text, you can use commands to recolor parts of the text. For example: "Write a #ff0000 red# word". This feature can be enabled individually for each label by `lv_label_set_recolor()` function.

## Text selection

If enabled by `LV_LABEL_TEXT_SELECTION` part of the text can be selected. It's similar when on PC a you use your mouse to select a text. The whole mechanism (click and select the text as you drag your finger/mouse) is implemented in [Text area](#) and the Label widget allows only to manually make parts of the text selected with `lv_label_get_text_selection_start(label, start_char_index)` and `lv_label_get_text_selection_end(label, end_char_index)`.

## Very long texts

LVGL can efficiently handle very long (e.g. > 40k characters) by saving some extra data (~12 bytes) to speed up drawing. To enable this feature, set `LV_LABEL_LONG_TXT_HINT 1` in `lv_conf.h`.

## Symbols

The labels can display symbols alongside letters (or on their own). Read the [Font](#) section to learn more about the symbols.

## Events

No special event's are send by the Label.

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Line wrap, recoloring and scrolling

code

```
#include "../../lv_examples.h"
#if LV_USE_LABEL && LV_BUILD_EXAMPLES

/**
 * Show line wrap, re-color, line align and text scrolling.
 */
void lv_example_label_1(void)
{
 lv_obj_t * label1 = lv_label_create(lv_scr_act());
 lv_label_set_long_mode(label1, LV_LABEL_LONG_WRAP); /*Break the long lines*/
 lv_label_set_recolor(label1, true); /*Enable re-coloring by
↪ commands in the text*/
 lv_label_set_text(label1, "#0000ff Re-color# #ff00ff words# #ff0000 of a# label,
↪ align the lines to the center"
 "and wrap long text automatically.");
 lv_obj_set_width(label1, 150); /*Set smaller width to make the lines wrap*/
 lv_obj_set_style_text_align(label1, LV_TEXT_ALIGN_CENTER, 0);
 lv_obj_align(label1, LV_ALIGN_CENTER, 0, -40);

 lv_obj_t * label2 = lv_label_create(lv_scr_act());
 lv_label_set_long_mode(label2, LV_LABEL_LONG_SCROLL_CIRCULAR); /*Circular
↪ scroll*/
 lv_obj_set_width(label2, 150);
 lv_label_set_text(label2, "It is a circularly scrolling text. ");
 lv_obj_align(label2, LV_ALIGN_CENTER, 0, 40);
}

#endif
```

#### Text shadow

code

```
#include "../../lv_examples.h"
#if LV_USE_LABEL && LV_BUILD_EXAMPLES

/**
 * Create a fake text shadow
 */
void lv_example_label_2(void)
{
 /*Create a style for the shadow*/
 static lv_style_t style_shadow;
 lv_style_init(&style_shadow);
 lv_style_set_text_opa(&style_shadow, LV_OPA_30);
 lv_style_set_text_color(&style_shadow, lv_color_black());
}
```

(continues on next page)

(continued from previous page)

```

/*Create a label for the shadow first (it's in the background)*/
lv_obj_t * shadow_label = lv_label_create(lv_scr_act());
lv_obj_add_style(shadow_label, &style_shadow, 0);

/*Create the main label*/
lv_obj_t * main_label = lv_label_create(lv_scr_act());
lv_label_set_text(main_label, "A simple method to create\n"
 "shadows on a text.\n"
 "It even works with\n\n"
 "newlines and spaces.");

/*Set the same text for the shadow label*/
lv_label_set_text(shadow_label, lv_label_get_text(main_label));

/*Position the main label*/
lv_obj_align(main_label, LV_ALIGN_CENTER, 0, 0);

/*Shift the second label down and to the right by 2 pixel*/
lv_obj_align_to(shadow_label, main_label, LV_ALIGN_TOP_LEFT, 2, 2);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```

typedef uint8_t lv_label_long_mode_t
typedef _lv_label_t lv_label_t

```

### Enums

enum **[anonymous]**

Long mode behaviors. Used in 'lv\_label\_ext\_t'

Values:

enumerator **LV\_LABEL\_LONG\_WRAP**

Keep the object width, wrap the too long lines and expand the object height

enumerator **LV\_LABEL\_LONG\_DOT**

Keep the size and write dots at the end if the text is too long

enumerator **LV\_LABEL\_LONG\_SCROLL**

Keep the size and roll the text back and forth

enumerator **LV\_LABEL\_LONG\_SCROLL\_CIRCULAR**  
Keep the size and roll the text circularly

enumerator **LV\_LABEL\_LONG\_CLIP**  
Keep the size and clip the text out of it

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_LABEL\_DOT\_NUM)

**LV\_EXPORT\_CONST\_INT**(LV\_LABEL\_POS\_LAST)

**LV\_EXPORT\_CONST\_INT**(LV\_LABEL\_TEXT\_SELECTION\_OFF)

*lv\_obj\_t* \***lv\_label\_create**(*lv\_obj\_t* \*parent)

Create a label objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new labely.

**Returns** pointer to the created button

void **lv\_label\_set\_text**(*lv\_obj\_t* \*obj, const char \*text)

Set a new text for a label. Memory will be allocated to store the text by the label.

**Parameters**

- **label** -- pointer to a label object
- **text** -- '\0' terminated character string. NULL to refresh with the current text.

void **lv\_label\_set\_text\_fmt**(*lv\_obj\_t* \*obj, const char \*fmt, ...)

void **lv\_label\_set\_text\_static**(*lv\_obj\_t* \*obj, const char \*text)

Set a static text. It will not be saved by the label so the 'text' variable has to be 'alive' while the label exist.

**Parameters**

- **label** -- pointer to a label object
- **text** -- pointer to a text. NULL to refresh with the current text.

void **lv\_label\_set\_long\_mode**(*lv\_obj\_t* \*obj, *lv\_label\_long\_mode\_t* long\_mode)

Set the behavior of the label with longer text then the object size

**Parameters**

- **label** -- pointer to a label object
- **long\_mode** -- the new mode from 'lv\_label\_long\_mode' enum. In LV\_LONG\_WRAP/DOT/SCROLL/SCROLL\_CIRC the size of the label should be set AFTER this function

void **lv\_label\_set\_recolor**(*lv\_obj\_t* \*obj, bool en)

void **lv\_label\_set\_text\_sel\_start**(*lv\_obj\_t* \*obj, uint32\_t index)

Set where text selection should start

**Parameters**

- **obj** -- pointer to a label object
- **index** -- character index from where selection should start.  
LV\_LABEL\_TEXT\_SELECTION\_OFF for no selection

void **lv\_label\_set\_text\_sel\_end**(*lv\_obj\_t* \*obj, uint32\_t index)  
Set where text selection should end

**Parameters**

- **obj** -- pointer to a label object
- **index** -- character index where selection should end.  
LV\_LABEL\_TEXT\_SELECTION\_OFF for no selection

char \***lv\_label\_get\_text**(const *lv\_obj\_t* \*obj)  
Get the text of a label

**Parameters** **obj** -- pointer to a label object

**Returns** the text of the label

*lv\_label\_long\_mode\_t* **lv\_label\_get\_long\_mode**(const *lv\_obj\_t* \*obj)  
Get the long mode of a label

**Parameters** **obj** -- pointer to a label object

**Returns** the current long mode

bool **lv\_label\_get\_recolor**(const *lv\_obj\_t* \*obj)  
Get the recoloring attribute

**Parameters** **obj** -- pointer to a label object

**Returns** true: recoloring is enabled, false: disable

void **lv\_label\_get\_letter\_pos**(const *lv\_obj\_t* \*obj, uint32\_t char\_id, lv\_point\_t \*pos)  
Get the relative x and y coordinates of a letter

**Parameters**

- **obj** -- pointer to a label object
- **index** -- index of the character [0 ... text length - 1]. Expressed in character index, not byte index (different in UTF-8)
- **pos** -- store the result here (E.g. index = 0 gives 0;0 coordinates if the text is aligned to the left)

uint32\_t **lv\_label\_get\_letter\_on**(const *lv\_obj\_t* \*obj, lv\_point\_t \*pos\_in)  
Get the index of letter on a relative point of a label.

**Parameters**

- **obj** -- pointer to label object
- **pos** -- pointer to point with coordinates on a the label

**Returns** The index of the letter on the 'pos\_p' point (E.g. on 0;0 is the 0. letter if aligned to the left)  
Expressed in character index and not byte index (different in UTF-8)

bool **lv\_label\_is\_char\_under\_pos**(const *lv\_obj\_t* \*obj, lv\_point\_t \*pos)  
Check if a character is drawn under a point.

**Parameters**

- **label** -- Label object

- **pos** -- Point to check for character under

**Returns** whether a character is drawn under the point

uint32\_t **lv\_label\_get\_text\_selection\_start**(const lv\_obj\_t \*obj)

Get the selection start index.

**Parameters** **obj** -- pointer to a label object.

**Returns** selection start index. LV\_LABEL\_TEXT\_SELECTION\_OFF if nothing is selected.

uint32\_t **lv\_label\_get\_text\_selection\_end**(const lv\_obj\_t \*obj)

Get the selection end index.

**Parameters** **obj** -- pointer to a label object.

**Returns** selection end index. LV\_LABEL\_TXT\_SEL\_OFF if nothing is selected.

void **lv\_label\_ins\_text**(lv\_obj\_t \*obj, uint32\_t pos, const char \*txt)

Insert a text to a label. The label text can not be static.

**Parameters**

- **obj** -- pointer to a label object
- **pos** -- character index to insert. Expressed in character index and not byte index. 0: before first char. LV\_LABEL\_POS\_LAST: after last char.
- **txt** -- pointer to the text to insert

void **lv\_label\_cut\_text**(lv\_obj\_t \*obj, uint32\_t pos, uint32\_t cnt)

Delete characters from a label. The label text can not be static.

**Parameters**

- **label** -- pointer to a label object
- **pos** -- character index from where to cut. Expressed in character index and not byte index. 0: start in from of the first character
- **cnt** -- number of characters to cut

## Variables

const lv\_obj\_class\_t **lv\_label\_class**

struct **\_lv\_label\_t**

### Public Members

lv\_obj\_t **obj**

char \***text**

char \***tmp\_ptr**

char **tmp**[LV\_LABEL\_DOT\_NUM + 1]

union **\_lv\_label\_t::[anonymous]** **dot**

uint32\_t **dot\_end**

lv\_draw\_label\_hint\_t **hint**

```

uint32_t sel_start
uint32_t sel_end
lv_point_t offset
lv_label_long_mode_t long_mode
uint8_t static_txt
uint8_t recolor
uint8_t expand
uint8_t dot_tmp_alloc

```

### 5.2.10 Line (lv\_line)

#### Overview

The Line object is capable of drawing straight lines between a set of points.

#### Parts and Styles

- **LV\_PART\_MAIN** It uses all the typical background properties and the line style properties.

#### Usage

##### Set points

The points has to be stored in an `lv_point_t` array and passed to the object by the `lv_line_set_points(lines, point_array, point_cnt)` function.

##### Auto-size

By default the Line's width and height is set to `LV_SIZE_CONTENT` to automatically set its size to involve all the points. If the size is set explicitly the point out of the object It can be enable with the `lv_line_set_auto_size(line, true)` function. If enabled then when the points are set the object's width and height will be changed according to the maximal x and y coordinates among the points. The *auto size* is enabled by default.

##### Invert y

By default, the `y == 0` point is in the top of the object. It might be counter-intuitive in some cases so the y coordinates can be inverted with `lv_line_set_y_invert(line, true)`. In this case, `y == 0` will be the bottom of the object. The *y invert* is disabled by default.



## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Simple Line

code

```
#include "../lv_examples.h"
#if LV_USE_LINE && LV_BUILD_EXAMPLES

void lv_example_line_1(void)
{
 /*Create an array for the points of the line*/
 static lv_point_t line_points[] = { {5, 5}, {70, 70}, {120, 10}, {180, 60}, {240, 10} };

 /*Create style*/
 static lv_style_t style_line;
 lv_style_init(&style_line);
 lv_style_set_line_width(&style_line, 8);
 lv_style_set_line_color(&style_line, lv_palette_main(LV_PALETTE_BLUE));
 lv_style_set_line_rounded(&style_line, true);

 /*Create a line and apply the new style*/
 lv_obj_t * line1;
 line1 = lv_line_create(lv_scr_act());
 lv_line_set_points(line1, line_points, 5); /*Set the points*/
 lv_obj_add_style(line1, &style_line, 0);
 lv_obj_center(line1);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_line_t lv_line_t
```

### Functions

```
lv_obj_t *lv_line_create(lv_obj_t *parent)
```

Create a line objects

**Parameters** **par** -- pointer to an object, it will be the parent of the new line

**Returns** pointer to the created line

```
void lv_line_set_points(lv_obj_t *obj, const lv_point_t points[], uint16_t point_num)
```

Set an array of points. The line object will connect these points.

**Parameters**

- **obj** -- pointer to a line object
- **points** -- an array of points. Only the address is saved, so the array needs to be alive while the line exists
- **point\_num** -- number of points in 'point\_a'

```
void lv_line_set_y_invert(lv_obj_t *obj, bool en)
```

Enable (or disable) the y coordinate inversion. If enabled then y will be subtracted from the height of the object, therefore the y = 0 coordinate will be on the bottom.

**Parameters**

- **obj** -- pointer to a line object
- **en** -- true: enable the y inversion, false:disable the y inversion

```
bool lv_line_get_y_invert(const lv_obj_t *obj)
```

Get the y inversion attribute

**Parameters** **obj** -- pointer to a line object

**Returns** true: y inversion is enabled, false: disabled

## Variables

```
const lv_obj_class_t lv_line_class
```

```
struct _lv_line_t
```

### Public Members

```
lv_obj_t obj
```

```
const lv_point_t *point_array
 Pointer to an array with the points of the line
```

```
uint16_t point_num
 Number of points in 'point_array'
```

```
uint8_t y_inv
 1: y == 0 will be on the bottom
```

## 5.2.11 Roller (lv\_roller)

### Overview

Roller allows you to simply select one option from more with scrolling.

### Parts and Styles

- **LV\_PART\_MAIN** The background of the roller that uses all the typical background properties and the text style properties. **style\_text\_line\_space** adjusts the space between the options. When the Roller is scrolled and doesn't stop exactly on an option it will scroll to the nearest valid option automatically in **anim\_time** milliseconds as it's specified in the style.
- **LV\_PART\_SELECTED** The selected option in the middle. Besides the typical background properties it uses the text style properties to change the appearance of the text in the selected area.

### Usage

#### Set options

The options are passed to the Roller as a string with **lv\_roller\_set\_options(roller, options, LV\_ROLLER\_MODE\_NORMAL/INFINITE)**. The options should be separated by **\n**. For example: "First\nSecond\nThird".

**LV\_ROLLER\_MODE\_INFINITE** make the roller circular.

You can select an option manually with **lv\_roller\_set\_selected(roller, id, LV\_ANIM\_ON/OFF)**, where *id* is the index of an option.

## Get selected option

The get the currently selected option use `lv_roller_get_selected(roller)` it will return the *index* of the selected option.

`lv_roller_get_selected_str(roller, buf, buf_size)` copy the name of the selected option to `buf`.

## Visible rows

The number of visible rows can be adjusted with `lv_roller_set_visible_row_count(roller, num)`.

This function calculates the height with the current style. If the font, line space, border width, etc of the roller changes this function needs to be called again.

## Events

- `LV_EVENT_VALUE_CHANGED` Sent when a new option is selected.

Learn more about [Events](#).

## Keys

- `LV_KEY_RIGHT/DOWN` Select the next option
- `LV_KEY_LEFT/UP` Select the previous option
- `LY_KEY_ENTER` Apply the selected option (Send `LV_EVENT_VALUE_CHANGED` event)

## Example

### C

#### Simple Roller

code

```
#include "../lv_examples.h"
#if LV_USE_ROLLER && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);
 if(code == LV_EVENT_VALUE_CHANGED) {
 char buf[32];
 lv_roller_get_selected_str(obj, buf, sizeof(buf));
 LV_LOG_USER("Selected month: %s\n", buf);
 }
}

/**
 * An infinite roller with the name of the months
 */
```

(continues on next page)

(continued from previous page)

```

void lv_example_roller_1(void)
{
 lv_obj_t *roller1 = lv_roller_create(lv_scr_act());
 lv_roller_set_options(roller1,
 "January\n"
 "February\n"
 "March\n"
 "April\n"
 "May\n"
 "June\n"
 "July\n"
 "August\n"
 "September\n"
 "October\n"
 "November\n"
 "December",
 LV_ROLLER_MODE_INFINITE);

 lv_roller_set_visible_row_count(roller1, 4);
 lv_obj_center(roller1);
 lv_obj_add_event_cb(roller1, event_handler, LV_EVENT_ALL, NULL);
}

#endif

```

## Styling the roller

code

```

#include "../lv_examples.h"
#if LV_USE_ROLLER && LV_FONT_MONTERRAT_22 && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);
 if(code == LV_EVENT_VALUE_CHANGED) {
 char buf[32];
 lv_roller_get_selected_str(obj, buf, sizeof(buf));
 LV_LOG_USER("Selected value: %s", buf);
 }
}

/**
 * Roller with various alignments and larger text in the selected area
 */
void lv_example_roller_2(void)
{
 /*A style to make the selected option larger*/
 static lv_style_t style_sel;
 lv_style_init(&style_sel);
 lv_style_set_text_font(&style_sel, &lv_font_montserrat_22);

 const char * opts = "1\n2\n3\n4\n5\n6\n7\n8\n9\n10";
 lv_obj_t *roller;

```

(continues on next page)

(continued from previous page)

```

/*A roller on the left with left aligned text, and custom width*/
roller = lv_roller_create(lv_scr_act());
lv_roller_set_options(roller, opts, LV_ROLLER_MODE_NORMAL);
lv_roller_set_visible_row_count(roller, 2);
lv_obj_set_width(roller, 100);
lv_obj_add_style(roller, &style_sel, LV_PART_SELECTED);
lv_obj_set_style_text_align(roller, LV_TEXT_ALIGN_LEFT, 0);
lv_obj_align(roller, LV_ALIGN_LEFT_MID, 10, 0);
lv_obj_add_event_cb(roller, event_handler, LV_EVENT_ALL, NULL);
lv_roller_set_selected(roller, 2, LV_ANIM_OFF);

/*A roller on the middle with center aligned text, and auto (default) width*/
roller = lv_roller_create(lv_scr_act());
lv_roller_set_options(roller, opts, LV_ROLLER_MODE_NORMAL);
lv_roller_set_visible_row_count(roller, 3);
lv_obj_add_style(roller, &style_sel, LV_PART_SELECTED);
lv_obj_align(roller, LV_ALIGN_CENTER, 0, 0);
lv_obj_add_event_cb(roller, event_handler, LV_EVENT_ALL, NULL);
lv_roller_set_selected(roller, 5, LV_ANIM_OFF);

/*A roller on the right with right aligned text, and custom width*/
roller = lv_roller_create(lv_scr_act());
lv_roller_set_options(roller, opts, LV_ROLLER_MODE_NORMAL);
lv_roller_set_visible_row_count(roller, 4);
lv_obj_set_width(roller, 80);
lv_obj_add_style(roller, &style_sel, LV_PART_SELECTED);
lv_obj_set_style_text_align(roller, LV_TEXT_ALIGN_RIGHT, 0);
lv_obj_align(roller, LV_ALIGN_RIGHT_MID, -10, 0);
lv_obj_add_event_cb(roller, event_handler, LV_EVENT_ALL, NULL);
lv_roller_set_selected(roller, 8, LV_ANIM_OFF);
}

#endif

```

### add fade mask to roller

code

```

#include "../../lv_examples.h"
#if LV_USE_ROLLER && LV_DRAW_COMPLEX && LV_BUILD_EXAMPLES

static void mask_event_cb(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);

 static int16_t mask_top_id = -1;
 static int16_t mask_bottom_id = -1;

 if (code == LV_EVENT_COVER_CHECK) {
 lv_event_set_cover_res(e, LV_COVER_RES_MASKED);
 } else if (code == LV_EVENT_DRAW_MAIN_BEGIN) {
 /* add mask */
 }
}

```

(continues on next page)

(continued from previous page)

```

const lv_font_t * font = lv_obj_get_style_text_font(obj, LV_PART_MAIN);
lv_coord_t line_space = lv_obj_get_style_text_line_space(obj, LV_PART_MAIN);
lv_coord_t font_h = lv_font_get_line_height(font);

lv_area_t roller_coords;
lv_obj_get_coords(obj, &roller_coords);

lv_area_t rect_area;
rect_area.x1 = roller_coords.x1;
rect_area.x2 = roller_coords.x2;
rect_area.y1 = roller_coords.y1;
rect_area.y2 = roller_coords.y1 + (lv_obj_get_height(obj) - font_h - line_
↪space) / 2;

lv_draw_mask_fade_param_t * fade_mask_top = lv_mem_buf_get(sizeof(lv_draw_
↪mask_fade_param_t));
lv_draw_mask_fade_init(fade_mask_top, &rect_area, LV_OPA_TRANSP, rect_area.y1,
↪ LV_OPA_COVER, rect_area.y2);
mask_top_id = lv_draw_mask_add(fade_mask_top, NULL);

rect_area.y1 = rect_area.y2 + font_h + line_space - 1;
rect_area.y2 = roller_coords.y2;

lv_draw_mask_fade_param_t * fade_mask_bottom = lv_mem_buf_get(sizeof(lv_draw_
↪mask_fade_param_t));
lv_draw_mask_fade_init(fade_mask_bottom, &rect_area, LV_OPA_COVER, rect_area.
↪y1, LV_OPA_TRANSP, rect_area.y2);
mask_bottom_id = lv_draw_mask_add(fade_mask_bottom, NULL);

} else if (code == LV_EVENT_DRAW_POST_END) {
lv_draw_mask_fade_param_t * fade_mask_top = lv_draw_mask_remove_id(mask_top_
↪id);
lv_draw_mask_fade_param_t * fade_mask_bottom = lv_draw_mask_remove_id(mask_
↪bottom_id);
lv_mem_buf_release(fade_mask_top);
lv_mem_buf_release(fade_mask_bottom);
mask_top_id = -1;
mask_bottom_id = -1;
}
}

/**
 * Add an fade mask to roller.
 */
void lv_example_roller_3(void)
{
static lv_style_t style;
lv_style_init(&style);
lv_style_set_bg_color(&style, lv_color_black());
lv_style_set_text_color(&style, lv_color_white());
lv_style_set_border_width(&style, 0);
lv_style_set_pad_all(&style, 0);
lv_obj_add_style(lv_scr_act(), &style, 0);

lv_obj_t *roller1 = lv_roller_create(lv_scr_act());
lv_obj_add_style(roller1, &style, 0);
lv_obj_set_style_bg_opa(roller1, LV_OPA_TRANSP, LV_PART_SELECTED);

```

(continues on next page)

(continued from previous page)

```

#if LV_FONT_MONTSEERRAT_22
 lv_obj_set_style_text_font(roller1, &lv_font_montserrat_22, LV_PART_SELECTED);
#endif

 lv_roller_set_options(roller1,
 "January\n"
 "February\n"
 "March\n"
 "April\n"
 "May\n"
 "June\n"
 "July\n"
 "August\n"
 "September\n"
 "October\n"
 "November\n"
 "December",
 LV_ROLLER_MODE_NORMAL);

 lv_obj_center(roller1);
 lv_roller_set_visible_row_count(roller1, 3);
 lv_obj_add_event_cb(roller1, mask_event_cb, LV_EVENT_ALL, NULL);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_roller_mode_t
```

```
typedef _lv_roller_t lv_roller_t
```

### Enums

enum **[anonymous]**

Roller mode.

*Values:*

enumerator **LV\_ROLLER\_MODE\_NORMAL**

Normal mode (roller ends at the end of the options).

enumerator **LV\_ROLLER\_MODE\_INFINITE**

Infinite mode (roller can be scrolled forever).



## Functions

*lv\_obj\_t* \***lv\_roller\_create**(*lv\_obj\_t* \*parent)

Create a roller objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new roller.

**Returns** pointer to the created roller

void **lv\_roller\_set\_options**(*lv\_obj\_t* \*obj, const char \*options, *lv\_roller\_mode\_t* mode)

Set the options on a roller

**Parameters**

- **obj** -- pointer to roller object
- **options** -- a string with '  
' separated options. E.g. "One\nTwo\nThree"
- **mode** -- LV\_ROLLER\_MODE\_NORMAL or LV\_ROLLER\_MODE\_INFINITE

void **lv\_roller\_set\_selected**(*lv\_obj\_t* \*obj, uint16\_t sel\_opt, *lv\_anim\_enable\_t* anim)

Set the selected option

**Parameters**

- **obj** -- pointer to a roller object
- **sel\_opt** -- index of the selected option (0 ... number of option - 1);
- **anim\_en** -- LV\_ANIM\_ON: set with animation; LV\_ANOM\_OFF set immediately

void **lv\_roller\_set\_visible\_row\_count**(*lv\_obj\_t* \*obj, uint8\_t row\_cnt)

Set the height to show the given number of rows (options)

**Parameters**

- **obj** -- pointer to a roller object
- **row\_cnt** -- number of desired visible rows

uint16\_t **lv\_roller\_get\_selected**(const *lv\_obj\_t* \*obj)

Get the index of the selected option

**Parameters** **obj** -- pointer to a roller object

**Returns** index of the selected option (0 ... number of option - 1);

void **lv\_roller\_get\_selected\_str**(const *lv\_obj\_t* \*obj, char \*buf, uint32\_t buf\_size)

Get the current selected option as a string.

**Parameters**

- **obj** -- pointer to ddlist object
- **buf** -- pointer to an array to store the string
- **buf\_size** -- size of buf in bytes. 0: to ignore it.

const char \***lv\_roller\_get\_options**(const *lv\_obj\_t* \*obj)

Get the options of a roller

**Parameters** **obj** -- pointer to roller object

**Returns**

the options separated by '

's (E.g. "Option1\nOption2\nOption3")

uint16\_t **lv\_roller\_get\_option\_cnt**(const *lv\_obj\_t* \*obj)

Get the total number of options

**Parameters** **obj** -- pointer to a roller object

**Returns** the total number of options

## Variables

const lv\_obj\_class\_t **lv\_roller\_class**

struct **\_lv\_roller\_t**

### Public Members

*lv\_obj\_t* **obj**

uint16\_t **option\_cnt**

Number of options

uint16\_t **sel\_opt\_id**

Index of the current option

uint16\_t **sel\_opt\_id\_ori**

Store the original index on focus

*lv\_roller\_mode\_t* **mode**

uint32\_t **moved**

## 5.2.12 Slider (lv\_slider)

### Overview

The Slider object looks like a *Bar* supplemented with a knob. The knob can be dragged to set a value. The Slider also can be vertical or horizontal.

### Parts and Styles

- **LV\_PART\_MAIN** The background of the slider and it uses all the typical background style properties. **padding** makes the indicator smaller in the respective direction.
- **LV\_PART\_INDICATOR** The indicator the show the current state of the slider. Also uses all the typical background style properties.
- **LV\_PART\_KNOB** A rectangle (or circle) drawn at the current value. It also uses all the typical background properties to describe the knob(s). By default the knob is square (with a optional radius) with side length equal to the smaller side of the slider. The knob can be made larger with the **padding** values. Padding values can be asymmetric too.

## Usage

### Value and range

To set an initial value use `lv_slider_set_value(slider, new_value, LV_ANIM_ON/OFF)`. The animation time is set by the styles' `anim_time` property.

To specify the range (min, max values) the `lv_slider_set_range(slider, min , max)` can be used.

### Modes

The slider can be one the following modes:

- `LV_SLIDER_MODE_NORMAL` A normal slider as described above
- `LV_SLIDER_SYMMETRICAL` Draw the indicator from the zero value to current value. Requires negative minimum range and positive maximum range.
- `LV_SLIDER_RANGE` Allows setting the start value too by `lv_bar_set_start_value(bar, new_value, LV_ANIM_ON/OFF)`. The start value has to be always smaller than the end value.

The mode can be changed with `lv_slider_set_mode(slider, LV_SLIDER_MODE_...)`

### Knob-only mode

Normally, the slider can be adjusted either by dragging the knob, or clicking on the slider bar. In the latter case the knob moves to the point clicked and slider value changes accordingly. In some cases it is desirable to set the slider to react on dragging the knob only.

This feature is enabled by adding the `LV_OBJ_FLAG_ADV_HITTEST`: `lv_obj_add_flag(slider, LV_OBJ_FLAG_ADV_HITTEST)`.

### Events

- `LV_EVENT_VALUE_CHANGED` Sent while the slider is being dragged or changed with keys. The event is sent continuously while the slider is dragged and only when it is released. Use `lv_slider_is_dragged` to decide whether is slider is being dragged or just released.

Learn more about [Events](#).

### Keys

- `LV_KEY_UP/RIGHT` Increment the slider's value by 1
- `LV_KEY_DOWN/LEFT` Decrement the slider's value by 1

Learn more about [Keys](#).

## Example

### C

#### Simple Slider

code

```
#include "../../lv_examples.h"
#if LV_USE_SLIDER && LV_BUILD_EXAMPLES

static void slider_event_cb(lv_event_t * e);
static lv_obj_t * slider_label;

/**
 * A default slider with a label displaying the current value
 */
void lv_example_slider_1(void)
{
 /*Create a slider in the center of the display*/
 lv_obj_t * slider = lv_slider_create(lv_scr_act());
 lv_obj_center(slider);
 lv_obj_add_event_cb(slider, slider_event_cb, LV_EVENT_VALUE_CHANGED, NULL);

 /*Create a label below the slider*/
 slider_label = lv_label_create(lv_scr_act());
 lv_label_set_text(slider_label, "0%");

 lv_obj_align_to(slider_label, slider, LV_ALIGN_OUT_BOTTOM_MID, 0, 10);
}

static void slider_event_cb(lv_event_t * e)
{
 lv_obj_t * slider = lv_event_get_target(e);
 char buf[8];
 lv_snprintf(buf, sizeof(buf), "%d%%", lv_slider_get_value(slider));
 lv_label_set_text(slider_label, buf);
 lv_obj_align_to(slider_label, slider, LV_ALIGN_OUT_BOTTOM_MID, 0, 10);
}

#endif
```

#### Slider with custom style

code

```
#include "../../lv_examples.h"
#if LV_USE_SLIDER && LV_BUILD_EXAMPLES

/**
 * Show how to style a slider.
 */
void lv_example_slider_2(void)
```

(continues on next page)

(continued from previous page)

```

{
 /*Create a transition*/
 static const lv_style_prop_t props[] = {LV_STYLE_BG_COLOR, 0};
 static lv_style_transition_dsc_t transition_dsc;
 lv_style_transition_dsc_init(&transition_dsc, props, lv_anim_path_linear, 300, 0,
↪NULL);

 static lv_style_t style_main;
 static lv_style_t style_indicator;
 static lv_style_t style_knob;
 static lv_style_t style_pressed_color;
 lv_style_init(&style_main);
 lv_style_set_bg_opa(&style_main, LV_OPA_COVER);
 lv_style_set_bg_color(&style_main, lv_color_hex3(0xbbb));
 lv_style_set_radius(&style_main, LV_RADIUS_CIRCLE);
 lv_style_set_pad_ver(&style_main, -2); /*Makes the indicator larger*/

 lv_style_init(&style_indicator);
 lv_style_set_bg_opa(&style_indicator, LV_OPA_COVER);
 lv_style_set_bg_color(&style_indicator, lv_palette_main(LV_PALETTE_CYAN));
 lv_style_set_radius(&style_indicator, LV_RADIUS_CIRCLE);
 lv_style_set_transition(&style_indicator, &transition_dsc);

 lv_style_init(&style_knob);
 lv_style_set_bg_opa(&style_knob, LV_OPA_COVER);
 lv_style_set_bg_color(&style_knob, lv_palette_main(LV_PALETTE_CYAN));
 lv_style_set_border_color(&style_knob, lv_palette_darken(LV_PALETTE_CYAN, 3));
 lv_style_set_border_width(&style_knob, 2);
 lv_style_set_radius(&style_knob, LV_RADIUS_CIRCLE);
 lv_style_set_pad_all(&style_knob, 6); /*Makes the knob larger*/
 lv_style_set_transition(&style_knob, &transition_dsc);

 lv_style_init(&style_pressed_color);
 lv_style_set_bg_color(&style_pressed_color, lv_palette_darken(LV_PALETTE_CYAN,
↪2));

 /*Create a slider and add the style*/
 lv_obj_t * slider = lv_slider_create(lv_scr_act());
 lv_obj_remove_style_all(slider); /*Remove the styles coming from the
↪theme*/

 lv_obj_add_style(slider, &style_main, LV_PART_MAIN);
 lv_obj_add_style(slider, &style_indicator, LV_PART_INDICATOR);
 lv_obj_add_style(slider, &style_pressed_color, LV_PART_INDICATOR | LV_STATE_
↪PRESSED);
 lv_obj_add_style(slider, &style_knob, LV_PART_KNOB);
 lv_obj_add_style(slider, &style_pressed_color, LV_PART_KNOB | LV_STATE_PRESSED);

 lv_obj_center(slider);
}

#endif

```

## Slider with extended drawer

code

```

#include "../../lv_examples.h"
#if LV_USE_SLIDER && LV_BUILD_EXAMPLES

static void slider_event_cb(lv_event_t * e);

/**
 * Show the current value when the slider is pressed by extending the drawer
 *
 */
void lv_example_slider_3(void)
{
 /*Create a slider in the center of the display*/
 lv_obj_t * slider;
 slider = lv_slider_create(lv_scr_act());
 lv_obj_center(slider);

 lv_slider_set_mode(slider, LV_SLIDER_MODE_RANGE);
 lv_slider_set_value(slider, 70, LV_ANIM_OFF);
 lv_slider_set_left_value(slider, 20, LV_ANIM_OFF);

 lv_obj_add_event_cb(slider, slider_event_cb, LV_EVENT_ALL, NULL);
 lv_obj_refresh_ext_draw_size(slider);
}

static void slider_event_cb(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);

 /*Provide some extra space for the value*/
 if(code == LV_EVENT_REFR_EXT_DRAW_SIZE) {
 lv_coord_t * size = lv_event_get_param(e);
 *size = LV_MAX(*size, 50);
 }
 else if(code == LV_EVENT_DRAW_PART_END) {
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_param(e);
 if(dsc->part == LV_PART_INDICATOR) {
 char buf[16];
 lv_snprintf(buf, sizeof(buf), "%d - %d", lv_slider_get_left_value(obj),
↪lv_slider_get_value(obj));

 lv_point_t label_size;
 lv_txt_get_size(&label_size, buf, LV_FONT_DEFAULT, 0, 0, LV_COORD_MAX, 0);
 lv_area_t label_area;
 label_area.x1 = dsc->draw_area->x1 + lv_area_get_width(dsc->draw_area) /
↪2 - label_size.x / 2;
 label_area.x2 = label_area.x1 + label_size.x;
 label_area.y2 = dsc->draw_area->y1 - 10;
 label_area.y1 = label_area.y2 - label_size.y;

 lv_draw_label_dsc_t label_draw_dsc;
 lv_draw_label_dsc_init(&label_draw_dsc);

```

(continues on next page)

(continued from previous page)

```

 lv_draw_label(&label_area, dsc->clip_area, &label_draw_dsc, buf, NULL);
 }
}
#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_slider_mode_t
```

```
typedef _lv_slider_t lv_slider_t
```

### Enums

```
enum [anonymous]
```

*Values:*

```
enumerator LV_SLIDER_MODE_NORMAL
```

```
enumerator LV_SLIDER_MODE_SYMMETRICAL
```

```
enumerator LV_SLIDER_MODE_RANGE
```

### Functions

```
lv_obj_t *lv_slider_create(lv_obj_t *parent)
```

Create a slider objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new slider.

**Returns** pointer to the created slider

```
static inline void lv_slider_set_value(lv_obj_t *obj, int32_t value, lv_anim_enable_t anim)
```

Set a new value on the slider

**Parameters**

- **obj** -- pointer to a slider object
- **value** -- the new value
- **anim** -- LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

```
static inline void lv_slider_set_left_value(lv_obj_t *obj, int32_t value, lv_anim_enable_t anim)
```

Set a new value for the left knob of a slider

**Parameters**

- **obj** -- pointer to a slider object
- **value** -- new value
- **anim** -- LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

static inline void **lv\_slider\_set\_range**(*lv\_obj\_t* \*obj, int32\_t min, int32\_t max)  
Set minimum and the maximum values of a bar

**Parameters**

- **obj** -- pointer to the slider object
- **min** -- minimum value
- **max** -- maximum value

static inline void **lv\_slider\_set\_mode**(*lv\_obj\_t* \*obj, *lv\_slider\_mode\_t* mode)  
Set the mode of slider.

**Parameters**

- **obj** -- pointer to a slider object
- **mode** -- the mode of the slider. See ::lv\_slider\_mode\_t

static inline int32\_t **lv\_slider\_get\_value**(const *lv\_obj\_t* \*obj)  
Get the value of the main knob of a slider

**Parameters** **obj** -- pointer to a slider object

**Returns** the value of the main knob of the slider

static inline int32\_t **lv\_slider\_get\_left\_value**(const *lv\_obj\_t* \*obj)  
Get the value of the left knob of a slider

**Parameters** **obj** -- pointer to a slider object

**Returns** the value of the left knob of the slider

static inline int32\_t **lv\_slider\_get\_min\_value**(const *lv\_obj\_t* \*obj)  
Get the minimum value of a slider

**Parameters** **obj** -- pointer to a slider object

**Returns** the minimum value of the slider

static inline int32\_t **lv\_slider\_get\_max\_value**(const *lv\_obj\_t* \*obj)  
Get the maximum value of a slider

**Parameters** **obj** -- pointer to a slider object

**Returns** the maximum value of the slider

bool **lv\_slider\_is\_dragged**(const *lv\_obj\_t* \*obj)  
Give the slider is being dragged or not

**Parameters** **obj** -- pointer to a slider object

**Returns** true: drag in progress false: not dragged

static inline *lv\_slider\_mode\_t* **lv\_slider\_get\_mode**(*lv\_obj\_t* \*slider)  
Get the mode of the slider.

**Parameters** **obj** -- pointer to a bar object



**Returns** see ::lv\_slider\_mode\_t

## Variables

```
const lv_obj_class_t lv_slider_class
struct _lv_slider_t
```

## Public Members

```
lv_bar_t bar
lv_area_t left_knob_area
lv_area_t right_knob_area
int32_t *value_to_set
uint8_t dragging
uint8_t left_knob_focus
```

## 5.2.13 Switch (lv\_switch)

### Overview

The Switch can be used to turn on/off something. It looks like a little slider.

### Parts and Styles

- **LV\_PART\_MAIN** The background of the switch and it uses all the typical background style properties. **padding** makes the indicator smaller in the respective direction.
- **LV\_PART\_INDICATOR** The indicator the show the current state of the switch. Also uses all the typical background style properties.
- **LV\_PART\_KNOB** A rectangle (or circle) drawn at left or right side of teh indicator. It also uses all the typical background properties to describe the knob(s). By default the knob is square (with a optional radius) with side length equal to the smaller side of the slider. The knob can be made larger with the **padding** values. Padding values can be asymmetric too.

### Usage

#### Change state

When the switch is turned on it goes to **LV\_STATE\_CHECKED**. To get the current satte of the switch use **lv\_obj\_has\_state(switch, LV\_STATE\_CHECHKED)**. To manually turn the switch on/off call **lvobj\_add/clear\_state(switch, LV\_STATE\_CHECKED)**.

## Events

- LV\_EVENT\_VALUE\_CHANGED Sent when the switch changes state.

Learn more about [Events](#).

## Keys

- LV\_KEY\_UP/RIGHT Turns on the slider
- LV\_KEY\_DOWN/LEFT Turns off the slider
- LV\_KEY\_ENTER Toggles the switch

Learn more about [Keys](#).

## Example

### C

#### Simple Switch

code

```
#include "../../lv_examples.h"
#if LV_USE_SWITCH && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);
 if(code == LV_EVENT_VALUE_CHANGED) {
 LV_LOG_USER("State: %s\n", lv_obj_has_state(obj, LV_STATE_CHECKED) ? "On" :
↪ "Off");
 }
}

void lv_example_switch_1(void)
{
 lv_obj_set_flex_flow(lv_scr_act(), LV_FLEX_FLOW_COLUMN);
 lv_obj_set_flex_align(lv_scr_act(), LV_FLEX_ALIGN_CENTER, LV_FLEX_ALIGN_CENTER,
↪ LV_FLEX_ALIGN_CENTER);

 lv_obj_t * sw;

 sw = lv_switch_create(lv_scr_act());
 lv_obj_add_event_cb(sw, event_handler, LV_EVENT_ALL, NULL);

 sw = lv_switch_create(lv_scr_act());
 lv_obj_add_state(sw, LV_STATE_CHECKED);
 lv_obj_add_event_cb(sw, event_handler, LV_EVENT_ALL, NULL);

 sw = lv_switch_create(lv_scr_act());
 lv_obj_add_state(sw, LV_STATE_DISABLED);
 lv_obj_add_event_cb(sw, event_handler, LV_EVENT_ALL, NULL);
}
```

(continues on next page)

(continued from previous page)

```

sw = lv_switch_create(lv_scr_act());
lv_obj_add_state(sw, LV_STATE_CHECKED | LV_STATE_DISABLED);
lv_obj_add_event_cb(sw, event_handler, LV_EVENT_ALL, NULL);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_switch_t lv_switch_t
```

### Functions

*lv\_obj\_t* \***lv\_switch\_create**(*lv\_obj\_t* \*parent)

Create a switch objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new switch

**Returns** pointer to the created switch

### Variables

```
const lv_obj_class_t lv_switch_class
```

```
struct _lv_switch_t
```

#### Public Members

*lv\_obj\_t* **obj**

## 5.2.14 Table (lv\_table)

### Overview

Tables, as usual, are built from rows, columns, and cells containing texts.

The Table object is very light weighted because only the texts are stored. No real objects are created for cells but they are just drawn on the fly.

## Parts and Styles

- **LV\_PART\_MAIN** The background of the table and uses all the typical background style properties.
- **LV\_PART\_ITEMS** The cells of the table and they also use all the typical background style properties and the text properties.

## Usage

### Set cell value

The cells can store only texts so numbers needs to be converted to text before displaying them in a table.

`lv_table_set_cell_value(table, row, col, "Content")`. The text is saved by the table so it can be even a local variable.

Line break can be used in the text like "Value\n60.3".

The new rows and column are automatically added is required

### Rows and Columns

To explicitly set number of rows and columns use `lv_table_set_row_cnt(table, row_cnt)` and `lv_table_set_col_cnt(table, col_cnt)`

### Width and Height

The width of the columns can be set with `lv_table_set_col_width(table, col_id, width)`. The overall width of the Table object will be set to the sum of columns widths.

The height is calculated automatically from the cell styles (font, padding etc) and the number of rows.

### Merge cells

Cells can be merged horizontally with `lv_table_set_cell_merge_right(table, col, row, true)`. To merge more adjacent cells apply this function for each cell.

### Scroll

If the label's width or height is set to `LV_SIZE_CONTENT` that size will be set to show the whole table in the respective direction. E.g. `lv_obj_set_size(table, LV_SIZE_CONTENT, LV_SIZE_CONTENT)` automatically sets the table size to show all the columns and rows.

If the width or height is set to smaller number than the "intrinsic" size then the table becomes scrollable.

## Events

- `LV_EVENT_DRAW_PART_BEGIN` and `LV_EVENT_DRAW_PART_END` are sent for both main and items parts to allow hooking the drawing. The for more detail on the main part see the [Base object's](#) documentation. For the items (cells) the following fields are used: `clip_area`, `draw_area`, `part`, `rect_dsc`, `label_dsc` id (current row × col count + current column).

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Simple table

code

```
#include "../../lv_examples.h"
#if LV_USE_TABLE && LV_BUILD_EXAMPLES

static void draw_part_event_cb(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_target(e);
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_param(e);
 /*If the cells are drawn...*/
 if(dsc->part == LV_PART_ITEMS) {
 uint32_t row = dsc->id / lv_table_get_col_cnt(obj);
 uint32_t col = dsc->id - row * lv_table_get_col_cnt(obj);

 /*Make the texts in the first cell center aligned*/
 if(row == 0) {
 dsc->label_dsc->align = LV_TEXT_ALIGN_CENTER;
 dsc->rect_dsc->bg_color = lv_color_mix(lv_palette_main(LV_PALETTE_BLUE), LV_COLOR_BLACK, 10);
 dsc->rect_dsc->bg_color, LV_OPA_20);
 dsc->rect_dsc->bg_opa = LV_OPA_COVER;
 }
 /*In the first column align the texts to the right*/
 else if(col == 0) {
 dsc->label_dsc->flag = LV_TEXT_ALIGN_RIGHT;
 }

 /*Make every 2nd row grayish*/
 if((row != 0 && row % 2) == 0) {
 dsc->rect_dsc->bg_color = lv_color_mix(lv_palette_main(LV_PALETTE_GREY), LV_COLOR_BLACK, 10);
 dsc->rect_dsc->bg_color, LV_OPA_10);
 dsc->rect_dsc->bg_opa = LV_OPA_COVER;
 }
 }
}
```

(continues on next page)

(continued from previous page)

```

void lv_example_table_1(void)
{
 lv_obj_t * table = lv_table_create(lv_scr_act());

 /*Fill the first column*/
 lv_table_set_cell_value(table, 0, 0, "Name");
 lv_table_set_cell_value(table, 1, 0, "Apple");
 lv_table_set_cell_value(table, 2, 0, "Banana");
 lv_table_set_cell_value(table, 3, 0, "Lemon");
 lv_table_set_cell_value(table, 4, 0, "Grape");
 lv_table_set_cell_value(table, 5, 0, "Melon");
 lv_table_set_cell_value(table, 6, 0, "Peach");
 lv_table_set_cell_value(table, 7, 0, "Nuts");

 /*Fill the second column*/
 lv_table_set_cell_value(table, 0, 1, "Price");
 lv_table_set_cell_value(table, 1, 1, "$7");
 lv_table_set_cell_value(table, 2, 1, "$4");
 lv_table_set_cell_value(table, 3, 1, "$6");
 lv_table_set_cell_value(table, 4, 1, "$2");
 lv_table_set_cell_value(table, 5, 1, "$5");
 lv_table_set_cell_value(table, 6, 1, "$1");
 lv_table_set_cell_value(table, 7, 1, "$9");

 /*Set a smaller height to the table. It'll make it scrollable*/
 lv_obj_set_height(table, 200);
 lv_obj_center(table);

 /*Add an event callback to to apply some custom drawing*/
 lv_obj_add_event_cb(table, draw_part_event_cb, LV_EVENT_DRAW_PART_BEGIN, NULL);
}

#endif

```

## Lightweighted list from table

code

```

#include "../lv_examples.h"
#if LV_USE_TABLE && LV_BUILD_EXAMPLES

#define ITEM_CNT 200

static void draw_event_cb(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_target(e);
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_draw_part_dsc(e);
 /*If the cells are drawn...*/
 if(dsc->part == LV_PART_ITEMS) {
 bool chk = lv_table_has_cell_ctrl(obj, dsc->id, 0, LV_TABLE_CELL_CTRL_CUSTOM_
↪1);

 lv_draw_rect_dsc_t rect_dsc;

```

(continues on next page)

(continued from previous page)

```

 lv_draw_rect_dsc_init(&rect_dsc);
 rect_dsc.bg_color = chk ? lv_theme_get_color_primary(obj) : lv_palette_
↪ lighten(LV_PALETTE_GREY, 2);
 rect_dsc.radius = LV_RADIUS_CIRCLE;

 lv_area_t sw_area;
 sw_area.x1 = dsc->draw_area->x2 - 50;
 sw_area.x2 = sw_area.x1 + 40;
 sw_area.y1 = dsc->draw_area->y1 + lv_area_get_height(dsc->draw_area) / 2 -
↪ 10;
 sw_area.y2 = sw_area.y1 + 20;
 lv_draw_rect(&sw_area, dsc->clip_area, &rect_dsc);

 rect_dsc.bg_color = lv_color_white();
 if(chk) {
 sw_area.x2 -= 2;
 sw_area.x1 = sw_area.x2 - 16;
 } else {
 sw_area.x1 += 2;
 sw_area.x2 = sw_area.x1 + 16;
 }
 sw_area.y1 += 2;
 sw_area.y2 -= 2;
 lv_draw_rect(&sw_area, dsc->clip_area, &rect_dsc);
}

static void change_event_cb(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_target(e);
 uint16_t col;
 uint16_t row;
 lv_table_get_selected_cell(obj, &row, &col);
 bool chk = lv_table_has_cell_ctrl(obj, row, 0, LV_TABLE_CELL_CTRL_CUSTOM_1);
 if(chk) lv_table_clear_cell_ctrl(obj, row, 0, LV_TABLE_CELL_CTRL_CUSTOM_1);
 else lv_table_add_cell_ctrl(obj, row, 0, LV_TABLE_CELL_CTRL_CUSTOM_1);
}

/**
 * A very light-weighted list created from table
 */
void lv_example_table_2(void)
{
 /*Measure memory usage*/
 lv_mem_monitor_t mon1;
 lv_mem_monitor(&mon1);

 uint32_t t = lv_tick_get();

 lv_obj_t * table = lv_table_create(lv_scr_act());

 /*Set a smaller height to the table. It'll make it scrollable*/
 lv_obj_set_size(table, 150, 200);

 lv_table_set_col_width(table, 0, 150);
 lv_table_set_row_cnt(table, ITEM_CNT); /*Not required but avoids a lot of memory_
↪ reallocation lv_table_set_set_value*/

```

(continues on next page)

(continued from previous page)

```

lv_table_set_col_cnt(table, 1);

/*Don't make the cell pressed, we will draw something different in the event*/
lv_obj_remove_style(table, NULL, LV_PART_ITEMS | LV_STATE_PRESSED);

uint32_t i;
for(i = 0; i < ITEM_CNT; i++) {
 lv_table_set_cell_value_fmt(table, i, 0, "Item %d", i + 1);
}

lv_obj_align(table, LV_ALIGN_CENTER, 0, -20);

/*Add an event callback to to apply some custom drawing*/
lv_obj_add_event_cb(table, draw_event_cb, LV_EVENT_DRAW_PART_END, NULL);
lv_obj_add_event_cb(table, change_event_cb, LV_EVENT_VALUE_CHANGED, NULL);

lv_mem_monitor_t mon2;
lv_mem_monitor(&mon2);

uint32_t mem_used = mon1.free_size - mon2.free_size;

uint32_t elaps = lv_tick_elaps(t);

lv_obj_t * label = lv_label_create(lv_scr_act());
lv_label_set_text_fmt(label, "%d items were created in %d ms\n"
 "using %d bytes of memory",
 ITEM_CNT, elaps, mem_used);

lv_obj_align(label, LV_ALIGN_BOTTOM_MID, 0, -10);
}

#endif

```

## MicroPython

No examples yet.

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_table_cell_ctrl_t
```

```
typedef _lv_table_t lv_table_t
```



## Enums

enum **[anonymous]**

*Values:*

enumerator **LV\_TABLE\_CELL\_CTRL\_MERGE\_RIGHT**

enumerator **LV\_TABLE\_CELL\_CTRL\_TEXT\_CROP**

enumerator **LV\_TABLE\_CELL\_CTRL\_CUSTOM\_1**

enumerator **LV\_TABLE\_CELL\_CTRL\_CUSTOM\_2**

enumerator **LV\_TABLE\_CELL\_CTRL\_CUSTOM\_3**

enumerator **LV\_TABLE\_CELL\_CTRL\_CUSTOM\_4**

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_TABLE\_CELL\_NONE)

*lv\_obj\_t* \***lv\_table\_create**(*lv\_obj\_t* \*parent)

Create a table object

**Parameters** **parent** -- pointer to an object, it will be the parent of the new table

**Returns** pointer to the created table

void **lv\_table\_set\_cell\_value**(*lv\_obj\_t* \*obj, uint16\_t row, uint16\_t col, const char \*txt)

Set the value of a cell.

---

**Note:** New rows/columns are added automatically if required

---

### Parameters

- **obj** -- pointer to a Table object
- **row** -- id of the row [0 .. row\_cnt -1]
- **col** -- id of the column [0 .. col\_cnt -1]
- **txt** -- text to display in the cell. It will be copied and saved so this variable is not required after this function call.

void **lv\_table\_set\_cell\_value\_fmt**(*lv\_obj\_t* \*obj, uint16\_t row, uint16\_t col, const char \*fmt, ...)

Set the value of a cell. Memory will be allocated to store the text by the table.

---

**Note:** New rows/columns are added automatically if required

---

### Parameters

- **obj** -- pointer to a Table object
- **row** -- id of the row [0 .. row\_cnt -1]
- **col** -- id of the column [0 .. col\_cnt -1]

- **fmt** -- printf-like format

void **lv\_table\_set\_row\_cnt**(*lv\_obj\_t* \*obj, uint16\_t row\_cnt)  
Set the number of rows

#### Parameters

- **obj** -- table pointer to a Table object
- **row\_cnt** -- number of rows

void **lv\_table\_set\_col\_cnt**(*lv\_obj\_t* \*obj, uint16\_t col\_cnt)  
Set the number of columns

#### Parameters

- **obj** -- table pointer to a Table object
- **col\_cnt** -- number of columns.

void **lv\_table\_set\_col\_width**(*lv\_obj\_t* \*obj, uint16\_t col\_id, lv\_coord\_t w)  
Set the width of a column

#### Parameters

- **obj** -- table pointer to a Table object
- **col\_id** -- id of the column [0 .. LV\_TABLE\_COL\_MAX -1]
- **w** -- width of the column

void **lv\_table\_add\_cell\_ctrl**(*lv\_obj\_t* \*obj, uint16\_t row, uint16\_t col, *lv\_table\_cell\_ctrl\_t* ctrl)  
Add control bits to the cell.

#### Parameters

- **obj** -- pointer to a Table object
- **row** -- id of the row [0 .. row\_cnt -1]
- **col** -- id of the column [0 .. col\_cnt -1]
- **ctrl** -- OR-ed values from ::lv\_table\_cell\_ctrl\_t

void **lv\_table\_clear\_cell\_ctrl**(*lv\_obj\_t* \*obj, uint16\_t row, uint16\_t col, *lv\_table\_cell\_ctrl\_t* ctrl)  
Clear control bits of the cell.

#### Parameters

- **obj** -- pointer to a Table object
- **row** -- id of the row [0 .. row\_cnt -1]
- **col** -- id of the column [0 .. col\_cnt -1]
- **ctrl** -- OR-ed values from ::lv\_table\_cell\_ctrl\_t

const char \***lv\_table\_get\_cell\_value**(*lv\_obj\_t* \*obj, uint16\_t row, uint16\_t col)  
Get the value of a cell.

#### Parameters

- **obj** -- pointer to a Table object
- **row** -- id of the row [0 .. row\_cnt -1]
- **col** -- id of the column [0 .. col\_cnt -1]

**Returns** text in the cell

uint16\_t **lv\_table\_get\_row\_cnt**(*lv\_obj\_t* \*obj)

Get the number of rows.

**Parameters** **obj** -- table pointer to a Table object

**Returns** number of rows.

uint16\_t **lv\_table\_get\_col\_cnt**(*lv\_obj\_t* \*obj)

Get the number of columns.

**Parameters** **obj** -- table pointer to a Table object

**Returns** number of columns.

lv\_coord\_t **lv\_table\_get\_col\_width**(*lv\_obj\_t* \*obj, uint16\_t col)

Get the width of a column

**Parameters**

- **obj** -- table pointer to a Table object
- **col** -- id of the column [0 .. LV\_TABLE\_COL\_MAX -1]

**Returns** width of the column

bool **lv\_table\_has\_cell\_ctrl**(*lv\_obj\_t* \*obj, uint16\_t row, uint16\_t col, *lv\_table\_cell\_ctrl\_t* ctrl)

Get whether a cell has the control bits

**Parameters**

- **obj** -- pointer to a Table object
- **row** -- id of the row [0 .. row\_cnt -1]
- **col** -- id of the column [0 .. col\_cnt -1]
- **ctrl** -- OR-ed values from ::lv\_table\_cell\_ctrl\_t

**Returns** true: all control bits are set; false: not all control bits are set

void **lv\_table\_get\_selected\_cell**(*lv\_obj\_t* \*obj, uint16\_t \*row, uint16\_t \*col)

Get the selected cell (pressed and or focused)

**Parameters**

- **obj** -- pointer to a table object
- **row** -- pointer to variable to store the selected row (LV\_TABLE\_CELL\_NONE: if no cell selected)
- **col** -- pointer to variable to store the selected column (LV\_TABLE\_CELL\_NONE: if no cell selected)

## Variables

const lv\_obj\_class\_t **lv\_table\_class**

struct **\_lv\_table\_t**

## Public Members

```
lv_obj_t obj
uint16_t col_cnt
uint16_t row_cnt
char **cell_data
lv_coord_t *row_h
lv_coord_t *col_w
uint16_t col_act
uint16_t row_act
```

### 5.2.15 Text area (lv\_textarea)

#### Overview

The Text Area is a *Base object* with a *Label* and a cursor on it. Texts or characters can be added to it. Long lines are wrapped and when the text becomes long enough the Text area can be scrolled.

One line mode and password modes are supported.

#### Parts and Styles

- LV\_PART\_MAIN The background of the text area and it uses all the typical background style properties and the text related style properties including `text_align` to align the text to the left, right or center.
- LV\_PART\_SCROLLBAR The scrollbar that is shown when the text is too long.
- LV\_PART\_SELECTED Tells the style of the *selected text*. Only `text_color` and `bg_color` style properties can be used.
- LV\_PART\_CURSOR Marks the position where the characters are inserted. The cursor's area is always the bounding box of the current character. A block cursor can be created by adding a background color and background opacity to LV\_PART\_CURSOR's style. The create line cursor let the cursor transparent and set a left border. The `anim_time` style property sets the cursors blink time.
- LV\_PART\_TEXTAREA\_PLACEHOLDER It's a part related only to the text area and allows styling the placeholder text.

#### Usage

##### Add text

You can insert text or characters to the current cursor's position with:

- `lv_textarea_add_char(textarea, 'c')`
- `lv_textarea_add_text(textarea, "insert this text")`

To add wide characters like 'á', 'ß' or CJK characters use `lv_textarea_add_text(ta, "á")`.

`lv_textarea_set_text(ta, "New text")` changes the whole text.

## Placeholder

A placeholder text can be specified - which is displayed when the Text area is empty - with `lv_textarea_set_placeholder_text(ta, "Placeholder text")`

## Delete character

To delete a character from the left of the current cursor position use `lv_textarea_del_char(textarea)`. To delete from the right use `lv_textarea_del_char_forward(textarea)`

## Move the cursor

The cursor position can be modified directly like `lv_textarea_set_cursor_pos(textarea, 10)`. The 0 position means "before the first characters", `LV_TA_CURSOR_LAST` means "after the last character"

You can step the cursor with

- `lv_textarea_cursor_right(textarea)`
- `lv_textarea_cursor_left(textarea)`
- `lv_textarea_cursor_up(textarea)`
- `lv_textarea_cursor_down(textarea)`

If `lv_textarea_set_cursor_click_pos(textarea, true)` is applied the cursor will jump to the position where the Text area was clicked.

## Hide the cursor

The cursor is always visible, however it can be good idea to style to be visible only in `LV_STATE_FOCUSED` state.

## One line mode

The Text area can be configured to be one lined with `lv_textarea_set_one_line(textarea, true)`. In this mode the height is set automatically to show only one line, line break character are ignored, and word wrap is disabled.

## Password mode

The text area supports password mode which can be enabled with `lv_textarea_set_password_mode(textarea, true)`.

If the • (Bullet, U+2022) character exists in the font, the entered characters are converted to it after some time or when a new character is entered. If • not exists, \* will be used.

In password mode `lv_textarea_get_text(textarea)` gives the real text, not the bullet characters.

The visibility time can be adjusted with `LV_TEXTAREA_DEF_PWD_SHOW_TIME` in `lv_conf.h`.

## Accepted characters

You can set a list of accepted characters with `lv_textarea_set_accepted_chars(textarea, "0123456789.+ -")`. Other characters will be ignored.

## Max text length

The maximum number of characters can be limited with `lv_textarea_set_max_length(textarea, max_char_num)`

## Very long texts

If there is a very long text in the Text area (e. g. > 20k characters) its scrolling and drawing might be slow. However, by enabling `LV_LABEL_LONG_TXT_HINT 1` in `lv_conf.h` the performance can be hugely improved. It will save some information about the label to speed up its drawing. Using `LV_LABEL_LONG_TXT_HINT` the scrolling and drawing will as fast as with "normal" short texts.

## Select text

A part of text can be selected if enabled with `lv_textarea_set_text_selection(textarea, true)`. It works like when you select a text on your PC with your mouse.

## Events

- `LV_EVENT_INSERT` Sent when before a character or text is inserted. The event paramter is the text planned to be inserted. `lv_textarea_set_insert_replace(textarea, "New text")` replaces the text to insert. The new text can not be in a local variable which is destroyed when the event callback exists. "" means do not insert anything.
- `LV_EVENT_VALUE_CHANGED` Sent when the content of the text area has been changed.
- `LV_EVENT_APPLY` Sent when `LV_KEY_ENTER` is pressed (or(sent) to a one line text area.

Learn more about [Events](#).

## Keys

- `LV_KEY_UP/DOWN/LEFT/RIGHT` Move the cursor
- Any character Add the character to the current cursor position

Learn more about [Keys](#).

## Example

### C

#### Simple Text area

code

```
#include "../lv_examples.h"
#if LV_USE_TEXTAREA && LV_BUILD_EXAMPLES

static void textarea_event_handler(lv_event_t * e)
{
 lv_obj_t * ta = lv_event_get_target(e);
 LV_LOG_USER("Enter was pressed. The current text is: %s", lv_textarea_get_
↪text(ta));
}

static void btnm_event_handler(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_target(e);
 lv_obj_t * ta = lv_event_get_user_data(e);
 const char * txt = lv_btnmatrix_get_btn_text(obj, lv_btnmatrix_get_selected_
↪btn(obj));

 if(strcmp(txt, LV_SYMBOL_BACKSPACE) == 0) lv_textarea_del_char(ta);
 else if(strcmp(txt, LV_SYMBOL_NEW_LINE) == 0) lv_event_send(ta, LV_EVENT_READY, ↪
↪NULL);
 else lv_textarea_add_text(ta, txt);
}

void lv_example_textarea_1(void)
{
 lv_obj_t * ta = lv_textarea_create(lv_scr_act());
 lv_textarea_set_one_line(ta, true);
 lv_obj_align(ta, LV_ALIGN_TOP_MID, 0, 10);
 lv_obj_add_event_cb(ta, textarea_event_handler, LV_EVENT_READY, ta);
 lv_obj_add_state(ta, LV_STATE_FOCUSED); /*To be sure the cursor is visible*/

 static const char * btnm_map[] = {"1", "2", "3", "\n",
 "4", "5", "6", "\n",
 "7", "8", "9", "\n",
 LV_SYMBOL_BACKSPACE, "0", LV_SYMBOL_NEW_LINE, ""};

 lv_obj_t * btnm = lv_btnmatrix_create(lv_scr_act());
 lv_obj_set_size(btnm, 200, 150);
 lv_obj_align(btnm, LV_ALIGN_BOTTOM_MID, 0, -10);
 lv_obj_add_event_cb(btnm, btnm_event_handler, LV_EVENT_VALUE_CHANGED, ta);
 lv_obj_clear_flag(btnm, LV_OBJ_FLAG_CLICK_FOCUSABLE); /*To keep the text area ↪
↪focused on button clicks*/
 lv_btnmatrix_set_map(btnm, btnm_map);
}

#endif
```

## Text area with password field

code

```

#include "../../lv_examples.h"
#if LV_USE_TEXTAREA && LV_USE_KEYBOARD && LV_BUILD_EXAMPLES

static void ta_event_cb(lv_event_t * e);

static lv_obj_t * kb;

void lv_example_textarea_2(void)
{
 /*Create the password box*/
 lv_obj_t * pwd_ta = lv_textarea_create(lv_scr_act());
 lv_textarea_set_text(pwd_ta, "");
 lv_textarea_set_password_mode(pwd_ta, true);
 lv_textarea_set_one_line(pwd_ta, true);
 lv_obj_set_width(pwd_ta, lv_pct(40));
 lv_obj_set_pos(pwd_ta, 5, 20);
 lv_obj_add_event_cb(pwd_ta, ta_event_cb, LV_EVENT_ALL, NULL);

 /*Create a label and position it above the text box*/
 lv_obj_t * pwd_label = lv_label_create(lv_scr_act());
 lv_label_set_text(pwd_label, "Password:");
 lv_obj_align_to(pwd_label, pwd_ta, LV_ALIGN_OUT_TOP_LEFT, 0, 0);

 /*Create the one-line mode text area*/
 lv_obj_t * text_ta = lv_textarea_create(lv_scr_act());
 lv_textarea_set_one_line(text_ta, true);
 lv_textarea_set_password_mode(text_ta, false);
 lv_obj_set_width(text_ta, lv_pct(40));
 lv_obj_add_event_cb(text_ta, ta_event_cb, LV_EVENT_ALL, NULL);
 lv_obj_align(text_ta, LV_ALIGN_TOP_RIGHT, -5, 20);

 /*Create a label and position it above the text box*/
 lv_obj_t * oneline_label = lv_label_create(lv_scr_act());
 lv_label_set_text(oneline_label, "Text:");
 lv_obj_align_to(oneline_label, text_ta, LV_ALIGN_OUT_TOP_LEFT, 0, 0);

 /*Create a keyboard*/
 kb = lv_keyboard_create(lv_scr_act());
 lv_obj_set_size(kb, LV_HOR_RES, LV_VER_RES / 2);

 lv_keyboard_set_textarea(kb, pwd_ta); /*Focus it on one of the text areas to
↪start*/
}

static void ta_event_cb(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * ta = lv_event_get_target(e);
 if(code == LV_EVENT_CLICKED || code == LV_EVENT_FOCUSED) {
 /*Focus on the clicked text area*/
 if(kb != NULL) lv_keyboard_set_textarea(kb, ta);
 }
}

```

(continues on next page)



(continued from previous page)

```

 else if(code == LV_EVENT_READY) {
 LV_LOG_USER("Ready, current text: %s", lv_textarea_get_text(ta));
 }
}

#endif

```

## Text auto-formatting

code

```

#include "../../lv_examples.h"
#if LV_USE_TEXTAREA && LV_USE_KEYBOARD && LV_BUILD_EXAMPLES

static void ta_event_cb(lv_event_t * e);

static lv_obj_t * kb;

/**
 * Automatically format text like a clock. E.g. "12:34"
 * Add the ':' automatically.
 */
void lv_example_textarea_3(void)
{
 /*Create the text area*/
 lv_obj_t * ta = lv_textarea_create(lv_scr_act());
 lv_obj_add_event_cb(ta, ta_event_cb, LV_EVENT_VALUE_CHANGED, NULL);
 lv_textarea_set_accepted_chars(ta, "0123456789:");
 lv_textarea_set_max_length(ta, 5);
 lv_textarea_set_one_line(ta, true);
 lv_textarea_set_text(ta, "");

 /*Create a keyboard*/
 kb = lv_keyboard_create(lv_scr_act());
 lv_obj_set_size(kb, LV_HOR_RES, LV_VER_RES / 2);
 lv_keyboard_set_mode(kb, LV_KEYBOARD_MODE_NUMBER);
 lv_keyboard_set_textarea(kb, ta);
}

static void ta_event_cb(lv_event_t * e)
{
 lv_obj_t * ta = lv_event_get_target(e);
 const char * txt = lv_textarea_get_text(ta);
 if(txt[0] >= '0' && txt[0] <= '9' &&
 txt[1] >= '0' && txt[1] <= '9' &&
 txt[2] != ':')
 {
 lv_textarea_set_cursor_pos(ta, 2);
 lv_textarea_add_char(ta, ':');
 }
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_textarea_t lv_textarea_t
```

### Enums

```
enum [anonymous]
```

*Values:*

```
enumerator LV_PART_TEXTAREA_PLACEHOLDER
```

### Functions

```
LV_EXPORT_CONST_INT(LV_TEXTAREA_CURSOR_LAST)
```

```
lv_obj_t *lv_textarea_create(lv_obj_t *parent)
Create a text area objects
```

**Parameters** **parent** -- pointer to an object, it will be the parent of the new text area

**Returns** pointer to the created text area

```
void lv_textarea_add_char(lv_obj_t *obj, uint32_t c)
Insert a character to the current cursor position. To add a wide char, e.g. 'Á' use lv_txt_encoded_conv_wc('Á')
```

**Parameters**

- **obj** -- pointer to a text area object
- **c** -- a character (e.g. 'a')

```
void lv_textarea_add_text(lv_obj_t *obj, const char *txt)
Insert a text to the current cursor position
```

**Parameters**

- **obj** -- pointer to a text area object
- **txt** -- a '\0' terminated string to insert

```
void lv_textarea_del_char(lv_obj_t *obj)
Delete a the left character from the current cursor position
```

**Parameters** **obj** -- pointer to a text area object

```
void lv_textarea_del_char_forward(lv_obj_t *obj)
Delete the right character from the current cursor position
```

**Parameters** **obj** -- pointer to a text area object

void **lv\_textarea\_set\_text**(*lv\_obj\_t* \*obj, const char \*txt)

Set the text of a text area

#### Parameters

- **obj** -- pointer to a text area object
- **txt** -- pointer to the text

void **lv\_textarea\_set\_placeholder\_text**(*lv\_obj\_t* \*obj, const char \*txt)

Set the placeholder text of a text area

#### Parameters

- **obj** -- pointer to a text area object
- **txt** -- pointer to the text

void **lv\_textarea\_set\_cursor\_pos**(*lv\_obj\_t* \*obj, int32\_t pos)

Set the cursor position

#### Parameters

- **obj** -- pointer to a text area object
- **pos** -- the new cursor position in character index < 0 : index from the end of the text  
LV\_TEXTAREA\_CURSOR\_LAST: go after the last character

void **lv\_textarea\_set\_cursor\_click\_pos**(*lv\_obj\_t* \*obj, bool en)

Enable/Disable the positioning of the cursor by clicking the text on the text area.

#### Parameters

- **obj** -- pointer to a text area object
- **en** -- true: enable click positions; false: disable

void **lv\_textarea\_set\_password\_mode**(*lv\_obj\_t* \*obj, bool en)

Enable/Disable password mode

#### Parameters

- **obj** -- pointer to a text area object
- **en** -- true: enable, false: disable

void **lv\_textarea\_set\_one\_line**(*lv\_obj\_t* \*obj, bool en)

Configure the text area to one line or back to normal

#### Parameters

- **obj** -- pointer to a text area object
- **en** -- true: one line, false: normal

void **lv\_textarea\_set\_accepted\_chars**(*lv\_obj\_t* \*obj, const char \*list)

Set a list of characters. Only these characters will be accepted by the text area

#### Parameters

- **obj** -- pointer to a text area object
- **list** -- list of characters. Only the pointer is saved. E.g. "+-.,0123456789"

void **lv\_textarea\_set\_max\_length**(*lv\_obj\_t* \*obj, uint32\_t num)

Set max length of a Text Area.

#### Parameters

- **obj** -- pointer to a text area object
- **num** -- the maximal number of characters can be added (`lv_textarea_set_text` ignores it)

void **lv\_textarea\_set\_insert\_replace**(*lv\_obj\_t* \*obj, const char \*txt)

In `LV_EVENT_INSERT` the text which planned to be inserted can be replaced by an other text. It can be used to add automatic formatting to the text area.

#### Parameters

- **obj** -- pointer to a text area object
- **txt** -- pointer to a new string to insert. If "" no text will be added. The variable must be live after the `event_cb` exists. (Should be `global` or `static`)

void **lv\_textarea\_set\_text\_selection**(*lv\_obj\_t* \*obj, bool en)

Enable/disable selection mode.

#### Parameters

- **obj** -- pointer to a text area object
- **en** -- true or false to enable/disable selection mode

void **lv\_textarea\_set\_password\_show\_time**(*lv\_obj\_t* \*obj, uint16\_t time)

Set how long show the password before changing it to '\*'

#### Parameters

- **obj** -- pointer to a text area object
- **time** -- show time in milliseconds. 0: hide immediately.

void **lv\_textarea\_set\_align**(*lv\_obj\_t* \*obj, lv\_text\_align\_t align)

Set the label's alignment. It sets where the label is aligned (in one line mode it can be smaller than the text area) and how the lines of the area align in case of multiline text area

#### Parameters

- **obj** -- pointer to a text area object
- **align** -- the align mode from `::lv_text_align_t`

const char \***lv\_textarea\_get\_text**(const *lv\_obj\_t* \*obj)

Get the text of a text area. In password mode it gives the real text (not '\*'s).

**Parameters** **obj** -- pointer to a text area object

**Returns** pointer to the text

const char \***lv\_textarea\_get\_placeholder\_text**(*lv\_obj\_t* \*obj)

Get the placeholder text of a text area

**Parameters** **obj** -- pointer to a text area object

**Returns** pointer to the text

*lv\_obj\_t* \***lv\_textarea\_get\_label**(const *lv\_obj\_t* \*obj)

Get the label of a text area

**Parameters** **obj** -- pointer to a text area object

**Returns** pointer to the label object

uint32\_t **lv\_textarea\_get\_cursor\_pos**(const *lv\_obj\_t* \*obj)

Get the current cursor position in character index

**Parameters** **obj** -- pointer to a text area object

**Returns** the cursor position

bool **lv\_textarea\_get\_cursor\_click\_pos**(*lv\_obj\_t* \*obj)

Get whether the cursor click positioning is enabled or not.

**Parameters** **obj** -- pointer to a text area object

**Returns** true: enable click positions; false: disable

bool **lv\_textarea\_get\_password\_mode**(const *lv\_obj\_t* \*obj)

Get the password mode attribute

**Parameters** **obj** -- pointer to a text area object

**Returns** true: password mode is enabled, false: disabled

bool **lv\_textarea\_get\_one\_line**(const *lv\_obj\_t* \*obj)

Get the one line configuration attribute

**Parameters** **obj** -- pointer to a text area object

**Returns** true: one line configuration is enabled, false: disabled

const char \***lv\_textarea\_get\_accepted\_chars**(*lv\_obj\_t* \*obj)

Get a list of accepted characters.

**Parameters** **obj** -- pointer to a text area object

**Returns** list of accented characters.

uint32\_t **lv\_textarea\_get\_max\_length**(*lv\_obj\_t* \*obj)

Get max length of a Text Area.

**Parameters** **obj** -- pointer to a text area object

**Returns** the maximal number of characters to be add

bool **lv\_textarea\_text\_is\_selected**(const *lv\_obj\_t* \*obj)

Find whether text is selected or not.

**Parameters** **obj** -- pointer to a text area object

**Returns** whether text is selected or not

bool **lv\_textarea\_get\_text\_selection**(*lv\_obj\_t* \*obj)

Find whether selection mode is enabled.

**Parameters** **obj** -- pointer to a text area object

**Returns** true: selection mode is enabled, false: disabled

uint16\_t **lv\_textarea\_get\_password\_show\_time**(*lv\_obj\_t* \*obj)

Set how long show the password before changing it to '\*'

**Parameters** **obj** -- pointer to a text area object

**Returns** show time in milliseconds. 0: hide immediately.

void **lv\_textarea\_clear\_selection**(*lv\_obj\_t* \*obj)

Clear the selection on the text area.

**Parameters** **obj** -- pointer to a text area object

void **lv\_textarea\_cursor\_right**(*lv\_obj\_t* \*obj)

Move the cursor one character right

**Parameters** **obj** -- pointer to a text area object

void **lv\_textarea\_cursor\_left**(*lv\_obj\_t* \*obj)  
Move the cursor one character left

**Parameters** **obj** -- pointer to a text area object

void **lv\_textarea\_cursor\_down**(*lv\_obj\_t* \*obj)  
Move the cursor one line down

**Parameters** **obj** -- pointer to a text area object

void **lv\_textarea\_cursor\_up**(*lv\_obj\_t* \*obj)  
Move the cursor one line up

**Parameters** **obj** -- pointer to a text area object

## Variables

```
const lv_obj_class_t lv_textarea_class
struct _lv_textarea_t
```

## Public Members

```
lv_obj_t obj
lv_obj_t *label
char *placeholder_txt
char *pwd_tmp
const char *accepted_chars
uint32_t max_length
uint16_t pwd_show_time
lv_coord_t valid_x
uint32_t pos
lv_area_t area
uint32_t txt_byte_pos
uint8_t show
uint8_t click_pos
struct _lv_textarea_t::[anonymous] cursor
uint32_t sel_start
uint32_t sel_end
uint8_t text_sel_in_prog
uint8_t text_sel_en
uint8_t pwd_mode
uint8_t one_line
```

## 5.3 Extra widgets

### 5.3.1 Calendar (lv\_calendar)

#### Overview

The Calendar object is a classic calendar which can:

- can show the days of any month in a 7x7 matrix
- Show the name of the days
- highlight the current day (today)
- highlight any user-defined dates

The Calendar is added to the default group (if it is set). Besides the Calendar is an editable object to allow selecting and clicking the dates with encoder navigation too.

To make the Calendar flexible, by default it doesn't show the current year or month. Instead, there are external "headers" that can be attached to the calendar.

#### Parts and Styles

The calendar object uses the *Button matrix* object under the hood to arrange the days into a matrix.

- **LV\_PART\_MAIN** The background of the calendar. It uses all the background related style properties.
- **LV\_PART\_ITEMS** Refers to the dates and day names. Button matrix control flags are set to differentiate the buttons and a custom drawer event is added to modify the properties of the buttons
  - day names have no border, no background and are drawn with a gray color
  - days of the previous and next month have **LV\_BTNMATRIX\_CTRL\_DISABLED** flag
  - today has a thicker border with the theme's primary color
  - highlighted day has some opacity with the theme's primary color.

#### Usage

Some functions use the `lv_calendar_date_t` type which is a structure with `year`, `month` and `day` fields.

#### Current date

To set the current date (today), use the `lv_calendar_set_today_date(calendar, year, month, day)` function. `month` needs to be in 1..12 range and `day` in 1..31 range.

## Shown date

To set the shown date, use `lv_calendar_set_shown_date(calendar, year, month);`

## Highlighted days

The list of highlighted dates should be stored in a `lv_calendar_date_t` array loaded by `lv_calendar_set_highlighted_dates(calendar, highlighted_dates, date_num)`. Only the array's pointer will be saved so the array should be a static or global variable.

## Name of the days

The name of the days can be adjusted with `lv_calendar_set_day_names(calendar, day_names)` where `day_names` looks like `const char * day_names[7] = {"Su", "Mo", ...}`; Only the pointer of the day names is saved so the elements should be static, global or constant variables.

## Events

- `LV_EVENT_VALUE_CHANGED` Sent if a date is clicked. `lv_calendar_get_pressed_date(calendar, &date)` tells which day is currently being pressed. Returns `LV_RES_OK` if there is valid pressed data, else `LV_RES_INV`.

Learn more about [vent](#).

## Keys

- `LV_KEY_RIGHT/UP/LEFT/RIGHT` To navigate among the buttons to dates
- `LV_KEY_ENTER` To press/release the selected date

Learn more about [Keys](#).

## Headers

### Arrow buttons

`lv_calendar_header_arrow_create(parent, calendar, button_size)` creates a header that contains a left and right arrow on the sides and a text with the current year and month between them.

### Drop-down

`lv_calendar_header_dropdown_create(parent, calendar)` creates a header that contains 2 drop-down lists: one for the year and another for the month.



## Example

### C

#### Calendar with header

code

```
#include "../lv_examples.h"
#if LV_USE_CALEDNDAR && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);

 if(code == LV_EVENT_VALUE_CHANGED) {
 lv_calendar_date_t date;
 if(lv_calendar_get_pressed_date(obj, &date)) {
 LV_LOG_USER("Clicked date: %02d.%02d.%d", date.day, date.month, date.
↪year);
 }
 }
}

void lv_example_calendar_1(void)
{
 lv_obj_t * calendar = lv_calendar_create(lv_scr_act());
 lv_obj_set_size(calendar, 200, 200);
 lv_obj_align(calendar, LV_ALIGN_CENTER, 0, 20);
 lv_obj_add_event_cb(calendar, event_handler, LV_EVENT_ALL, NULL);

 lv_calendar_set_today_date(calendar, 2021, 02, 23);
 lv_calendar_set_showed_date(calendar, 2021, 02);

 /*Highlight a few days*/
 static lv_calendar_date_t highlighted_days[3]; /*Only its pointer will be ↵
↪saved so should be static*/
 highlighted_days[0].year = 2021;
 highlighted_days[0].month = 02;
 highlighted_days[0].day = 6;

 highlighted_days[1].year = 2021;
 highlighted_days[1].month = 02;
 highlighted_days[1].day = 11;

 highlighted_days[2].year = 2022;
 highlighted_days[2].month = 02;
 highlighted_days[2].day = 22;

 lv_calendar_set_highlighted_dates(calendar, highlighted_days, 3);

#if LV_USE_CALEDNDAR_HEADER_DROPDOWN
 lv_calendar_header_dropdown_create(lv_scr_act(), calendar);
#elif LV_USE_CALEDNDAR_HEADER_ARROW
 lv_calendar_header_arrow_create(lv_scr_act(), calendar, 25);
#endif
}
```

(continues on next page)

(continued from previous page)

```
}
#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_calendar_t lv_calendar_t
```

### Functions

```
lv_obj_t *lv_calendar_create(lv_obj_t *parent)
```

```
void lv_calendar_set_today_date(lv_obj_t *obj, uint32_t year, uint32_t month, uint32_t day)
 Set the today's date
```

#### Parameters

- **obj** -- pointer to a calendar object
- **year** -- today's year
- **month** -- today's month [1..12]
- **day** -- today's day [1..31]

```
void lv_calendar_set_showed_date(lv_obj_t *obj, uint32_t year, uint32_t month)
 Set the currently showed
```

#### Parameters

- **obj** -- pointer to a calendar object
- **year** -- today's year
- **month** -- today's month [1..12]

```
void lv_calendar_set_highlighted_dates(lv_obj_t *obj, lv_calendar_date_t highlighted[], uint16_t
 date_num)
```

Set the the highlighted dates

#### Parameters

- **obj** -- pointer to a calendar object
- **highlighted** -- pointer to an *lv\_calendar\_date\_t* array containing the dates. Only the pointer will be saved so this variable can't be local which will be destroyed later.
- **date\_num** -- number of dates in the array

```
void lv_calendar_set_day_names(lv_obj_t *obj, const char **day_names)
 Set the name of the days
```

**Parameters**

- **obj** -- pointer to a calendar object
- **day\_names** -- pointer to an array with the names. E.g. `const char * days[7] = {"Sun", "Mon", ...}` Only the pointer will be saved so this variable can't be local which will be destroyed later.

`const lv_calendar_date_t *lv_calendar_get_today_date(const lv_obj_t *calendar)`

Get the today's date

**Parameters** **calendar** -- pointer to a calendar object

**Returns** return pointer to an `lv_calendar_date_t` variable containing the date of today.

`const lv_calendar_date_t *lv_calendar_get_showed_date(const lv_obj_t *calendar)`

Get the currently showed

**Parameters** **calendar** -- pointer to a calendar object

**Returns** pointer to an `lv_calendar_date_t` variable containing the date is being shown.

`lv_calendar_date_t *lv_calendar_get_highlighted_dates(const lv_obj_t *calendar)`

Get the the highlighted dates

**Parameters** **calendar** -- pointer to a calendar object

**Returns** pointer to an `lv_calendar_date_t` array containing the dates.

`uint16_t lv_calendar_get_highlighted_dates_num(const lv_obj_t *calendar)`

Get the number of the highlighted dates

**Parameters** **calendar** -- pointer to a calendar object

**Returns** number of highlighted days

`lv_res_t lv_calendar_get_pressed_date(const lv_obj_t *calendar, lv_calendar_date_t *date)`

Get the currently pressed day

**Parameters**

- **calendar** -- pointer to a calendar object
- **date** -- store the pressed date here

**Returns** LV\_RES\_OK: there is a valid pressed date; LV\_RES\_INV: there is no pressed data

**Variables**

`const lv_obj_class_t lv_calendar_class`

`struct lv_calendar_date_t`

`#include <lv_calendar.h>` Represents a date on the calendar object (platform-agnostic).

## Public Members

uint16\_t **year**

int8\_t **month**

int8\_t **day**  
1..12

struct **\_lv\_calendar\_t**

## Public Members

*lv\_btnmatrix\_t* **btnm**

*lv\_calendar\_date\_t* **today**

*lv\_calendar\_date\_t* **showed\_date**

*lv\_calendar\_date\_t* \***highlighted\_dates**

uint16\_t **highlighted\_dates\_num**

const char \***map**[8 \* 7]

char **nums**[7 \* 6][4]

## 5.3.2 Chart (lv\_chart)

### Overview

Charts are a basic object to visualize data points. They support *Line* charts (connect points with lines and/or draw points on them) and *Bar* charts.

Charts also support:

- division lines
- 2 y axis
- axis ticks and texts on ticks
- cursors
- scrolling and zooming

### Parts and Styles

- **LV\_PART\_MAIN** The background of the chart. It uses all the typical background related style properties and *line* properties for the division lines. *Padding* makes the series area smaller.
- **LV\_PART\_SCROLLBAR** The scrollbar used if the chart is zoomed. See the *Base object*'s documentation for details.
- **LV\_PART\_ITEMS** Refers to the line or bar series.
  - Line chart: The *line* properties are used by the lines. **width**, **height**, **bg\_color** and **radius** is used to set the appearance of points.

- Bar chart: The typical background properties are used to style the bars.
- `LV_PART_CURSOR` *Line* properties are used to style the cursors. `width`, `height`, `bg_color` and `radius` is used to set the appearance of points.
- `LV_PART_TICKS` *Line* and *Text* style properties are used to style the ticks

## Usage

### Chart type

The following data display types exist:

- `LV_CHART_TYPE_NONE` Do not display any data. It can be used to hide the series.
- `LV_CHART_TYPE_LINE` Draw lines between the data points and/or points (rectangles or circles) on the data points.
- `LV_CHART_TYPE_BAR` - Draw bars.
- `LV_CHART_TYPE_SCATTER` - X/Y chart drawing point's and lines between the points. .

You can specify the display type with `lv_chart_set_type(chart, LV_CHART_TYPE...)`.

### Data series

You can add any number of series to the charts by `lv_chart_add_series(chart, color, axis)`. It allocates data for a `lv_chart_series_t` structure which contains the chosen `color` and an array for the data points. `axis` can have the following values:

- `LV_CHART_AXIS_PRIMARY_Y` Left axis
- `LV_CHART_AXIS_SECONDARY_Y` Right axis
- `LV_CHART_AXIS_PRIMARY_X` Bottom axis
- `LV_CHART_AXIS_SECONDARY_X` Top axis

`axis` tells which axis's range should be used to scale the values.

With `lv_chart_set_ext_y_array(chart, ser, value_array)` makes the chart use an external array for the given series. `value_array` should look like this: `lv_coord_t * value_array[num_points]`. The array size needs to be large enough to hold all the points of that series. The array's pointer will be saved in the chart so it needs to be global, static or dynamically allocated. Note: you should call `lv_chart_refresh(chart)` after the external data source has been updated, to update the chart.

The value array of a series can be get by `lv_chart_get_y_array(chart, ser)`. It can be use with `ext_array` or *normal arrays*.

For `LV_CHART_TYPE_SCATTER` type `lv_chart_set_ext_x_array(chart, ser, value_array)` and `lv_chart_get_x_array(chart, ser)` can be used as well.

## Modify the data

You have several options to set the data of series:

1. Set the values manually in the array like `ser1->points[3] = 7` and refresh the chart with `lv_chart_refresh(chart)`.
2. Use `lv_chart_set_value_by_id(chart, ser, value, id)` where `id` is the index of the point you wish to update.
3. Use the `lv_chart_set_next_value(chart, ser, value)`.
4. Initialize all points to a given value with: `lv_chart_set_all_value(chart, ser, value)`.

Use `LV_CHART_POINT_DEF` as value to make the library skip drawing that point, column, or line segment.

For `LV_CHART_TYPE_SCATTER` type `lv_chart_set_value_by_id2(chart, ser, id, value)` and `lv_chart_set_next_value2(chart, ser, x_value, y_value)` can be used as well.

## Update modes

`lv_chart_set_next_value` can behave in two ways depending on *update mode*:

- `LV_CHART_UPDATE_MODE_SHIFT` Shift old data to the left and add the new one to the right.
- `LV_CHART_UPDATE_MODE_CIRCULAR` - Circularly add the new data (Like an ECG diagram).

The update mode can be changed with `lv_chart_set_update_mode(chart, LV_CHART_UPDATE_MODE_...)`.

## Number of points

The number of points in the series can be modified by `lv_chart_set_point_count(chart, point_num)`. The default value is 10. Note: this also affects the number of points processed when an external buffer is assigned to a series. So you need to be sure the external array is large enough.

## Handling large number of points

On line charts if the number of points is greater than the pixels horizontally, the Chart will draw only vertical lines to make the drawing of large amount of data effective. If there are let's say 10 point a pixel, LVGL searches the smallest and the greatest value and draws a vertical lines between them. It ensures to not miss any peaks.

## Vertical range

You can specify the minimum and maximum values in y-direction with `lv_chart_set_range(chart, axis, min, max)`. `axis` can be `LV_CHART_AXIS_PRIMARY` (left axis) or `LV_CHART_AXIS_SECONDARY` (right axis).

The value of the points will be scaled proportionally. The default range is: 0..100.

## Division lines

The number of horizontal and vertical division lines can be modified by `lv_chart_set_div_line_count(chart, hdiv_num, vdiv_num)`. The default settings are 3 horizontal and 5 vertical division lines. If there is a visible border on a side and there is no padding on that side the division line would be drawn on top of the border, therefore it won't be drawn.

## Override default start point for series

If you wish a plot to start from a point other than the default which is `point[0]` of the series, you can set an alternative index with the function `lv_chart_set_x_start_point(chart, ser, id)` where `id` is the new index position to start plotting from.

Note that `LV_CHART_UPDATE_MODE_SHIFT` also changes the `start_point`.

## Tick marks and labels

Ticks and labels can be added to the axis with `lv_chart_set_axis_tick(chart, axis, major_len, minor_len, major_cnt, minor_cnt, label_en, draw_size)`.

- `axis` can be `LV_CHART_AXIS_X/PRIMARY_Y/SECONDARY_Y`
- `major_len` is the length of major ticks
- `minor_len` is the length of minor ticks
- `major_cnt` is the number of major ticks on the axis
- `minor_cnt` is the number of minor ticks between two major ticks
- `label_en` true: enable label drawing on major ticks
- `draw_size` extra size required to draw the tick and labels (start with 20 px and increase if the ticks/labels are clipped)

## Zoom

The chart can be zoomed independently in x and y directions with `lv_chart_set_zoom_x(chart, factor)` and `lv_chart_set_zoom_y(chart, factor)`. If `factor` is 256 there is no zoom. 512 means double zoom, etc. Fractional values are also possible but < 256 value is not allowed.

## Cursor

A cursor can be added with `lv_chart_cursor_t * c1 = lv_chart_add_cursor(chart, color, dir);`. The possible values of `dir` are `LV_DIR_NONE/RIGHT/UP/LEFT/DOWN/HOR/VER/ALL` or their OR-ed values to tell in which direction(s) should the cursor be drawn.

`lv_chart_set_cursor_pos(chart, cursor, &point)` sets the position of the cursor. `pos` is a pointer to an `lv_point_t` variable. E.g. `lv_point_t point = {10, 20};`. If the chart is scrolled the cursor will remain on the same place.

`lv_chart_get_point_pos_by_id(chart, series, id, &point_out)` tells the coordinate of a given point. It's useful to place the cursor to a given point.

`lv_chart_set_cursor_point(chart, cursor, series, point_id)` sticks the cursor the point. If the point's position changes (new value or scrolling) the cursor will move with the point.

## Events

- **LV\_EVENT\_VALUE\_CHANGED** Sent when a new point is clicked pressed. `lv_chart_get_pressed_point(chart)` returns the zero based index of the pressed point.
- **LV\_EVENT\_DRAW\_PART\_BEGIN** and **LV\_EVENT\_DRAW\_PART\_END** are sent for multiple parts. The fields of `lv_obj_draw_part_dsc_t` is set as the followings:
  - **LV\_PART\_ITEMS** (the series)
    - \* *Line chart* `clip_area`, `id` (index of the point), `value` (value of idth point), `p1`, `p2` (points of the line), `draw_area` (area of the point), `line_dsc`, `rect_dsc`, `sub_part_ptr` (pointer to the series), `part`
    - \* *Bar chart* `clip_area`, `id` (index of the point), `value` (value of idth point), `draw_area` (area of the point), `rect_dsc`, `sub_part_ptr` (pointer to the series), `part`
  - **LV\_PART\_TICKS** (major tick lines and label) `clip_area`, `id` (axis), `value` (scaled value of the tick), `text` (value converted to decimal), `line_dsc`, `label_dsc`, `part`
  - **LV\_PART\_CURSOR** Te events are send for 3 times:
    - \* vertical line `clip_area`, `p1`, `p2` (points of the line), `line_dsc`, `part`
    - \* horizontal line `clip_area`, `p1`, `p2` (points of the line), `line_dsc`, `part`
    - \* point `clip_area`, `draw_area` (points of the line), `rect_dsc`, `part`
  - **LV\_PART\_MAIN** (the division lines) `clip_area`, `id` (index of the line), `p1`, `p2` (points of the line), `line_dsc`, `part`

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Line Chart

code

```
#include "../../lv_examples.h"
#if LV_USE_CHART && LV_BUILD_EXAMPLES

void lv_example_chart_1(void)
{
 /*Create a chart*/
 lv_obj_t * chart;
```

(continues on next page)



(continued from previous page)

```

chart = lv_chart_create(lv_scr_act());
lv_obj_set_size(chart, 200, 150);
lv_obj_center(chart);
lv_chart_set_type(chart, LV_CHART_TYPE_LINE); /*Show lines and points too*/

/*Add two data series*/
lv_chart_series_t * ser1 = lv_chart_add_series(chart, lv_palette_main(LV_PALETTE_
↪RED), LV_CHART_AXIS_PRIMARY_Y);
lv_chart_series_t * ser2 = lv_chart_add_series(chart, lv_palette_main(LV_PALETTE_
↪GREEN), LV_CHART_AXIS_SECONDARY_Y);

/*Set the next points on 'ser1'*/
lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 30);
lv_chart_set_next_value(chart, ser1, 70);
lv_chart_set_next_value(chart, ser1, 90);

/*Directly set points on 'ser2'*/
ser2->y_points[0] = 90;
ser2->y_points[1] = 70;
ser2->y_points[2] = 65;
ser2->y_points[3] = 65;
ser2->y_points[4] = 65;
ser2->y_points[5] = 65;
ser2->y_points[6] = 65;
ser2->y_points[7] = 65;
ser2->y_points[8] = 65;
ser2->y_points[9] = 65;

lv_chart_refresh(chart); /*Required after direct set*/
}

#endif

```

### Faded area line chart with custom division lines

code

```

#include "../lv_examples.h"
#if LV_USE_CHART && LV_DRAW_COMPLEX && LV_BUILD_EXAMPLES

static lv_obj_t * chart1;
static lv_chart_series_t * ser1;
static lv_chart_series_t * ser2;

static void draw_event_cb(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_target(e);

```

(continues on next page)

(continued from previous page)

```

/*Add the faded area before the lines are drawn*/
lv_obj_draw_part_dsc_t * dsc = lv_event_get_draw_part_dsc(e);
if(dsc->part == LV_PART_ITEMS) {
 if(!dsc->p1 || !dsc->p2) return;

 /*Add a line mask that keeps the area below the line*/
 lv_draw_mask_line_param_t line_mask_param;
 lv_draw_mask_line_points_init(&line_mask_param, dsc->p1->x, dsc->p1->y, dsc->
↪p2->x, dsc->p2->y, LV_DRAW_MASK_LINE_SIDE_BOTTOM);
 int16_t line_mask_id = lv_draw_mask_add(&line_mask_param, NULL);

 /*Add a fade effect: transparent bottom covering top*/
 lv_coord_t h = lv_obj_get_height(obj);
 lv_draw_mask_fade_param_t fade_mask_param;
 lv_draw_mask_fade_init(&fade_mask_param, &obj->coords, LV_OPA_COVER, obj->
↪coords.y1 + h / 8, LV_OPA_TRANSP, obj->coords.y2);
 int16_t fade_mask_id = lv_draw_mask_add(&fade_mask_param, NULL);

 /*Draw a rectangle that will be affected by the mask*/
 lv_draw_rect_dsc_t draw_rect_dsc;
 lv_draw_rect_dsc_init(&draw_rect_dsc);
 draw_rect_dsc.bg_opa = LV_OPA_20;
 draw_rect_dsc.bg_color = dsc->line_dsc->color;

 lv_area_t a;
 a.x1 = dsc->p1->x;
 a.x2 = dsc->p2->x - 1;
 a.y1 = LV_MIN(dsc->p1->y, dsc->p2->y);
 a.y2 = obj->coords.y2;
 lv_draw_rect(&a, dsc->clip_area, &draw_rect_dsc);

 /*Remove the masks*/
 lv_draw_mask_remove_id(line_mask_id);
 lv_draw_mask_remove_id(fade_mask_id);
}
/*Hook the division lines too*/
else if(dsc->part == LV_PART_MAIN) {
 if(dsc->line_dsc == NULL) return;

 /*Vertical line*/
 if(dsc->p1->x == dsc->p2->x) {
 dsc->line_dsc->color = lv_palette_lighten(LV_PALETTE_GREY, 1);
 if(dsc->id == 3) {
 dsc->line_dsc->width = 2;
 dsc->line_dsc->dash_gap = 0;
 dsc->line_dsc->dash_width = 0;
 }
 else {
 dsc->line_dsc->width = 1;
 dsc->line_dsc->dash_gap = 6;
 dsc->line_dsc->dash_width = 6;
 }
 }
 /*Horizontal line*/
 else {
 if(dsc->id == 2) {
 dsc->line_dsc->width = 2;

```

(continues on next page)

(continued from previous page)

```

 dsc->line_dsc->dash_gap = 0;
 dsc->line_dsc->dash_width = 0;
 }
 else {
 dsc->line_dsc->width = 2;
 dsc->line_dsc->dash_gap = 6;
 dsc->line_dsc->dash_width = 6;
 }

 if(dsc->id == 1 || dsc->id == 3) {
 dsc->line_dsc->color = lv_palette_main(LV_PALETTE_GREEN);
 } else {
 dsc->line_dsc->color = lv_palette_lighten(LV_PALETTE_GREY, 1);
 }
}
}
}

static void add_data(lv_timer_t * timer)
{
 LV_UNUSED(timer);
 static uint32_t cnt = 0;
 lv_chart_set_next_value(chart1, ser1, lv_rand(20, 90));

 if(cnt % 4 == 0) lv_chart_set_next_value(chart1, ser2, lv_rand(40, 60));

 cnt++;
}

/**
 * Add a faded area effect to the line chart and make some division lines ticker
 */
void lv_example_chart_2(void)
{
 /*Create a chart1*/
 chart1 = lv_chart_create(lv_scr_act());
 lv_obj_set_size(chart1, 200, 150);
 lv_obj_center(chart1);
 lv_chart_set_type(chart1, LV_CHART_TYPE_LINE); /*Show lines and points too*/

 lv_chart_set_div_line_count(chart1, 5, 7);

 lv_obj_add_event_cb(chart1, draw_event_cb, LV_EVENT_DRAW_PART_BEGIN, NULL);
 lv_chart_set_update_mode(chart1, LV_CHART_UPDATE_MODE_CIRCULAR);

 /*Add two data series*/
 ser1 = lv_chart_add_series(chart1, lv_palette_main(LV_PALETTE_RED), LV_CHART_AXIS_PRIMARY_Y);
 ser2 = lv_chart_add_series(chart1, lv_palette_main(LV_PALETTE_BLUE), LV_CHART_AXIS_SECONDARY_Y);

 uint32_t i;
 for(i = 0; i < 10; i++) {
 lv_chart_set_next_value(chart1, ser1, lv_rand(20, 90));
 lv_chart_set_next_value(chart1, ser2, lv_rand(30, 70));
 }
}

```

(continues on next page)

(continued from previous page)

```

 lv_timer_create(add_data, 200, NULL);
}

#endif

```

### Axis ticks and labels with scrolling

code

```

#include "../../lv_examples.h"
#if LV_USE_CHART && LV_BUILD_EXAMPLES

static void draw_event_cb(lv_event_t * e)
{
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_param(e);
 if(dsc->part == LV_PART_TICKS && dsc->id == LV_CHART_AXIS_PRIMARY_X) {
 const char * month[] = {"Jan", "Febr", "March", "Apr", "May", "Jun", "July",
 ↪ "Aug", "Sept", "Oct", "Nov", "Dec"};
 lv_snprintf(dsc->text, sizeof(dsc->text), "%s", month[dsc->value]);
 }
}

/**
 * Add ticks and labels to the axis and demonstrate scrolling
 */
void lv_example_chart_3(void)
{
 /*Create a chart*/
 lv_obj_t * chart;
 chart = lv_chart_create(lv_scr_act());
 lv_obj_set_size(chart, 200, 150);
 lv_obj_center(chart);
 lv_chart_set_type(chart, LV_CHART_TYPE_BAR);
 lv_chart_set_range(chart, LV_CHART_AXIS_PRIMARY_Y, 0, 100);
 lv_chart_set_range(chart, LV_CHART_AXIS_SECONDARY_Y, 0, 400);
 lv_chart_set_point_count(chart, 12);
 lv_obj_add_event_cb(chart, draw_event_cb, LV_EVENT_DRAW_PART_BEGIN, NULL);

 /*Add ticks and label to every axis*/
 lv_chart_set_axis_tick(chart, LV_CHART_AXIS_PRIMARY_X, 10, 5, 12, 3, true, 40);
 lv_chart_set_axis_tick(chart, LV_CHART_AXIS_PRIMARY_Y, 10, 5, 6, 2, true, 50);
 lv_chart_set_axis_tick(chart, LV_CHART_AXIS_SECONDARY_Y, 10, 5, 3, 4, true, 50);

 /*Zoom in a little in X*/
 lv_chart_set_zoom_x(chart, 800);

 /*Add two data series*/
 lv_chart_series_t * ser1 = lv_chart_add_series(chart, lv_palette_lighten(LV_
 ↪ PALETTE_GREEN, 2), LV_CHART_AXIS_PRIMARY_Y);
 lv_chart_series_t * ser2 = lv_chart_add_series(chart, lv_palette_darken(LV_
 ↪ PALETTE_GREEN, 2), LV_CHART_AXIS_SECONDARY_Y);

 /*Set the next points on 'ser1'*/
 lv_chart_set_next_value(chart, ser1, 31);
 lv_chart_set_next_value(chart, ser1, 66);
}

```

(continues on next page)

(continued from previous page)

```

lv_chart_set_next_value(chart, ser1, 10);
lv_chart_set_next_value(chart, ser1, 89);
lv_chart_set_next_value(chart, ser1, 63);
lv_chart_set_next_value(chart, ser1, 56);
lv_chart_set_next_value(chart, ser1, 32);
lv_chart_set_next_value(chart, ser1, 35);
lv_chart_set_next_value(chart, ser1, 57);
lv_chart_set_next_value(chart, ser1, 85);
lv_chart_set_next_value(chart, ser1, 22);
lv_chart_set_next_value(chart, ser1, 58);

lv_coord_t * ser2_array = lv_chart_get_y_array(chart, ser2);
/*Directly set points on 'ser2'*/
ser2_array[0] = 92;
ser2_array[1] = 71;
ser2_array[2] = 61;
ser2_array[3] = 15;
ser2_array[4] = 21;
ser2_array[5] = 35;
ser2_array[6] = 35;
ser2_array[7] = 58;
ser2_array[8] = 31;
ser2_array[9] = 53;
ser2_array[10] = 33;
ser2_array[11] = 73;

lv_chart_refresh(chart); /*Required after direct set*/
}

#endif

```

### Show the value of the pressed points

code

```

#include "../lv_examples.h"
#if LV_USE_CHART && LV_BUILD_EXAMPLES

static void event_cb(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * chart = lv_event_get_target(e);

 if(code == LV_EVENT_VALUE_CHANGED) {
 lv_obj_invalidate(chart);
 }
 if(code == LV_EVENT_REFR_EXT_DRAW_SIZE) {
 lv_coord_t * s = lv_event_get_param(e);
 *s = LV_MAX(*s, 20);
 }
 else if(code == LV_EVENT_DRAW_POST_END) {
 int32_t id = lv_chart_get_pressed_point(chart);
 if(id == LV_CHART_POINT_NONE) return;
 }
}

```

(continues on next page)

(continued from previous page)

```

 LV_LOG_USER("Selected point %d", id);

 lv_chart_series_t * ser = lv_chart_get_series_next(chart, NULL);
 while(ser) {
 lv_point_t p;
 lv_chart_get_point_pos_by_id(chart, ser, id, &p);

 lv_coord_t * y_array = lv_chart_get_y_array(chart, ser);
 lv_coord_t value = y_array[id];

 char buf[16];
 lv_snprintf(buf, sizeof(buf), LV_SYMBOL_DUMMY"%d", value);

 lv_draw_rect_dsc_t draw_rect_dsc;
 lv_draw_rect_dsc_init(&draw_rect_dsc);
 draw_rect_dsc.bg_color = lv_color_black();
 draw_rect_dsc.bg_opa = LV_OPA_50;
 draw_rect_dsc.radius = 3;
 draw_rect_dsc.bg_img_src = buf;
 draw_rect_dsc.bg_img_recolor = lv_color_white();

 lv_area_t a;
 a.x1 = chart->coords.x1 + p.x - 20;
 a.x2 = chart->coords.x1 + p.x + 20;
 a.y1 = chart->coords.y1 + p.y - 30;
 a.y2 = chart->coords.y1 + p.y + 10;

 const lv_area_t * clip_area = lv_event_get_clip_area(e);
 lv_draw_rect(&a, clip_area, &draw_rect_dsc);

 ser = lv_chart_get_series_next(chart, ser);
 }
}
else if(code == LV_EVENT_RELEASED) {
 lv_obj_invalidate(chart);
}
}

/**
 * Show the value of the pressed points
 */
void lv_example_chart_4(void)
{
 /*Create a chart*/
 lv_obj_t * chart;
 chart = lv_chart_create(lv_scr_act());
 lv_obj_set_size(chart, 200, 150);
 lv_obj_center(chart);

 lv_obj_add_event_cb(chart, event_cb, LV_EVENT_ALL, NULL);
 lv_obj_refresh_ext_draw_size(chart);

 /*Zoom in a little in X*/
 lv_chart_set_zoom_x(chart, 800);

 /*Add two data series*/
 lv_chart_series_t * ser1 = lv_chart_add_series(chart, lv_palette_main(LV_PALETTE_
↵ RED), LV_CHART_AXIS_PRIMARY_Y);

```

(continues on next page)

(continued from previous page)

```

 lv_chart_series_t * ser2 = lv_chart_add_series(chart, lv_palette_main(LV_PALETTE_
↪GREEN), LV_CHART_AXIS_PRIMARY_Y);
 uint32_t i;
 for(i = 0; i < 10; i++) {
 lv_chart_set_next_value(chart, ser1, lv_rand(60,90));
 lv_chart_set_next_value(chart, ser2, lv_rand(10,40));
 }
}

↪endif

```

## Display 1000 data points with zooming and scrolling

code

```

#include "../lv_examples.h"
↪if LV_USE_CHART && LV_BUILD_EXAMPLES

static lv_obj_t * chart;
static lv_chart_series_t * ser;
static lv_chart_cursor_t * cursor;

static void event_cb(lv_event_t * e)
{
 static int32_t last_id = -1;
 lv_event_code_t code = lv_event_get_code(e);
 lv_obj_t * obj = lv_event_get_target(e);

 if(code == LV_EVENT_VALUE_CHANGED) {
 last_id = lv_chart_get_pressed_point(obj);
 if(last_id != LV_CHART_POINT_NONE) {
 lv_chart_set_cursor_point(obj, cursor, NULL, last_id);
 }
 }
 else if(code == LV_EVENT_DRAW_PART_END) {
 lv_obj_draw_part_dsc_t * dsc = lv_event_get_draw_part_dsc(e);
 if(dsc->part == LV_PART_CURSOR && dsc->p1 && dsc->p2 && dsc->p1->y == dsc->p2-
↪->y && last_id >= 0) {
 lv_coord_t * data_array = lv_chart_get_y_array(chart, ser);
 lv_coord_t v = data_array[last_id];
 char buf[16];
 lv_snprintf(buf, sizeof(buf), "%d", v);

 lv_point_t size;
 ↪lv_txt_get_size(&size, buf, LV_FONT_DEFAULT, 0, 0, LV_COORD_MAX, LV_TEXT_
↪FLAG_NONE);

 lv_area_t a;
 a.y2 = dsc->p1->y - 5;
 a.y1 = a.y2 - size.y - 10;
 a.x1 = dsc->p1->x + 10;
 a.x2 = a.x1 + size.x + 10;

```

(continues on next page)

(continued from previous page)

```

 lv_draw_rect_dsc_t draw_rect_dsc;
 lv_draw_rect_dsc_init(&draw_rect_dsc);
 draw_rect_dsc.bg_color = lv_palette_main(LV_PALETTE_BLUE);
 draw_rect_dsc.radius = 3;

 lv_draw_rect(&a, dsc->clip_area, &draw_rect_dsc);

 lv_draw_label_dsc_t draw_label_dsc;
 lv_draw_label_dsc_init(&draw_label_dsc);
 draw_label_dsc.color = lv_color_white();
 a.x1 += 5;
 a.x2 -= 5;
 a.y1 += 5;
 a.y2 -= 5;
 lv_draw_label(&a, dsc->clip_area, &draw_label_dsc, buf, NULL);
 }
}

/**
 * Show cursor on the clicked point
 */
void lv_example_chart_6(void)
{
 chart = lv_chart_create(lv_scr_act());
 lv_obj_set_size(chart, 200, 150);
 lv_obj_align(chart, LV_ALIGN_CENTER, 0, -10);

 lv_chart_set_axis_tick(chart, LV_CHART_AXIS_PRIMARY_Y, 10, 5, 6, 5, true, 40);
 lv_chart_set_axis_tick(chart, LV_CHART_AXIS_PRIMARY_X, 10, 5, 10, 1, true, 30);

 lv_obj_add_event_cb(chart, event_cb, LV_EVENT_ALL, NULL);
 lv_obj_refresh_ext_draw_size(chart);

 cursor = lv_chart_add_cursor(chart, lv_palette_main(LV_PALETTE_BLUE), LV_DIR_LEFT,
↪ LV_DIR_BOTTOM);

 ser = lv_chart_add_series(chart, lv_palette_main(LV_PALETTE_RED), LV_CHART_AXIS_
↪ PRIMARY_Y);
 uint32_t i;
 for(i = 0; i < 10; i++) {
 lv_chart_set_next_value(chart, ser, lv_rand(10,90));
 }

 lv_chart_set_zoom_x(chart, 500);

 lv_obj_t * label = lv_label_create(lv_scr_act());
 lv_label_set_text(label, "Click on a point");
 lv_obj_align_to(label, chart, LV_ALIGN_OUT_TOP_MID, 0, -5);
}

#endif

```



## MicroPython

No examples yet.

## API

### Typedefs

```

typedef uint8_t lv_chart_type_t
typedef uint8_t lv_chart_update_mode_t
typedef uint8_t lv_chart_axis_t
typedef _lv_chart_series_t lv_chart_series_t
typedef _lv_chart_cursor_t lv_chart_cursor_t
typedef _lv_chart_tick_dsc_t lv_chart_tick_dsc_t
typedef _lv_chart_t lv_chart_t

```

### Enums

enum **[anonymous]**

Chart types

*Values:*

enumerator **LV\_CHART\_TYPE\_NONE**

Don't draw the series

enumerator **LV\_CHART\_TYPE\_LINE**

Connect the points with lines

enumerator **LV\_CHART\_TYPE\_BAR**

Draw columns

enumerator **LV\_CHART\_TYPE\_SCATTER**

Draw points and lines in 2D (x,y coordinates)

enum **[anonymous]**

Chart update mode for lv\_chart\_set\_next

*Values:*

enumerator **LV\_CHART\_UPDATE\_MODE\_SHIFT**

Shift old data to the left and add the new one the right

enumerator **LV\_CHART\_UPDATE\_MODE\_CIRCULAR**

Add the new data in a circular way

enum **[anonymous]**

Enumeration of the axis'

*Values:*

enumerator **LV\_CHART\_AXIS\_PRIMARY\_Y**

enumerator **LV\_CHART\_AXIS\_SECONDARY\_Y**

enumerator **LV\_CHART\_AXIS\_PRIMARY\_X**

enumerator **LV\_CHART\_AXIS\_SECONDARY\_X**

enumerator **\_LV\_CHART\_AXIS\_LAST**

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_CHART\_POINT\_NONE)

*lv\_obj\_t* \***lv\_chart\_create**(*lv\_obj\_t* \*parent)

Create a chart objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new chart

**Returns** pointer to the created chart

void **lv\_chart\_set\_type**(*lv\_obj\_t* \*obj, *lv\_chart\_type\_t* type)

Set a new type for a chart

**Parameters**

- **obj** -- pointer to a chart object
- **type** -- new type of the chart (from 'lv\_chart\_type\_t' enum)

void **lv\_chart\_set\_point\_count**(*lv\_obj\_t* \*obj, uint16\_t cnt)

Set the number of points on a data line on a chart

**Parameters**

- **obj** -- pointer to a chart object
- **cnt** -- new number of points on the data lines

void **lv\_chart\_set\_range**(*lv\_obj\_t* \*obj, *lv\_chart\_axis\_t* axis, lv\_coord\_t min, lv\_coord\_t max)

Set the minimal and maximal y values on an axis

**Parameters**

- **obj** -- pointer to a chart object
- **axis** -- LV\_CHART\_AXIS\_PRIMARY\_Y or LV\_CHART\_AXIS\_SECONDARY\_Y
- **min** -- minimum value of the y axis
- **max** -- maximum value of the y axis

void **lv\_chart\_set\_update\_mode**(*lv\_obj\_t* \*obj, *lv\_chart\_update\_mode\_t* update\_mode)

Set update mode of the chart object. Affects

**Parameters**

- **obj** -- pointer to a chart object

- **mode** -- the update mode

void **lv\_chart\_set\_div\_line\_count**(*lv\_obj\_t* \*obj, uint8\_t hdiv, uint8\_t vdiv)  
Set the number of horizontal and vertical division lines

**Parameters**

- **obj** -- pointer to a chart object
- **hdiv** -- number of horizontal division lines
- **vdiv** -- number of vertical division lines

void **lv\_chart\_set\_zoom\_x**(*lv\_obj\_t* \*obj, uint16\_t zoom\_x)  
Zoom into the chart in X direction

**Parameters**

- **obj** -- pointer to a chart object
- **zoom\_x** -- zoom in x direction. LV\_ZOOM\_NONE or 256 for no zoom, 512 double zoom

void **lv\_chart\_set\_zoom\_y**(*lv\_obj\_t* \*obj, uint16\_t zoom\_y)  
Zoom into the chart in Y direction

**Parameters**

- **obj** -- pointer to a chart object
- **zoom\_y** -- zoom in y direction. LV\_ZOOM\_NONE or 256 for no zoom, 512 double zoom

uint16\_t **lv\_chart\_get\_zoom\_x**(const *lv\_obj\_t* \*obj)  
Get X zoom of a chart

**Parameters** **obj** -- pointer to a chart object

**Returns** the X zoom value

uint16\_t **lv\_chart\_get\_zoom\_y**(const *lv\_obj\_t* \*obj)  
Get Y zoom of a chart

**Parameters** **obj** -- pointer to a chart object

**Returns** the Y zoom value

void **lv\_chart\_set\_axis\_tick**(*lv\_obj\_t* \*obj, *lv\_chart\_axis\_t* axis, lv\_coord\_t major\_len, lv\_coord\_t minor\_len, lv\_coord\_t major\_cnt, lv\_coord\_t minor\_cnt, bool label\_en, lv\_coord\_t draw\_size)

Set the number of tick lines on an axis

**Parameters**

- **obj** -- pointer to a chart object
- **axis** -- an axis which ticks count should be set
- **major\_len** -- length of major ticks
- **minor\_len** -- length of minor ticks
- **major\_cnt** -- number of major ticks on the axis
- **minor\_cnt** -- number of minor ticks between two major ticks
- **label\_en** -- true: enable label drawing on major ticks
- **draw\_size** -- extra size required to draw the tick and labels (start with 20 px and increase if the ticks/labels are clipped)

*lv\_chart\_type\_t* **lv\_chart\_get\_type**(const *lv\_obj\_t* \*obj)

Get the type of a chart

**Parameters** **obj** -- pointer to chart object

**Returns** type of the chart (from 'lv\_chart\_t' enum)

uint16\_t **lv\_chart\_get\_point\_count**(const *lv\_obj\_t* \*obj)

Get the data point number per data line on chart

**Parameters** **chart** -- pointer to chart object

**Returns** point number on each data line

uint16\_t **lv\_chart\_get\_x\_start\_point**(const *lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser)

Get the current index of the x-axis start point in the data array

**Parameters**

- **chart** -- pointer to a chart object
- **ser** -- pointer to a data series on 'chart'

**Returns** the index of the current x start point in the data array

void **lv\_chart\_get\_point\_pos\_by\_id**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, uint16\_t id, lv\_point\_t \*p\_out)

Get the position of a point to the chart.

**Parameters**

- **chart** -- pointer to a chart object
- **ser** -- pointer to series
- **id** -- the index.
- **p\_out** -- store the result position here

void **lv\_chart\_refresh**(*lv\_obj\_t* \*obj)

Refresh a chart if its data line has changed

**Parameters** **chart** -- pointer to chart object

*lv\_chart\_series\_t* \***lv\_chart\_add\_series**(*lv\_obj\_t* \*obj, lv\_color\_t color, *lv\_chart\_axis\_t* axis)

Allocate and add a data series to the chart

**Parameters**

- **obj** -- pointer to a chart object
- **color** -- color of the data series
- **axis** -- the y axis to which the series should be attached  
(::LV\_CHART\_AXIS\_PRIMARY\_Y or ::LV\_CHART\_AXIS\_SECONDARY\_Y)

**Returns** pointer to the allocated data series

void **lv\_chart\_remove\_series**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*series)

Deallocate and remove a data series from a chart

**Parameters**

- **chart** -- pointer to a chart object
- **series** -- pointer to a data series on 'chart'

void **lv\_chart\_hide\_series**(*lv\_obj\_t* \*chart, *lv\_chart\_series\_t* \*series, bool hide)

Hide/Unhide a single series of a chart.

**Parameters**

- **obj** -- pointer to a chart object.
- **series** -- pointer to a series object
- **hide** -- true: hide the series

void **lv\_chart\_set\_series\_color**(*lv\_obj\_t* \*chart, *lv\_chart\_series\_t* \*series, lv\_color\_t color)

Change the color of a series

**Parameters**

- **obj** -- pointer to a chart object.
- **series** -- pointer to a series object
- **color** -- the new color of the series

void **lv\_chart\_set\_x\_start\_point**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, uint16\_t id)

Set the index of the x-axis start point in the data array. This point will be considers the first (left) point and the other points will be drawn after it.

**Parameters**

- **obj** -- pointer to a chart object
- **ser** -- pointer to a data series on 'chart'
- **id** -- the index of the x point in the data array

*lv\_chart\_series\_t* \***lv\_chart\_get\_series\_next**(const *lv\_obj\_t* \*chart, const *lv\_chart\_series\_t* \*ser)

Get the next series.

**Parameters**

- **chart** -- pointer to a chart
- **ser** -- the previous series or NULL to get the first

**Returns** the next series or NULL if there is no more.

*lv\_chart\_cursor\_t* \***lv\_chart\_add\_cursor**(*lv\_obj\_t* \*obj, lv\_color\_t color, lv\_dir\_t dir)

Add a cursor with a given color

**Parameters**

- **obj** -- pointer to chart object
- **color** -- color of the cursor
- **dir** -- direction of the cursor. LV\_DIR\_RIGHT/LEFT/TOP/DOWN/HOR/VER/ALL. OR-ed values are possible

**Returns** pointer to the created cursor

void **lv\_chart\_set\_cursor\_pos**(*lv\_obj\_t* \*chart, *lv\_chart\_cursor\_t* \*cursor, lv\_point\_t \*pos)

Set the coordinate of the cursor with respect to the paddings

**Parameters**

- **obj** -- pointer to a chart object
- **cursor** -- pointer to the cursor
- **pos** -- the new coordinate of cursor relative the the chart

void **lv\_chart\_set\_cursor\_point**(*lv\_obj\_t* \*chart, *lv\_chart\_cursor\_t* \*cursor, *lv\_chart\_series\_t* \*ser, uint16\_t point\_id)

Stick the cursor to a point

#### Parameters

- **obj** -- pointer to a chart object
- **cursor** -- pointer to the cursor
- **ser** -- pointer to a series
- **point\_id** -- the point's index or LV\_CHART\_POINT\_NONE to not assign to any points.

lv\_point\_t **lv\_chart\_get\_cursor\_point**(*lv\_obj\_t* \*chart, *lv\_chart\_cursor\_t* \*cursor)

Get the coordinate of the cursor with respect to the paddings

#### Parameters

- **obj** -- pointer to a chart object
- **cursor** -- pointer to cursor

**Returns** coordinate of the cursor as lv\_point\_t

void **lv\_chart\_set\_all\_value**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, lv\_coord\_t value)

Initialize all data points of a series with a value

#### Parameters

- **obj** -- pointer to chart object
- **ser** -- pointer to a data series on 'chart'
- **value** -- the new value for all points. LV\_CHART\_POINT\_DEF can be used to hide the points.

void **lv\_chart\_set\_next\_value**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, lv\_coord\_t value)

Set the next point's Y value according to the update mode policy.

#### Parameters

- **obj** -- pointer to chart object
- **ser** -- pointer to a data series on 'chart'
- **value** -- the new value of the next data

void **lv\_chart\_set\_next\_value2**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, lv\_coord\_t x\_value, lv\_coord\_t y\_value)

Set the next point's X and Y value according to the update mode policy.

#### Parameters

- **obj** -- pointer to chart object
- **ser** -- pointer to a data series on 'chart'
- **x\_value** -- the new X value of the next data
- **y\_value** -- the new Y value of the next data

void **lv\_chart\_set\_value\_by\_id**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, uint16\_t id, lv\_coord\_t value)

Set an individual point's y value of a chart's series directly based on its index

#### Parameters

- **obj** -- pointer to a chart object

- **ser** -- pointer to a data series on 'chart'
- **id** -- the index of the x point in the array
- **value** -- value to assign to array point

void **lv\_chart\_set\_value\_by\_id2**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, uint16\_t id, lv\_coord\_t x\_value, lv\_coord\_t y\_value)

Set an individual point's x and y value of a chart's series directly based on its index Can be used only with LV\_CHART\_TYPE\_SCATTER.

#### Parameters

- **obj** -- pointer to chart object
- **ser** -- pointer to a data series on 'chart'
- **id** -- the index of the x point in the array
- **x\_value** -- the new X value of the next data
- **y\_value** -- the new Y value of the next data

void **lv\_chart\_set\_ext\_y\_array**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, lv\_coord\_t array[])

Set an external array for the y data points to use for the chart NOTE: It is the users responsibility to make sure the `point_cnt` matches the external array size.

#### Parameters

- **obj** -- pointer to a chart object
- **ser** -- pointer to a data series on 'chart'
- **array** -- external array of points for chart

void **lv\_chart\_set\_ext\_x\_array**(*lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser, lv\_coord\_t array[])

Set an external array for the x data points to use for the chart NOTE: It is the users responsibility to make sure the `point_cnt` matches the external array size.

#### Parameters

- **obj** -- pointer to a chart object
- **ser** -- pointer to a data series on 'chart'
- **array** -- external array of points for chart

lv\_coord\_t \***lv\_chart\_get\_y\_array**(const *lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser)

Get the array of y values of a series

#### Parameters

- **obj** -- pointer to a chart object
- **ser** -- pointer to a data series on 'chart'

**Returns** the array of values with 'point\_count' elements

lv\_coord\_t \***lv\_chart\_get\_x\_array**(const *lv\_obj\_t* \*obj, *lv\_chart\_series\_t* \*ser)

Get the array of x values of a series

#### Parameters

- **obj** -- pointer to a chart object
- **ser** -- pointer to a data series on 'chart'

**Returns** the array of values with 'point\_count' elements

```
uint32_t lv_chart_get_pressed_point(const lv_obj_t *obj)
```

Get the index of the currently pressed point. It's the same for every series.

**Parameters** **obj** -- pointer to a chart object

**Returns** the index of the point [0 .. point count] or LV\_CHART\_POINT\_ID\_NONE if no point is being pressed

## Variables

```
const lv_obj_class_t lv_chart_class
```

```
struct _lv_chart_series_t
```

*#include <lv\_chart.h>* Descriptor a chart series

### Public Members

```
lv_coord_t *x_points
```

```
lv_coord_t *y_points
```

```
lv_color_t color
```

```
uint16_t start_point
```

```
uint8_t hidden
```

```
uint8_t x_ext_buf_assigned
```

```
uint8_t y_ext_buf_assigned
```

```
uint8_t x_axis_sec
```

```
uint8_t y_axis_sec
```

```
struct _lv_chart_cursor_t
```

### Public Members

```
lv_point_t pos
```

```
uint16_t point_id
```

```
lv_color_t color
```

```
lv_chart_series_t *ser
```

```
lv_dir_t dir
```

```
uint8_t pos_set
```

```
struct _lv_chart_tick_dsc_t
```



**Public Members**

```

lv_coord_t major_len
lv_coord_t minor_len
lv_coord_t draw_size
uint32_t minor_cnt
uint32_t major_cnt
uint32_t label_en
struct _lv_chart_t

```

**Public Members**

```

lv_obj_t obj
lv_ll_t series_ll
 Linked list for the series (stores lv_chart_series_t)

lv_ll_t cursor_ll
 Linked list for the cursors (stores lv_chart_cursor_t)

lv_chart_tick_dsc_t tick[4]
lv_coord_t ymin[2]
lv_coord_t ymax[2]
lv_coord_t xmin[2]
lv_coord_t xmax[2]
uint16_t pressed_point_id
uint16_t hdiv_cnt
 Number of horizontal division lines

uint16_t vdiv_cnt
 Number of vertical division lines

uint16_t point_cnt
 Point number in a data line

uint16_t zoom_x
uint16_t zoom_y
lv_chart_type_t type
 Line or column chart

lv_chart_update_mode_t update_mode

```

### 5.3.3 Color wheel (lv\_colorwheel)

#### Overview

As its name implies *Color wheel* allows to select color. The Hue, Saturation and Value of the color can be selected after each other.

Long pressing the object, the color wheel will change to the next parameter of the color (hue, saturation or value). Besides, double click will reset the current parameter.

#### Parts and Styles

- **LV\_PART\_MAIN** Only `arc_width` is used to set the width of the color wheel
- **LV\_PART\_KNOB** A rectangle (or circle) drawn on the current value. It uses all the rectangle like style properties and padding to make it larger than the width of the arc.

#### Usage

##### Create a color wheel

`lv_colorwheel_create(parent, knob_recolor)` creates a new color wheel. With `knob_recolor=true` the knob's background color will be set to the current color.

##### Set color

The color can be set manually with `lv_colorwheel_set_hue/saturation/value(colorwheel, x)` or all at once with `lv_colorwheel_set_hsv(colorwheel, hsv)` or `lv_colorwheel_set_color(colorwheel, rgb)`

##### Color mode

The current color mode can be manually selected with `lv_colorwheel_set_color_mode(colorwheel, LV_COLORWHEEL_MODE_HUE/SATURATION/VALUE)`.

The color mode be fixed (do not change with long press) using `lv_colorwheel_set_color_mode_fixed(colorwheel, true)`

#### Events

- **LV\_EVENT\_VALUE\_CHANGED** Sent if a new color is selected.

Learn more about [Events](#).

## Keys

- LV\_KEY\_UP, LV\_KEY\_RIGHT Increment the current parameter's value by 1
- LV\_KEY\_DOWN, LV\_KEY\_LEFT Decrement the current parameter's by 1
- LV\_KEY\_ENTER By long press the next mode will be shown. By double click the current parameter will be reset.

Learn more about [Keys](#).

## Example

### C

#### Simple Colorwheel

code

```
#include "../../lv_examples.h"
#if LV_USE_COLORWHEEL && LV_BUILD_EXAMPLES

void lv_example_colorwheel_1(void)
{
 lv_obj_t * cw;

 cw = lv_colorwheel_create(lv_scr_act(), true);
 lv_obj_set_size(cw, 200, 200);
 lv_obj_center(cw);
}

#endif
```

### MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_colorwheel_mode_t
typedef _lv_colorwheel_t lv_colorwheel_t
```

## Enums

enum **[anonymous]**

*Values:*

enumerator **LV\_COLORWHEEL\_MODE\_HUE**

enumerator **LV\_COLORWHEEL\_MODE\_SATURATION**

enumerator **LV\_COLORWHEEL\_MODE\_VALUE**

## Functions

*lv\_obj\_t* \***lv\_colorwheel\_create**(*lv\_obj\_t* \*parent, bool knob\_recolor)

Create a color picker objects with disc shape

**Parameters**

- **parent** -- pointer to an object, it will be the parent of the new color picker
- **knob\_recolor** -- true: set the knob's color to the current color

**Returns** pointer to the created color picker

bool **lv\_colorwheel\_set\_hsv**(*lv\_obj\_t* \*obj, *lv\_color\_hsv\_t* hsv)

Set the current hsv of a color wheel.

**Parameters**

- **colorwheel** -- pointer to color wheel object
- **color** -- current selected hsv

**Returns** true if changed, otherwise false

bool **lv\_colorwheel\_set\_rgb**(*lv\_obj\_t* \*obj, *lv\_color\_t* color)

Set the current color of a color wheel.

**Parameters**

- **colorwheel** -- pointer to color wheel object
- **color** -- current selected color

**Returns** true if changed, otherwise false

void **lv\_colorwheel\_set\_mode**(*lv\_obj\_t* \*obj, *lv\_colorwheel\_mode\_t* mode)

Set the current color mode.

**Parameters**

- **colorwheel** -- pointer to color wheel object
- **mode** -- color mode (hue/sat/val)

void **lv\_colorwheel\_set\_mode\_fixed**(*lv\_obj\_t* \*obj, bool fixed)

Set if the color mode is changed on long press on center

**Parameters**

- **colorwheel** -- pointer to color wheel object
- **fixed** -- color mode cannot be changed on long press

*lv\_color\_hsv\_t* **lv\_colorwheel\_get\_hsv**(*lv\_obj\_t* \*obj)

Get the current selected hsv of a color wheel.

**Parameters** **colorwheel** -- pointer to color wheel object

**Returns** current selected hsv

*lv\_color\_t* **lv\_colorwheel\_get\_rgb**(*lv\_obj\_t* \*obj)

Get the current selected color of a color wheel.

**Parameters** **colorwheel** -- pointer to color wheel object

**Returns** color current selected color

*lv\_colorwheel\_mode\_t* **lv\_colorwheel\_get\_color\_mode**(*lv\_obj\_t* \*obj)

Get the current color mode.

**Parameters** **colorwheel** -- pointer to color wheel object

**Returns** color mode (hue/sat/val)

bool **lv\_colorwheel\_get\_color\_mode\_fixed**(*lv\_obj\_t* \*obj)

Get if the color mode is changed on long press on center

**Parameters** **colorwheel** -- pointer to color wheel object

**Returns** mode cannot be changed on long press

## Variables

const *lv\_obj\_class\_t* **lv\_colorwheel\_class**

struct **\_lv\_colorwheel\_t**

### Public Members

*lv\_obj\_t* **obj**

*lv\_color\_hsv\_t* **hsv**

*lv\_point\_t* **pos**

uint8\_t **recolor**

struct *\_lv\_colorwheel\_t*::[anonymous] **knob**

uint32\_t **last\_click\_time**

uint32\_t **last\_change\_time**

*lv\_point\_t* **last\_press\_point**

*lv\_colorwheel\_mode\_t* **mode**

uint8\_t **mode\_fixed**

### 5.3.4 Image button (lv\_imgbtn)

#### Overview

The Image button is very similar to the simple 'Button' object. The only difference is that it displays user-defined images in each state instead of drawing a rectangle.

You can set a left, right and center image, and the center image will be repeated to match the width of the object.

#### Parts and Styles

- `LV_PART_MAIN` Refers to the image(s). If background style properties are used, a rectangle will be drawn behind the image button.

#### Usage

##### Image sources

To set the image in a state, use the `lv_imgbtn_set_src(imgbtn, LV_IMGBTN_STATE_..., src_left, src_center, src_right)`.

The image sources works the same as described in the [Image object](#) except that, "Symbols" are not supported by the Image button. Any of the sources can `NULL`.

The possible states are:

- `LV_IMGBTN_STATE_RELEASED`
- `LV_IMGBTN_STATE_PRESSED`
- `LV_IMGBTN_STATE_DISABLED`
- `LV_IMGBTN_STATE_CHECKED_RELEASED`
- `LV_IMGBTN_STATE_CHECKED_PRESSED`
- `LV_IMGBTN_STATE_CHECKED_DISABLED`

If you set the sources only in `LV_IMGBTN_STATE_RELEASED`, the sources will be used in other states too. If you set e.g. `LV_IMGBTN_STATE_PRESSED` they will be used in pressed state instead of the released images.

#### Events

- `LV_EVENT_VALUE_CHANGED` Sent when the button is toggled.

Learn more about [Events](#).

## Keys

- LV\_KEY\_RIGHT/UP Go to toggled state if LV\_OBJ\_FLAG\_CHECKABLE is enabled.
- LV\_KEY\_LEFT/DOWN Go to non-toggled state if LV\_OBJ\_FLAG\_CHECKABLE is enabled.
- LV\_KEY\_ENTER Clicks the button

Learn more about [Keys](#).

## Example

### C

#### Simple Image button

code

```
#include "../lv_examples.h"
#if LV_USE_IMGBTN && LV_BUILD_EXAMPLES

void lv_example_imgbtn_1(void)
{
 LV_IMG_DECLARE(imgbtn_left);
 LV_IMG_DECLARE(imgbtn_right);
 LV_IMG_DECLARE(imgbtn_mid);

 /*Create a transition animation on width transformation and recolor.*/
 static lv_style_prop_t tr_prop[] = {LV_STYLE_TRANSFORM_WIDTH, LV_STYLE_IMG_
 ↪ RECOLOR_OPA, 0};
 static lv_style_transition_dsc_t tr;
 lv_style_transition_dsc_init(&tr, tr_prop, lv_anim_path_linear, 200, 0, NULL);

 static lv_style_t style_def;
 lv_style_init(&style_def);
 lv_style_set_text_color(&style_def, lv_color_white());
 lv_style_set_transition(&style_def, &tr);

 /*Darken the button when pressed and make it wider*/
 static lv_style_t style_pr;
 lv_style_init(&style_pr);
 lv_style_set_img_recolor_opa(&style_pr, LV_OPA_30);
 lv_style_set_img_recolor(&style_pr, lv_color_black());
 lv_style_set_transform_width(&style_pr, 20);

 /*Create an image button*/
 lv_obj_t * imgbtn1 = lv_imgbtn_create(lv_scr_act());
 lv_imgbtn_set_src(imgbtn1, LV_IMGBTN_STATE_RELEASED, &imgbtn_left, &imgbtn_mid, &
 ↪ imgbtn_right);
 lv_obj_add_style(imgbtn1, &style_def, 0);
 lv_obj_add_style(imgbtn1, &style_pr, LV_STATE_PRESSED);

 lv_obj_align(imgbtn1, LV_ALIGN_CENTER, 0, 0);

 /*Create a label on the image button*/
 lv_obj_t * label = lv_label_create(imgbtn1);
 lv_label_set_text(label, "Button");
}
```

(continues on next page)

(continued from previous page)

```

 lv_obj_align(label, LV_ALIGN_CENTER, 0, -4);
}
#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_imgbtn_t lv_imgbtn_t
```

### Enums

```
enum lv_imgbtn_state_t
```

*Values:*

```

enumerator LV_IMGBTN_STATE_RELEASED
enumerator LV_IMGBTN_STATE_PRESSED
enumerator LV_IMGBTN_STATE_DISABLED
enumerator LV_IMGBTN_STATE_CHECKED_RELEASED
enumerator LV_IMGBTN_STATE_CHECKED_PRESSED
enumerator LV_IMGBTN_STATE_CHECKED_DISABLED
enumerator _LV_IMGBTN_STATE_NUM

```

### Functions

```
lv_obj_t *lv_imgbtn_create(lv_obj_t *parent)
```

Create a image button objects

**Parameters** **par** -- pointer to an object, it will be the parent of the new image button

**Returns** pointer to the created image button

```
void lv_imgbtn_set_src(lv_obj_t *imgbtn, lv_imgbtn_state_t state, const void *src_left, const void *src_mid,
 const void *src_right)
```

Set images for a state of the image button

**Parameters**

- **imgbtn** -- pointer to an image button object
- **state** -- for which state set the new image



- **src\_left** -- pointer to an image source for the left side of the button (a C array or path to a file)
- **src\_mid** -- pointer to an image source for the middle of the button (ideally 1px wide) (a C array or path to a file)
- **src\_right** -- pointer to an image source for the right side of the button (a C array or path to a file)

const void \***lv\_imgbtn\_get\_src\_left**(*lv\_obj\_t* \*imgbtn, *lv\_imgbtn\_state\_t* state)  
Get the left image in a given state

#### Parameters

- **imgbtn** -- pointer to an image button object
- **state** -- the state where to get the image (from *lv\_btn\_state\_t*)`

**Returns** pointer to the left image source (a C array or path to a file)

const void \***lv\_imgbtn\_get\_src\_middle**(*lv\_obj\_t* \*imgbtn, *lv\_imgbtn\_state\_t* state)  
Get the middle image in a given state

#### Parameters

- **imgbtn** -- pointer to an image button object
- **state** -- the state where to get the image (from *lv\_btn\_state\_t*)`

**Returns** pointer to the middle image source (a C array or path to a file)

const void \***lv\_imgbtn\_get\_src\_right**(*lv\_obj\_t* \*imgbtn, *lv\_imgbtn\_state\_t* state)  
Get the right image in a given state

#### Parameters

- **imgbtn** -- pointer to an image button object
- **state** -- the state where to get the image (from *lv\_btn\_state\_t*)`

**Returns** pointer to the left image source (a C array or path to a file)

## Variables

const *lv\_obj\_class\_t* **lv\_imgbtn\_class**  
struct **\_lv\_imgbtn\_t**

### Public Members

*lv\_obj\_t* **obj**

const void \***img\_src\_mid**[\_LV\_IMGBTN\_STATE\_NUM]

const void \***img\_src\_left**[\_LV\_IMGBTN\_STATE\_NUM]

const void \***img\_src\_right**[\_LV\_IMGBTN\_STATE\_NUM]

*lv\_img\_cf\_t* **act\_cf**

### 5.3.5 Keyboard (lv\_keyboard)

#### Overview

The Keyboard object is a special *Button matrix* with predefined keymaps and other features to realize a virtual keyboard to write texts into a *Text area*.

#### Parts and Styles

Similarly to Button matrices Keyboards consist of 2 part:

- `LV_PART_MAIN` The main part and uses all the typical background properties
- `LV_PART_ITEMS` The buttons and it also uses all typical background properties and the *text* properties.

#### Usage

#### Modes

The Keyboards have the following modes:

- `LV_KEYBOARD_MODE_TEXT_LOWER` Display lower case letters
- `LV_KEYBOARD_MODE_TEXT_UPPER` Display upper case letters
- `LV_KEYBOARD_MODE_TEXT_SPECIAL` Display special characters
- `LV_KEYBOARD_MODE_NUM` Display numbers, +/- sign, and decimal dot.

The TEXT modes' layout contains buttons to change mode.

To set the mode manually, use `lv_keyboard_set_mode(kb, mode)`. The default mode is `LV_KEYBOARD_MODE_TEXT_UPPER`.

#### Assign Text area

You can assign a *Text area* to the Keyboard to automatically put the clicked characters there. To assign the text area, use `lv_keyboard_set_textarea(kb, ta)`.

#### New Keymap

You can specify a new map (layout) for the keyboard with `lv_keyboard_set_map(kb, map)` and `lv_keyboard_set_ctrl_map(kb, ctrl_map)`. Learn more about the *Button matrix* object. Keep in mind that, using following keywords will have the same effect as with the original map:

- `LV_SYMBOL_OK` Apply.
- `LV_SYMBOL_CLOSE` or `LV_SYMBOL_KEYBOARD` Close.
- `LV_SYMBOL_BACKSPACE` Delete on the left.
- `LV_SYMBOL_LEFT` Move the cursor left.
- `LV_SYMBOL_RIGHT` Move the cursor right.
- `LV_SYMBOL_NEW_LINE` New line.

- "ABC" Load the uppercase map.
- "abc" Load the lower case map.
- "l#" Load the lower case map.

## Events

- LV\_EVENT\_VALUE\_CHANGED Sent when the button is pressed/released or repeated after long press. The event data is set to the ID of the pressed/released button.
- LV\_EVENT\_READY - The *Ok* button is clicked.
- LV\_EVENT\_CANCEL - The *Close* button is clicked.

The keyboard has a **default event handler** callback called `lv_keyboard_def_event_cb`. It handles the button pressing, map changing, the assigned text area, etc. You can remove it and replace it with a custom event handler if you wish.

Learn more about [Events](#).

## Keys

- LV\_KEY\_RIGHT/UP/LEFT/RIGHT To navigate among the buttons and select one.
- LV\_KEY\_ENTER To press/release the selected button.

Learn more about [Keys](#).

## Examples

### C

#### Keyboard with text area

code

```
Error encountered while trying to open /home/runner/work/lvgl/lvgl/examples/_widgets/
↳ keyboard/lv_example_keyboard_1.c
```

### MicroPython

#### Keyboard with text area

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_keyboard_mode_t
typedef lv_keyboard_t lv_keyboard_t
```

### Enums

```
enum [anonymous]
 Current keyboard mode.

 Values:

 enumerator LV_KEYBOARD_MODE_TEXT_LOWER
 enumerator LV_KEYBOARD_MODE_TEXT_UPPER
 enumerator LV_KEYBOARD_MODE_SPECIAL
 enumerator LV_KEYBOARD_MODE_NUMBER
```

### Functions

```
lv_obj_t *lv_keyboard_create(lv_obj_t *parent)
 Create a keyboard objects
```

**Parameters** **par** -- pointer to an object, it will be the parent of the new keyboard

**Returns** pointer to the created keyboard

```
void lv_keyboard_set_textarea(lv_obj_t *kb, lv_obj_t *ta)
 Assign a Text Area to the Keyboard. The pressed characters will be put there.
```

**Parameters**

- **kb** -- pointer to a Keyboard object
- **ta** -- pointer to a Text Area object to write there

```
void lv_keyboard_set_mode(lv_obj_t *kb, lv_keyboard_mode_t mode)
 Set a new a mode (text or number map)
```

**Parameters**

- **kb** -- pointer to a Keyboard object
- **mode** -- the mode from 'lv\_keyboard\_mode\_t'

```
void lv_keyboard_set_map(lv_obj_t *kb, lv_keyboard_mode_t mode, const char *map[], const
 lv_btnmatrix_ctrl_t ctrl_map[])
```

Set a new map for the keyboard

**Parameters**

- **kb** -- pointer to a Keyboard object
- **mode** -- keyboard map to alter 'lv\_keyboard\_mode\_t'

- **map** -- pointer to a string array to describe the map. See 'lv\_btmatrix\_set\_map()' for more info.

*lv\_obj\_t* \***lv\_keyboard\_get\_textarea**(const *lv\_obj\_t* \*kb)

Assign a Text Area to the Keyboard. The pressed characters will be put there.

**Parameters** **kb** -- pointer to a Keyboard object

**Returns** pointer to the assigned Text Area object

*lv\_keyboard\_mode\_t* **lv\_keyboard\_get\_mode**(const *lv\_obj\_t* \*kb)

Set a new a mode (text or number map)

**Parameters** **kb** -- pointer to a Keyboard object

**Returns** the current mode from 'lv\_keyboard\_mode\_t'

static inline const char \*\***lv\_keyboard\_get\_map\_array**(const *lv\_obj\_t* \*kb)

Get the current map of a keyboard

**Parameters** **kb** -- pointer to a keyboard object

**Returns** the current map

void **lv\_keyboard\_def\_event\_cb**(lv\_event\_t \*e)

Default keyboard event to add characters to the Text area and change the map. If a custom `event_cb` is added to the keyboard this function be called from it to handle the button clicks

**Parameters**

- **kb** -- pointer to a keyboard
- **event** -- the triggering event

## Variables

const lv\_obj\_class\_t **lv\_keyboard\_class**

struct **\_lv\_keyboard\_t**

### Public Members

*lv\_btmatrix\_t* **btm**

*lv\_obj\_t* \***ta**

*lv\_keyboard\_mode\_t* **mode**

## 5.3.6 LED (lv\_led)

### Overview

The LEDs are rectangle-like (or circle) object. It's brightness can be adjusted. With lower brightness the the colors of the LED become darker.

## Parts and Styles

The LEDs have only one main part, called `LV_LED_PART_MAIN` and it uses all the typical background style properties.

## Usage

### Color

You can set the color of the LED with `lv_led_set_color(led, lv_color_hex(0xff0080))`. This will be used as background color, border color, and shadow color.

### Brightness

You can set their brightness with `lv_led_set_bright(led, bright)`. The brightness should be between 0 (darkest) and 255 (lightest).

### Toggle

Use `lv_led_on(led)` and `lv_led_off(led)` to set the brightness to a predefined ON or OFF value. The `lv_led_toggle(led)` toggles between the ON and OFF state.

### Events

No special event are sent by the LED object.

Learn more about [Events](#).

### Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### LED with custom style

code

```
Error encountered while trying to open /home/runner/work/lvgl/lvgl/examples/lv_ex_widgets/lv_ex_led/lv_ex_led_1.c
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_led_t lv_led_t
```

### Functions

```
lv_obj_t *lv_led_create(lv_obj_t *parent)
```

Create a led objects

**Parameters** **par** -- pointer to an object, it will be the parent of the new led

**Returns** pointer to the created led

```
void lv_led_set_color(lv_obj_t *led, lv_color_t color)
```

Set the color of the LED

**Parameters**

- **led** -- pointer to a LED object
- **color** -- the color of the the LED

```
void lv_led_set_brightness(lv_obj_t *led, uint8_t bright)
```

Set the brightness of a LED object

**Parameters**

- **led** -- pointer to a LED object
- **bright** -- LV\_LED\_BRIGHT\_MIN (max. dark) ... LV\_LED\_BRIGHT\_MAX (max. light)

```
void lv_led_on(lv_obj_t *led)
```

Light on a LED

**Parameters** **led** -- pointer to a LED object

```
void lv_led_off(lv_obj_t *led)
```

Light off a LED

**Parameters** **led** -- pointer to a LED object

```
void lv_led_toggle(lv_obj_t *led)
```

Toggle the state of a LED

**Parameters** **led** -- pointer to a LED object

```
uint8_t lv_led_get_brightness(const lv_obj_t *obj)
```

Get the brightness of a LED object

**Parameters** **led** -- pointer to LED object

**Returns** bright 0 (max. dark) ... 255 (max. light)

## Variables

```
const lv_obj_class_t lv_led_class
struct _lv_led_t
```

### Public Members

```
lv_obj_t obj
lv_color_t color
uint8_t bright
 Current brightness of the LED (0..255)
```

## 5.3.7 List (lv\_list)

### Overview

The List is basically a rectangle with vertical layout to which Buttons and Texts can be added

### Parts and Styles

#### Background

- LV\_PART\_MAIN The main part of the list that uses all the typical background properties
- LV\_PART\_SCROLLBAR The scrollbar. See the [Base objects](#) documentation for details.

**Buttons and Texts** See the [/widgets/core/btn's](#) and [/widgets/core/label's](#) documentation.

### Usage

#### Buttons

`lv_list_add_btn(list, icon, text)` adds a full-width button with an icon - that can be an image or symbol - and a text.

The text starts to scroll horizontally if its too long.

#### Texts

`lv_list_add_text(list, icon, text)` adds a text.



## Events

No special events are sent by the List, but sent by the Button as usual.

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### API

#### Functions

```
lv_obj_t *lv_list_create(lv_obj_t *parent)
```

```
lv_obj_t *lv_list_add_text(lv_obj_t *list, const char *txt)
```

```
lv_obj_t *lv_list_add_btn(lv_obj_t *list, const char *icon, const char *txt)
```

```
const char *lv_list_get_btn_text(lv_obj_t *list, lv_obj_t *btn)
```

#### Variables

```
const lv_obj_class_t lv_list_class
```

```
const lv_obj_class_t lv_list_text_class
```

```
const lv_obj_class_t lv_list_btn_class
```

## 5.3.8 Meter (lv\_meter)

### Overview

The Meter widget can visualize data in very flexible ways. It can show arcs, needles, ticks, lines and labels.

## Parts and Styles

- **LV\_PART\_MAIN** The background of the Meter and it uses the typical background properties.
- **LV\_PART\_TICK** The tick lines a labels using the *line* and *text* style properties.
- **LV\_PART\_INDICATOR** The needle line or image using the *line* and *img* style properties, plus the background properties to draw a square (or circle) on the pivot of the needles. Padding makes the square larger.
- **LV\_PART\_ITEMS** The arcs using the *arc* properties.

## Usage

### Add a scale

For first a *Scale* needs to be added to the Meter with `lv_meter_scale_t * scale = lv_meter_add_scale(meter)`. The Scale has minor and major ticks and labels on the major tick. Later indicators (needles, arcs, tick modifiers) can be added to the meter

Any number of scaled can be added to Meter.

The minor tick lines can be configured with: `lv_meter_set_scale_ticks(meter, scale, tick_count, line_width, tick_length, ctick_olor)`.

To add major tick lines use `lv_meter_set_scale_major_ticks(meter, scale, nth_major, tick_width, tick_length, tick_color, label_gap)`. `nth_major` tells how many minor ticks to skip to draw a major tick.

Labels are added automatically on major ticks with `label_gap` distance from the ticks with text proportionally to the values of the tick line.

`lv_meter_set_scale_range(meter, scale, min, max, angle_range, rotation)` sets the value and angle range of the scale.

### Add indicators

Indicators needs to be added to a Scale and their value is interpreted in the range of the Scale.

All the indicator add functions returns `lv_meter_indicator_t *`.

### Needle line

`indic = lv_meter_add_needle_line(meter, scale, line_width, line_color, r_mod)` adds a needle line to a Scale. By default the length of the line is the same as the scale's radius but `r_mod` changes the length.

`lv_meter_set_indicator_value(meter, indic, value)` sets the value of the indicator.

## Needle image

`indic = lv_meter_add_needle_img(meter, scale, img_src, pivot_x, pivot_y)` sets an image that will be used as a needle. `img_src` should be a needle pointing to the right like this `-0--->`. `pivot_x` and `pivot_y` sets the pivot point of the rotation relative to the top left corner of the image.

`lv_meter_set_indicator_value(meter, indicator, value)` sets the value of the indicator.

## Arc

`indic = lv_meter_add_arc(meter, scale, arc_width, arc_color, r_mod)` adds an arc indicator. By default the radius of the arc is the same as the scale's radius but `r_mod` changes the radius.

`lv_meter_set_indicator_start_value(meter, indic, value)` and `lv_meter_set_indicator_end_value(meter, indicator, value)` sets the value of the indicator.

## Scale lines (ticks)

`indic = lv_meter_add_scale_lines(meter, scale, color_start, color_end, local, width_mod)` adds an indicator that modifies the ticks lines. If `local` is `true` the ticks' color will be faded from `color_start` to `color_end` in the indicator's start and end value range. If `local` is `false` `color_start` and `color_end` is mapped to the start and end value of the scale and only a "slice" of that color gradient will be visible in the indicator's start and end value range. `width_mod` modifies the width of the tick lines.

`lv_meter_set_indicator_start_value(meter, indicator, value)` and `lv_meter_set_indicator_end_value(meter, indicator, value)` sets the value of the indicator.

## Events

- `LV_EVENT_DRAW_PART_BEGIN` and `LV_EVENT_DRAW_PART_END` is sent for the tick labels to allow overwriting the texts. The following fields of `lv_obj_draw_part_dsc_t` is set: `clip_area`, `part` (to `LV_PART_TICK`), `id` (the index of the major tick line), `value` (the value of the tick line), `label_dsc`, `text` (value converted to decimal)

Learn more about [Events](#).

## Keys

No keys are handled by the Meter widget.

Learn more about [Keys](#).

## Example

### C

#### Simple meter

code

```
#include "../../lv_examples.h"
#if LV_USE_METER && LV_BUILD_EXAMPLES

static lv_obj_t * meter;

static void set_value(void * indic, int32_t v)
{
 lv_meter_set_indicator_value(meter, indic, v);
}

/**
 * A simple meter
 */
void lv_example_meter_1(void)
{
 meter = lv_meter_create(lv_scr_act());
 lv_obj_center(meter);
 lv_obj_set_size(meter, 200, 200);

 /*Add a scale first*/
 lv_meter_scale_t * scale = lv_meter_add_scale(meter);
 lv_meter_set_scale_ticks(meter, scale, 41, 2, 10, lv_palette_main(LV_PALETTE_
→GREY));
 lv_meter_set_scale_major_ticks(meter, scale, 8, 4, 15, lv_color_black(), 10);

 lv_meter_indicator_t * indic;

 /*Add a blue arc to the start*/
 indic = lv_meter_add_arc(meter, scale, 3, lv_palette_main(LV_PALETTE_BLUE), 0);
 lv_meter_set_indicator_start_value(meter, indic, 0);
 lv_meter_set_indicator_end_value(meter, indic, 20);

 /*Make the tick lines blue at the start of the scale*/
 indic = lv_meter_add_scale_lines(meter, scale, lv_palette_main(LV_PALETTE_BLUE),
→lv_palette_main(LV_PALETTE_BLUE), false, 0);
 lv_meter_set_indicator_start_value(meter, indic, 0);
 lv_meter_set_indicator_end_value(meter, indic, 20);

 /*Add a red arc to the end*/
 indic = lv_meter_add_arc(meter, scale, 3, lv_palette_main(LV_PALETTE_RED), 0);
 lv_meter_set_indicator_start_value(meter, indic, 80);
 lv_meter_set_indicator_end_value(meter, indic, 100);

 /*Make the tick lines red at the end of the scale*/
 indic = lv_meter_add_scale_lines(meter, scale, lv_palette_main(LV_PALETTE_RED),
→lv_palette_main(LV_PALETTE_RED), false, 0);
 lv_meter_set_indicator_start_value(meter, indic, 80);
 lv_meter_set_indicator_end_value(meter, indic, 100);
}
```

(continues on next page)

(continued from previous page)

```

 /*Add a needle line indicator*/
 indic = lv_meter_add_needle_line(meter, scale, 4, lv_palette_main(LV_PALETTE_
↪GREY), -10);

 /*Create an animation to set the value*/
 lv_anim_t a;
 lv_anim_init(&a);
 lv_anim_set_exec_cb(&a, set_value);
 lv_anim_set_var(&a, indic);
 lv_anim_set_values(&a, 0, 100);
 lv_anim_set_time(&a, 2000);
 lv_anim_set_repeat_delay(&a, 100);
 lv_anim_set_playback_time(&a, 500);
 lv_anim_set_playback_delay(&a, 100);
 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);
 lv_anim_start(&a);
}

#endif

```

### A meter with multiple arcs

code

```

#include "../lv_examples.h"
#if LV_USE_METER && LV_BUILD_EXAMPLES

static lv_obj_t * meter;

static void set_value(void * indic, int32_t v)
{
 lv_meter_set_indicator_end_value(meter, indic, v);
}

/**
 * A clock from a meter
 */
void lv_example_meter_3(void)
{
 meter = lv_meter_create(lv_scr_act());
 lv_obj_set_size(meter, 220, 220);
 lv_obj_center(meter);

 /*Create a scale for the minutes*/
 /*61 ticks in a 360 degrees range (the last and the first line overlaps)*/
 lv_meter_scale_t * scale_min = lv_meter_add_scale(meter);
 lv_meter_set_scale_ticks(meter, scale_min, 61, 1, 10, lv_palette_main(LV_PALETTE_
↪GREY));
 lv_meter_set_scale_range(meter, scale_min, 0, 60, 360, 270);

 /*Create an other scale for the hours. It's only visual and contains only major ↪
↪ticks*/
 lv_meter_scale_t * scale_hour = lv_meter_add_scale(meter);

```

(continues on next page)

(continued from previous page)

```

 lv_meter_set_scale_ticks(meter, scale_hour, 12, 0, 0, lv_palette_main(LV_PALETTE_
↪ GREY)); /*12 ticks*/
 lv_meter_set_scale_major_ticks(meter, scale_hour, 1, 2, 20, lv_color_black(), 10);
↪ /*Every tick is major*/
 lv_meter_set_scale_range(meter, scale_hour, 1, 12, 330, 300); /*[1..12]
↪ values in an almost full circle*/

 LV_IMG_DECLARE(img_hand)

 /*Add a the hands from images*/
 lv_meter_indicator_t * indic_min = lv_meter_add_needle_img(meter, scale_min, &img_
↪ hand, 5, 5);
 lv_meter_indicator_t * indic_hour = lv_meter_add_needle_img(meter, scale_min, &
↪ img_hand, 5, 5);

 /*Create an animation to set the value*/
 lv_anim_t a;
 lv_anim_init(&a);
 lv_anim_set_exec_cb(&a, set_value);
 lv_anim_set_values(&a, 0, 60);
 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);
 lv_anim_set_time(&a, 2000); /*2 sec for 1 turn of the minute hand (1 hour)*/
 lv_anim_set_var(&a, indic_min);
 lv_anim_start(&a);

 lv_anim_set_var(&a, indic_hour);
 lv_anim_set_time(&a, 24000); /*24 sec for 1 turn of the hour hand*/
 lv_anim_set_values(&a, 0, 60);
 lv_anim_start(&a);
}

#endif

```

## Pie chart

code

```

#include "../lv_examples.h"
#if LV_USE_METER && LV_BUILD_EXAMPLES

/**
 * Create a pie chart
 */
void lv_example_meter_4(void)
{
 lv_obj_t * meter = lv_meter_create(lv_scr_act());

 /*Remove the background and the circle from the middle*/
 lv_obj_remove_style(meter, NULL, LV_PART_MAIN);
 lv_obj_remove_style(meter, NULL, LV_PART_INDICATOR);

 lv_obj_set_size(meter, 200, 200);
 lv_obj_center(meter);

 /*Add a scale first with no ticks.*/

```

(continues on next page)

(continued from previous page)

```

lv_meter_scale_t * scale = lv_meter_add_scale(meter);
lv_meter_set_scale_ticks(meter, scale, 0, 0, 0, lv_color_black());
lv_meter_set_scale_range(meter, scale, 0, 100, 360, 0);

/*Add a three arc indicator*/
lv_coord_t indic_w = 100;
lv_meter_indicator_t * indic1 = lv_meter_add_arc(meter, scale, indic_w, lv_palette_
↪main(LV_PALETTE_ORANGE), 0);
lv_meter_set_indicator_start_value(meter, indic1, 0);
lv_meter_set_indicator_end_value(meter, indic1, 40);

lv_meter_indicator_t * indic2 = lv_meter_add_arc(meter, scale, indic_w, lv_
↪palette_main(LV_PALETTE_YELLOW), 0);
lv_meter_set_indicator_start_value(meter, indic2, 40); /*Start from the_
↪previous*/
lv_meter_set_indicator_end_value(meter, indic2, 80);

lv_meter_indicator_t * indic3 = lv_meter_add_arc(meter, scale, indic_w, lv_
↪palette_main(LV_PALETTE_DEEP_ORANGE), 0);
lv_meter_set_indicator_start_value(meter, indic3, 80); /*Start from the_
↪previous*/
lv_meter_set_indicator_end_value(meter, indic3, 100);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```

typedef lv_meter_scale_t lv_meter_scale_t
typedef lv_meter_indicator_t lv_meter_indicator_t
typedef lv_meter_t lv_meter_t

```

### Enums

```

enum lv_meter_indicator_type_t
 Values:

 enumerator LV_METER_INDICATOR_TYPE_NEEDLE_IMG
 enumerator LV_METER_INDICATOR_TYPE_NEEDLE_LINE
 enumerator LV_METER_INDICATOR_TYPE_SCALE_LINES
 enumerator LV_METER_INDICATOR_TYPE_ARC

```

## Functions

*lv\_obj\_t* \***lv\_meter\_create**(*lv\_obj\_t* \*parent)

Create a meter objects

**Parameters** **parent** -- pointer to an object, it will be the parent of the new bar.

**Returns** pointer to the created meter

*lv\_meter\_scale\_t* \***lv\_meter\_add\_scale**(*lv\_obj\_t* \*obj)

Add a new scale to the meter.

---

**Note:** Indicators can be attached to scales.

---

**Parameters** **obj** -- pointer to a meter object

**Returns** the new scale

void **lv\_meter\_set\_scale\_ticks**(*lv\_obj\_t* \*obj, *lv\_meter\_scale\_t* \*scale, uint16\_t cnt, uint16\_t width, uint16\_t len, lv\_color\_t color)

Set the properties of the ticks of a scale

**Parameters**

- **obj** -- pointer to a meter object
- **scale** -- pointer to scale (added to meter)
- **cnt** -- number of tick lines
- **width** -- width of tick lines
- **len** -- length of tick lines
- **color** -- color of tick lines

void **lv\_meter\_set\_scale\_major\_ticks**(*lv\_obj\_t* \*obj, *lv\_meter\_scale\_t* \*scale, uint16\_t nth, uint16\_t width, uint16\_t len, lv\_color\_t color, int16\_t label\_gap)

Make some "normal" ticks major ticks and set their attributes. Texts with the current value are also added to the major ticks.

**Parameters**

- **obj** -- pointer to a meter object
- **scale** -- pointer to scale (added to meter)
- **nth** -- make every Nth normal tick major tick. (start from the first on the left)
- **width** -- width of the major ticks
- **len** -- length of the major ticks
- **color** -- color of the major ticks
- **label\_gap** -- gap between the major ticks and the labels

void **lv\_meter\_set\_scale\_range**(*lv\_obj\_t* \*obj, *lv\_meter\_scale\_t* \*scale, int32\_t min, int32\_t max, uint32\_t angle\_range, uint32\_t rotation)

Set the value and angular range of a scale.

**Parameters**

- **obj** -- pointer to a meter object



- **scale** -- pointer to scale (added to `meter`)
- **min** -- the minimum value
- **max** -- the maximal value
- **angle\_range** -- the angular range of the scale
- **rotation** -- the angular offset from the 3 o'clock position (clock-wise)

*lv\_meter\_indicator\_t* \***lv\_meter\_add\_needle\_line**(*lv\_obj\_t* \*obj, *lv\_meter\_scale\_t* \*scale, uint16\_t width, lv\_color\_t color, int16\_t r\_mod)

Add a needle line indicator the scale

#### Parameters

- **obj** -- pointer to a meter object
- **scale** -- pointer to scale (added to `meter`)
- **width** -- width of the line
- **color** -- color of the line
- **r\_mod** -- the radius modifier (added to the scale's radius) to get the lines length

**Returns** the new indicator

*lv\_meter\_indicator\_t* \***lv\_meter\_add\_needle\_img**(*lv\_obj\_t* \*obj, *lv\_meter\_scale\_t* \*scale, const void \*src, lv\_coord\_t pivot\_x, lv\_coord\_t pivot\_y)

Add a needle image indicator the scale

---

**Note:** the needle image should point to the right, like -O-->

---

#### Parameters

- **obj** -- pointer to a meter object
- **scale** -- pointer to scale (added to `meter`)
- **src** -- the image source of the indicator. path or pointer to *lv\_img\_dsc\_t*
- **pivot\_x** -- the X pivot point of the needle
- **pivot\_y** -- the Y pivot point of the needle

**Returns** the new indicator

*lv\_meter\_indicator\_t* \***lv\_meter\_add\_arc**(*lv\_obj\_t* \*obj, *lv\_meter\_scale\_t* \*scale, uint16\_t width, lv\_color\_t color, int16\_t r\_mod)

Add an arc indicator the scale

#### Parameters

- **obj** -- pointer to a meter object
- **scale** -- pointer to scale (added to `meter`)
- **width** -- width of the arc
- **color** -- color of the arc
- **r\_mod** -- the radius modifier (added to the scale's radius) to get the outer radius of the arc

**Returns** the new indicator

```
lv_meter_indicator_t *lv_meter_add_scale_lines(lv_obj_t *obj, lv_meter_scale_t *scale, lv_color_t
 color_start, lv_color_t color_end, bool local, int16_t
 width_mod)
```

Add a scale line indicator the scale. It will modify the ticks.

#### Parameters

- **obj** -- pointer to a meter object
- **scale** -- pointer to scale (added to meter)
- **color\_start** -- the start color
- **color\_end** -- the end color
- **local** -- tell how to map start and end color. true: the indicator's start and end\_value; false: the scale's min max value
- **width\_mod** -- add this the affected tick's width

**Returns** the new indicator

```
void lv_meter_set_indicator_value(lv_obj_t *obj, lv_meter_indicator_t *indic, int32_t value)
```

Set the value of the indicator. It will set start and end value to the same value

#### Parameters

- **obj** -- pointer to a meter object
- **indic** -- pointer to an indicator
- **value** -- the new value

```
void lv_meter_set_indicator_start_value(lv_obj_t *obj, lv_meter_indicator_t *indic, int32_t value)
```

Set the start value of the indicator.

#### Parameters

- **obj** -- pointer to a meter object
- **indic** -- pointer to an indicator
- **value** -- the new value

```
void lv_meter_set_indicator_end_value(lv_obj_t *obj, lv_meter_indicator_t *indic, int32_t value)
```

Set the end value of the indicator.

#### Parameters

- **obj** -- pointer to a meter object
- **indic** -- pointer to an indicator
- **value** -- the new value

## Variables

```
const lv_obj_class_t lv_meter_class
struct _lv_meter_scale_t
```

### Public Members

```
lv_color_t tick_color
uint16_t tick_cnt
uint16_t tick_length
uint16_t tick_width
lv_color_t tick_major_color
uint16_t tick_major_nth
uint16_t tick_major_length
uint16_t tick_major_width
int16_t label_gap
int16_t label_color
int32_t min
int32_t max
int16_t r_mod
uint16_t angle_range
int16_t rotation
struct _lv_meter_indicator_t
```

### Public Members

```
lv_meter_scale_t *scale
lv_meter_indicator_type_t type
lv_opa_t opa
int32_t start_value
int32_t end_value
const void *src
lv_point_t pivot
struct _lv_meter_indicator_t::[anonymous]::[anonymous] needle_img
uint16_t width
int16_t r_mod
lv_color_t color
```

```

struct _lv_meter_indicator_t::[anonymous]::[anonymous] needle_line
struct _lv_meter_indicator_t::[anonymous]::[anonymous] arc
int16_t width_mod
lv_color_t color_start
lv_color_t color_end
uint8_t local_grad
struct _lv_meter_indicator_t::[anonymous]::[anonymous] scale_lines
union _lv_meter_indicator_t::[anonymous] type_data
struct _lv_meter_t

```

### Public Members

```

lv_obj_t obj
lv_ll_t scale_ll
lv_ll_t indicator_ll

```

## 5.3.9 Message box (lv\_msgbox)

### Overview

The Message boxes act as pop-ups. They are built from a background container, a title, an optional close button, a text and optional buttons.

The text will be broken into multiple lines automatically and the height will be set automatically to involve the text and the buttons.

The message box can be a modal (block clicks on the rest of the screen) or not modal.

### Parts and Styles

The message box is built from other widgets so you can check these widget's documentation for details.

- Background: *lv\_obj*
- Close button: *lv\_btn*
- Title and text: *lv\_label*
- Buttons: *lv\_btnmatrix*

## Usage

### Create a message box

`lv_msgbox_create(parent, title, txt, btn_txts[], add_close_btn)` creates a message box.

If `parent` is `NULL` the message box will be a modal. `title` and `txt` are strings for the title and the text. `btn_txts[]` is an array with the buttons' text. E.g. `const char * btn_txts[] = {"Ok", "Cancel", NULL}`. `add_close_btn` can be `true` or `false` to add/don't add a close button.

### Get the parts

The building block of the message box can be get with the following functions:

```
lv_obj_t * lv_msgbox_get_title(lv_obj_t * mbox);
lv_obj_t * lv_msgbox_get_close_btn(lv_obj_t * mbox);
lv_obj_t * lv_msgbox_get_text(lv_obj_t * mbox);
lv_obj_t * lv_msgbox_get_btns(lv_obj_t * mbox);
```

### Close the message box

`lv_msgbox_close(msgbox)` closes (deletes) the message box.

### Events

- `LV_EVENT_VALUE_CHANGED` is sent by the buttons if one of them is clicked. `LV_OBJ_FLAG_EVENT_BUBBLE` is enabled on the buttons so you can add events to the message box itself. In the event `lv_event_get_target(e)` will give the button matrix, `lv_event_get_current_target(e)` will give the message box. `lv_msgbox_get_active_btn_text(msgbox)` can be used to get the text of the clicked button.

Learn more about [Events](#).

### Keys

Keys have effect on the close button and button matrix. You can add them manually to a group if required.

Learn more about [Keys](#).

### Example

#### C

#### Simple Message box

code

```

#include "../lv_examples.h"
#if LV_USE_MSGBOX && LV_BUILD_EXAMPLES

static void event_cb(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_current_target(e);
 LV_LOG_USER("Button %s clicked", lv_msgbox_get_active_btn_text(obj));
}

void lv_example_msgbox_1(void)
{
 static const char * btns[] = {"Apply", "Close", ""};

 lv_obj_t * mbox1 = lv_msgbox_create(NULL, "Hello", "This is a message box with_
↪two buttons.", btns, true);
 lv_obj_add_event_cb(mbox1, event_cb, LV_EVENT_VALUE_CHANGED, NULL);
 lv_obj_center(mbox1);
}

#endif

```

## MicroPython

No examples yet.

## API

### Functions

*lv\_obj\_t* \***lv\_msgbox\_create**(*lv\_obj\_t* \*parent, const char \*title, const char \*txt, const char \*btn\_txts[], bool add\_close\_btn)

Create a message box objects

#### Parameters

- **parent** -- pointer to parent or NULL to create a full screen modal message box
- **title** -- the title of the message box
- **txt** -- the text of the message box
- **btn\_txts** -- the buttons as an array of texts terminated by an "" element. E.g. {"btn1", "btn2", ""}
- **add\_close\_btn** -- true: add a close button

**Returns** pointer to the message box object

*lv\_obj\_t* \***lv\_msgbox\_get\_title**(*lv\_obj\_t* \*mbox)

*lv\_obj\_t* \***lv\_msgbox\_get\_close\_btn**(*lv\_obj\_t* \*mbox)

*lv\_obj\_t* \***lv\_msgbox\_get\_text**(*lv\_obj\_t* \*mbox)

```
lv_obj_t *lv_msgbox_get_btns(lv_obj_t *mbox)
```

```
const char *lv_msgbox_get_active_btn_text(lv_obj_t *mbox)
```

```
void lv_msgbox_close(lv_obj_t *mbox)
```

## Variables

```
const lv_obj_class_t lv_msgbox_class
```

### 5.3.10 Span (lv\_span)

#### Overview

A spangroup is the object that is used to display rich text. different from the label object, **spangroup** can automatically organize text of different fonts, colors, and sizes into the spangroup obj.

#### Parts and Styles

- **LV\_PART\_MAIN** The spangroup has only the part.

#### Usage

##### Set text and style

spangroup object uses span to describe text and text style. so, first we need to create **span** descriptor use function `lv_span_t * span = lv_spangroup_new_span(spangroup)`.then use `lv_span_set_text(span, "text")` to set text.The style of the modified text is the same as the normal style used, eg: `lv_style_set_text_color(&span->style, lv_palette_main(LV_PALETTE_RED))`.

If spangroup object mode `!= LV_SPAN_MODE_FIXED`.You must call `lv_spangroup_refr_mode()` after you have modified **span** style(eg:set text, changed the font size, del span).

#### Text align

like label object, The spangroup can be one the following modes:

- **LV\_TEXT\_ALIGN\_LEFT** Align text to left.
- **LV\_TEXT\_ALIGN\_CENTER** Align text to center.
- **LV\_TEXT\_ALIGN\_RIGHT** Align text to right.
- **LV\_TEXT\_ALIGN\_AUTO** Align text auto.

use function `lv_spangroup_set_align(spangroup, LV_TEXT_ALIGN_CENTER)` to set text align.

## Modes

The spangroup can be one the following modes:

- `LV_SPAN_MODE_FIXED` fixed the obj size.
- `LV_SPAN_MODE_EXPAND` Expand the object size to the text size. only one line.
- `LV_SPAN_MODE_BREAK` Keep width, break the too long lines and auto expand height.

use function `lv_spangroup_set_mode(spangroup, LV_SPAN_MODE_BREAK)` to set obj mode.

## Overflow

The spangroup can be one the following modes:

- `LV_SPAN_OVERFLOW_CLIP` truncate the text at the limit of the area.
- `LV_SPAN_OVERFLOW_ELLIPSIS` This mode value will display an ellipsis(...) when text overflow the area.

use function `lv_spangroup_set_overflow(spangroup, LV_SPAN_OVERFLOW_CLIP)` to set obj Overflow.

## first line indent

use function `lv_spangroup_set_indent(spangroup, 20)` to set text indent of first line.

## Events

No special events are sent by this widget.

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Span with custom styles

code

```
#include "../lv_examples.h"
#if LV_USE_SPAN && LV_BUILD_EXAMPLES

/**
 * Create span.
 */
```

(continues on next page)



(continued from previous page)

```

void lv_example_span_1(void)
{
 static lv_style_t style;
 lv_style_init(&style);
 lv_style_set_border_width(&style, 1);
 lv_style_set_border_color(&style, lv_palette_main(LV_PALETTE_ORANGE));
 lv_style_set_pad_all(&style, 2);

 lv_obj_t * spans = lv_spangroup_create(lv_scr_act());
 lv_obj_set_width(spans, 300);
 lv_obj_set_height(spans, 300);
 lv_obj_center(spans);
 lv_obj_add_style(spans, &style, 0);

 lv_spangroup_set_align(spans, LV_TEXT_ALIGN_LEFT);
 lv_spangroup_set_overflow(spans, LV_SPAN_OVERFLOW_CLIP);
 lv_spangroup_set_indent(spans, 20);
 lv_spangroup_set_mode(spans, LV_SPAN_MODE_BREAK);

 lv_span_t * span = lv_spangroup_new_span(spans);
 lv_span_set_text(span, "china is a beautiful country.");
 lv_style_set_text_color(&span->style, lv_palette_main(LV_PALETTE_RED));
 lv_style_set_text_decor(&span->style, LV_TEXT_DECOR_STRIKETHROUGH | LV_TEXT_DECOR_
↪ UNDERLINE);
 lv_style_set_text_opa(&span->style, LV_OPA_30);

 span = lv_spangroup_new_span(spans);
 lv_span_set_text_static(span, "good good study, day day up.");
 #if LV_FONT_MONTSEERRAT_24
 lv_style_set_text_font(&span->style, &lv_font_montserrat_24);
 #endif
 lv_style_set_text_color(&span->style, lv_palette_main(LV_PALETTE_GREEN));

 span = lv_spangroup_new_span(spans);
 lv_span_set_text_static(span, "LVGL is an open-source graphics library.");
 lv_style_set_text_color(&span->style, lv_palette_main(LV_PALETTE_BLUE));

 span = lv_spangroup_new_span(spans);
 lv_span_set_text_static(span, "the boy no name.");
 lv_style_set_text_color(&span->style, lv_palette_main(LV_PALETTE_GREEN));
 #if LV_FONT_MONTSEERRAT_20
 lv_style_set_text_font(&span->style, &lv_font_montserrat_20);
 #endif
 lv_style_set_text_decor(&span->style, LV_TEXT_DECOR_UNDERLINE);

 span = lv_spangroup_new_span(spans);
 lv_span_set_text(span, "I have a dream that hope to come true.");

 lv_spangroup_refr_mode(spans);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_span_overflow_t
typedef uint8_t lv_span_mode_t
typedef _lv_span_t lv_span_t
typedef _lv_spangroup_t lv_spangroup_t
```

### Enums

```
enum [anonymous]
 Values:

 enumerator LV_SPAN_OVERFLOW_CLIP
 enumerator LV_SPAN_OVERFLOW_ELLIPSIS
enum [anonymous]
 Values:

 enumerator LV_SPAN_MODE_FIXED
 fixed the obj size

 enumerator LV_SPAN_MODE_EXPAND
 Expand the object size to the text size

 enumerator LV_SPAN_MODE_BREAK
 Keep width, break the too long lines and expand height
```

### Functions

```
lv_obj_t *lv_spangroup_create(lv_obj_t *par)
 Create a spangroup objects

 Parameters par -- pointer to an object, it will be the parent of the new spangroup

 Returns pointer to the created spangroup

lv_span_t *lv_spangroup_new_span(lv_obj_t *obj)
 Create a span string descriptor and add to spangroup.

 Parameters obj -- pointer to a spangroup object.

 Returns pointer to the created span.

void lv_spangroup_del_span(lv_obj_t *obj, lv_span_t *span)
 Remove the span from the spangroup and free memory.
```

**Parameters**

- **obj** -- pointer to a spangroup object.
- **span** -- pointer to a span.

void **lv\_span\_set\_text**(*lv\_span\_t* \*span, const char \*text)

Set a new text for a span. Memory will be allocated to store the text by the span.

**Parameters**

- **span** -- pointer to a span.
- **text** -- pointer to a text.

void **lv\_span\_set\_text\_static**(*lv\_span\_t* \*span, const char \*text)

Set a static text. It will not be saved by the span so the 'text' variable has to be 'alive' while the span exist.

**Parameters**

- **span** -- pointer to a span.
- **text** -- pointer to a text.

void **lv\_spangroup\_set\_align**(*lv\_obj\_t* \*obj, lv\_text\_align\_t align)

Set the align of the spangroup.

**Parameters**

- **obj** -- pointer to a spangroup object.
- **align** -- see lv\_text\_align\_t for details.

void **lv\_spangroup\_set\_overflow**(*lv\_obj\_t* \*obj, *lv\_span\_overflow\_t* overflow)

Set the overflow of the spangroup.

**Parameters**

- **obj** -- pointer to a spangroup object.
- **overflow** -- see lv\_span\_overflow\_t for details.

void **lv\_spangroup\_set\_indent**(*lv\_obj\_t* \*obj, lv\_coord\_t indent)

Set the indent of the spangroup.

**Parameters**

- **obj** -- pointer to a spangroup object.
- **indent** -- The first line indentation

void **lv\_spangroup\_set\_mode**(*lv\_obj\_t* \*obj, *lv\_span\_mode\_t* mode)

Set the mode of the spangroup.

**Parameters**

- **obj** -- pointer to a spangroup object.
- **mode** -- see lv\_span\_mode\_t for details.

lv\_text\_align\_t **lv\_spangroup\_get\_align**(*lv\_obj\_t* \*obj)

get the align of the spangroup.

**Parameters** **obj** -- pointer to a spangroup object.

**Returns** the align value.

*lv\_span\_overflow\_t* **lv\_spangroup\_get\_overflow**(*lv\_obj\_t* \*obj)

get the overflow of the spangroup.

**Parameters** **obj** -- pointer to a spangroup object.

**Returns** the overflow value.

lv\_coord\_t **lv\_spangroup\_get\_indent**(lv\_obj\_t \*obj)  
get the indent of the spangroup.

**Parameters** **obj** -- pointer to a spangroup object.

**Returns** the indent value.

lv\_span\_mode\_t **lv\_spangroup\_get\_mode**(lv\_obj\_t \*obj)  
get the mode of the spangroup.

**Parameters** **obj** -- pointer to a spangroup object.

lv\_coord\_t **lv\_spangroup\_get\_max\_line\_h**(lv\_obj\_t \*obj)  
get max line height of all span in the spangroup.

**Parameters** **obj** -- pointer to a spangroup object.

lv\_coord\_t **lv\_spangroup\_get\_expand\_width**(lv\_obj\_t \*obj)  
get the width when all span of spangroup on a line. include spangroup pad.

**Parameters** **obj** -- pointer to a spangroup object.

lv\_coord\_t **lv\_spangroup\_get\_expand\_height**(lv\_obj\_t \*obj, lv\_coord\_t width)  
get the height with width fixed. the height include spangroup pad.

**Parameters** **obj** -- pointer to a spangroup object.

void **lv\_spangroup\_refr\_mode**(lv\_obj\_t \*obj)  
update the mode of the spangroup.

**Parameters** **obj** -- pointer to a spangroup object.

## Variables

const lv\_obj\_class\_t **lv\_spangroup\_class**  
struct **\_lv\_span\_t**

## Public Members

char \***txt**  
lv\_style\_t **style**  
uint8\_t **static\_flag**  
struct **\_lv\_spangroup\_t**  
#include <lv\_span.h> Data of label

## Public Members

```
lv_obj_t obj
lv_coord_t indent
lv_ll_t child_ll
uint8_t mode
uint8_t align
uint8_t overflow
```

### 5.3.11 Spinbox (lv\_spinbox)

#### Overview

The Spinbox contains a number as text which can be increased or decreased by *Keys* or API functions. Under the hood the Spinbox is a modified *Text area*.

#### Parts and Styles

The parts of the Spinbox are identical to the *Text area*.

#### Value, range and step

`lv_spinbox_set_value(spinbox, 1234)` sets a new value on the Spinbox.

`lv_spinbox_increment(spinbox)` and `lv_spinbox_decrement(spinbox)` increments/decrements the value of the Spinbox according to the currently selected digit.

`lv_spinbox_set_range(spinbox, -1000, 2500)` sets a range. If the value is changed by `lv_spinbox_set_value`, by *Keys*, `lv_spinbox_increment/decrement` this range will be respected.

`lv_spinbox_set_step(spinbox, 100)` sets which digits to change on increment/decrement. Only  $10^n$  values can be set, and not for example 3.

#### Format

`lv_spinbox_set_digit_format(spinbox, digit_count, separator_position)` sets the number format. `digit_count` is the number of digit excluding the decimal separator and the sign. `separator_position` is the number of digit before the decimal point. If 0, decimal point is not

## Rollover

`lv_spinbox_set_rollover(spinbox, true/false)` enables/disabled rollover mode. If the minimum or maximum values is reached with rollover the value will change to the other limit. If not enabled the value will be remain at the minimum or maximum value.

## Events

- `LV_EVENT_VALUE_CHANGED` Sent when the value has changed.

Learn more about [Events](#).

## Keys

- `LV_KEY_LEFT/RIGHT` With *Keypad* move the cursor left/right. With *Encoder* decrement/increment the selected digit.
- `LV_KEY_UP/DOWN` With *Keypad* and *Encoder* increment/decrement the value.
- `LV_KEY_ENTER` With *Encoder* got the net digit. Jump to the first after the last.

## Example

### C

#### Simple Spinbox

code

```
#include "../../lv_examples.h"
#if LV_USE_SPINBOX && LV_BUILD_EXAMPLES

static lv_obj_t * spinbox;

static void lv_spinbox_increment_event_cb(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 if(code == LV_EVENT_SHORT_CLICKED || code == LV_EVENT_LONG_PRESSED_REPEAT) {
 lv_spinbox_increment(spinbox);
 }
}

static void lv_spinbox_decrement_event_cb(lv_event_t * e)
{
 lv_event_code_t code = lv_event_get_code(e);
 if(code == LV_EVENT_SHORT_CLICKED || code == LV_EVENT_LONG_PRESSED_REPEAT) {
 lv_spinbox_decrement(spinbox);
 }
}

void lv_example_spinbox_1(void)
{
```

(continues on next page)

(continued from previous page)

```

spinbox = lv_spinbox_create(lv_scr_act());
lv_spinbox_set_range(spinbox, -1000, 25000);
lv_spinbox_set_digit_format(spinbox, 5, 2);
lv_spinbox_step_prev(spinbox);
lv_obj_set_width(spinbox, 100);
lv_obj_center(spinbox);

lv_coord_t h = lv_obj_get_height(spinbox);

lv_obj_t * btn = lv_btn_create(lv_scr_act());
lv_obj_set_size(btn, h, h);
lv_obj_align_to(btn, spinbox, LV_ALIGN_OUT_RIGHT_MID, 5, 0);
lv_obj_set_style_bg_img_src(btn, LV_SYMBOL_PLUS, 0);
lv_obj_add_event_cb(btn, lv_spinbox_increment_event_cb, LV_EVENT_ALL, NULL);

btn = lv_btn_create(lv_scr_act());
lv_obj_set_size(btn, h, h);
lv_obj_align_to(btn, spinbox, LV_ALIGN_OUT_LEFT_MID, -5, 0);
lv_obj_set_style_bg_img_src(btn, LV_SYMBOL_MINUS, 0);
lv_obj_add_event_cb(btn, lv_spinbox_decrement_event_cb, LV_EVENT_ALL, NULL);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_spinbox_t lv_spinbox_t
```

### Functions

*lv\_obj\_t* \***lv\_spinbox\_create**(*lv\_obj\_t* \*parent)

Create a spinbox objects

**Parameters** **par** -- pointer to an object, it will be the parent of the new spinbox

**Returns** pointer to the created spinbox

void **lv\_spinbox\_set\_value**(*lv\_obj\_t* \*obj, int32\_t i)

Set spinbox value

**Parameters**

- **spinbox** -- pointer to spinbox
- **i** -- value to be set

void **lv\_spinbox\_set\_rollover**(*lv\_obj\_t* \*obj, bool b)

Set spinbox rollover function

**Parameters**

- **spinbox** -- pointer to spinbox
- **b** -- true or false to enable or disable (default)

void **lv\_spinbox\_set\_digit\_format**(*lv\_obj\_t* \*obj, uint8\_t digit\_count, uint8\_t separator\_position)

Set spinbox digit format (digit count and decimal format)

**Parameters**

- **spinbox** -- pointer to spinbox
- **digit\_count** -- number of digit excluding the decimal separator and the sign
- **separator\_position** -- number of digit before the decimal point. If 0, decimal point is not shown

void **lv\_spinbox\_set\_step**(*lv\_obj\_t* \*obj, uint32\_t step)

Set spinbox step

**Parameters**

- **spinbox** -- pointer to spinbox
- **step** -- steps on increment/decrement. Can be 1, 10, 100, 1000, etc the digit that will change.

void **lv\_spinbox\_set\_range**(*lv\_obj\_t* \*obj, int32\_t range\_min, int32\_t range\_max)

Set spinbox value range

**Parameters**

- **spinbox** -- pointer to spinbox
- **range\_min** -- maximum value, inclusive
- **range\_max** -- minimum value, inclusive

bool **lv\_spinbox\_get\_rollover**(*lv\_obj\_t* \*obj)

Get spinbox rollover function status

**Parameters** **spinbox** -- pointer to spinbox

int32\_t **lv\_spinbox\_get\_value**(*lv\_obj\_t* \*obj)

Get the spinbox numeral value (user has to convert to float according to its digit format)

**Parameters** **spinbox** -- pointer to spinbox

**Returns** value integer value of the spinbox

int32\_t **lv\_spinbox\_get\_step**(*lv\_obj\_t* \*obj)

Get the spinbox step value (user has to convert to float according to its digit format)

**Parameters** **spinbox** -- pointer to spinbox

**Returns** value integer step value of the spinbox

void **lv\_spinbox\_step\_next**(*lv\_obj\_t* \*obj)

Select next lower digit for edition by dividing the step by 10

**Parameters** **spinbox** -- pointer to spinbox

void **lv\_spinbox\_step\_prev**(*lv\_obj\_t* \*obj)

Select next higher digit for edition by multiplying the step by 10

**Parameters** **spinbox** -- pointer to spinbox



void **lv\_spinbox\_increment**(*lv\_obj\_t* \*obj)

Increment spinbox value by one step

**Parameters** **spinbox** -- pointer to spinbox

void **lv\_spinbox\_decrement**(*lv\_obj\_t* \*obj)

Decrement spinbox value by one step

**Parameters** **spinbox** -- pointer to spinbox

## Variables

const lv\_obj\_class\_t **lv\_spinbox\_class**

struct **\_lv\_spinbox\_t**

### Public Members

*lv\_textarea\_t* **ta**

int32\_t **value**

int32\_t **range\_max**

int32\_t **range\_min**

int32\_t **step**

uint16\_t **digit\_count**

uint16\_t **dec\_point\_pos**

uint16\_t **rollover**

## Example

### 5.3.12 Spinner (lv\_spinner)

#### Overview

The Spinner object is a spinning arc over a ring.

#### Parts and Styles

The parts are identical to the parts of *lv\_arc*.

## Usage

### Create a spinner

To create spinner use `lv_spinner_create(parent, spin_time, arc_length)`. `spin_time` set the spin time in milliseconds, `arc_length` sets the length of the spinning arc in degrees.

### Events

No special events are sent the the Spinner.

Learn more about [Events](#).

### Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).

### Example

#### C

##### Simple spinner

code

```
#include "../../lv_examples.h"
#if LV_USE_SPINNER && LV_BUILD_EXAMPLES

void lv_example_spinner_1(void)
{
 /*Create a spinner*/
 lv_obj_t * spinner = lv_spinner_create(lv_scr_act(), 1000, 60);
 lv_obj_set_size(spinner, 100, 100);
 lv_obj_center(spinner);
}

#endif
```

#### MicroPython

##### MicroPython

No examples yet.

## API

### Functions

*lv\_obj\_t* \***lv\_spinner\_create**(*lv\_obj\_t* \*parent, uint32\_t time, uint32\_t arc\_length)

### 5.3.13 Tabview (lv\_tabview)

#### Overview

The Tab view object can be used to organize content in tabs. The Tab view is built from other widgets like this:

- Main container: *lv\_obj*)
  - Tab buttons: *lv\_btnmatrix*
  - Container for the tabs: *lv\_obj*
    - \* Content of the tabs: *lv\_obj*

The tab buttons can be positioned on the topn, bottom, left and right side of teh Tab view.

A new tab can be selected either clicking on a tab button or sliding horizontally on the content.

#### Parts and Styles

There are no special parts on the Tab view but the *lv\_obj* and *lv\_btnmatrix* widgets are used to build up the Tab view.

#### Usage

##### Create a Tab view

*lv\_tabview\_create*(parent, tab\_pos, tab\_size); creates a new empty Tab view. *tab\_pos* can be LV\_DIR\_TOP/BOTTOM/LEFT/RIGHT to position the tab buttons to a side. *tab\_size* is the height (in case of LV\_DIR\_TOP/BOTTOM) or width (in case of LV\_DIR\_LEFT/RIGHT) tab buttons.

##### Add tabs

New tabs can be added with *lv\_tabview\_add\_tab*(tabview, "Tab name"). It will return with a pointer to an *lv\_obj* object where the tab's content can be created.

## Change tab

To select a new tab you can:

- Click on its tab button
- Slide horizontally
- Use `lv_tabview_set_act(tabview, id, LV_ANIM_ON/OFF)` function

## Get the parts

`lv_tabview_get_content(tabview)` return the container for the tabs,  
`lv_tabview_get_tab_btns(tabview)` returns the Tab buttons which is a *Button matrix*.

## Events

- `LV_EVENT_VALUE_CHANGED` Sent when a new tab is selected by sliding or clicking the tab button.  
`lv_tabview_get_tab_act(tabview)` returns the zero based index of the current tab.

Learn more about *Events*.

## Keys

Keys have effect only on the tab buttons (Button matrix). You can add it manually to a group if required.

Learn more about *Keys*.

## Example

### C

#### Simple Tabview

code

```
#include "../lv_examples.h"
#if LV_USE_TABVIEW && LV_BUILD_EXAMPLES

void lv_example_tabview_1(void)
{
 /*Create a Tab view object*/
 lv_obj_t *tabview;
 tabview = lv_tabview_create(lv_scr_act(), LV_DIR_TOP, 50);

 /*Add 3 tabs (the tabs are page (lv_page) and can be scrolled*/
 lv_obj_t *tab1 = lv_tabview_add_tab(tabview, "Tab 1");
 lv_obj_t *tab2 = lv_tabview_add_tab(tabview, "Tab 2");
 lv_obj_t *tab3 = lv_tabview_add_tab(tabview, "Tab 3");

 /*Add content to the tabs*/
 lv_obj_t *label = lv_label_create(tab1);
 lv_label_set_text(label, "This the first tab\n\n")
}
```

(continues on next page)

(continued from previous page)

```

 "If the content\n"
 "of a tab\n"
 "becomes too\n"
 "longer\n"
 "than the\n"
 "container\n"
 "then it\n"
 "automatically\n"
 "becomes\n"
 "scrollable.\n"
 "\n"
 "\n"
 "\n"
 "Can you see it?");

 label = lv_label_create(tab2);
 lv_label_set_text(label, "Second tab");

 label = lv_label_create(tab3);
 lv_label_set_text(label, "Third tab");

 lv_obj_scroll_to_view_recursive(label, LV_ANIM_ON);
}
#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef lv_tabview_t lv_tabview_t
```

### Functions

```
lv_obj_t *lv_tabview_create(lv_obj_t *parent, lv_dir_t tab_pos, lv_coord_t tab_size)
```

```
lv_obj_t *lv_tabview_add_tab(lv_obj_t *tv, const char *name)
```

```
lv_obj_t *lv_tabview_get_content(lv_obj_t *tv)
```

```
lv_obj_t *lv_tabview_get_tab_btns(lv_obj_t *tv)
```

```
void lv_tabview_set_act(lv_obj_t *obj, uint32_t id, lv_anim_enable_t anim_en)
```

```
uint16_t lv_tabview_get_tab_act(lv_obj_t *tv)
```

## Variables

```
const lv_obj_class_t lv_tabview_class
struct _lv_tabview_t
```

## Public Members

```
lv_obj_t obj
char **map
uint16_t tab_cnt
uint16_t tab_cur
lv_dir_t tab_pos
```

### 5.3.14 Tile view (lv\_tileview)

#### Overview

The Tile view is a container object where its elements (called *tiles*) can be arranged in a grid form. By swiping the user can navigate between the tiles. Any direction of swiping can be disabled on the tiles individually to not allow moving from tile to an other.

If the Tile view is screen sized it gives a user interface you might have seen on the smartwatches.

#### Parts and Styles

The Tile view is build from an *lv\_obj* container and also *lv\_obj* tiles.

The parts and styles work the same as for *lv\_obj*.

#### Usage

##### Add a tile

`lv_tileview_add_tile(tileview, row_id, col_id, dir)` creates a new tile on the `row_id`th row and `col_id`th column. `dir` can be `LV_DIR_LEFT/RIGHT/TOP/BOTTOM/HOR/VER/ALL` or OR-ed values to enable moving to the adjacent tiles into the given direction with swiping.

The returned value is an `lv_obj_t *` on which the content of the tab can be created.

## Change tile

The Tile view can scroll to a tile with `lv_obj_set_tile(tileview, tile_obj, LV_ANIM_ON/OFF)` or `lv_obj_set_tile_id(tileview, col_id, row_id, LV_ANIM_ON/OFF);`

## Events

- `LV_EVENT_VALUE_CHANGED` Sent when a new tile loaded either with scrolling. `lv_tileview_get_tile_act(tabview)` can be used to get current tile.

## Keys

Keys are not handled by the Tile view.

Learn more about [Keys](#).

## Example

### C

#### Tileview with content

code

```
#include "../lv_examples.h"
#if LV_USE_TILEVIEW && LV_BUILD_EXAMPLES

/**
 * Create a 2x2 tile view and allow scrolling only in an "L" shape.
 * Demonstrate scroll chaining with a long list that
 * scrolls the tile view when it cant't be scrolled further.
 */
void lv_example_tileview_1(void)
{
 lv_obj_t *tv = lv_tileview_create(lv_scr_act());

 /*Tile1: just a label*/
 lv_obj_t * tile1 = lv_tileview_add_tile(tv, 0, 0, LV_DIR_BOTTOM);
 lv_obj_t * label = lv_label_create(tile1);
 lv_label_set_text(label, "Scroll down");
 lv_obj_center(label);

 /*Tile2: a button*/
 lv_obj_t * tile2 = lv_tileview_add_tile(tv, 0, 1, LV_DIR_TOP | LV_DIR_RIGHT);

 lv_obj_t * btn = lv_btn_create(tile2);

 label = lv_label_create(btn);
 lv_label_set_text(label, "Scroll up or right");

 lv_obj_set_size(btn, LV_SIZE_CONTENT, LV_SIZE_CONTENT);
 lv_obj_center(btn);
}
```

(continues on next page)

(continued from previous page)

```

/*Tile3: a list*/
lv_obj_t * tile3 = lv_tileview_add_tile(tv, 1, 1, LV_DIR_LEFT);
lv_obj_t * list = lv_list_create(tile3);
lv_obj_set_size(list, LV_PCT(100), LV_PCT(100));

lv_list_add_btn(list, NULL, "One");
lv_list_add_btn(list, NULL, "Two");
lv_list_add_btn(list, NULL, "Three");
lv_list_add_btn(list, NULL, "Four");
lv_list_add_btn(list, NULL, "Five");
lv_list_add_btn(list, NULL, "Six");
lv_list_add_btn(list, NULL, "Seven");
lv_list_add_btn(list, NULL, "Eight");
lv_list_add_btn(list, NULL, "Nine");
lv_list_add_btn(list, NULL, "Ten");
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```

typedef lv_tileview_t lv_tileview_t
typedef lv_tileview_tile_t lv_tileview_tile_t

```

### Functions

*lv\_obj\_t* \***lv\_tileview\_create**(*lv\_obj\_t* \*parent)  
Create a tileview objects

**Parameters** **par** -- pointer to an object, it will be the parent of the new tileview

**Returns** pointer to the created tileview

*lv\_obj\_t* \***lv\_tileview\_add\_tile**(*lv\_obj\_t* \*tv, uint8\_t row\_id, uint8\_t col\_id, lv\_dir\_t dir)

void **lv\_obj\_set\_tile**(*lv\_obj\_t* \*tv, *lv\_obj\_t* \*tile\_obj, *lv\_anim\_enable\_t* anim\_en)

void **lv\_obj\_set\_tile\_id**(*lv\_obj\_t* \*tv, uint32\_t col\_id, uint32\_t row\_id, *lv\_anim\_enable\_t* anim\_en)

*lv\_obj\_t* \***lv\_tileview\_get\_tile\_act**(*lv\_obj\_t* \*obj)



## Variables

```
const lv_obj_class_t lv_tileview_class
const lv_obj_class_t lv_tileview_tile_class
struct _lv_tileview_t
```

### Public Members

```
lv_obj_t obj
lv_obj_t *tile_act
struct _lv_tileview_tile_t
```

### Public Members

```
lv_obj_t obj
lv_dir_t dir
```

## 5.3.15 Window (lv\_win)

### Overview

The Window is container-like objects built from a header with title and button and a content area.

### Parts and Styles

The Window is built from other widgets so you can check these widget's documentation for details:

- Background: *lv\_obj*
- Header on the background: *lv\_obj*
- Title on the header: *lv\_label*
- Buttons on the header: *lv\_btn*
- Content area on the background: *lv\_obj*

### Usage

#### Create a Window

`lv_win_create(parent, header_height)` creates a Window with an empty header.

## Title and buttons

Any number of text's (but typically only one) can be added to the header with `lv_win_add_title(win, "The title")`.

Control buttons can be added to the window's header with `lv_win_add_btn_right(win, icon, btn_width)`. `icon` can be any image source, and `btn_width` is the width of the button.

The title and the buttons will be added in the order of the functions are called. So adding a button, a text and two other buttons will result in a button on the left, a title, and 2 buttons on the right. The width of the title is set to take all the remaining space on the header. In other words it pushes the buttons to the right added after the title.

## Get the parts

`lv_win_get_header(win)` return a pointer to the header, `lv_win_get_content(win)` returns a pointer to the content container to which the content of the window can be added.

## Events

No special events are sent by the windows, however events can be added manually to the return value of `lv_win_add_btn_right`.

Learn more about [Events](#).

## Keys

No *Keys* are handled by the window.

Learn more about [Keys](#).

## Example

### C

#### Simple window

code

```
#include "../../lv_examples.h"
#if LV_USE_WIN && LV_BUILD_EXAMPLES

static void event_handler(lv_event_t * e)
{
 lv_obj_t * obj = lv_event_get_target(e);
 LV_LOG_USER("Button %d clicked", lv_obj_get_child_id(obj));
}

void lv_example_win_1(void)
{
 lv_obj_t * win = lv_win_create(lv_scr_act(), 60);
 lv_obj_t * btn;
```

(continues on next page)

(continued from previous page)

```

btn = lv_win_add_btn(win, LV_SYMBOL_LEFT, 40);
lv_obj_add_event_cb(btn, event_handler, LV_EVENT_CLICKED, NULL);

lv_win_add_title(win, "A title");

btn = lv_win_add_btn(win, LV_SYMBOL_RIGHT, 40);
lv_obj_add_event_cb(btn, event_handler, LV_EVENT_CLICKED, NULL);

btn = lv_win_add_btn(win, LV_SYMBOL_CLOSE, 60);
lv_obj_add_event_cb(btn, event_handler, LV_EVENT_CLICKED, NULL);

lv_obj_t * cont = lv_win_get_content(win); /*Content can be added here*/
lv_obj_t * label = lv_label_create(cont);
lv_label_set_text(label, "This is\n"
 "a pretty\n"
 "long text\n"
 "to see how\n"
 "the window\n"
 "becomes\n"
 "scrollable.\n"
 "\n"
 "\n"
 "Some more\n"
 "text to be\n"
 "sure it\n"
 "overflows. :)");
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef _lv_win_t lv_win_t
```

## Functions

*lv\_obj\_t* \***lv\_win\_create**(*lv\_obj\_t* \*parent, lv\_coord\_t header\_height)

*lv\_obj\_t* \***lv\_win\_add\_title**(*lv\_obj\_t* \*win, const char \*txt)

*lv\_obj\_t* \***lv\_win\_add\_btn**(*lv\_obj\_t* \*win, const void \*icon, lv\_coord\_t btn\_w)

*lv\_obj\_t* \***lv\_win\_get\_header**(*lv\_obj\_t* \*win)

*lv\_obj\_t* \***lv\_win\_get\_content**(*lv\_obj\_t* \*win)

## Variables

const lv\_obj\_class\_t **lv\_win\_class**

struct \_lv\_win\_t

## Public Members

*lv\_obj\_t* **obj**

## LAYOUTS

### 6.1 Flex

#### 6.1.1 Overview

The Flexbox (or Flex for short) is a subset of [CSS Flexbox](#).

It can arrange items into rows or columns (tracks), handle wrapping, adjust the spacing between the items and tracks, handle *grow* to make the item(s) will the remaining space with respect to min/max width and height.

To make an object flex container call `lv_obj_set_layout(obj, LV_LAYOUT_FLEX)`.

Note that, the flex layout needs to enabled with `LV_USE_FLEX` in `lv_conf.h`.

#### 6.1.2 Terms

- tracks: the rows or columns
- main direction: row or column, the direction in which the items are placed
- cross direction: perpendicular to the main direction
- wrap: if there there is no more space in the track a new track is started
- grow: if set on an item it will grow to fill the remaining space on the track. The available space will be distributed among items respective to the their grow value (larger value means more space)
- gap: the space between the rows and columns or the items on a track

#### 6.1.3 Simple interface

With follwoing functions you can simple set a Flex layout on any parent.

## Flex flow

`lv_obj_set_flex_flow(obj, flex_flow)`

The possible values for `flex_flow` are:

- `LV_FLEX_FLOW_ROW` Place the children in a row without wrapping
- `LV_FLEX_FLOW_COLUMN` Place the children in a column without wrapping
- `LV_FLEX_FLOW_ROW_WRAP` Place the children in a row with wrapping
- `LV_FLEX_FLOW_COLUMN_WRAP` Place the children in a column with wrapping
- `LV_FLEX_FLOW_ROW_REVERSE` Place the children in a row without wrapping but in reversed order
- `LV_FLEX_FLOW_COLUMN_REVERSE` Place the children in a column without wrapping but in reversed order
- `LV_FLEX_FLOW_ROW_WRAP_REVERSE` Place the children in a row without wrapping but in reversed order
- `LV_FLEX_FLOW_COLUMN_WRAP_REVERSE` Place the children in a column without wrapping but in reversed order

## Flex align

To manage the placement of the children use `lv_obj_set_flex_align(obj, main_place, cross_place, track_cross_place)`

- `main_place` tells how to distribute the items in their track on the main axis. E.g. flush the items to the right on `LV_FLEX_FLOW_ROW_WRAP`. (It's called `justify-content` in CSS)
- `cross_place` tells how to distribute the items in their track on the cross axis. E.g. if the items have different height place them to the bottom of the track. (It's called `align-items` in CSS)
- `track_cross_place` tells how to distribute the tracks (It's called `align-content` in CSS)

The possible values are:

- `LV_FLEX_ALIGN_START` means left on a horizontally and top vertically. (default)
- `LV_FLEX_ALIGN_END` means right on a horizontally and bottom vertically
- `LV_FLEX_ALIGN_CENTER` simply center
- `LV_FLEX_ALIGN_SPACE_EVENLY` items are distributed so that the spacing between any two items (and the space to the edges) is equal. Not applies to `track_cross_place`.
- `LV_FLEX_ALIGN_SPACE_AROUND` items are evenly distributed in the track with equal space around them. Note that visually the spaces aren't equal, since all the items have equal space on both sides. The first item will have one unit of space against the container edge, but two units of space between the next item because that next item has its own spacing that applies. Not applies to `track_cross_place`.
- `LV_FLEX_ALIGN_SPACE_BETWEEN` items are evenly distributed in the track: first item is on the start line, last item on the end line. Not applies to `track_cross_place`.

## Flex grow

Flex grow can be used to make one or more children fill the available space on the track. If more children has grow the available space will be distributed proportionally to the grow values. For example let's there is 400 px remaining space and 4 object with grow:

- A with grow = 1
- B with grow = 1
- C with grow = 2

A and B will have 100 px size, and C will have 200 px size.

Flex grow can be set on a child with `lv_obj_set_flex_flow(child, value)`. `value` needs to be `> 1` or `0` to disable grow on the child.

### 6.1.4 Style interface

All the Flex related values are style properties under the hood and you can use them similarly to any other style property. The following flex related style properties exist:

- `FLEX_FLOW`
- `FLEX_MAIN_PLACE`
- `FLEX_CROSS_PLACE`
- `FLEX_TRACK_PLACE`
- `FLEX_GROW`

### 6.1.5 Other features

#### RTL

If the base direction of the container is set the `LV_BASE_DIR_RTL` the meaning of `LV_FLEX_ALIGN_START` and `LV_FLEX_ALIGN_END` is swapped on ROW layouts. I.e. `START` will mean right.

The items on ROW layouts, and tracks of COLUMN layouts will be placed from right to left.

#### New track

You can force Flex to put an item into a new line with `lv_obj_add_flag(child, LV_OBJ_FLAG_FLEX_IN_NEW_TRACK)`.

## 6.1.6 Example

### C

#### A simple row and a column layout with flexbox

code

```
#include "../../lv_examples.h"
#if LV_USE_FLEX && LV_BUILD_EXAMPLES

/**
 * A simple row and a column layout with flexbox
 */
void lv_example_flex_1(void)
{
 /*Create a container with ROW flex direction*/
 lv_obj_t * cont_row = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont_row, 300, 75);
 lv_obj_align(cont_row, LV_ALIGN_TOP_MID, 0, 5);
 lv_obj_set_flex_flow(cont_row, LV_FLEX_FLOW_ROW);

 /*Create a container with COLUMN flex direction*/
 lv_obj_t * cont_col = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont_col, 200, 150);
 lv_obj_align_to(cont_col, cont_row, LV_ALIGN_OUT_BOTTOM_MID, 0, 5);
 lv_obj_set_flex_flow(cont_col, LV_FLEX_FLOW_COLUMN);

 uint32_t i;
 for(i = 0; i < 10; i++) {
 lv_obj_t * obj;
 lv_obj_t * label;

 /*Add items to the row*/
 obj = lv_btn_create(cont_row);
 lv_obj_set_size(obj, 100, LV_PCT(100));

 label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "Item: %d", i);
 lv_obj_center(label);

 /*Add items to the column*/
 obj = lv_btn_create(cont_col);
 lv_obj_set_size(obj, LV_PCT(100), LV_SIZE_CONTENT);

 label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "Item: %d", i);
 lv_obj_center(label);
 }
}

#endif
```



## Arrange items in rows with wrap and even spacing

code

```
#include "../../lv_examples.h"
#if LV_USE_FLEX && LV_BUILD_EXAMPLES

/**
 * Arrange items in rows with wrap and place the items to get even space around them.
 */
void lv_example_flex_2(void)
{
 static lv_style_t style;
 lv_style_init(&style);
 lv_style_set_flex_flow(&style, LV_FLEX_FLOW_ROW_WRAP);
 lv_style_set_flex_main_place(&style, LV_FLEX_ALIGN_SPACE_EVENLY);
 lv_style_set_layout(&style, LV_LAYOUT_FLEX);

 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_add_style(cont, &style, 0);

 uint32_t i;
 for(i = 0; i < 8; i++) {
 lv_obj_t * obj = lv_obj_create(cont);
 lv_obj_set_size(obj, 70, LV_SIZE_CONTENT);

 lv_obj_t * label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "%d", i);
 lv_obj_center(label);
 }
}

#endif
```

## Demonstrate flex grow

code

```
#include "../../lv_examples.h"
#if LV_USE_FLEX && LV_BUILD_EXAMPLES

/**
 * Demonstrate flex grow.
 */
void lv_example_flex_3(void)
{
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_flex_flow(cont, LV_FLEX_FLOW_ROW);

 lv_obj_t * obj;
 obj = lv_obj_create(cont);
 lv_obj_set_size(obj, 40, 40); /*Fix size*/
}
```

(continues on next page)

(continued from previous page)

```

obj = lv_obj_create(cont);
lv_obj_set_height(obj, 40);
lv_obj_set_flex_grow(obj, 1); /*1 portion from the free space*/

obj = lv_obj_create(cont);
lv_obj_set_height(obj, 40);
lv_obj_set_flex_grow(obj, 2); /*2 portion from the free space*/

obj = lv_obj_create(cont);
lv_obj_set_size(obj, 40, 40); /*Fix size. It is flushed to the right by
↪the "grow" items*/
}

#endif

```

### Demonstrate flex grow.

code

```

#include "../../lv_examples.h"
#if LV_USE_FLEX && LV_BUILD_EXAMPLES

/**
 * Reverse the order of flex items
 */
void lv_example_flex_4(void)
{
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_flex_flow(cont, LV_FLEX_FLOW_COLUMN_REVERSE);

 uint32_t i;
 for(i = 0; i < 6; i++) {
 lv_obj_t * obj = lv_obj_create(cont);
 lv_obj_set_size(obj, 100, 50);

 lv_obj_t * label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "Item: %d", i);
 lv_obj_center(label);
 }
}

#endif

```

## Demonstrate column and row gap style properties

code

```
#include "../../lv_examples.h"
#if LV_USE_FLEX && LV_BUILD_EXAMPLES

static void row_gap_anim(void * obj, int32_t v)
{
 lv_obj_set_style_pad_row(obj, v, 0);
}

static void column_gap_anim(void * obj, int32_t v)
{
 lv_obj_set_style_pad_column(obj, v, 0);
}

/**
 * Demonstrate the effect of column and row gap style properties
 */
void lv_example_flex_5(void)
{
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_flex_flow(cont, LV_FLEX_FLOW_ROW_WRAP);

 uint32_t i;
 for(i = 0; i < 9; i++) {
 lv_obj_t * obj = lv_obj_create(cont);
 lv_obj_set_size(obj, 70, LV_SIZE_CONTENT);

 lv_obj_t * label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "%d", i);
 lv_obj_center(label);
 }

 lv_anim_t a;
 lv_anim_init(&a);
 lv_anim_set_var(&a, cont);
 lv_anim_set_values(&a, 0, 10);
 lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);

 lv_anim_set_exec_cb(&a, row_gap_anim);
 lv_anim_set_time(&a, 500);
 lv_anim_set_playback_time(&a, 500);
 lv_anim_start(&a);

 lv_anim_set_exec_cb(&a, column_gap_anim);
 lv_anim_set_time(&a, 3000);
 lv_anim_set_playback_time(&a, 3000);
 lv_anim_start(&a);
}

#endif
```

## RTL base direction changes order of the items

code

```
#include "../../lv_examples.h"
#if LV_USE_FLEX && LV_BUILD_EXAMPLES

/**
 * RTL base direction changes order of the items.
 * Also demonstrate how horizontal scrolling works with RTL.
 */
void lv_example_flex_6(void)
{
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_style_base_dir(cont, LV_BASE_DIR_RTL, 0);
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_flex_flow(cont, LV_FLEX_FLOW_ROW_WRAP);

 uint32_t i;
 for(i = 0; i < 20; i++) {
 lv_obj_t * obj = lv_obj_create(cont);
 lv_obj_set_size(obj, 70, LV_SIZE_CONTENT);

 lv_obj_t * label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "%d", i);
 lv_obj_center(label);
 }
}
#endif
```

## MicroPython

No examples yet.

## 6.1.7 API

### Enums

enum **lv\_flex\_align\_t**

Values:

enumerator **LV\_FLEX\_ALIGN\_START**

enumerator **LV\_FLEX\_ALIGN\_END**

enumerator **LV\_FLEX\_ALIGN\_CENTER**

enumerator **LV\_FLEX\_ALIGN\_SPACE\_EVENLY**

enumerator **LV\_FLEX\_ALIGN\_SPACE\_AROUND**

enumerator **LV\_FLEX\_ALIGN\_SPACE\_BETWEEN**

enum **lv\_flex\_flow\_t**

Values:

enumerator **LV\_FLEX\_FLOW\_ROW**  
 enumerator **LV\_FLEX\_FLOW\_COLUMN**  
 enumerator **LV\_FLEX\_FLOW\_ROW\_WRAP**  
 enumerator **LV\_FLEX\_FLOW\_ROW\_REVERSE**  
 enumerator **LV\_FLEX\_FLOW\_ROW\_WRAP\_REVERSE**  
 enumerator **LV\_FLEX\_FLOW\_COLUMN\_WRAP**  
 enumerator **LV\_FLEX\_FLOW\_COLUMN\_REVERSE**  
 enumerator **LV\_FLEX\_FLOW\_COLUMN\_WRAP\_REVERSE**

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_OBJ\_FLAG\_FLEX\_IN\_NEW\_TRACK)

void **lv\_flex\_init**(void)

Initialize a flex layout the default values

**Parameters** **flex** -- pointer to a flex layout descriptor

void **lv\_obj\_set\_flex\_flow**(*lv\_obj\_t* \*obj, *lv\_flex\_flow\_t* flow)

Set how the item should flow

**Parameters**

- **flex** -- pointer to a flex layout descriptor
- **flow** -- an element of *lv\_flex\_flow\_t*.

void **lv\_obj\_set\_flex\_align**(*lv\_obj\_t* \*obj, *lv\_flex\_align\_t* main\_place, *lv\_flex\_align\_t* cross\_place, *lv\_flex\_align\_t* track\_cross\_place)

Set how to place (where to align) the items and tracks

**Parameters**

- **flex** -- pointer: to a flex layout descriptor
- **main\_place** -- where to place the items on main axis (in their track). Any value of *lv\_flex\_align\_t*.
- **cross\_place** -- where to place the item in their track on the cross axis. **LV\_FLEX\_ALIGN\_START/END/CENTER**
- **track\_place** -- where to place the tracks in the cross direction. Any value of *lv\_flex\_align\_t*.

void **lv\_obj\_set\_flex\_grow**(*lv\_obj\_t* \*obj, uint8\_t grow)

Sets the width or height (on main axis) to grow the object in order fill the free space

**Parameters**

- **obj** -- pointer to an object. The parent must have flex layout else nothing will happen.
- **grow** -- a value to set how much free space to take proportionally to other growing items.

static inline void **lv\_style\_set\_flex\_flow**(*lv\_style\_t* \*style, *lv\_flex\_flow\_t* value)

```

static inline void lv_style_set_flex_main_place(lv_style_t *style, lv_flex_align_t value)

static inline void lv_style_set_flex_cross_place(lv_style_t *style, lv_flex_align_t value)

static inline void lv_style_set_flex_track_place(lv_style_t *style, lv_flex_align_t value)

static inline void lv_style_set_flex_grow(lv_style_t *style, uint8_t value)

static inline void lv_obj_set_style_flex_flow(lv_obj_t *obj, lv_flex_flow_t value, lv_style_selector_t
selector)

static inline void lv_obj_set_style_flex_main_place(lv_obj_t *obj, lv_flex_align_t value,
lv_style_selector_t selector)

static inline void lv_obj_set_style_flex_cross_place(lv_obj_t *obj, lv_flex_align_t value,
lv_style_selector_t selector)

static inline void lv_obj_set_style_flex_track_place(lv_obj_t *obj, lv_flex_align_t value,
lv_style_selector_t selector)

static inline void lv_obj_set_style_flex_grow(lv_obj_t *obj, uint8_t value, lv_style_selector_t selector)

static inline lv_flex_flow_t lv_obj_get_style_flex_flow(const lv_obj_t *obj, uint32_t part)

static inline lv_flex_align_t lv_obj_get_style_flex_main_place(const lv_obj_t *obj, uint32_t part)

static inline lv_flex_align_t lv_obj_get_style_flex_cross_place(const lv_obj_t *obj, uint32_t part)

static inline lv_flex_align_t lv_obj_get_style_flex_track_place(const lv_obj_t *obj, uint32_t part)

static inline uint8_t lv_obj_get_style_flex_grow(const lv_obj_t *obj, uint32_t part)

```

## Variables

```

uint32_t LV_LAYOUT_FLEX

lv_style_prop_t LV_STYLE_FLEX_FLOW

lv_style_prop_t LV_STYLE_FLEX_MAIN_PLACE

lv_style_prop_t LV_STYLE_FLEX_CROSS_PLACE

lv_style_prop_t LV_STYLE_FLEX_TRACK_PLACE

lv_style_prop_t LV_STYLE_FLEX_GROW

```

## 6.2 Grid

### 6.2.1 Overview

The Grid layout is a subset of [CSS Flexbox](#).

It can arrange items into 2D "table" that has rows or columns (tracks). The item can span through multiple columns or rows. The track's size can be set in pixel, to the largest item (`LV_GRID_CONTENT`) or in "Free unit" (FR) to distribute the free space proportionally.

To make an object grid container call `lv_obj_set_layout(obj, LV_LAYOUT_GRID)`.

Note that, the grid layout needs to be enabled with `LV_USE_GRID` in `lv_conf.h`.

### 6.2.2 Terms

- tracks: the rows or columns
- free unit (FR): if set on track's size is set in FR it will grow to fill the remaining space on the parent.
- gap: the space between the rows and columns or the items on a track

### 6.2.3 Simple interface

With the following functions you can simply set a Grid layout on any parent.

#### Grid descriptors

First you need to describe the size of rows and columns. It can be done by declaring 2 arrays and the track sizes in them. The last element must be `LV_GRID_TEMPLATE_LAST`.

For example:

```
static lv_coord_t column_dsc[] = {100, 400, LV_GRID_TEMPLATE_LAST}; /*2 columns
↳with 100 and 400 ps width*/
static lv_coord_t row_dsc[] = {100, 100, 100, LV_GRID_TEMPLATE_LAST}; /*3 100 px tall
↳rows*/
```

To set the descriptors on a parent use `lv_obj_set_grid_dsc_array(obj, col_dsc, row_dsc)`.

Besides simple settings the size in pixel you can use two special values:

- `LV_GRID_CONTENT` set the width to the largest children on this track
- `LV_GRID_FR(X)` tell what portion of the remaining space should be used by this track. Larger value means larger space.

## Grid items

By default the children are not added to the grid but they need to be added manually to a cell.

To do this call `lv_obj_set_grid_cell(child, column_align, column_pos, column_span, row_align, row_pos, row_span)`.

`column_align` and `row_align` tell how to align the children in its cell. The possible values are:

- `LV_GRID_ALIGN_START` means left on a horizontally and top vertically. (default)
- `LV_GRID_ALIGN_END` means right on a horizontally and bottom vertically
- `LV_GRID_ALIGN_CENTER` simply center

`column_pos` and `row_pos` means the zero based index of the cell into the item should be placed.

`column_span` and `row_span` means how many tracks should the item involve from the start cell. Must be  $> 1$ .

## Grid align

If there are some empty space the track can be aligned several ways:

- `LV_GRID_ALIGN_START` means left on a horizontally and top vertically. (default)
- `LV_GRID_ALIGN_END` means right on a horizontally and bottom vertically
- `LV_GRID_ALIGN_CENTER` simply center
- `LV_GRID_ALIGN_SPACE_EVENLY` items are distributed so that the spacing between any two items (and the space to the edges) is equal. Not applies to `track_cross_place`.
- `LV_GRID_ALIGN_SPACE_AROUND` items are evenly distributed in the track with equal space around them. Note that visually the spaces aren't equal, since all the items have equal space on both sides. The first item will have one unit of space against the container edge, but two units of space between the next item because that next item has its own spacing that applies. Not applies to `track_cross_place`.
- `LV_GRID_ALIGN_SPACE_BETWEEN` items are evenly distributed in the track: first item is on the start line, last item on the end line. Not applies to `track_cross_place`.

To set the track's alignment use `lv_obj_set_grid_align(obj, column_align, row_align)`.

## 6.2.4 Style interface

All the Grid related values are style properties under the hood and you can use them similarly to any other style properties. The following Grid related style properties exist:

- `GRID_COLUMN_DSC_ARRAY`
- `GRID_ROW_DSC_ARRAY`
- `GRID_COLUMN_ALIGN`
- `GRID_ROW_ALIGN`
- `GRID_CELL_X_ALIGN`
- `GRID_CELL_COLUMN_POS`
- `GRID_CELL_COLUMN_SPAN`
- `GRID_CELL_Y_ALIGN`
- `GRID_CELL_ROW_POS`



- GRID\_CELL\_ROW\_SPAN

## 6.2.5 Other features

### RTL

If the base direction of the container is set the LV\_BASE\_DIR\_RTL the meaning of LV\_GRID\_ALIGN\_START and LV\_GRID\_ALIGN\_END is swapped. I.e. START will mean right.

The columns will be placed from right to left.

## 6.2.6 Example

### C

#### A simple grid

code

```
#include "../../lv_examples.h"
#if LV_USE_GRID && LV_BUILD_EXAMPLES

/**
 * A simple grid
 */
void lv_example_grid_1(void)
{
 static lv_coord_t col_dsc[] = {70, 70, 70, LV_COORD_MAX};
 static lv_coord_t row_dsc[] = {50, 50, 50, LV_COORD_MAX};

 /*Create a container with grid*/
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_style_grid_column_dsc_array(cont, col_dsc, 0);
 lv_obj_set_style_grid_row_dsc_array(cont, row_dsc, 0);
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_layout(cont, LV_LAYOUT_GRID);

 lv_obj_t * label;
 lv_obj_t * obj;

 uint32_t i;
 for(i = 0; i < 9; i++) {
 uint8_t col = i % 3;
 uint8_t row = i / 3;

 obj = lv_btn_create(cont);
 /*Stretch the cell horizontally and vertically too
 Set span to 1 to make the cell 1 column/row sized/
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_STRETCH, col, 1,
 LV_GRID_ALIGN_STRETCH, row, 1);

 label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "c%d, r%d", col, row);
 }
}
```

(continues on next page)

(continued from previous page)

```

 lv_obj_center(label);
 }
}

#endif

```

## Demonstrate cell placement and span

code

```

#include "../../lv_examples.h"
#if LV_USE_GRID && LV_BUILD_EXAMPLES

/**
 * Demonstrate cell placement and span
 */
void lv_example_grid_2(void)
{
 static lv_coord_t col_dsc[] = {70, 70, 70, LV_GRID_TEMPLATE_LAST};
 static lv_coord_t row_dsc[] = {50, 50, 50, LV_GRID_TEMPLATE_LAST};

 /*Create a container with grid*/
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_grid_dsc_array(cont, col_dsc, row_dsc);
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);

 lv_obj_t * label;
 lv_obj_t * obj;

 /*Cell to 0;0 and align to to the start (left/top) horizontally and vertically.
 ↳too*/
 obj = lv_obj_create(cont);
 lv_obj_set_size(obj, LV_SIZE_CONTENT, LV_SIZE_CONTENT);
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_START, 0, 1,
 LV_GRID_ALIGN_START, 0, 1);
 label = lv_label_create(obj);
 lv_label_set_text(label, "c0, r0");

 /*Cell to 1;0 and align to to the start (left) horizontally and center vertically.
 ↳too*/
 obj = lv_obj_create(cont);
 lv_obj_set_size(obj, LV_SIZE_CONTENT, LV_SIZE_CONTENT);
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_START, 1, 1,
 LV_GRID_ALIGN_CENTER, 0, 1);
 label = lv_label_create(obj);
 lv_label_set_text(label, "c1, r0");

 /*Cell to 2;0 and align to to the start (left) horizontally and end (bottom)
 ↳vertically too*/
 obj = lv_obj_create(cont);
 lv_obj_set_size(obj, LV_SIZE_CONTENT, LV_SIZE_CONTENT);
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_START, 2, 1,
 LV_GRID_ALIGN_END, 0, 1);

```

(continues on next page)

(continued from previous page)

```

label = lv_label_create(obj);
lv_label_set_text(label, "c2, r0");

/*Cell to 1;1 but 2 column wide (span = 2).Set width and height to stretched.*/
obj = lv_obj_create(cont);
lv_obj_set_size(obj, LV_SIZE_CONTENT, LV_SIZE_CONTENT);
lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_STRETCH, 1, 2,
 LV_GRID_ALIGN_STRETCH, 1, 1);
label = lv_label_create(obj);
lv_label_set_text(label, "c1-2, r1");

/*Cell to 0;1 but 2 rows tall (span = 2).Set width and height to stretched.*/
obj = lv_obj_create(cont);
lv_obj_set_size(obj, LV_SIZE_CONTENT, LV_SIZE_CONTENT);
lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_STRETCH, 0, 1,
 LV_GRID_ALIGN_STRETCH, 1, 2);
label = lv_label_create(obj);
lv_label_set_text(label, "c0\nr1-2");
}

#endif

```

## Demonstrate grid's "free unit"

code

```

#include "../lv_examples.h"
#if LV_USE_GRID && LV_BUILD_EXAMPLES

/**
 * Demonstrate grid's "free unit"
 */
void lv_example_grid_3(void)
{
 /*Column 1: fix width 60 px
 *Column 2: 1 unit from the remaining free space
 Column 3: 2 unit from the remaining free space/
 static lv_coord_t col_dsc[] = {60, LV_GRID_FR(1), LV_GRID_FR(2), LV_GRID_TEMPLATE_
↪LAST};

 /*Row 1: fix width 60 px
 *Row 2: 1 unit from the remaining free space
 Row 3: fix width 60 px/
 static lv_coord_t row_dsc[] = {40, LV_GRID_FR(1), 40, LV_GRID_TEMPLATE_LAST};

 /*Create a container with grid*/
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_grid_dsc_array(cont, col_dsc, row_dsc);

 lv_obj_t * label;
 lv_obj_t * obj;
 uint32_t i;
 for(i = 0; i < 9; i++) {

```

(continues on next page)

(continued from previous page)

```

 uint8_t col = i % 3;
 uint8_t row = i / 3;

 obj = lv_obj_create(cont);
 /*Stretch the cell horizontally and vertically too
 Set span to 1 to make the cell 1 column/row sized/
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_STRETCH, col, 1,
 LV_GRID_ALIGN_STRETCH, row, 1);

 label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "%d,%d", col, row);
 lv_obj_center(label);
}
}

#endif

```

## Demonstrate track placement

code

```

#include "../lv_examples.h"
#if LV_USE_GRID && LV_BUILD_EXAMPLES

/**
 * Demonstrate track placement
 */
void lv_example_grid_4(void)
{
 static lv_coord_t col_dsc[] = {60, 60, 60, LV_GRID_TEMPLATE_LAST};
 static lv_coord_t row_dsc[] = {40, 40, 40, LV_GRID_TEMPLATE_LAST};

 /*Add space between the columns and move the rows to the bottom (end)*/

 /*Create a container with grid*/
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_grid_align(cont, LV_GRID_ALIGN_SPACE_BETWEEN, LV_GRID_ALIGN_END);
 lv_obj_set_grid_dsc_array(cont, col_dsc, row_dsc);
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);

 lv_obj_t * label;
 lv_obj_t * obj;
 uint32_t i;
 for(i = 0; i < 9; i++) {
 uint8_t col = i % 3;
 uint8_t row = i / 3;

 obj = lv_obj_create(cont);
 /*Stretch the cell horizontally and vertically too
 Set span to 1 to make the cell 1 column/row sized/
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_STRETCH, col, 1,
 LV_GRID_ALIGN_STRETCH, row, 1);
 }
}

```

(continues on next page)

(continued from previous page)

```

 label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "%d,%d", col, row);
 lv_obj_center(label);
 }
}

#endif

```

## Demonstrate column and row gap

code

```

#include "../lv_examples.h"
#if LV_USE_GRID && LV_BUILD_EXAMPLES

static void row_gap_anim(void * obj, int32_t v)
{
 lv_obj_set_style_pad_row(obj, v, 0);
}

static void column_gap_anim(void * obj, int32_t v)
{
 lv_obj_set_style_pad_column(obj, v, 0);
}

/**
 * Demonstrate column and row gap
 */
void lv_example_grid_5(void)
{
 /*60x60 cells*/
 static lv_coord_t col_dsc[] = {60, 60, 60, LV_GRID_TEMPLATE_LAST};
 static lv_coord_t row_dsc[] = {40, 40, 40, LV_GRID_TEMPLATE_LAST};

 /*Create a container with grid*/
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_grid_dsc_array(cont, col_dsc, row_dsc);

 lv_obj_t * label;
 lv_obj_t * obj;
 uint32_t i;
 for(i = 0; i < 9; i++) {
 uint8_t col = i % 3;
 uint8_t row = i / 3;

 obj = lv_obj_create(cont);
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_STRETCH, col, 1,
 LV_GRID_ALIGN_STRETCH, row, 1);
 label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "%d,%d", col, row);
 lv_obj_center(label);
 }
}

```

(continues on next page)

(continued from previous page)

```

lv_anim_t a;
lv_anim_init(&a);
lv_anim_set_var(&a, cont);
lv_anim_set_values(&a, 0, 10);
lv_anim_set_repeat_count(&a, LV_ANIM_REPEAT_INFINITE);

lv_anim_set_exec_cb(&a, row_gap_anim);
lv_anim_set_time(&a, 500);
lv_anim_set_playback_time(&a, 500);
lv_anim_start(&a);

lv_anim_set_exec_cb(&a, column_gap_anim);
lv_anim_set_time(&a, 3000);
lv_anim_set_playback_time(&a, 3000);
lv_anim_start(&a);
}

#endif

```

## Demonstrate RTL direction on grid

code

```

#include "../lv_examples.h"
#if LV_USE_GRID && LV_BUILD_EXAMPLES

/**
 * Demonstrate RTL direction on grid
 */
void lv_example_grid_6(void)
{
 static lv_coord_t col_dsc[] = {60, 60, 60, LV_GRID_TEMPLATE_LAST};
 static lv_coord_t row_dsc[] = {40, 40, 40, LV_GRID_TEMPLATE_LAST};

 /*Create a container with grid*/
 lv_obj_t * cont = lv_obj_create(lv_scr_act());
 lv_obj_set_size(cont, 300, 220);
 lv_obj_center(cont);
 lv_obj_set_style_base_dir(cont, LV_BASE_DIR_RTL, 0);
 lv_obj_set_grid_dsc_array(cont, col_dsc, row_dsc);

 lv_obj_t * label;
 lv_obj_t * obj;
 uint32_t i;
 for(i = 0; i < 9; i++) {
 uint8_t col = i % 3;
 uint8_t row = i / 3;

 obj = lv_obj_create(cont);
 /*Stretch the cell horizontally and vertically too
 Set span to 1 to make the cell 1 column/row sized/
 lv_obj_set_grid_cell(obj, LV_GRID_ALIGN_STRETCH, col, 1,

```

(continues on next page)

(continued from previous page)

```

 LV_GRID_ALIGN_STRETCH, row, 1);

 label = lv_label_create(obj);
 lv_label_set_text_fmt(label, "%d,%d", col, row);
 lv_obj_center(label);
}
#endif

```

## MicroPython

No examples yet.

## 6.2.7 API

### Enums

enum **lv\_grid\_align\_t**

*Values:*

enumerator **LV\_GRID\_ALIGN\_START**  
 enumerator **LV\_GRID\_ALIGN\_CENTER**  
 enumerator **LV\_GRID\_ALIGN\_END**  
 enumerator **LV\_GRID\_ALIGN\_STRETCH**  
 enumerator **LV\_GRID\_ALIGN\_SPACE\_EVENLY**  
 enumerator **LV\_GRID\_ALIGN\_SPACE\_AROUND**  
 enumerator **LV\_GRID\_ALIGN\_SPACE\_BETWEEN**

### Functions

**LV\_EXPORT\_CONST\_INT**(LV\_GRID\_CONTENT)

**LV\_EXPORT\_CONST\_INT**(LV\_GRID\_TEMPLATE\_LAST)

void **lv\_grid\_init**(void)

void **lv\_obj\_set\_grid\_dsc\_array**(*lv\_obj\_t* \*obj, const lv\_coord\_t col\_dsc[], const lv\_coord\_t row\_dsc[])

void **lv\_obj\_set\_grid\_align**(*lv\_obj\_t* \*obj, *lv\_grid\_align\_t* column\_align, *lv\_grid\_align\_t* row\_align)

void **lv\_obj\_set\_grid\_cell**(struct *lv\_obj\_t* \*obj, *lv\_grid\_align\_t* column\_align, uint8\_t col\_pos, uint8\_t col\_span, *lv\_grid\_align\_t* row\_align, uint8\_t row\_pos, uint8\_t row\_span)

Set the cell of an object. The object's parent needs to have grid layout, else nothing will happen

**Parameters**

- **obj** -- pointer to an object
- **hor\_place** -- the vertical alignment in the cell. LV\_GRID\_START/END/CENTER/STRETCH
- **col\_pos** -- column ID
- **col\_span** -- number of columns to take ( $\geq 1$ )
- **ver\_place** -- the horizontal alignment in the cell. LV\_GRID\_START/END/CENTER/STRETCH
- **row\_pos** -- row ID
- **row\_span** -- number of rows to take ( $\geq 1$ )

```
static inline lv_coord_t lv_grid_fr(uint8_t x)
```

Just a wrapper to LV\_GRID\_FR for bindings.

```
static inline void lv_style_set_grid_row_dsc_array(lv_style_t *style, const lv_coord_t value[])
```

```
static inline void lv_style_set_grid_column_dsc_array(lv_style_t *style, const lv_coord_t value[])
```

```
static inline void lv_style_set_grid_row_align(lv_style_t *style, lv_grid_align_t value)
```

```
static inline void lv_style_set_grid_column_align(lv_style_t *style, lv_grid_align_t value)
```

```
static inline void lv_style_set_grid_cell_column_pos(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_grid_cell_column_span(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_grid_cell_row_pos(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_grid_cell_row_span(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_grid_cell_x_align(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_style_set_grid_cell_y_align(lv_style_t *style, lv_coord_t value)
```

```
static inline void lv_obj_set_style_grid_row_dsc_array(lv_obj_t *obj, const lv_coord_t value[],
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_grid_column_dsc_array(lv_obj_t *obj, const lv_coord_t value[],
lv_style_selector_t selector)
```

```
static inline void lv_obj_set_style_grid_row_align(lv_obj_t *obj, lv_grid_align_t value,
lv_style_selector_t selector)
```



```

static inline void lv_obj_set_style_grid_column_align(lv_obj_t *obj, lv_grid_align_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_grid_cell_column_pos(lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_grid_cell_column_span(lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_grid_cell_row_pos(lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_grid_cell_row_span(lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_grid_cell_x_align(lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline void lv_obj_set_style_grid_cell_y_align(lv_obj_t *obj, lv_coord_t value,
 lv_style_selector_t selector)

static inline const lv_coord_t *lv_obj_get_style_grid_row_dsc_array(const struct _lv_obj_t *obj,
 uint32_t part)

static inline const lv_coord_t *lv_obj_get_style_grid_column_dsc_array(const struct _lv_obj_t *obj,
 uint32_t part)

static inline lv_grid_align_t lv_obj_get_style_grid_row_align(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_grid_align_t lv_obj_get_style_grid_column_align(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_coord_t lv_obj_get_style_grid_cell_column_pos(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_coord_t lv_obj_get_style_grid_cell_column_span(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_coord_t lv_obj_get_style_grid_cell_row_pos(const struct _lv_obj_t *obj, uint32_t part)

static inline lv_coord_t lv_obj_get_style_grid_cell_row_span(const struct _lv_obj_t *obj, uint32_t
 part)

static inline lv_coord_t lv_obj_get_style_grid_cell_x_align(const struct _lv_obj_t *obj, uint32_t part)

```

```
static inline lv_coord_t lv_obj_get_style_grid_cell_y_align(const struct _lv_obj_t *obj, uint32_t part)
```

## Variables

uint32\_t **LV\_LAYOUT\_GRID**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_COLUMN\_DSC\_ARRAY**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_COLUMN\_ALIGN**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_ROW\_DSC\_ARRAY**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_ROW\_ALIGN**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_CELL\_COLUMN\_POS**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_CELL\_COLUMN\_SPAN**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_CELL\_X\_ALIGN**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_CELL\_ROW\_POS**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_CELL\_ROW\_SPAN**

*lv\_style\_prop\_t* **LV\_STYLE\_GRID\_CELL\_Y\_ALIGN**

## CONTRIBUTING

### 7.1 Introduction

Join LVGL's community and leave your footprint in the library!

There are a lot of ways to contribute to LVGL even if you are new to the library or even new to programming.

It might be scary to make the first step but you have nothing to be afraid of. A friendly and helpful community is waiting for you. Get to know like-minded people and make something great together.

So let's find which contribution option fits you the best and help you join the development of LVGL!

Before getting started here are some guidelines to make contribution smoother:

- Be kind and friendly.
- Be sure to read the relevant part of the documentation before posting a question.
- Ask questions in the [Forum](#) and use [GitHub](#) for development-related discussions.
- Always fill out the post or issue templates in the Forum or GitHub (or at least provide equivalent information). It makes much easier to understand your case and you will get a useful answer faster.
- If possible send an absolute minimal but buildable code example in order to reproduce the issue. Be sure it contains all the required variable declarations, constants, and assets (images, fonts).
- Use [Markdown](#) to format your posts. You can learn it in 10 minutes.
- Speak about one thing in one issue or topic. It makes your post easier to find later for someone with the same question.
- Give feedback and close the issue or mark the topic as solved if your question is answered.
- For non-trivial fixes and features, it's better to open an issue first to discuss the details instead of sending a pull request directly.
- Please read and follow the Coding style guide.

## 7.2 Pull request

Merging new code into lvgl, documentation, blog, examples, and other repositories happen via *Pull requests* (PR for short). A PR is a notification like "Hey, I made some updates to your project. Here are the changes, you can add them if you want." To do this you need a copy (called fork) of the original project under your account, make some changes there, and notify the original repository about your updates. You can see how it looks like on GitHub for lvgl here: <https://github.com/lvgl/lvgl/pulls>.

To add your changes you can edit files online on GitHub and send a new Pull request from there (recommended for small changes) or add the updates in your favorite editor/IDE and use git to publish the changes (recommended for more complex updates).

### 7.2.1 From GitHub

1. Navigate to the file you want to edit.
2. Click the Edit button in the top right-hand corner.
3. Add your changes to the file
4. Add a commit message on the bottom of the page
5. Click the *Propose changes* button

### 7.2.2 From command line

The instructions describe the main lvgl repository but it works the same way for the other repositories.

1. Fork the [lvgl repository](#). To do this click the "Fork" button in the top right corner. It will "copy" the lvgl repository to your GitHub account ([https://github.com/<YOUR\\_NAME>?tab=repositories](https://github.com/<YOUR_NAME>?tab=repositories))
2. Clone your forked repository.
3. Add your changes. You can create a *feature branch* from *master* for the updates: `git checkout -b the-new-feature`
4. Commit and push your changes to the forked lvgl repository.
5. Create a PR on GitHub from the page of your lvgl repository ([https://github.com/<YOUR\\_NAME>/lvgl](https://github.com/<YOUR_NAME>/lvgl)) by clicking the "New pull request" button. Don't forget to select the branch where you added your changes.
6. Set the base branch. It means where you want to merge your update. In the lvgl repo fixes go to *master*, new features to *dev* branch.
7. Describe what is in the update. An example code is welcome if applicable.
8. If you need to make more changes, just update your forked lvgl repo with new commits. They will automatically appear in the PR.

## 7.3 Developer Certification of Origin (DCO)

### 7.3.1 Overview

To ensure that all licensing criteria is met for all repositories of the LVGL project we apply a process called DCO (Developer's Certificate of Origin).

The text of DCO can be read here: <https://developercertificate.org/>.

By contributing to any repositories of the LVGL project you state that your contribution corresponds with the DCO.

No further action is required if your contribution fulfills the DCO. If you are not sure about it feel free to ask us in a comment.

### 7.3.2 Accepted licenses and copyright notices

To make the DCO easier to digest, here are some practical guides about specific cases:

#### Your own work

The simplest case is when the contribution is solely your own work. In this case you can just send a Pull Request without worrying about any licensing issues.

#### Use code from online source

If the code you would like to add is based on an article, post or comment on a website (e.g. StackOverflow) the license and/or rules of that site should be followed.

For example in case of StackOwerflow a notice like this can be used:

```
/* The original version of this code-snippet was published on StackOverflow.
 * Post: http://stackoverflow.com/questions/12345
 * Author: http://stackoverflow.com/users/12345/username
 * The following parts of the snippet were changed:
 * - Check this or that
 * - Optimize performance here and there
 */
... code snippet here ...
```

#### Use MIT licensed code

As LVGL is also MIT licensed other MIT licensed code can be integrated without issues. The MIT license requests a copyright notice be added to the derived work. So you need to copy the original work's license file or it's text to the code you want to add.

## Use GPL licensed code

As GPL license is not compatible with MIT license so LVGL can not accept GPL licensed code.

## 7.4 Ways to contribute

Even if you're just getting started with LVGL there are plenty of ways to get your feet wet. Most of these options don't even require knowing a single line of LVGL code.

Below we have collected some opportunities about the ways you can contribute to LVGL.

### 7.4.1 Give LVGL a Star

Show that you like LVGL by giving it star on GitHub!

Star

This simple click makes LVGL more visible on GitHub and makes it more attractive to other people. So with this, you already helped a lot!

### 7.4.2 Tell what you have achieved

Have you already started using LVGL in a *Simulator*, a development board, or on your custom hardware? Was it easy or were there some obstacles? Are you happy with the result? Showing your project to others is a win-win situation because it increases yours and LVGL's reputation at the same time.

You can post about your project on Twitter, Facebook, LinkedIn, create a YouTube video, and so on. Only one think: on social media don't forget to add a link to <https://lvgl.io> or <https://github.com/lvgl> and [#lvgl](#). Thank you! :)

You can also open a new topic in the [My projects](#) category of the Forum.

The [LVGL Blog](#) welcomes posts from anyone. It's a good place to talk about a project you created with LVGL, write a tutorial, or share some nice tricks. The latest blog posts are shown on the [homepage of LVGL](#) to make your work more visible.

The blog is hosted on GitHub. If you add a post GitHub automatically turns it into a website. See the [README](#) of the blog repo to see how to add your post.

Any of these helps a lot to spread the word of LVGL and familiarize it with new developers.

If you don't want to speak about it publicly feel free to use [Contact form](#) on [lvgl.io](https://lvgl.io) to private message to us.

### 7.4.3 Write examples

As you learn LVGL probably you will play with the features of widgets. But why don't you publish your experiments?

Every widgets' documentation contains some examples. For example here are the examples of the [Drop-down list](#). The examples are directly loaded from the [lvgl/examples](#) folder.

So all you need to do is send a [Pull request](#) to the [lvgl](#) repository and follow some conventions:

- Name the examples like `lv_example_<widget_name>_<index>`
- Make the example as short and simple as possible

- Add comments to explain what the example does
- Use 320x240 resolution
- Update `index.rst` in the example's folder with your new example. See how the other examples are added.

### 7.4.4 Improve the docs

As you read the documentation you might see some typos or unclear sentences. All the documentation is located in the [lvgl/docs](#) folder. For typos and straightforward fixes, you can simply edit the file on GitHub.

Note that the documentation is also formatted in [Markdown](#).

### 7.4.5 Report bugs

As you use LVGL you might find bugs. Before reporting them be sure to check the relevant parts of the documentation.

If it really seems like a bug feel free to open an [issue on GitHub](#).

When filing the issue be sure to fill the template. It helps a lot to find the root of the problems and helps to avoid a lot of questions.

### 7.4.6 Send fixes

The beauty of open-source software is you can easily dig in to it to understand how it works. You can also fix or adjust it as you wish.

If you found and fixed a bug don't hesitate to send a [Pull request](#) with the fix.

In your Pull request please also add a line to [CHANGELOG.md](#).

### 7.4.7 Join the conversations in the Forum

It feels great to know you are not alone if something is not working. It's even better to help others when they struggle with something.

While you were learning LVGL you might have questions and used the Forum to get answers. As a result, you probably have more knowledge about how LVGL works.

One of the best ways to give back is to use the Forum and answer the questions of newcomers - like you were once.

Just read the titles and if you are familiar with the topic don't hesitate to share your thoughts and suggestions.

Participating in the discussions is one of the best ways to become part of the project and get to know like-minded people!

### 7.4.8 Add features

We collect the planned features in GitHub on the [Roadmap](#) page. If you are interested in any of them feel free to share your opinion and/or participate in the the implementation.

Other features which are (still) not on the road map are listed in the [Feature request](#) category of the Forum. If you have a feature idea for LVGL please use the Forum to share it! Make sure to check that there isn't an existing post; if there is, you should comment on it to show that there is increased interest in an existing request.

When adding a new features the followings also needs to be updated:

- Add a line to [CHANGELOG.md](#).
- Update the documentation.
- Add an example if applicable. See this [guide](#).

### 7.4.9 Become a maintainer

If you want to become part of the core development team, you can become a maintainer of a repository.

By becoming a maintainer:

- you get write access to that repo:
  - add code directly without sending a pull request
  - accept pull requests
  - close/reopen/edit issues
- your word has higher impact when we makeing decisions

You can become a maintainer by invitation, however the following conditions need to met

1. Have > 50 replies in the Forum. You can look at your stats [here](#)
2. Send > 5 non-trivial pull requests to the repo where you would like to be a maintainer

If you are interested, just send a message (e.g. from the Forum) to the current maintainers of the repository. They will check is the prerequisites are met. Note that meeting the prerequisites is not a guarantee of acceptance, i.e. if the conditions are met you won't automatically become a maintainer. It's up to the current maintainers to make the decision.

### 7.4.10 Move your project repository under LVGL organization

Besides the core `lvgl` repository there are other repos for ports to development boards, IDEs or other environment. If you ported LVGL to a new platform we can host it under the LVGL organization among the other repos.

This way your project will become part of the whole LVGL project and can get more visibility. If you are interested in this opportunity just open an [issue in lvgl repo](#) and tell what you have!

If we agree that your port fit well into the LVGL organisation, we will open a repository for your project where you will have admin rights.

To make this concept sustainable there a few rules to follow:

- You need to add a README to your repo.
- We expect to maintain the repo to some extent:
  - Follow at least the major versions of lvgl
  - Respond to the issues (in a reasonable time)
- If there is no activity in a repo for 1 year it will be archived



## CHANGELOG

### 8.1 v8.0.0 (Planned in May 2021)

#### 8.1.1 Directory structure

- The `lv_` prefix is removed from the folder names
- The `docs` is moved to the `lvgl` repository
- The `examples` are moved to the `lvgl` repository
- Create an `src/extra` folder for complex widgets:
  - It makes the core LVGL leaner
  - In `extra` we can have a lot and specific widgets
  - Good place for contributions

#### 8.1.2 Widget changes

- `lv_cont` removed, layout features are moved to `lv_obj`
- `lv_page` removed, scroll features are moved to `lv_obj`
- `lv_objmask` the same can be achieved by events
- `lv_meter` added as the union of `lv_linemeter` and `lv_gauge`
- `lv_span` new widget mimicing HTML `<span>`
- `lv_animing` new widget for simple slideshow animations
- + many minor changes and improvements

#### 8.1.3 New scrolling

- Support "elastic" scrolling when scrolled in
- Support scroll chaining among any objects types (not only `lv_page`s)
- Remove `lv_drag`. Similar effect can be achieved by setting the position in `LV_EVENT_PRESSING`
- Add snapping
- Add snap stop to scroll max 1 snap point

### 8.1.4 New layouts

- CSS Grid-like layout support
- CSS Flexbox-like layout support

### 8.1.5 Styles

- Optimize and simplify styles
- State is saved in the object instead of the style property
- Object size and position can be set in styles too

### 8.1.6 Events

- Allow adding multiple events to an object
- A `user_data` can be attached to the added events

### 8.1.7 Driver changes

- `lv_disp_drv_t`, `lv_indev_drv_t`, `lv_fs_drv_t` needs to be `static`
- `...disp_buf...` is renamed to `draw_buf`. See an initialization example [here](#).
- No partial update if two screen sized buffers are set
- `disp_drv->full_refresh = 1` makes always the whole display redraw.
- `hor_res` and `ver_res` need to be set in `disp_drv`
- `indev_read_cb` returns `void`. To indicate that there is more that to read set `data->continue_reading = 1` in the `read_cb`

### 8.1.8 Other changes

- Remove the copy parameter from create functions
- Simplified File system interface API
- Use a more generic inheritance
- The built-in themes are reworked
- `lv_obj_align` now saved the alignment and realigns the object automatically but can't be used to align to other than the parent
- `lv_obj_align_to` can align to an object but doesn't save the alignment
- `lv_pct(x)` can be used to set the size and position in percentage
- There are many other changes in widgets that are not detailed here. Please refer to the documentation of the widgets.

### 8.1.9 New release policy

- We will follow [Release branches with GitLab flow](#)
- Minor releases are expected in every 3-4 month
- `master` will always contain the latest changes

### 8.1.10 Migrating from v7 to v8

- First and foremost, create a new `lv_conf.h` based on `lv_conf_template.h`.
- To try the new version it's recommended to use a simulator project and see the examples.
- When migrating your project to v8
  - Update the drivers are described above
  - Update the styles
  - Update the events
  - Use the new layouts instead of `lv_cont` features
  - Use `lv_obj` instead of `lv_page`
  - The other parts are mainly minor renames and refactoring. See the functions' documentation for descriptions.

## 8.2 v7.11.0 (16.03.2021)

### 8.2.1 New features

- Add better screen orientation management with software rotation support
- Decide text animation's direction based on `base_dir` (when using `LV_USE_BIDI`)

### 8.2.2 Bugfixes

- `fix(gauge)` fix needle invalidation
- `fix(bar)` correct symmetric handling for vertical sliders

## 8.3 v7.10.1 (16.02.2021)

### 8.3.1 Bugfixes

- `fix(draw)` overlap outline with background to prevent aliasing artifacts
- `fix(indev)` clear the indev's `act_obj` in `lv_indev_reset`
- `fix(text)` fix out of bounds read in `_lv_txt_get_width`
- `fix(list)` scroll list when button is focused using `LV_KEY_NEXT/PREV`
- `fix(text)` improve Arabic contextual analysis by adding hyphen processing and proper handling of lam-alef sequence

- fix(delete) delete animation after the children are deleted
- fix(gauge) consider paddings for needle images

## 8.4 v7.10.0 (02.02.2021)

### 8.4.1 New features

- feat(indev) allow input events to be passed to disabled objects
- feat(spinbox) add inline get\_step function for MicroPython support

### 8.4.2 Bugfixes

- fix(btnmatrix) fix lv\_btnmatrix\_get\_active\_btn\_text() when used in a group

## 8.5 v7.9.1 (19.01.2021)

### 8.5.1 Bugfixes

- fix(cpicker) fix division by zero
- fix(dropdown) fix selecting options after the last one
- fix(msgbox) use the animation time provided
- fix(gpu\_nxp\_pxp) fix incorrect define name
- fix(indev) don't leave edit mode if there is only one object in the group
- fix(draw\_rect) fix draw pattern stack-use-after-scope error

## 8.6 v7.9.0 (05.01.2021)

### 8.6.1 New features

- feat(chart) add lv\_chart\_remove\_series and lv\_chart\_hide\_series
- feat(img\_cache) allow disabling image caching
- calendar: make get\_day\_of\_week() public
- Added support for Zephyr integration

## 8.6.2 Bugfixes

- fix(draw\_rect) free buffer used for arabic processing
- fix(win) arabic process the title of the window
- fix(dropdown) arabic process the option in lv\_dropdown\_add\_option
- fix(textarea) buffer overflow in password mode with UTF-8 characters
- fix(textarea) cursor position after hiding character in password mode
- fix(linometer) draw critical lines with correct color
- fix(lv\_conf\_internal) be sure Kconfig defines are always uppercase
- fix(kconfig) handle disable sprintf float correctly.
- fix(layout) stop layout after recursion threshold is reached
- fix(gauge) fix redraw with image needle

## 8.7 v7.8.1 (15.12.2020)

### 8.7.1 Bugfixes

- fix(lv\_scr\_load\_anim) fix when multiple screen are loaded at tsame time with delay
- fix(page) fix LV\_SCROLLBAR\_MODE\_DRAG

## 8.8 v7.8.0 (01.12.2020)

### 8.8.1 New features

- make DMA2D non blocking
- add unscii-16 built-in font
- add KConfig
- add lv\_refr\_get\_fps\_avg()

### 8.8.2 Bugfixes

- fix(btnmatrix) handle arabic texts in button matrices
- fix(indev) disabled object shouldn't absorb clicks but let the parent to be clicked
- fix(arabic) support processing again already processed texts with \_lv\_txt\_ap\_proc
- fix(textarea) support Arabic letter connections
- fix(dropdown) support Arabic letter connections
- fix(value\_str) support Arabic letter connections in value string property
- fix(indev) in LV\_INDEV\_TYPE\_BUTTON recognize 1 cycle long presses too
- fix(arc) make arc work with encoder

- fix(slider) adjusting the left knob too with encoder
- fix reference to LV\_DRAW\_BUF\_MAX\_NUM in lv\_mem.c
- fix(polygon draw) join adjacent points if they are on the same coordinate
- fix(linometer) fix invalidation when setting new value
- fix(table) add missing invalidation when changing cell type
- refactor(roller) rename LV\_ROLLER\_MODE\_INIFINITE -> LV\_ROLLER\_MODE\_INFINITE

## 8.9 v7.7.2 (17.11.2020)

### 8.9.1 Bugfixes

- fix(draw\_triangle): fix polygon/triangle drawing when the order of points is counter-clockwise
- fix(btnmatrix): fix setting the same map with modified pointers
- fix(arc) fix and improve arc dragging
- label: Repair calculate back `dot` character logical error which cause infinite loop.
- fix(theme\_material): remove the bottom border from tabview header
- fix(imgbtn) guess a the closest available state with valid src
- fix(spinbox) update cursor position in lv\_spinbox\_set\_step

## 8.10 v7.7.1 (03.11.2020)

### 8.10.1 Bugfixes

- Respect btnmatrix's `one_check` in `lv_btnmatrix_set_btn_ctrl`
- Gauge: make the needle images to use the styles from `LV_GAUGE_PART_PART`
- Group: fix in `lv_group_remove_obj` to handle deleting hidden obejcts correctly

## 8.11 v7.7.0 (20.10.2020)

### 8.11.1 New features

- Add PXP GPU support (for NXP MCUs)
- Add VG-Lite GPU support (for NXP MCUs)
- Allow max. 16 cell types for table
- Add `lv_table_set_text_fmt()`
- Use margin on calendar header to set distances and padding to the size of the header
- Add `text_sel_bg` style property

### 8.11.2 Bugfixes

- Theme update to support text selection background
- Fix imgbtn state change
- Support RTL in table (draw columns right to left)
- Support RTL in pretty layout (draw columns right to left)
- Skip objects in groups if they are in disabled state
- Fix dropdown selection with RTL basedirection
- Fix rectangle border drawing with large width
- Fix `lv_win_clean()`

## 8.12 v7.6.1 (06.10.2020)

### 8.12.1 Bugfixes

- Fix BIDI support in dropdown list
- Fix copying base dir in `lv_obj_create`
- Handle sub pixel rendering in font loader
- Fix transitions with style caching
- Fix click focus
- Fix imgbtn image switching with empty style
- Material theme: do not set the text font to allow easy global font change

## 8.13 v7.6.0 (22.09.2020)

### 8.13.1 New features

- Check whether any style property has changed on a state change to decide if any redraw is required

### 8.13.2 Bugfixes

- Fix selection of options with non-ASCII letters in dropdown list
- Fix font loader to support `LV_FONT_FMT_TXT_LARGE`

## 8.14 v7.5.0 (15.09.2020)

### 8.14.1 New features

- Add `clean_dcache_cb` and `lv_disp_clean_dcache` to enable users to use their own cache management function
- Add `gpu_wait_cb` to wait until the GPU is working. It allows to run CPU a wait only when the rendered data is needed.
- Add 10px and 8ox built in fonts

### 8.14.2 Bugfixes

- Fix unexpected DEFOCUS on `lv_page` when clicking to bg after the scrollable
- Fix `lv_obj_del` and `lv_obj_clean` if the children list changed during deletion.
- Adjust button matrix button width to include padding when spanning multiple units.
- Add rounding to btnmatrix line height calculation
- Add `decmodpr_buf` to GC roots
- Fix division by zero in `draw_pattern` (`lv_draw_rect.c`) if the image or letter is not found
- Fix drawing images with 1 px height or width

## 8.15 v7.4.0 (01.09.2020)

The main new features of v7.4 are run-time font loading, style caching and arc knob with value setting by click.

### 8.15.1 New features

- Add `lv_font_load()` function - Loads a `lv_font_t` object from a binary font file
- Add `lv_font_free()` function - Frees the memory allocated by the `lv_font_load()` function
- Add style caching to reduce access time of properties with default value
- arc: add set value by click feature
- arc: add `LV_ARC_PART_KNOB` similarly to slider
- send gestures event if the object was dragged. User can check dragging with `lv_indev_is_dragging(lv_indev_act())` in the event function.



## 8.15.2 Bugfixes

- Fix color bleeding on border drawing
- Fix using 'LV\_SCROLLBAR\_UNHIDE' after 'LV\_SCROLLBAR\_ON'
- Fix cropping of last column/row if an image is zoomed
- Fix zooming and rotateing mosaic images
- Fix deleting tabview with LEFT/RIGHT tab position
- Fix btnmatrix to not send event when CLICK\_TRIG = true and the cursor slid from a pressed button
- Fix roller width if selected text is larger than the normal

## 8.16 v7.3.1 (18.08.2020)

### 8.16.1 Bugfixes

- Fix drawing value string twice
- Rename `lv_chart_clear_serie` to `lv_chart_clear_series` and `lv_obj_align_origo` to `lv_obj_align_mid`
- Add linemeter's mirror feature again
- Fix text decor (underline strikethrough) with older versions of font converter
- Fix setting local style property multiple times
- Add missing background drawing and radius handling to image button
- Allow adding extra label to list buttons
- Fix crash if `lv_table_set_col_cnt` is called before `lv_table_set_row_cnt` for the first time
- Fix overflow in large image transformations
- Limit extra button click area of button matrix's buttons. With large paddings it was counter intuitive. (Gaps are mapped to button when clicked).
- Fix `lv_btnmatrix_set_one_check` not forcing exactly one button to be checked
- Fix color picker invalidation in rectangle mode
- Init disabled days to gray color in calendar

## 8.17 v7.3.0 (04.08.2020)

### 8.17.1 New features

- Add `lv_task_get_next`
- Add `lv_event_send_refresh`, `lv_event_send_refresh_recursive` to easily send `LV_EVENT_REFRESH` to object
- Add `lv_tabview_set_tab_name()` function - used to change a tab's name

- Add LV\_THEME\_MATERIAL\_FLAG\_NO\_TRANSITION and LV\_THEME\_MATERIAL\_FLAG\_NO\_FOCUS flags
- Reduce code size by adding: LV\_USE\_FONT\_COMPRESSED and LV\_FONT\_USE\_SUBPX and applying some optimization
- Add LV\_MEMCPY\_MEMSET\_STD to use standard memcpy and memset

### 8.17.2 Bugfixes

- Do not print warning for missing glyph if its height OR width is zero.
- Prevent duplicated sending of LV\_EVENT\_INSERT from text area
- Tidy outer edges of cpicker widget.
- Remove duplicated lines from lv\_tabview\_add\_tab
- btnmatrix: handle combined states of buttons (e.g. checked + disabled)
- textarea: fix typo in lv\_textarea\_set\_scrollbar\_mode
- gauge: fix image needle drawing
- fix using freed memory in \_lv\_style\_list\_remove\_style

## 8.18 v7.2.0 (21.07.2020)

### 8.18.1 New features

- Add screen transitions with lv\_scr\_load\_anim()
- Add display background color, wallpaper and opacity. Shown when the screen is transparent. Can be used with lv\_disp\_set\_bg\_opa/color/image().
- Add LV\_CALENDAR\_WEEK\_STARTS\_MONDAY
- Add lv\_chart\_set\_x\_start\_point() function - Set the index of the x-axis start point in the data array
- Add lv\_chart\_set\_ext\_array() function - Set an external array of data points to use for the chart
- Add lv\_chart\_set\_point\_id() function - Set an individual point value in the chart series directly based on index
- Add lv\_chart\_get\_x\_start\_point() function - Get the current index of the x-axis start point in the data array
- Add lv\_chart\_get\_point\_id() function - Get an individual point value in the chart series directly based on index
- Add ext\_buf\_assigned bit field to lv\_chart\_series\_t structure - it's true if external buffer is assigned to series
- Add lv\_chart\_set\_series\_axis() to assign series to primary or secondary axis
- Add lv\_chart\_set\_y\_range() to allow setting range of secondary y axis (based on lv\_chart\_set\_range but extended with an axis parameter)
- Allow setting different font for the selected text in lv\_roller

- Add `theme->apply_cb` to replace `theme->apply_xcb` to make it compatible with the MicroPython binding
- Add `lv_theme_set_base()` to allow easy extension of built-in (or any) themes
- Add `lv_obj_align_x()` and `lv_obj_align_y()` functions
- Add `lv_obj_align_origo_x()` and `lv_obj_align_origo_y()` functions

## 8.18.2 Bugfixes

- `tileview` fix navigation when not screen sized
- Use 14px font by default to for better compatibility with smaller displays
- `linemeter` fix conversation of current value to "level"
- Fix drawing on right border
- Set the cursor image non clickable by default
- Improve mono theme when used with keyboard or encoder

## 8.19 v7.1.0 (07.07.2020)

### 8.19.1 New features

- Add `focus_parent` attribute to `lv_obj`
- Allow using buttons in encoder input device
- Add `lv_btnmatrix_set/get_align` capability
- DMA2D: Remove dependency on ST CubeMX HAL
- Added `max_used` propriety to `lv_mem_monitor_t` struct
- In `lv_init` test if the strings are UTF-8 encoded.
- Add `user_data` to themes
- Add `LV_BIG_ENDIAN_SYSTEM` flag to `lv_conf.h` in order to fix displaying images on big endian systems.
- Add inline function `lv_checkbox_get_state(const lv_obj_t * cb)` to extend the checkbox functionality.
- Add inline function `lv_checkbox_set_state(const lv_obj_t * cb, lv_btn_state_t state)` to extend the checkbox functionality.

### 8.19.2 Bugfixes

- `lv_img` fix invalidation area when angle or zoom changes
- Update the style handling to support Big endian MCUs
- Change some methods to support big endian hardware.
- remove use of c++ keyword 'new' in parameter of function `lv_theme_set_base()`.
- Add `LV_BIG_ENDIAN_SYSTEM` flag to `lv_conf.h` in order to fix displaying images on big endian systems.
- Fix inserting chars in text area in big endian hardware.

## 8.20 v7.0.2 (16.06.2020)

### 8.20.1 Bugfixes

- `lv_textarea` fix wrong cursor position when clicked after the last character
- Change all text related indices from 16-bit to 32-bit integers throughout whole library. #1545
- Fix gestures
- Do not call `set_px_cb` for transparent pixel
- Fix list button focus in material theme
- Fix crash when the a text area is cleared with the backspace of a keyboard
- Add version number to `lv_conf_template.h`
- Add log in true double buffering mode with `set_px_cb`
- `lv_dropdown`: fix missing `LV_EVENT_VALUE_CHANGED` event when used with encoder
- `lv_tileview`: fix if not the {0;0} tile is created first
- `lv_debug`: restructure to allow asserting in from `lv_misc` too
- add assert if `_lv_mem_buf_get()` fails
- `lv_textarea`: fix character delete in password mode
- Update `LV_OPA_MIN` and `LV_OPA_MAX` to widen the opacity processed range
- `lv_btnm` fix sending events for hidden buttons
- `lv_gaguge` make `lv_gauge_set_angle_offset` offset the labels and needles too
- Fix typo in the API `scrllable` -> `scrollable`
- `tabview` by default allow auto expanding the page only to right and bottom (#1573)
- fix crash when drawing gradient to the same color
- chart: fix memory leak
- `img`: improve hit test for transformed images

## 8.21 v7.0.1 (01.06.2020)

### 8.21.1 Bugfixes

- Make the Micropython working by adding the required variables as `GC_ROOT`
- Prefix some internal API functions with `_` to reduce the API of LVGL
- Fix built-in SimSun CJK font
- Fix UTF-8 encoding when `LV_USE_ARABIC_PERSIAN_CHARS` is enabled
- Fix DMA2D usage when 32 bit images directly blended
- Fix `lv_roller` in infinite mode when used with encoder
- Add `lv_theme_get_color_secondary()`

- Add `LV_COLOR_MIX_ROUND_OFS` to adjust color mixing to make it compatible with the GPU
- Improve DMA2D blending
- Remove memcpy from `lv_ll` (caused issues with some optimization settings)
- `lv_chart` fix X tick drawing
- Fix vertical dashed line drawing
- Some additional minor fixes and formatings

## 8.22 v7.0.0 (18.05.2020)

### 8.22.1 Documentation

The docs for v7 is available at <https://docs.littlevgl.com/v7/en/html/index.html>

### 8.22.2 Legal changes

The name of the project is changed to LVGL and the new website is on <https://lvgl.io>

LVGL remains free under the same conditions (MIT license) and a company is created to manage LVGL and offer services.

### 8.22.3 New drawing system

Complete rework of LVGL's draw engine to use "masks" for more advanced and higher quality graphical effects. A possible use-case of this system is to remove the overflowing content from the rounded edges. It also allows drawing perfectly anti-aliased circles, lines, and arcs. Internally, the drawings happen by defining masks (such as rounded rectangle, line, angle). When something is drawn the currently active masks can make some pixels transparent. For example, rectangle borders are drawn by using 2 rectangle masks: one mask removes the inner part and another the outer part.

The API in this regard remained the same but some new functions were added:

- `lv_img_set_zoom`: set image object's zoom factor
- `lv_img_set_angle`: set image object's angle without using canvas
- `lv_img_set_pivot`: set the pivot point of rotation

The new drawing engine brought new drawing features too. They are highlighted in the "style" section.

### 8.22.4 New style system

The old style system is replaced with a new more flexible and lightweight one. It uses an approach similar to CSS: support cascading styles, inheriting properties and local style properties per object. As part of these updates, a lot of objects were reworked and the APIs have been changed.

- more shadows options: *offset* and *spread*
- gradient stop position to shift the gradient area and horizontal gradient
- `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE` blending modes
- *clip corner*: crop the content on the rounded corners
- *text underline* and *strikethrough*

- dashed vertical and horizontal lines (*dash\_gap*, *dash\_width*)
- *outline*: a border-like part drawn out of the background. Can have spacing to the background.
- *pattern*: display an image in the middle of the background or repeat it
- *value*: display a text which is stored in the style. It can be used e.g. as a lightweight text on buttons too.
- *margin*: similar to *padding* but used to keep space outside of the object

Read the [Style](#) section of the documentation to learn how the new styles system works.

### 8.22.5 GPU integration

To better utilize GPUs, from this version GPU usage can be integrated into LVGL. In `lv_conf.h` any supported GPUs can be enabled with a single configuration option.

Right now, only ST's DMA2D (Chrom-ART) is integrated. More will in the upcoming releases.

### 8.22.6 Renames

The following object types are renamed:

- `sw` -> `switch`
- `ta` -> `textarea`
- `cb` -> `checkbox`
- `lmeter` -> `linemeter`
- `mbox` -> `msgbox`
- `ddlist` -> `dropdown`
- `btnm` -> `btnmatrix`
- `kb` -> `keyboard`
- `preload` -> `spinner`
- `lv_objx` folder -> `lv_widgets`
- `LV_FIT_FILL` -> `LV_FIT_PARENT`
- `LV_FIT_FLOOD` -> `LV_FLOOD_MAX`
- `LV_LAYOUT_COL_L/M/R` -> `LV_LAYOUT_COLUMN_LEFT/MID/RIGHT`
- `LV_LAYOUT_ROW_T/M/B` -> `LV_LAYOUT_ROW_TOP/MID/BOTTOM`

### 8.22.7 Reworked and improved object

- `dropdown`: Completely reworked. Now creates a separate list when opened and can be dropped to down/up/left/right.
- `label`: `body_draw` is removed, instead, if its style has a visible background/border/shadow etc it will be drawn. Padding really makes the object larger (not just virtually as before)
- `arc`: can draw background too.
- `btn`: doesn't store styles for each state because it's done naturally in the new style system.

- **calendar**: highlight the pressed datum. The used styles are changed: use `LV_CALENDAR_PART_DATE` normal for normal dates, checked for highlighted, focused for today, pressed for the being pressed. (checked+pressed, focused+pressed also work)
- **chart**: only has `LINE` and `COLUMN` types because with new styles all the others can be described. `LV_CHART_PART_SERIES` sets the style of the series. `bg_opa > 0` draws an area in `LINE` mode. `LV_CHART_PART_SERIES_BG` also added to set a different style for the series area. Padding in `LV_CHART_PART_BG` makes the series area smaller, and it ensures space for axis labels/numbers.
- **linemeter, gauge**: can have background if the related style properties are set. Padding makes the scale/lines smaller. `scale_border_width` and `scale_end_border_width` allow to draw an arc on the outer part of the scale lines.
- **gauge**: `lv_gauge_set_needle_img` allows use image as needle
- **canvas**: allow drawing to true color alpha and alpha only canvas, add `lv_canvas_blur_hor/ver` and rename `lv_canvas_rotate` to `lv_canvas_transform`
- **textarea**: If available in the font use bullet (U+2022) character in text area password

### 8.22.8 New object types

- `lv_objmask`: masks can be added to it. The children will be masked accordingly.

### 8.22.9 Others

- Change the built-in fonts to `Montserrat` and add built-in fonts from 12 px to 48 px for every 2nd size.
- Add example CJK and Arabic/Persian/Hebrew built-in font
- Add ° and "bullet" to the built-in fonts
- Add Arabic/Persian script support: change the character according to its position in the text.
- Add `playback_time` to animations.
- Add `repeat_count` to animations instead of the current "repeat forever".
- Replace `LV_LAYOUT_PRETTY` with `LV_LAYOUT_PRETTY_TOP/MID/BOTTOM`

### 8.22.10 Demos

- `lv_examples` was reworked and new examples and demos were added

### 8.22.11 New release policy

- Maintain this Changelog for every release
- Save old major version in new branches. E.g. `release/v6`
- Merge new features and fixes directly into `master` and release a patch or minor releases every 2 weeks.

### 8.22.12 Migrating from v6 to v7

- First and foremost, create a new `lv_conf.h` based on `lv_conf_template.h`.
- To try the new version it suggested using a simulator project and see the examples.
- If you have a running project, the most difficult part of the migration is updating to the new style system. Unfortunately, there is no better way than manually updating to the new format.
- The other parts are mainly minor renames and refactoring as described above.



## ROADMAP

This is a summary for planned new features and a collection of ideas. This list indicates only the current intention and it can be changed.

### 9.1 v8.X

- `lv_snapshot`: buffer a widget and all of its children into an image. The source widget can be on a different screen too. The result image can be transformed.
- Add radio button support
- Unit testing (gtest?). See [#1658](#)
- Benchmarking (gem5?). See [#1660](#)
- chart: pre-delete X pint after the lastly set
- chart: autoscroll to the right
- 9-patch support for `lv_imgbtn`.
- Handle stride. See [#1858](#)
- Optimize line and circle drawing and masking

### 9.2 Ideas

- Reconsider color format management for run time color format setting, and custom color format usage. (Also [RGB888](#))
- Make gradients more versatile
- Make image transformations more versatile
- Switch to RGBA colors in styles
- Consider direct binary font format support
- Simplify groups. Discussion is [here](#).
- Use `generate-changelog` to automatically generate changelog
- `lv_mem_alloc_aligned(size, align)`
- Text node. See [#1701](#)
- CPP binding. See [Forum](#)

- Optimize font decompression
- Need coverage report for tests
- Need static analyze (via coverity.io or something else)
- Support dot\_begin and dot\_middle long modes for labels
- Add new label alignment modes. [#1656](#)
- Support larger images: [#1892](#)

## 9.3 v8

- Create an `extra` folder for complex widgets
  - It makes the core LVGL leaner
  - In `extra` we can have a lot and specific widgets
  - Good place for contributions
- New scrolling:
  - See [feat/new-scroll](#) branch and [#1614](#) issue.
  - Remove `lv_page` and support scrolling on `lv_obj`
  - Support "elastic" scrolling when scrolled in
  - Support scroll chaining among any objects types (not only `lv_pages`)
  - Remove `lv_drag`. Similar effect can be achieved by setting the position in `LV_EVENT_PRESSING`
  - Add snapping
  - Add snap stop to scroll max 1 snap point
  - Already working
- New layouts:
  - See [#1615](#) issue
  - [CSS Grid](#)-like layout support
  - [CSS Flexbox](#)-like layout support
  - Remove `lv_cont` and support layouts on `lv_obj`
- Simplified File system interface ([feat/new\\_fs\\_api](#) branch) to make porting easier
  - Work in progress
- Remove the align parameter from `lv_canvas_draw_text`
- Remove the copy parameter from create functions
- Optimize and simplify styles [#1832](#)
- Use a more generic inheritance [#1919](#)
- Allow adding multiple events to an object

## Symbols

\_lv\_anim\_core\_init (C++ function), 165  
 \_lv\_anim\_t (C++ struct), 169  
 \_lv\_anim\_t (C++ type), 165  
 \_lv\_anim\_t::act\_time (C++ member), 170  
 \_lv\_anim\_t::current\_value (C++ member), 170  
 \_lv\_anim\_t::early\_apply (C++ member), 170  
 \_lv\_anim\_t::end\_value (C++ member), 170  
 \_lv\_anim\_t::exec\_cb (C++ member), 170  
 \_lv\_anim\_t::get\_value\_cb (C++ member), 170  
 \_lv\_anim\_t::path\_cb (C++ member), 170  
 \_lv\_anim\_t::playback\_delay (C++ member), 170  
 \_lv\_anim\_t::playback\_now (C++ member), 171  
 \_lv\_anim\_t::playback\_time (C++ member), 170  
 \_lv\_anim\_t::ready\_cb (C++ member), 170  
 \_lv\_anim\_t::repeat\_cnt (C++ member), 170  
 \_lv\_anim\_t::repeat\_delay (C++ member), 170  
 \_lv\_anim\_t::run\_round (C++ member), 171  
 \_lv\_anim\_t::start\_cb (C++ member), 170  
 \_lv\_anim\_t::start\_cb\_called (C++ member), 171  
 \_lv\_anim\_t::start\_value (C++ member), 170  
 \_lv\_anim\_t::time (C++ member), 170  
 \_lv\_anim\_t::time\_orig (C++ member), 171  
 \_lv\_anim\_t::user\_data (C++ member), 170  
 \_lv\_anim\_t::var (C++ member), 170  
 \_lv\_arc\_t (C++ struct), 200  
 \_lv\_arc\_t::bg\_angle\_end (C++ member), 200  
 \_lv\_arc\_t::bg\_angle\_start (C++ member), 200  
 \_lv\_arc\_t::chg\_rate (C++ member), 200  
 \_lv\_arc\_t::dragging (C++ member), 200  
 \_lv\_arc\_t::indic\_angle\_end (C++ member), 200  
 \_lv\_arc\_t::indic\_angle\_start (C++ member), 200  
 \_lv\_arc\_t::last\_angle (C++ member), 200  
 \_lv\_arc\_t::last\_tick (C++ member), 200  
 \_lv\_arc\_t::max\_value (C++ member), 200  
 \_lv\_arc\_t::min\_close (C++ member), 200  
 \_lv\_arc\_t::min\_value (C++ member), 200  
 \_lv\_arc\_t::obj (C++ member), 200  
 \_lv\_arc\_t::rotation (C++ member), 200  
 \_lv\_arc\_t::type (C++ member), 200  
 \_lv\_arc\_t::value (C++ member), 200  
 \_lv\_bar\_anim\_t (C++ struct), 208  
 \_lv\_bar\_anim\_t::anim\_end (C++ member), 208  
 \_lv\_bar\_anim\_t::anim\_start (C++ member), 208  
 \_lv\_bar\_anim\_t::anim\_state (C++ member), 208  
 \_lv\_bar\_anim\_t::bar (C++ member), 208  
 \_lv\_bar\_t (C++ struct), 208  
 \_lv\_bar\_t::cur\_value (C++ member), 209  
 \_lv\_bar\_t::cur\_value\_anim (C++ member), 209  
 \_lv\_bar\_t::indic\_area (C++ member), 209  
 \_lv\_bar\_t::max\_value (C++ member), 209  
 \_lv\_bar\_t::min\_value (C++ member), 209  
 \_lv\_bar\_t::mode (C++ member), 209  
 \_lv\_bar\_t::obj (C++ member), 209  
 \_lv\_bar\_t::start\_value (C++ member), 209  
 \_lv\_bar\_t::start\_value\_anim (C++ member), 209  
 \_lv\_btn\_t (C++ struct), 214  
 \_lv\_btn\_t::obj (C++ member), 214  
 \_lv\_btnmatrix\_t (C++ struct), 223  
 \_lv\_btnmatrix\_t::btn\_cnt (C++ member), 223  
 \_lv\_btnmatrix\_t::btn\_id\_sel (C++ member), 223  
 \_lv\_btnmatrix\_t::button\_areas (C++ member), 223  
 \_lv\_btnmatrix\_t::ctrl\_bits (C++ member), 223  
 \_lv\_btnmatrix\_t::map\_p (C++ member), 223  
 \_lv\_btnmatrix\_t::obj (C++ member), 223  
 \_lv\_btnmatrix\_t::one\_check (C++ member), 223  
 \_lv\_calendar\_t (C++ struct), 305  
 \_lv\_calendar\_t::btnm (C++ member), 305  
 \_lv\_calendar\_t::highlighted\_dates (C++

member), 305  
 \_lv\_calendar\_t::highlighted\_dates\_num (C++ member), 305  
 \_lv\_calendar\_t::map (C++ member), 305  
 \_lv\_calendar\_t::nums (C++ member), 305  
 \_lv\_calendar\_t::showed\_date (C++ member), 305  
 \_lv\_calendar\_t::today (C++ member), 305  
 \_lv\_canvas\_t (C++ struct), 232  
 \_lv\_canvas\_t::dsc (C++ member), 232  
 \_lv\_canvas\_t::img (C++ member), 232  
 \_lv\_chart\_cursor\_t (C++ struct), 325  
 \_lv\_chart\_cursor\_t::color (C++ member), 325  
 \_lv\_chart\_cursor\_t::dir (C++ member), 325  
 \_lv\_chart\_cursor\_t::point\_id (C++ member), 325  
 \_lv\_chart\_cursor\_t::pos (C++ member), 325  
 \_lv\_chart\_cursor\_t::pos\_set (C++ member), 325  
 \_lv\_chart\_cursor\_t::ser (C++ member), 325  
 \_lv\_chart\_series\_t (C++ struct), 325  
 \_lv\_chart\_series\_t::color (C++ member), 325  
 \_lv\_chart\_series\_t::hidden (C++ member), 325  
 \_lv\_chart\_series\_t::start\_point (C++ member), 325  
 \_lv\_chart\_series\_t::x\_axis\_sec (C++ member), 325  
 \_lv\_chart\_series\_t::x\_ext\_buf\_assigned (C++ member), 325  
 \_lv\_chart\_series\_t::x\_points (C++ member), 325  
 \_lv\_chart\_series\_t::y\_axis\_sec (C++ member), 325  
 \_lv\_chart\_series\_t::y\_ext\_buf\_assigned (C++ member), 325  
 \_lv\_chart\_series\_t::y\_points (C++ member), 325  
 \_lv\_chart\_t (C++ struct), 326  
 \_lv\_chart\_t::cursor\_ll (C++ member), 326  
 \_lv\_chart\_t::hdiv\_cnt (C++ member), 326  
 \_lv\_chart\_t::obj (C++ member), 326  
 \_lv\_chart\_t::point\_cnt (C++ member), 326  
 \_lv\_chart\_t::pressed\_point\_id (C++ member), 326  
 \_lv\_chart\_t::series\_ll (C++ member), 326  
 \_lv\_chart\_t::tick (C++ member), 326  
 \_lv\_chart\_t::type (C++ member), 326  
 \_lv\_chart\_t::update\_mode (C++ member), 326  
 \_lv\_chart\_t::vdiv\_cnt (C++ member), 326  
 \_lv\_chart\_t::xmax (C++ member), 326  
 \_lv\_chart\_t::xmin (C++ member), 326  
 \_lv\_chart\_t::ymax (C++ member), 326  
 \_lv\_chart\_t::ymin (C++ member), 326  
 \_lv\_chart\_t::zoom\_x (C++ member), 326  
 \_lv\_chart\_t::zoom\_y (C++ member), 326  
 \_lv\_chart\_tick\_dsc\_t (C++ struct), 325  
 \_lv\_chart\_tick\_dsc\_t::draw\_size (C++ member), 326  
 \_lv\_chart\_tick\_dsc\_t::label\_en (C++ member), 326  
 \_lv\_chart\_tick\_dsc\_t::major\_cnt (C++ member), 326  
 \_lv\_chart\_tick\_dsc\_t::major\_len (C++ member), 326  
 \_lv\_chart\_tick\_dsc\_t::minor\_cnt (C++ member), 326  
 \_lv\_chart\_tick\_dsc\_t::minor\_len (C++ member), 326  
 \_lv\_checkbox\_t (C++ struct), 235  
 \_lv\_checkbox\_t::obj (C++ member), 235  
 \_lv\_checkbox\_t::static\_txt (C++ member), 235  
 \_lv\_checkbox\_t::txt (C++ member), 235  
 \_lv\_color\_filter\_dsc\_t (C++ struct), 134  
 \_lv\_color\_filter\_dsc\_t::filter\_cb (C++ member), 134  
 \_lv\_color\_filter\_dsc\_t::user\_data (C++ member), 134  
 \_lv\_colorwheel\_t (C++ struct), 330  
 \_lv\_colorwheel\_t::hsv (C++ member), 330  
 \_lv\_colorwheel\_t::knob (C++ member), 330  
 \_lv\_colorwheel\_t::last\_change\_time (C++ member), 330  
 \_lv\_colorwheel\_t::last\_click\_time (C++ member), 330  
 \_lv\_colorwheel\_t::last\_press\_point (C++ member), 330  
 \_lv\_colorwheel\_t::mode (C++ member), 330  
 \_lv\_colorwheel\_t::mode\_fixed (C++ member), 330  
 \_lv\_colorwheel\_t::obj (C++ member), 330  
 \_lv\_colorwheel\_t::pos (C++ member), 330  
 \_lv\_colorwheel\_t::recolor (C++ member), 330  
 \_lv\_disp\_draw\_buf\_t (C++ struct), 33  
 \_lv\_disp\_draw\_buf\_t (C++ type), 31  
 \_lv\_disp\_draw\_buf\_t::area (C++ member), 34  
 \_lv\_disp\_draw\_buf\_t::buf1 (C++ member), 34  
 \_lv\_disp\_draw\_buf\_t::buf2 (C++ member), 34  
 \_lv\_disp\_draw\_buf\_t::buf\_act (C++ member), 34  
 \_lv\_disp\_draw\_buf\_t::flushing (C++ member), 34  
 \_lv\_disp\_draw\_buf\_t::flushing\_last (C++ member), 34

\_lv\_disp\_draw\_buf\_t::last\_area (C++ member), 34  
 \_lv\_disp\_draw\_buf\_t::last\_part (C++ member), 34  
 \_lv\_disp\_draw\_buf\_t::size (C++ member), 34  
 \_lv\_disp\_drv\_t (C++ struct), 34  
 \_lv\_disp\_drv\_t::antialiasing (C++ member), 34  
 \_lv\_disp\_drv\_t::clean\_dcache\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::color\_chroma\_key (C++ member), 35  
 \_lv\_disp\_drv\_t::dpi (C++ member), 35  
 \_lv\_disp\_drv\_t::draw\_buf (C++ member), 34  
 \_lv\_disp\_drv\_t::drv\_update\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::flush\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::full\_refresh (C++ member), 34  
 \_lv\_disp\_drv\_t::gpu\_fill\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::gpu\_wait\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::hor\_res (C++ member), 34  
 \_lv\_disp\_drv\_t::monitor\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::rotated (C++ member), 34  
 \_lv\_disp\_drv\_t::rounder\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::screen\_transp (C++ member), 34  
 \_lv\_disp\_drv\_t::set\_px\_cb (C++ member), 35  
 \_lv\_disp\_drv\_t::sw\_rotate (C++ member), 34  
 \_lv\_disp\_drv\_t::user\_data (C++ member), 35  
 \_lv\_disp\_drv\_t::ver\_res (C++ member), 34  
 \_lv\_disp\_drv\_t::wait\_cb (C++ member), 35  
 \_lv\_disp\_get\_refr\_timer (C++ function), 129  
 \_lv\_disp\_t (C++ struct), 35  
 \_lv\_disp\_t (C++ type), 31  
 \_lv\_disp\_t::act\_scr (C++ member), 36  
 \_lv\_disp\_t::bg\_color (C++ member), 36  
 \_lv\_disp\_t::bg\_img (C++ member), 36  
 \_lv\_disp\_t::bg\_opa (C++ member), 36  
 \_lv\_disp\_t::del\_prev (C++ member), 36  
 \_lv\_disp\_t::driver (C++ member), 36  
 \_lv\_disp\_t::inv\_area\_joined (C++ member), 37  
 \_lv\_disp\_t::inv\_areas (C++ member), 36  
 \_lv\_disp\_t::inv\_p (C++ member), 37  
 \_lv\_disp\_t::last\_activity\_time (C++ member), 37  
 \_lv\_disp\_t::prev\_scr (C++ member), 36  
 \_lv\_disp\_t::refr\_timer (C++ member), 36  
 \_lv\_disp\_t::scr\_to\_load (C++ member), 36  
 \_lv\_disp\_t::screen\_cnt (C++ member), 36  
 \_lv\_disp\_t::screens (C++ member), 36  
 \_lv\_disp\_t::sys\_layer (C++ member), 36  
 \_lv\_disp\_t::theme (C++ member), 36  
 \_lv\_disp\_t::top\_layer (C++ member), 36  
 \_lv\_dropdown\_list\_t (C++ struct), 244  
 \_lv\_dropdown\_list\_t::dropdown (C++ member), 244  
 \_lv\_dropdown\_list\_t::obj (C++ member), 244  
 \_lv\_dropdown\_t (C++ struct), 243  
 \_lv\_dropdown\_t::dir (C++ member), 244  
 \_lv\_dropdown\_t::list (C++ member), 244  
 \_lv\_dropdown\_t::obj (C++ member), 244  
 \_lv\_dropdown\_t::option\_cnt (C++ member), 244  
 \_lv\_dropdown\_t::options (C++ member), 244  
 \_lv\_dropdown\_t::pr\_opt\_id (C++ member), 244  
 \_lv\_dropdown\_t::sel\_opt\_id (C++ member), 244  
 \_lv\_dropdown\_t::sel\_opt\_id\_orig (C++ member), 244  
 \_lv\_dropdown\_t::selected\_highlight (C++ member), 244  
 \_lv\_dropdown\_t::static\_txt (C++ member), 244  
 \_lv\_dropdown\_t::symbol (C++ member), 244  
 \_lv\_dropdown\_t::text (C++ member), 244  
 \_lv\_fs\_drv\_t (C++ struct), 161  
 \_lv\_fs\_drv\_t::close\_cb (C++ member), 161  
 \_lv\_fs\_drv\_t::dir\_close\_cb (C++ member), 162  
 \_lv\_fs\_drv\_t::dir\_open\_cb (C++ member), 162  
 \_lv\_fs\_drv\_t::dir\_read\_cb (C++ member), 162  
 \_lv\_fs\_drv\_t::letter (C++ member), 161  
 \_lv\_fs\_drv\_t::open\_cb (C++ member), 161  
 \_lv\_fs\_drv\_t::read\_cb (C++ member), 161  
 \_lv\_fs\_drv\_t::ready\_cb (C++ member), 161  
 \_lv\_fs\_drv\_t::seek\_cb (C++ member), 161  
 \_lv\_fs\_drv\_t::tell\_cb (C++ member), 161  
 \_lv\_fs\_drv\_t::user\_data (C++ member), 162  
 \_lv\_fs\_drv\_t::write\_cb (C++ member), 161  
 \_lv\_fs\_init (C++ function), 159  
 \_lv\_group\_init (C++ function), 120  
 \_lv\_group\_t (C++ struct), 122  
 \_lv\_group\_t (C++ type), 119  
 \_lv\_group\_t::editing (C++ member), 122  
 \_lv\_group\_t::focus\_cb (C++ member), 122  
 \_lv\_group\_t::frozen (C++ member), 122  
 \_lv\_group\_t::obj\_focus (C++ member), 122  
 \_lv\_group\_t::obj\_ll (C++ member), 122

---

[\\_lv\\_group\\_t::refocus\\_policy \(C++ member\), 122](#)  
[\\_lv\\_group\\_t::user\\_data \(C++ member\), 122](#)  
[\\_lv\\_group\\_t::wrap \(C++ member\), 122](#)  
[\\_lv\\_img\\_buf\\_get\\_transformed\\_area \(C++ function\), 154](#)  
[\\_lv\\_img\\_buf\\_transform \(C++ function\), 153](#)  
[\\_lv\\_img\\_buf\\_transform\\_anti\\_alias \(C++ function\), 153](#)  
[\\_lv\\_img\\_buf\\_transform\\_init \(C++ function\), 153](#)  
[\\_lv\\_img\\_t \(C++ struct\), 253](#)  
[\\_lv\\_img\\_t::angle \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::antialias \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::cf \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::h \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::obj \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::offset \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::pivot \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::src \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::src\\_type \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::w \(C++ member\), 253](#)  
[\\_lv\\_img\\_t::zoom \(C++ member\), 253](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t \(C++ struct\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::angle \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::antialias \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::cf \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::cfg \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::chroma\\_keyed \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::color \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::cosma \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::has\\_alpha \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::img\\_dsc \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::native\\_color \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::opa \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::pivot\\_x \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::pivot\\_x\\_256 \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::pivot\\_y \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::pivot\\_y\\_256 \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::px\\_size \(C++ member\), 156](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::pxi \(C++ member\), 156](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::res \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::sinma \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::src \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::src\\_h \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::src\\_w \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::tmp \(C++ member\), 156](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::xs \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::xs\\_int \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::ys \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::ys\\_int \(C++ member\), 156](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::zoom \(C++ member\), 155](#)  
[\\_lv\\_img\\_transform\\_dsc\\_t::zoom\\_inv \(C++ member\), 155](#)  
[\\_lv\\_imgbtn\\_t \(C++ struct\), 334](#)  
[\\_lv\\_imgbtn\\_t::act\\_cf \(C++ member\), 334](#)  
[\\_lv\\_imgbtn\\_t::img\\_src\\_left \(C++ member\), 334](#)  
[\\_lv\\_imgbtn\\_t::img\\_src\\_mid \(C++ member\), 334](#)  
[\\_lv\\_imgbtn\\_t::img\\_src\\_right \(C++ member\), 334](#)  
[\\_lv\\_imgbtn\\_t::obj \(C++ member\), 334](#)  
[\\_lv\\_indev\\_drv\\_t \(C++ struct\), 43](#)  
[\\_lv\\_indev\\_drv\\_t::disp \(C++ member\), 43](#)  
[\\_lv\\_indev\\_drv\\_t::feedback\\_cb \(C++ member\), 43](#)  
[\\_lv\\_indev\\_drv\\_t::gesture\\_limit \(C++ member\), 43](#)  
[\\_lv\\_indev\\_drv\\_t::gesture\\_min\\_velocity \(C++ member\), 43](#)  
[\\_lv\\_indev\\_drv\\_t::long\\_press\\_repeat\\_time \(C++ member\), 44](#)  
[\\_lv\\_indev\\_drv\\_t::long\\_press\\_time \(C++ member\), 44](#)  
[\\_lv\\_indev\\_drv\\_t::read\\_cb \(C++ member\), 43](#)  
[\\_lv\\_indev\\_drv\\_t::read\\_timer \(C++ member\), 43](#)  
[\\_lv\\_indev\\_drv\\_t::scroll\\_limit \(C++ member\), 43](#)

\_lv\_indev\_drv\_t::scroll\_throw (C++ member), 43  
 \_lv\_indev\_drv\_t::type (C++ member), 43  
 \_lv\_indev\_drv\_t::user\_data (C++ member), 43  
 \_lv\_indev\_proc\_t (C++ struct), 44  
 \_lv\_indev\_proc\_t (C++ type), 41  
 \_lv\_indev\_proc\_t::act\_obj (C++ member), 44  
 \_lv\_indev\_proc\_t::act\_point (C++ member), 44  
 \_lv\_indev\_proc\_t::disabled (C++ member), 44  
 \_lv\_indev\_proc\_t::gesture\_dir (C++ member), 44  
 \_lv\_indev\_proc\_t::gesture\_sent (C++ member), 44  
 \_lv\_indev\_proc\_t::gesture\_sum (C++ member), 44  
 \_lv\_indev\_proc\_t::keypad (C++ member), 45  
 \_lv\_indev\_proc\_t::last\_key (C++ member), 45  
 \_lv\_indev\_proc\_t::last\_obj (C++ member), 44  
 \_lv\_indev\_proc\_t::last\_point (C++ member), 44  
 \_lv\_indev\_proc\_t::last\_pressed (C++ member), 44  
 \_lv\_indev\_proc\_t::last\_raw\_point (C++ member), 44  
 \_lv\_indev\_proc\_t::last\_state (C++ member), 45  
 \_lv\_indev\_proc\_t::long\_pr\_sent (C++ member), 44  
 \_lv\_indev\_proc\_t::longpr\_rep\_timestamp (C++ member), 45  
 \_lv\_indev\_proc\_t::pointer (C++ member), 45  
 \_lv\_indev\_proc\_t::pr\_timestamp (C++ member), 45  
 \_lv\_indev\_proc\_t::reset\_query (C++ member), 44  
 \_lv\_indev\_proc\_t::scroll\_area (C++ member), 44  
 \_lv\_indev\_proc\_t::scroll\_dir (C++ member), 44  
 \_lv\_indev\_proc\_t::scroll\_obj (C++ member), 44  
 \_lv\_indev\_proc\_t::scroll\_sum (C++ member), 44  
 \_lv\_indev\_proc\_t::scroll\_throw\_vect (C++ member), 44  
 \_lv\_indev\_proc\_t::scroll\_throw\_vect\_ori (C++ member), 44  
 \_lv\_indev\_proc\_t::state (C++ member), 44  
 \_lv\_indev\_proc\_t::types (C++ member), 45  
 \_lv\_indev\_proc\_t::vect (C++ member), 44  
 \_lv\_indev\_proc\_t::wait\_until\_release (C++ member), 44  
 \_lv\_indev\_read (C++ function), 42  
 \_lv\_indev\_t (C++ struct), 45  
 \_lv\_indev\_t (C++ type), 41  
 \_lv\_indev\_t::btn\_points (C++ member), 45  
 \_lv\_indev\_t::cursor (C++ member), 45  
 \_lv\_indev\_t::driver (C++ member), 45  
 \_lv\_indev\_t::group (C++ member), 45  
 \_lv\_indev\_t::proc (C++ member), 45  
 \_lv\_keyboard\_t (C++ struct), 338  
 \_lv\_keyboard\_t::btnm (C++ member), 338  
 \_lv\_keyboard\_t::mode (C++ member), 338  
 \_lv\_keyboard\_t::ta (C++ member), 338  
 \_lv\_label\_t (C++ struct), 260  
 \_lv\_label\_t::dot (C++ member), 260  
 \_lv\_label\_t::dot\_end (C++ member), 260  
 \_lv\_label\_t::dot\_tmp\_alloc (C++ member), 261  
 \_lv\_label\_t::expand (C++ member), 261  
 \_lv\_label\_t::hint (C++ member), 260  
 \_lv\_label\_t::long\_mode (C++ member), 261  
 \_lv\_label\_t::obj (C++ member), 260  
 \_lv\_label\_t::offset (C++ member), 261  
 \_lv\_label\_t::recolor (C++ member), 261  
 \_lv\_label\_t::sel\_end (C++ member), 261  
 \_lv\_label\_t::sel\_start (C++ member), 260  
 \_lv\_label\_t::static\_txt (C++ member), 261  
 \_lv\_label\_t::text (C++ member), 260  
 \_lv\_label\_t::tmp (C++ member), 260  
 \_lv\_label\_t::tmp\_ptr (C++ member), 260  
 \_lv\_led\_t (C++ struct), 341  
 \_lv\_led\_t::bright (C++ member), 341  
 \_lv\_led\_t::color (C++ member), 341  
 \_lv\_led\_t::obj (C++ member), 341  
 \_lv\_line\_t (C++ struct), 264  
 \_lv\_line\_t::obj (C++ member), 264  
 \_lv\_line\_t::point\_array (C++ member), 264  
 \_lv\_line\_t::point\_num (C++ member), 264  
 \_lv\_line\_t::y\_inv (C++ member), 264  
 \_lv\_meter\_indicator\_t (C++ struct), 352  
 \_lv\_meter\_indicator\_t::arc (C++ member), 353  
 \_lv\_meter\_indicator\_t::color (C++ member), 352  
 \_lv\_meter\_indicator\_t::color\_end (C++ member), 353  
 \_lv\_meter\_indicator\_t::color\_start (C++ member), 353  
 \_lv\_meter\_indicator\_t::end\_value (C++ member), 352  
 \_lv\_meter\_indicator\_t::local\_grad (C++ member), 353



\_lv\_meter\_indicator\_t::needle\_img (C++ member), 352  
 \_lv\_meter\_indicator\_t::needle\_line (C++ member), 352  
 \_lv\_meter\_indicator\_t::opa (C++ member), 352  
 \_lv\_meter\_indicator\_t::pivot (C++ member), 352  
 \_lv\_meter\_indicator\_t::r\_mod (C++ member), 352  
 \_lv\_meter\_indicator\_t::scale (C++ member), 352  
 \_lv\_meter\_indicator\_t::scale\_lines (C++ member), 353  
 \_lv\_meter\_indicator\_t::src (C++ member), 352  
 \_lv\_meter\_indicator\_t::start\_value (C++ member), 352  
 \_lv\_meter\_indicator\_t::type (C++ member), 352  
 \_lv\_meter\_indicator\_t::type\_data (C++ member), 353  
 \_lv\_meter\_indicator\_t::width (C++ member), 352  
 \_lv\_meter\_indicator\_t::width\_mod (C++ member), 353  
 \_lv\_meter\_scale\_t (C++ struct), 352  
 \_lv\_meter\_scale\_t::angle\_range (C++ member), 352  
 \_lv\_meter\_scale\_t::label\_color (C++ member), 352  
 \_lv\_meter\_scale\_t::label\_gap (C++ member), 352  
 \_lv\_meter\_scale\_t::max (C++ member), 352  
 \_lv\_meter\_scale\_t::min (C++ member), 352  
 \_lv\_meter\_scale\_t::r\_mod (C++ member), 352  
 \_lv\_meter\_scale\_t::rotation (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_cnt (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_color (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_length (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_major\_color (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_major\_length (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_major\_nth (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_major\_width (C++ member), 352  
 \_lv\_meter\_scale\_t::tick\_width (C++ member), 352  
 \_lv\_meter\_t (C++ struct), 353  
 \_lv\_meter\_t::indicator\_ll (C++ member), 353  
 \_lv\_meter\_t::obj (C++ member), 353  
 \_lv\_meter\_t::scale\_ll (C++ member), 353  
 \_lv\_obj\_spec\_attr\_t (C++ struct), 192  
 \_lv\_obj\_spec\_attr\_t::child\_cnt (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::children (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::event\_dsc (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::event\_dsc\_cnt (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::ext\_click\_pad (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::ext\_draw\_size (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::group\_p (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::scroll (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::scroll\_dir (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::scroll\_snap\_x (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::scroll\_snap\_y (C++ member), 192  
 \_lv\_obj\_spec\_attr\_t::scrollbar\_mode (C++ member), 192  
 \_lv\_obj\_t (C++ struct), 192  
 \_lv\_obj\_t (C++ type), 186  
 \_lv\_obj\_t::class\_p (C++ member), 193  
 \_lv\_obj\_t::coords (C++ member), 193  
 \_lv\_obj\_t::flags (C++ member), 193  
 \_lv\_obj\_t::h\_layout (C++ member), 193  
 \_lv\_obj\_t::layout\_inv (C++ member), 193  
 \_lv\_obj\_t::parent (C++ member), 193  
 \_lv\_obj\_t::scr\_layout\_inv (C++ member), 193  
 \_lv\_obj\_t::skip\_trans (C++ member), 193  
 \_lv\_obj\_t::spec\_attr (C++ member), 193  
 \_lv\_obj\_t::state (C++ member), 193  
 \_lv\_obj\_t::style\_cnt (C++ member), 193  
 \_lv\_obj\_t::styles (C++ member), 193  
 \_lv\_obj\_t::user\_data (C++ member), 193  
 \_lv\_obj\_t::w\_layout (C++ member), 193  
 \_lv\_roller\_t (C++ struct), 271  
 \_lv\_roller\_t::mode (C++ member), 271  
 \_lv\_roller\_t::moved (C++ member), 271  
 \_lv\_roller\_t::obj (C++ member), 271  
 \_lv\_roller\_t::option\_cnt (C++ member), 271  
 \_lv\_roller\_t::sel\_opt\_id (C++ member), 271



\_lv\_roller\_t::sel\_opt\_id\_ori (C++ member), 271  
 \_lv\_slider\_t (C++ struct), 278  
 \_lv\_slider\_t::bar (C++ member), 278  
 \_lv\_slider\_t::dragging (C++ member), 278  
 \_lv\_slider\_t::left\_knob\_area (C++ member), 278  
 \_lv\_slider\_t::left\_knob\_focus (C++ member), 278  
 \_lv\_slider\_t::right\_knob\_area (C++ member), 278  
 \_lv\_slider\_t::value\_to\_set (C++ member), 278  
 \_lv\_span\_t (C++ struct), 361  
 \_lv\_span\_t::static\_flag (C++ member), 361  
 \_lv\_span\_t::style (C++ member), 361  
 \_lv\_span\_t::txt (C++ member), 361  
 \_lv\_spangroup\_t (C++ struct), 361  
 \_lv\_spangroup\_t::align (C++ member), 362  
 \_lv\_spangroup\_t::child\_ll (C++ member), 362  
 \_lv\_spangroup\_t::indent (C++ member), 362  
 \_lv\_spangroup\_t::mode (C++ member), 362  
 \_lv\_spangroup\_t::obj (C++ member), 362  
 \_lv\_spangroup\_t::overflow (C++ member), 362  
 \_lv\_spinbox\_t (C++ struct), 366  
 \_lv\_spinbox\_t::dec\_point\_pos (C++ member), 366  
 \_lv\_spinbox\_t::digit\_count (C++ member), 366  
 \_lv\_spinbox\_t::range\_max (C++ member), 366  
 \_lv\_spinbox\_t::range\_min (C++ member), 366  
 \_lv\_spinbox\_t::rollover (C++ member), 366  
 \_lv\_spinbox\_t::step (C++ member), 366  
 \_lv\_spinbox\_t::ta (C++ member), 366  
 \_lv\_spinbox\_t::value (C++ member), 366  
 \_lv\_style\_get\_prop\_group (C++ function), 77  
 \_lv\_style\_t (C++ struct), 79  
 \_lv\_style\_t::const\_props (C++ member), 79  
 \_lv\_style\_t::has\_group (C++ member), 79  
 \_lv\_style\_t::is\_const (C++ member), 79  
 \_lv\_style\_t::prop1 (C++ member), 79  
 \_lv\_style\_t::prop\_cnt (C++ member), 79  
 \_lv\_style\_t::sentinel (C++ member), 79  
 \_lv\_style\_t::v\_p (C++ member), 79  
 \_lv\_style\_t::value1 (C++ member), 79  
 \_lv\_style\_t::values\_and\_props (C++ member), 79  
 \_lv\_style\_transition\_dsc\_t (C++ type), 72  
 \_lv\_style\_transiton\_t (C++ struct), 78  
 \_lv\_style\_transiton\_t::delay (C++ member), 78  
 \_lv\_style\_transiton\_t::path\_xcb (C++ member), 78  
 \_lv\_style\_transiton\_t::props (C++ member), 78  
 \_lv\_style\_transiton\_t::time (C++ member), 78  
 \_lv\_style\_transiton\_t::user\_data (C++ member), 78  
 \_lv\_switch\_t (C++ struct), 280  
 \_lv\_switch\_t::obj (C++ member), 280  
 \_lv\_table\_t (C++ struct), 288  
 \_lv\_table\_t::cell\_data (C++ member), 289  
 \_lv\_table\_t::col\_act (C++ member), 289  
 \_lv\_table\_t::col\_cnt (C++ member), 289  
 \_lv\_table\_t::col\_w (C++ member), 289  
 \_lv\_table\_t::obj (C++ member), 289  
 \_lv\_table\_t::row\_act (C++ member), 289  
 \_lv\_table\_t::row\_cnt (C++ member), 289  
 \_lv\_table\_t::row\_h (C++ member), 289  
 \_lv\_tabview\_t (C++ struct), 371  
 \_lv\_tabview\_t::map (C++ member), 371  
 \_lv\_tabview\_t::obj (C++ member), 371  
 \_lv\_tabview\_t::tab\_cnt (C++ member), 371  
 \_lv\_tabview\_t::tab\_cur (C++ member), 371  
 \_lv\_tabview\_t::tab\_pos (C++ member), 371  
 \_lv\_textarea\_t (C++ struct), 299  
 \_lv\_textarea\_t::accepted\_chars (C++ member), 299  
 \_lv\_textarea\_t::area (C++ member), 299  
 \_lv\_textarea\_t::click\_pos (C++ member), 299  
 \_lv\_textarea\_t::cursor (C++ member), 299  
 \_lv\_textarea\_t::label (C++ member), 299  
 \_lv\_textarea\_t::max\_length (C++ member), 299  
 \_lv\_textarea\_t::obj (C++ member), 299  
 \_lv\_textarea\_t::one\_line (C++ member), 299  
 \_lv\_textarea\_t::placeholder\_txt (C++ member), 299  
 \_lv\_textarea\_t::pos (C++ member), 299  
 \_lv\_textarea\_t::pwd\_mode (C++ member), 299  
 \_lv\_textarea\_t::pwd\_show\_time (C++ member), 299  
 \_lv\_textarea\_t::pwd\_tmp (C++ member), 299  
 \_lv\_textarea\_t::sel\_end (C++ member), 299  
 \_lv\_textarea\_t::sel\_start (C++ member), 299  
 \_lv\_textarea\_t::show (C++ member), 299  
 \_lv\_textarea\_t::text\_sel\_en (C++ member), 299  
 \_lv\_textarea\_t::text\_sel\_in\_prog (C++ member), 299  
 \_lv\_textarea\_t::txt\_byte\_pos (C++ member), 299

\_lv\_textarea\_t::valid\_x (C++ member), 299  
 \_lv\_theme\_t (C++ struct), 80  
 \_lv\_theme\_t::apply\_cb (C++ member), 80  
 \_lv\_theme\_t::color\_primary (C++ member), 80  
 \_lv\_theme\_t::color\_secondary (C++ member), 80  
 \_lv\_theme\_t::disp (C++ member), 80  
 \_lv\_theme\_t::flags (C++ member), 80  
 \_lv\_theme\_t::font\_large (C++ member), 80  
 \_lv\_theme\_t::font\_normal (C++ member), 80  
 \_lv\_theme\_t::font\_small (C++ member), 80  
 \_lv\_theme\_t::parent (C++ member), 80  
 \_lv\_theme\_t::user\_data (C++ member), 80  
 \_lv\_tileview\_t (C++ struct), 374  
 \_lv\_tileview\_t::obj (C++ member), 374  
 \_lv\_tileview\_t::tile\_act (C++ member), 374  
 \_lv\_tileview\_tile\_t (C++ struct), 374  
 \_lv\_tileview\_tile\_t::dir (C++ member), 374  
 \_lv\_tileview\_tile\_t::obj (C++ member), 374  
 \_lv\_timer\_core\_init (C++ function), 173  
 \_lv\_timer\_t (C++ struct), 174  
 \_lv\_timer\_t (C++ type), 173  
 \_lv\_timer\_t::last\_run (C++ member), 175  
 \_lv\_timer\_t::paused (C++ member), 175  
 \_lv\_timer\_t::period (C++ member), 175  
 \_lv\_timer\_t::repeat\_count (C++ member), 175  
 \_lv\_timer\_t::timer\_cb (C++ member), 175  
 \_lv\_timer\_t::user\_data (C++ member), 175  
 \_lv\_win\_t (C++ struct), 377  
 \_lv\_win\_t::obj (C++ member), 377  
 [anonymous] (C++ enum), 72, 73, 119, 130, 150, 158, 159, 186, 187, 197, 207, 220, 257, 269, 276, 286, 295, 318, 329, 337, 359  
 [anonymous]::LV\_ARC\_MODE\_NORMAL (C++ enumerator), 197  
 [anonymous]::LV\_ARC\_MODE\_REVERSE (C++ enumerator), 197  
 [anonymous]::LV\_ARC\_MODE\_SYMMETRICAL (C++ enumerator), 197  
 [anonymous]::LV\_BAR\_MODE\_NORMAL (C++ enumerator), 207  
 [anonymous]::LV\_BAR\_MODE\_RANGE (C++ enumerator), 207  
 [anonymous]::LV\_BAR\_MODE\_SYMMETRICAL (C++ enumerator), 207  
 [anonymous]::LV\_BLEND\_MODE\_ADDITIVE (C++ enumerator), 72  
 [anonymous]::LV\_BLEND\_MODE\_NORMAL (C++ enumerator), 72  
 [anonymous]::LV\_BLEND\_MODE\_SUBTRACTIVE (C++ enumerator), 72  
 [anonymous]::LV\_BORDER\_SIDE\_BOTTOM (C++ enumerator), 72  
 [anonymous]::LV\_BORDER\_SIDE\_FULL (C++ enumerator), 73  
 [anonymous]::LV\_BORDER\_SIDE\_INTERNAL (C++ enumerator), 73  
 [anonymous]::LV\_BORDER\_SIDE\_LEFT (C++ enumerator), 73  
 [anonymous]::LV\_BORDER\_SIDE\_NONE (C++ enumerator), 72  
 [anonymous]::LV\_BORDER\_SIDE\_RIGHT (C++ enumerator), 73  
 [anonymous]::LV\_BORDER\_SIDE\_TOP (C++ enumerator), 72  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_CHECKABLE (C++ enumerator), 220  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_CHECKED (C++ enumerator), 220  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_CLICK\_TRIG (C++ enumerator), 220  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_CUSTOM\_1 (C++ enumerator), 220  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_CUSTOM\_2 (C++ enumerator), 221  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_DISABLED (C++ enumerator), 220  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_HIDDEN (C++ enumerator), 220  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_NO\_REPEAT (C++ enumerator), 220  
 [anonymous]::LV\_BTNMATRIX\_CTRL\_RECOLOR (C++ enumerator), 220  
 [anonymous]::LV\_CHART\_AXIS\_PRIMARY\_X (C++ enumerator), 319  
 [anonymous]::LV\_CHART\_AXIS\_PRIMARY\_Y (C++ enumerator), 319  
 [anonymous]::LV\_CHART\_AXIS\_SECONDARY\_X (C++ enumerator), 319  
 [anonymous]::LV\_CHART\_AXIS\_SECONDARY\_Y (C++ enumerator), 319  
 [anonymous]::LV\_CHART\_TYPE\_BAR (C++ enumerator), 318  
 [anonymous]::LV\_CHART\_TYPE\_LINE (C++ enumerator), 318  
 [anonymous]::LV\_CHART\_TYPE\_NONE (C++ enumerator), 318  
 [anonymous]::LV\_CHART\_TYPE\_SCATTER (C++ enumerator), 318  
 [anonymous]::LV\_CHART\_UPDATE\_MODE\_CIRCULAR (C++ enumerator), 318  
 [anonymous]::LV\_CHART\_UPDATE\_MODE\_SHIFT (C++ enumerator), 318  
 [anonymous]::LV\_COLORWHEEL\_MODE\_HUE (C++ enumerator), 329

[anonymous]::LV_COLORWHEEL_MODE_SATURATION (C++ enumerator), 329	[anonymous]::LV_IMG_CF_INDEXED_1BIT (C++ enumerator), 150
[anonymous]::LV_COLORWHEEL_MODE_VALUE (C++ enumerator), 329	[anonymous]::LV_IMG_CF_INDEXED_2BIT (C++ enumerator), 150
[anonymous]::LV_FS_MODE_RD (C++ enumerator), 159	[anonymous]::LV_IMG_CF_INDEXED_4BIT (C++ enumerator), 150
[anonymous]::LV_FS_MODE_WR (C++ enumerator), 159	[anonymous]::LV_IMG_CF_INDEXED_8BIT (C++ enumerator), 150
[anonymous]::LV_FS_RES_BUSY (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RAW (C++ enumerator), 150
[anonymous]::LV_FS_RES_DENIED (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RAW_ALPHA (C++ enumerator), 150
[anonymous]::LV_FS_RES_FS_ERR (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RAW_CHROMA_KEYED (C++ enumerator), 150
[anonymous]::LV_FS_RES_FULL (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_15 (C++ enumerator), 150
[anonymous]::LV_FS_RES_HW_ERR (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_16 (C++ enumerator), 150
[anonymous]::LV_FS_RES_INV_PARAM (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_17 (C++ enumerator), 151
[anonymous]::LV_FS_RES_LOCKED (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_18 (C++ enumerator), 151
[anonymous]::LV_FS_RES_NOT_EX (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_19 (C++ enumerator), 151
[anonymous]::LV_FS_RES_NOT_IMP (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_20 (C++ enumerator), 151
[anonymous]::LV_FS_RES_OK (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_21 (C++ enumerator), 151
[anonymous]::LV_FS_RES_OUT_OF_MEM (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_22 (C++ enumerator), 151
[anonymous]::LV_FS_RES_TOUT (C++ enumerator), 158	[anonymous]::LV_IMG_CF_RESERVED_23 (C++ enumerator), 151
[anonymous]::LV_FS_RES_UNKNOWN (C++ enumerator), 158	[anonymous]::LV_IMG_CF_TRUE_COLOR (C++ enumerator), 150
[anonymous]::LV_FS_SEEK_CUR (C++ enumerator), 159	[anonymous]::LV_IMG_CF_TRUE_COLOR_ALPHA (C++ enumerator), 150
[anonymous]::LV_FS_SEEK_END (C++ enumerator), 159	[anonymous]::LV_IMG_CF_TRUE_COLOR_CHROMA_KEYED (C++ enumerator), 150
[anonymous]::LV_FS_SEEK_SET (C++ enumerator), 159	[anonymous]::LV_IMG_CF_UNKNOWN (C++ enumerator), 150
[anonymous]::LV_GRAD_DIR_HOR (C++ enumerator), 73	[anonymous]::LV_IMG_CF_USER_ENCODED_0 (C++ enumerator), 151
[anonymous]::LV_GRAD_DIR_NONE (C++ enumerator), 73	[anonymous]::LV_IMG_CF_USER_ENCODED_1 (C++ enumerator), 151
[anonymous]::LV_GRAD_DIR_VER (C++ enumerator), 73	[anonymous]::LV_IMG_CF_USER_ENCODED_2 (C++ enumerator), 151
[anonymous]::LV_IMG_CF_ALPHA_1BIT (C++ enumerator), 150	[anonymous]::LV_IMG_CF_USER_ENCODED_3 (C++ enumerator), 151
[anonymous]::LV_IMG_CF_ALPHA_2BIT (C++ enumerator), 150	[anonymous]::LV_IMG_CF_USER_ENCODED_4 (C++ enumerator), 151
[anonymous]::LV_IMG_CF_ALPHA_4BIT (C++ enumerator), 150	[anonymous]::LV_IMG_CF_USER_ENCODED_5 (C++ enumerator), 151
[anonymous]::LV_IMG_CF_ALPHA_8BIT (C++ enumerator), 150	[anonymous]::LV_IMG_CF_USER_ENCODED_6 (C++ enumerator), 151

[anonymous]::LV\_IMG\_CF\_USER\_ENCODED\_7  
     (C++ *enumerator*), 151  
 [anonymous]::LV\_KEYBOARD\_MODE\_NUMBER  
     (C++ *enumerator*), 337  
 [anonymous]::LV\_KEYBOARD\_MODE\_SPECIAL  
     (C++ *enumerator*), 337  
 [anonymous]::LV\_KEYBOARD\_MODE\_TEXT\_LOWER  
     (C++ *enumerator*), 337  
 [anonymous]::LV\_KEYBOARD\_MODE\_TEXT\_UPPER  
     (C++ *enumerator*), 337  
 [anonymous]::LV\_KEY\_BACKSPACE (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_DEL (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_DOWN (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_END (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_ENTER (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_ESC (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_HOME (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_LEFT (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_NEXT (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_PREV (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_RIGHT (C++ *enumerator*), 119  
 [anonymous]::LV\_KEY\_UP (C++ *enumerator*), 119  
 [anonymous]::LV\_LABEL\_LONG\_CLIP (C++ *enumerator*), 258  
 [anonymous]::LV\_LABEL\_LONG\_DOT (C++ *enumerator*), 257  
 [anonymous]::LV\_LABEL\_LONG\_SCROLL (C++ *enumerator*), 257  
 [anonymous]::LV\_LABEL\_LONG\_SCROLL\_CIRCULAR (C++ *enumerator*), 257  
 [anonymous]::LV\_LABEL\_LONG\_WRAP (C++ *enumerator*), 257  
 [anonymous]::LV\_OBJ\_FLAG\_ADV\_HITTEST (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_CHECKABLE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_CLICKABLE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_CLICK\_FOCUSABLE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_EVENT\_BUBBLE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_FLOATING (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_GESTURE\_BUBBLE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_HIDDEN (C++ *enumerator*), 187  
 [anonymous]::LV\_OBJ\_FLAG\_IGNORE\_LAYOUT (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_LAYOUT\_1 (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_LAYOUT\_2 (C++ *enumerator*), 189  
 [anonymous]::LV\_OBJ\_FLAG\_PRESS\_LOCK (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_SCROLLABLE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_SCROLL\_CHAIN (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_SCROLL\_ELASTIC (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_SCROLL\_MOMENTUM (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_SCROLL\_ONE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_SCROLL\_ON\_FOCUS (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_SNAPABLE (C++ *enumerator*), 188  
 [anonymous]::LV\_OBJ\_FLAG\_USER\_1 (C++ *enumerator*), 189  
 [anonymous]::LV\_OBJ\_FLAG\_USER\_2 (C++ *enumerator*), 189  
 [anonymous]::LV\_OBJ\_FLAG\_USER\_3 (C++ *enumerator*), 189  
 [anonymous]::LV\_OBJ\_FLAG\_USER\_4 (C++ *enumerator*), 189  
 [anonymous]::LV\_OBJ\_FLAG\_WIDGET\_1 (C++ *enumerator*), 189  
 [anonymous]::LV\_OBJ\_FLAG\_WIDGET\_2 (C++ *enumerator*), 189  
 [anonymous]::LV\_OPA\_0 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_10 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_100 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_20 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_30 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_40 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_50 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_60 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_70 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_80 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_90 (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_COVER (C++ *enumerator*), 130  
 [anonymous]::LV\_OPA\_TRANSP (C++ *enumerator*), 130

- tor), 130
- [anonymous]::LV\_PART\_ANY (C++ enumerator), 187
- [anonymous]::LV\_PART\_CURSOR (C++ enumerator), 187
- [anonymous]::LV\_PART\_CUSTOM\_FIRST (C++ enumerator), 187
- [anonymous]::LV\_PART\_INDICATOR (C++ enumerator), 187
- [anonymous]::LV\_PART\_ITEMS (C++ enumerator), 187
- [anonymous]::LV\_PART\_KNOB (C++ enumerator), 187
- [anonymous]::LV\_PART\_MAIN (C++ enumerator), 187
- [anonymous]::LV\_PART\_SCROLLBAR (C++ enumerator), 187
- [anonymous]::LV\_PART\_SELECTED (C++ enumerator), 187
- [anonymous]::LV\_PART\_TEXTAREA\_PLACEHOLDER (C++ enumerator), 295
- [anonymous]::LV\_PART\_TICKS (C++ enumerator), 187
- [anonymous]::LV\_ROLLER\_MODE\_INFINITE (C++ enumerator), 269
- [anonymous]::LV\_ROLLER\_MODE\_NORMAL (C++ enumerator), 269
- [anonymous]::LV\_SLIDER\_MODE\_NORMAL (C++ enumerator), 276
- [anonymous]::LV\_SLIDER\_MODE\_RANGE (C++ enumerator), 276
- [anonymous]::LV\_SLIDER\_MODE\_SYMMETRICAL (C++ enumerator), 276
- [anonymous]::LV\_SPAN\_MODE\_BREAK (C++ enumerator), 359
- [anonymous]::LV\_SPAN\_MODE\_EXPAND (C++ enumerator), 359
- [anonymous]::LV\_SPAN\_MODE\_FIXED (C++ enumerator), 359
- [anonymous]::LV\_SPAN\_OVERFLOW\_CLIP (C++ enumerator), 359
- [anonymous]::LV\_SPAN\_OVERFLOW\_ELLIPSIS (C++ enumerator), 359
- [anonymous]::LV\_STATE\_ANY (C++ enumerator), 187
- [anonymous]::LV\_STATE\_CHECKED (C++ enumerator), 186
- [anonymous]::LV\_STATE\_DEFAULT (C++ enumerator), 186
- [anonymous]::LV\_STATE\_DISABLED (C++ enumerator), 187
- [anonymous]::LV\_STATE\_EDITED (C++ enumerator), 186
- [anonymous]::LV\_STATE\_FOCUSED (C++ enumerator), 186
- [anonymous]::LV\_STATE\_FOCUS\_KEY (C++ enumerator), 186
- [anonymous]::LV\_STATE\_HOVERED (C++ enumerator), 186
- [anonymous]::LV\_STATE\_PRESSED (C++ enumerator), 186
- [anonymous]::LV\_STATE\_SCROLLED (C++ enumerator), 186
- [anonymous]::LV\_STATE\_USER\_1 (C++ enumerator), 187
- [anonymous]::LV\_STATE\_USER\_2 (C++ enumerator), 187
- [anonymous]::LV\_STATE\_USER\_3 (C++ enumerator), 187
- [anonymous]::LV\_STATE\_USER\_4 (C++ enumerator), 187
- [anonymous]::LV\_TABLE\_CELL\_CTRL\_CUSTOM\_1 (C++ enumerator), 286
- [anonymous]::LV\_TABLE\_CELL\_CTRL\_CUSTOM\_2 (C++ enumerator), 286
- [anonymous]::LV\_TABLE\_CELL\_CTRL\_CUSTOM\_3 (C++ enumerator), 286
- [anonymous]::LV\_TABLE\_CELL\_CTRL\_CUSTOM\_4 (C++ enumerator), 286
- [anonymous]::LV\_TABLE\_CELL\_CTRL\_MERGE\_RIGHT (C++ enumerator), 286
- [anonymous]::LV\_TABLE\_CELL\_CTRL\_TEXT\_CROP (C++ enumerator), 286
- [anonymous]::LV\_TEXT\_DECOR\_NONE (C++ enumerator), 72
- [anonymous]::LV\_TEXT\_DECOR\_STRIKETHROUGH (C++ enumerator), 72
- [anonymous]::LV\_TEXT\_DECOR\_UNDERLINE (C++ enumerator), 72
- [anonymous]::\_LV\_BTNMATRIX\_CTRL\_RESERVED (C++ enumerator), 220
- [anonymous]::\_LV\_BTNMATRIX\_WIDTH (C++ enumerator), 220
- [anonymous]::\_LV\_CHART\_AXIS\_LAST (C++ enumerator), 319
- ## L
- lv\_anim\_count\_running (C++ function), 168
- lv\_anim\_custom\_del (C++ function), 168
- lv\_anim\_custom\_exec\_cb\_t (C++ type), 165
- lv\_anim\_del (C++ function), 168
- lv\_anim\_del\_all (C++ function), 168
- lv\_anim\_enable\_t (C++ enum), 165
- lv\_anim\_enable\_t::LV\_ANIM\_OFF (C++ enumerator), 165
- lv\_anim\_enable\_t::LV\_ANIM\_ON (C++ enumerator), 165
- lv\_anim\_exec\_xcb\_t (C++ type), 164



lv\_anim\_get (C++ function), 168  
 lv\_anim\_get\_delay (C++ function), 168  
 lv\_anim\_get\_value\_cb\_t (C++ type), 165  
 lv\_anim\_init (C++ function), 165  
 lv\_anim\_path\_bounce (C++ function), 169  
 lv\_anim\_path\_cb\_t (C++ type), 164  
 lv\_anim\_path\_ease\_in (C++ function), 169  
 lv\_anim\_path\_ease\_in\_out (C++ function), 169  
 lv\_anim\_path\_ease\_out (C++ function), 169  
 lv\_anim\_path\_linear (C++ function), 169  
 lv\_anim\_path\_overshoot (C++ function), 169  
 lv\_anim\_path\_step (C++ function), 169  
 lv\_anim\_ready\_cb\_t (C++ type), 165  
 lv\_anim\_refr\_now (C++ function), 169  
 lv\_anim\_set\_custom\_exec\_cb (C++ function), 166  
 lv\_anim\_set\_delay (C++ function), 166  
 lv\_anim\_set\_early\_apply (C++ function), 167  
 lv\_anim\_set\_exec\_cb (C++ function), 166  
 lv\_anim\_set\_get\_value\_cb (C++ function), 167  
 lv\_anim\_set\_path\_cb (C++ function), 166  
 lv\_anim\_set\_playback\_delay (C++ function), 167  
 lv\_anim\_set\_playback\_time (C++ function), 167  
 lv\_anim\_set\_ready\_cb (C++ function), 167  
 lv\_anim\_set\_repeat\_count (C++ function), 167  
 lv\_anim\_set\_repeat\_delay (C++ function), 167  
 lv\_anim\_set\_start\_cb (C++ function), 166  
 lv\_anim\_set\_time (C++ function), 166  
 lv\_anim\_set\_values (C++ function), 166  
 lv\_anim\_set\_var (C++ function), 165  
 lv\_anim\_speed\_to\_time (C++ function), 168  
 lv\_anim\_start (C++ function), 167  
 lv\_anim\_start\_cb\_t (C++ type), 165  
 lv\_anim\_t (C++ type), 165  
 lv\_arc\_class (C++ member), 200  
 lv\_arc\_create (C++ function), 197  
 lv\_arc\_get\_angle\_end (C++ function), 199  
 lv\_arc\_get\_angle\_start (C++ function), 199  
 lv\_arc\_get\_bg\_angle\_end (C++ function), 199  
 lv\_arc\_get\_bg\_angle\_start (C++ function), 199  
 lv\_arc\_get\_max\_value (C++ function), 199  
 lv\_arc\_get\_min\_value (C++ function), 199  
 lv\_arc\_get\_mode (C++ function), 199  
 lv\_arc\_get\_value (C++ function), 199  
 lv\_arc\_mode\_t (C++ type), 197  
 lv\_arc\_set\_angles (C++ function), 197  
 lv\_arc\_set\_bg\_angles (C++ function), 198  
 lv\_arc\_set\_bg\_end\_angle (C++ function), 198  
 lv\_arc\_set\_bg\_start\_angle (C++ function), 197  
 lv\_arc\_set\_change\_rate (C++ function), 198  
 lv\_arc\_set\_end\_angle (C++ function), 197  
 lv\_arc\_set\_mode (C++ function), 198  
 lv\_arc\_set\_range (C++ function), 198  
 lv\_arc\_set\_rotation (C++ function), 198  
 lv\_arc\_set\_start\_angle (C++ function), 197  
 lv\_arc\_set\_value (C++ function), 198  
 lv\_arc\_t (C++ type), 197  
 lv\_async\_call (C++ function), 175  
 lv\_async\_cb\_t (C++ type), 175  
 lv\_bar\_class (C++ member), 208  
 lv\_bar\_create (C++ function), 207  
 lv\_bar\_get\_max\_value (C++ function), 208  
 lv\_bar\_get\_min\_value (C++ function), 208  
 lv\_bar\_get\_mode (C++ function), 208  
 lv\_bar\_get\_start\_value (C++ function), 208  
 lv\_bar\_get\_value (C++ function), 207  
 lv\_bar\_mode\_t (C++ type), 206  
 lv\_bar\_set\_mode (C++ function), 207  
 lv\_bar\_set\_range (C++ function), 207  
 lv\_bar\_set\_start\_value (C++ function), 207  
 lv\_bar\_set\_value (C++ function), 207  
 lv\_bar\_t (C++ type), 206  
 lv\_blend\_mode\_t (C++ type), 72  
 lv\_border\_side\_t (C++ type), 72  
 lv\_btn\_class (C++ member), 214  
 lv\_btn\_create (C++ function), 213  
 lv\_btn\_t (C++ type), 213  
 lv\_btnmatrix\_btn\_draw\_cb\_t (C++ type), 220  
 lv\_btnmatrix\_class (C++ member), 223  
 lv\_btnmatrix\_clear\_btn\_ctrl (C++ function), 221  
 lv\_btnmatrix\_clear\_btn\_ctrl\_all (C++ function), 222  
 lv\_btnmatrix\_create (C++ function), 221  
 lv\_btnmatrix\_ctrl\_t (C++ type), 220  
 lv\_btnmatrix\_get\_btn\_text (C++ function), 223  
 lv\_btnmatrix\_get\_map (C++ function), 222  
 lv\_btnmatrix\_get\_one\_checked (C++ function), 223  
 lv\_btnmatrix\_get\_selected\_btn (C++ function), 222  
 lv\_btnmatrix\_has\_btn\_ctrl (C++ function), 223  
 lv\_btnmatrix\_set\_btn\_ctrl (C++ function), 221  
 lv\_btnmatrix\_set\_btn\_ctrl\_all (C++ function), 222  
 lv\_btnmatrix\_set\_btn\_width (C++ function), 222  
 lv\_btnmatrix\_set\_ctrl\_map (C++ function), 221  
 lv\_btnmatrix\_set\_map (C++ function), 221

lv\_btnmatrix\_set\_one\_checked (C++ function), 222  
 lv\_btnmatrix\_set\_selected\_btn (C++ function), 221  
 lv\_btnmatrix\_t (C++ type), 220  
 lv\_calendar\_class (C++ member), 304  
 lv\_calendar\_create (C++ function), 303  
 lv\_calendar\_date\_t (C++ struct), 304  
 lv\_calendar\_date\_t::day (C++ member), 305  
 lv\_calendar\_date\_t::month (C++ member), 305  
 lv\_calendar\_date\_t::year (C++ member), 305  
 lv\_calendar\_get\_highlighted\_dates (C++ function), 304  
 lv\_calendar\_get\_highlighted\_dates\_num (C++ function), 304  
 lv\_calendar\_get\_pressed\_date (C++ function), 304  
 lv\_calendar\_get\_showed\_date (C++ function), 304  
 lv\_calendar\_get\_today\_date (C++ function), 304  
 lv\_calendar\_set\_day\_names (C++ function), 303  
 lv\_calendar\_set\_highlighted\_dates (C++ function), 303  
 lv\_calendar\_set\_showed\_date (C++ function), 303  
 lv\_calendar\_set\_today\_date (C++ function), 303  
 lv\_calendar\_t (C++ type), 303  
 lv\_canvas\_blur\_hor (C++ function), 230  
 lv\_canvas\_blur\_ver (C++ function), 230  
 lv\_canvas\_copy\_buf (C++ function), 229  
 lv\_canvas\_create (C++ function), 228  
 lv\_canvas\_draw\_arc (C++ function), 231  
 lv\_canvas\_draw\_img (C++ function), 231  
 lv\_canvas\_draw\_line (C++ function), 231  
 lv\_canvas\_draw\_polygon (C++ function), 231  
 lv\_canvas\_draw\_rect (C++ function), 230  
 lv\_canvas\_draw\_text (C++ function), 231  
 lv\_canvas\_fill\_bg (C++ function), 230  
 lv\_canvas\_get\_img (C++ function), 229  
 lv\_canvas\_get\_px (C++ function), 229  
 lv\_canvas\_set\_buffer (C++ function), 228  
 lv\_canvas\_set\_palette (C++ function), 229  
 lv\_canvas\_set\_px (C++ function), 228  
 lv\_canvas\_t (C++ type), 228  
 lv\_canvas\_transform (C++ function), 229  
 lv\_chart\_add\_cursor (C++ function), 322  
 lv\_chart\_add\_series (C++ function), 321  
 lv\_chart\_axis\_t (C++ type), 318  
 lv\_chart\_class (C++ member), 325  
 lv\_chart\_create (C++ function), 319  
 lv\_chart\_cursor\_t (C++ type), 318  
 lv\_chart\_get\_cursor\_point (C++ function), 323  
 lv\_chart\_get\_point\_count (C++ function), 321  
 lv\_chart\_get\_point\_pos\_by\_id (C++ function), 321  
 lv\_chart\_get\_pressed\_point (C++ function), 324  
 lv\_chart\_get\_series\_next (C++ function), 322  
 lv\_chart\_get\_type (C++ function), 320  
 lv\_chart\_get\_x\_array (C++ function), 324  
 lv\_chart\_get\_x\_start\_point (C++ function), 321  
 lv\_chart\_get\_y\_array (C++ function), 324  
 lv\_chart\_get\_zoom\_x (C++ function), 320  
 lv\_chart\_get\_zoom\_y (C++ function), 320  
 lv\_chart\_hide\_series (C++ function), 321  
 lv\_chart\_refresh (C++ function), 321  
 lv\_chart\_remove\_series (C++ function), 321  
 lv\_chart\_series\_t (C++ type), 318  
 lv\_chart\_set\_all\_value (C++ function), 323  
 lv\_chart\_set\_axis\_tick (C++ function), 320  
 lv\_chart\_set\_cursor\_point (C++ function), 322  
 lv\_chart\_set\_cursor\_pos (C++ function), 322  
 lv\_chart\_set\_div\_line\_count (C++ function), 320  
 lv\_chart\_set\_ext\_x\_array (C++ function), 324  
 lv\_chart\_set\_ext\_y\_array (C++ function), 324  
 lv\_chart\_set\_next\_value (C++ function), 323  
 lv\_chart\_set\_next\_value2 (C++ function), 323  
 lv\_chart\_set\_point\_count (C++ function), 319  
 lv\_chart\_set\_range (C++ function), 319  
 lv\_chart\_set\_series\_color (C++ function), 322  
 lv\_chart\_set\_type (C++ function), 319  
 lv\_chart\_set\_update\_mode (C++ function), 319  
 lv\_chart\_set\_value\_by\_id (C++ function), 323  
 lv\_chart\_set\_value\_by\_id2 (C++ function), 324  
 lv\_chart\_set\_x\_start\_point (C++ function), 322  
 lv\_chart\_set\_zoom\_x (C++ function), 320  
 lv\_chart\_set\_zoom\_y (C++ function), 320  
 lv\_chart\_t (C++ type), 318  
 lv\_chart\_tick\_dsc\_t (C++ type), 318  
 lv\_chart\_type\_t (C++ type), 318  
 lv\_chart\_update\_mode\_t (C++ type), 318  
 lv\_checkbox\_class (C++ member), 235  
 lv\_checkbox\_create (C++ function), 235  
 lv\_checkbox\_get\_text (C++ function), 235  
 lv\_checkbox\_set\_text (C++ function), 235  
 lv\_checkbox\_set\_text\_static (C++ function), 235

lv\_checkbox\_t (C++ type), 234  
 lv\_color16\_t (C++ union), 133  
 lv\_color16\_t::blue (C++ member), 133  
 lv\_color16\_t::ch (C++ member), 133  
 lv\_color16\_t::full (C++ member), 133  
 lv\_color16\_t::green (C++ member), 133  
 lv\_color16\_t::green\_h (C++ member), 133  
 lv\_color16\_t::green\_l (C++ member), 133  
 lv\_color16\_t::red (C++ member), 133  
 lv\_color1\_t (C++ union), 132  
 lv\_color1\_t::blue (C++ member), 133  
 lv\_color1\_t::ch (C++ member), 133  
 lv\_color1\_t::full (C++ member), 133  
 lv\_color1\_t::green (C++ member), 133  
 lv\_color1\_t::red (C++ member), 133  
 lv\_color32\_t (C++ union), 133  
 lv\_color32\_t::alpha (C++ member), 134  
 lv\_color32\_t::blue (C++ member), 134  
 lv\_color32\_t::ch (C++ member), 134  
 lv\_color32\_t::full (C++ member), 134  
 lv\_color32\_t::green (C++ member), 134  
 lv\_color32\_t::red (C++ member), 134  
 lv\_color8\_t (C++ union), 133  
 lv\_color8\_t::blue (C++ member), 133  
 lv\_color8\_t::ch (C++ member), 133  
 lv\_color8\_t::full (C++ member), 133  
 lv\_color8\_t::green (C++ member), 133  
 lv\_color8\_t::red (C++ member), 133  
 lv\_color\_black (C++ function), 132  
 lv\_color\_brightness (C++ function), 131  
 lv\_color\_change\_lightness (C++ function), 132  
 lv\_color\_chroma\_key (C++ function), 132  
 lv\_color\_darken (C++ function), 132  
 lv\_color\_filter\_cb\_t (C++ type), 130  
 lv\_color\_filter\_dsc\_init (C++ function), 131  
 lv\_color\_filter\_dsc\_t (C++ type), 130  
 lv\_color\_hex (C++ function), 131  
 lv\_color\_hex3 (C++ function), 131  
 lv\_color\_hsv\_t (C++ struct), 134  
 lv\_color\_hsv\_t::h (C++ member), 134  
 lv\_color\_hsv\_t::s (C++ member), 134  
 lv\_color\_hsv\_t::v (C++ member), 134  
 lv\_color\_hsv\_to\_rgb (C++ function), 132  
 lv\_color\_lighten (C++ function), 132  
 lv\_color\_make (C++ function), 131  
 lv\_color\_rgb\_to\_hsv (C++ function), 132  
 lv\_color\_to1 (C++ function), 131  
 lv\_color\_to16 (C++ function), 131  
 lv\_color\_to32 (C++ function), 131  
 lv\_color\_to8 (C++ function), 131  
 lv\_color\_to\_hsv (C++ function), 132  
 lv\_color\_white (C++ function), 132  
 lv\_colorwheel\_class (C++ member), 330  
 lv\_colorwheel\_create (C++ function), 329  
 lv\_colorwheel\_get\_color\_mode (C++ function), 330  
 lv\_colorwheel\_get\_color\_mode\_fixed (C++ function), 330  
 lv\_colorwheel\_get\_hsv (C++ function), 329  
 lv\_colorwheel\_get\_rgb (C++ function), 330  
 lv\_colorwheel\_mode\_t (C++ type), 328  
 lv\_colorwheel\_set\_hsv (C++ function), 329  
 lv\_colorwheel\_set\_mode (C++ function), 329  
 lv\_colorwheel\_set\_mode\_fixed (C++ function), 329  
 lv\_colorwheel\_set\_rgb (C++ function), 329  
 lv\_colorwheel\_t (C++ type), 328  
 lv\_deinit (C++ function), 189  
 lv\_disp\_clean\_dcache (C++ function), 129  
 lv\_disp\_dpx (C++ function), 129  
 lv\_disp\_draw\_buf\_init (C++ function), 32  
 lv\_disp\_draw\_buf\_t (C++ type), 31  
 lv\_disp\_drv\_init (C++ function), 32  
 lv\_disp\_drv\_register (C++ function), 32  
 lv\_disp\_drv\_t (C++ type), 31  
 lv\_disp\_drv\_update (C++ function), 32  
 lv\_disp\_get\_antialiasing (C++ function), 33  
 lv\_disp\_get\_default (C++ function), 32  
 lv\_disp\_get\_dpi (C++ function), 33  
 lv\_disp\_get\_draw\_buf (C++ function), 33  
 lv\_disp\_get\_hor\_res (C++ function), 32  
 lv\_disp\_get\_inactive\_time (C++ function), 129  
 lv\_disp\_get\_layer\_sys (C++ function), 128  
 lv\_disp\_get\_layer\_top (C++ function), 128  
 lv\_disp\_get\_next (C++ function), 33  
 lv\_disp\_get\_rotation (C++ function), 33  
 lv\_disp\_get\_scr\_act (C++ function), 127  
 lv\_disp\_get\_scr\_prev (C++ function), 127  
 lv\_disp\_get\_theme (C++ function), 128  
 lv\_disp\_get\_ver\_res (C++ function), 32  
 lv\_disp\_load\_scr (C++ function), 128  
 lv\_disp\_remove (C++ function), 32  
 lv\_disp\_rot\_t (C++ enum), 31  
 lv\_disp\_rot\_t::LV\_DISP\_ROT\_180 (C++ enumerator), 31  
 lv\_disp\_rot\_t::LV\_DISP\_ROT\_270 (C++ enumerator), 31  
 lv\_disp\_rot\_t::LV\_DISP\_ROT\_90 (C++ enumerator), 31  
 lv\_disp\_rot\_t::LV\_DISP\_ROT\_NONE (C++ enumerator), 31  
 lv\_disp\_set\_bg\_color (C++ function), 128  
 lv\_disp\_set\_bg\_image (C++ function), 128  
 lv\_disp\_set\_bg\_opa (C++ function), 128  
 lv\_disp\_set\_default (C++ function), 32  
 lv\_disp\_set\_rotation (C++ function), 33



`lv_disp_set_theme` (C++ function), 128  
`lv_disp_t` (C++ type), 31  
`lv_disp_trig_activity` (C++ function), 129  
`lv_dpx` (C++ function), 129  
`lv_dropdown_add_option` (C++ function), 241  
`lv_dropdown_class` (C++ member), 243  
`lv_dropdown_clear_options` (C++ function), 241  
`lv_dropdown_close` (C++ function), 243  
`lv_dropdown_create` (C++ function), 241  
`lv_dropdown_get_dir` (C++ function), 243  
`lv_dropdown_get_list` (C++ function), 242  
`lv_dropdown_get_option_cnt` (C++ function), 243  
`lv_dropdown_get_options` (C++ function), 242  
`lv_dropdown_get_selected` (C++ function), 242  
`lv_dropdown_get_selected_highlight` (C++ function), 243  
`lv_dropdown_get_selected_str` (C++ function), 243  
`lv_dropdown_get_symbol` (C++ function), 243  
`lv_dropdown_get_text` (C++ function), 242  
`lv_dropdown_list_t` (C++ type), 240  
`lv_dropdown_open` (C++ function), 243  
`lv_dropdown_set_dir` (C++ function), 242  
`lv_dropdown_set_options` (C++ function), 241  
`lv_dropdown_set_options_static` (C++ function), 241  
`lv_dropdown_set_selected` (C++ function), 241  
`lv_dropdown_set_selected_highlight` (C++ function), 242  
`lv_dropdown_set_symbol` (C++ function), 242  
`lv_dropdown_set_text` (C++ function), 241  
`lv_dropdown_t` (C++ type), 240  
`lv_dropdownlist_class` (C++ member), 243  
`LV_EXPORT_CONST_INT` (C++ function), 76, 165, 221, 241, 258, 286, 295, 319, 386, 396  
`lv_flex_align_t` (C++ enum), 385  
`lv_flex_align_t::LV_FLEX_ALIGN_CENTER` (C++ enumerator), 385  
`lv_flex_align_t::LV_FLEX_ALIGN_END` (C++ enumerator), 385  
`lv_flex_align_t::LV_FLEX_ALIGN_SPACE_AROUND` (C++ enumerator), 385  
`lv_flex_align_t::LV_FLEX_ALIGN_SPACE_BETWEEN` (C++ enumerator), 385  
`lv_flex_align_t::LV_FLEX_ALIGN_SPACE_EVENLY` (C++ enumerator), 385  
`lv_flex_align_t::LV_FLEX_ALIGN_START` (C++ enumerator), 385  
`lv_flex_flow_t` (C++ enum), 385  
`lv_flex_flow_t::LV_FLEX_FLOW_COLUMN` (C++ enumerator), 386  
`lv_flex_flow_t::LV_FLEX_FLOW_COLUMN_REVERSE` (C++ enumerator), 386  
`lv_flex_flow_t::LV_FLEX_FLOW_COLUMN_WRAP` (C++ enumerator), 386  
`lv_flex_flow_t::LV_FLEX_FLOW_COLUMN_WRAP_REVERSE` (C++ enumerator), 386  
`lv_flex_flow_t::LV_FLEX_FLOW_ROW` (C++ enumerator), 385  
`lv_flex_flow_t::LV_FLEX_FLOW_ROW_REVERSE` (C++ enumerator), 386  
`lv_flex_flow_t::LV_FLEX_FLOW_ROW_WRAP` (C++ enumerator), 386  
`lv_flex_flow_t::LV_FLEX_FLOW_ROW_WRAP_REVERSE` (C++ enumerator), 386  
`lv_flex_init` (C++ function), 386  
`lv_fs_close` (C++ function), 160  
`lv_fs_dir_close` (C++ function), 161  
`lv_fs_dir_open` (C++ function), 160  
`lv_fs_dir_read` (C++ function), 161  
`lv_fs_dir_t` (C++ struct), 162  
`lv_fs_dir_t::dir_d` (C++ member), 162  
`lv_fs_dir_t::drv` (C++ member), 162  
`lv_fs_drv_init` (C++ function), 159  
`lv_fs_drv_register` (C++ function), 159  
`lv_fs_drv_t` (C++ type), 158  
`lv_fs_file_t` (C++ struct), 162  
`lv_fs_file_t::drv` (C++ member), 162  
`lv_fs_file_t::file_d` (C++ member), 162  
`lv_fs_get_drv` (C++ function), 159  
`lv_fs_get_ext` (C++ function), 161  
`lv_fs_get_last` (C++ function), 161  
`lv_fs_get_letters` (C++ function), 161  
`lv_fs_is_ready` (C++ function), 159  
`lv_fs_mode_t` (C++ type), 158  
`lv_fs_open` (C++ function), 159  
`lv_fs_read` (C++ function), 160  
`lv_fs_res_t` (C++ type), 158  
`lv_fs_seek` (C++ function), 160  
`lv_fs_tell` (C++ function), 160  
`lv_fs_up` (C++ function), 161  
`lv_fs_whence_t` (C++ type), 158  
`lv_fs_write` (C++ function), 160  
`lv_grad_dir_t` (C++ type), 72  
`lv_grid_align_t` (C++ enum), 396  
`lv_grid_align_t::LV_GRID_ALIGN_CENTER` (C++ enumerator), 396  
`lv_grid_align_t::LV_GRID_ALIGN_END` (C++ enumerator), 396  
`lv_grid_align_t::LV_GRID_ALIGN_SPACE_AROUND` (C++ enumerator), 396  
`lv_grid_align_t::LV_GRID_ALIGN_SPACE_BETWEEN` (C++ enumerator), 396  
`lv_grid_align_t::LV_GRID_ALIGN_SPACE_EVENLY` (C++ enumerator), 396

lv\_grid\_align\_t::LV\_GRID\_ALIGN\_START (C++ enumerator), 396  
 lv\_grid\_align\_t::LV\_GRID\_ALIGN\_STRETCH (C++ enumerator), 396  
 lv\_grid\_fr (C++ function), 397  
 lv\_grid\_init (C++ function), 396  
 lv\_group\_add\_obj (C++ function), 120  
 lv\_group\_create (C++ function), 120  
 lv\_group\_del (C++ function), 120  
 lv\_group\_focus\_cb\_t (C++ type), 119  
 lv\_group\_focus\_freeze (C++ function), 120  
 lv\_group\_focus\_next (C++ function), 120  
 lv\_group\_focus\_obj (C++ function), 120  
 lv\_group\_focus\_prev (C++ function), 120  
 lv\_group\_get\_default (C++ function), 120  
 lv\_group\_get\_editing (C++ function), 121  
 lv\_group\_get\_focus\_cb (C++ function), 121  
 lv\_group\_get\_focused (C++ function), 121  
 lv\_group\_get\_obj\_count (C++ function), 122  
 lv\_group\_get\_wrap (C++ function), 122  
 lv\_group\_refocus\_policy\_t (C++ enum), 119  
 lv\_group\_refocus\_policy\_t::LV\_GROUP\_REFOCUS\_POLICY\_NEXT (C++ enumerator), 119  
 lv\_group\_refocus\_policy\_t::LV\_GROUP\_REFOCUS\_POLICY\_PREV (C++ enumerator), 119  
 lv\_group\_remove\_all\_objs (C++ function), 120  
 lv\_group\_remove\_obj (C++ function), 120  
 lv\_group\_send\_data (C++ function), 121  
 lv\_group\_set\_default (C++ function), 120  
 lv\_group\_set\_editing (C++ function), 121  
 lv\_group\_set\_focus\_cb (C++ function), 121  
 lv\_group\_set\_refocus\_policy (C++ function), 121  
 lv\_group\_set\_wrap (C++ function), 121  
 lv\_group\_t (C++ type), 119  
 lv\_img\_buf\_alloc (C++ function), 152  
 lv\_img\_buf\_free (C++ function), 153  
 lv\_img\_buf\_get\_img\_size (C++ function), 153  
 lv\_img\_buf\_get\_px\_alpha (C++ function), 152  
 lv\_img\_buf\_get\_px\_color (C++ function), 152  
 lv\_img\_buf\_set\_palette (C++ function), 153  
 lv\_img\_buf\_set\_px\_alpha (C++ function), 152  
 lv\_img\_buf\_set\_px\_color (C++ function), 152  
 lv\_img\_cf\_t (C++ type), 149  
 lv\_img\_class (C++ member), 253  
 lv\_img\_create (C++ function), 251  
 lv\_img\_dsc\_t (C++ struct), 154  
 lv\_img\_dsc\_t::data (C++ member), 155  
 lv\_img\_dsc\_t::data\_size (C++ member), 155  
 lv\_img\_dsc\_t::header (C++ member), 155  
 lv\_img\_get\_angle (C++ function), 252  
 lv\_img\_get\_antialias (C++ function), 253  
 lv\_img\_get\_offset\_x (C++ function), 252  
 lv\_img\_get\_offset\_y (C++ function), 252  
 lv\_img\_get\_pivot (C++ function), 252  
 lv\_img\_get\_src (C++ function), 252  
 lv\_img\_get\_zoom (C++ function), 252  
 lv\_img\_header\_t (C++ struct), 154  
 lv\_img\_header\_t::always\_zero (C++ member), 154  
 lv\_img\_header\_t::cf (C++ member), 154  
 lv\_img\_header\_t::h (C++ member), 154  
 lv\_img\_header\_t::reserved (C++ member), 154  
 lv\_img\_header\_t::w (C++ member), 154  
 lv\_img\_set\_angle (C++ function), 251  
 lv\_img\_set\_antialias (C++ function), 252  
 lv\_img\_set\_offset\_x (C++ function), 251  
 lv\_img\_set\_offset\_y (C++ function), 251  
 lv\_img\_set\_pivot (C++ function), 252  
 lv\_img\_set\_src (C++ function), 251  
 lv\_img\_set\_zoom (C++ function), 252  
 lv\_img\_t (C++ type), 251  
 lv\_img\_transform\_dsc\_t (C++ type), 149  
 lv\_imgbtn\_class (C++ member), 334  
 lv\_imgbtn\_get\_src (C++ function), 333  
 lv\_imgbtn\_get\_src\_left (C++ function), 334  
 lv\_imgbtn\_get\_src\_middle (C++ function), 334  
 lv\_imgbtn\_get\_src\_right (C++ function), 334  
 lv\_imgbtn\_set\_src (C++ function), 333  
 lv\_imgbtn\_state\_t (C++ enum), 333  
 lv\_imgbtn\_state\_t::LV\_IMGBTN\_STATE\_NUM (C++ enumerator), 333  
 lv\_imgbtn\_state\_t::LV\_IMGBTN\_STATE\_CHECKED\_DISABLED (C++ enumerator), 333  
 lv\_imgbtn\_state\_t::LV\_IMGBTN\_STATE\_CHECKED\_PRESSED (C++ enumerator), 333  
 lv\_imgbtn\_state\_t::LV\_IMGBTN\_STATE\_CHECKED\_RELEASED (C++ enumerator), 333  
 lv\_imgbtn\_state\_t::LV\_IMGBTN\_STATE\_DISABLED (C++ enumerator), 333  
 lv\_imgbtn\_state\_t::LV\_IMGBTN\_STATE\_PRESSED (C++ enumerator), 333  
 lv\_imgbtn\_state\_t::LV\_IMGBTN\_STATE\_RELEASED (C++ enumerator), 333  
 lv\_imgbtn\_t (C++ type), 333  
 lv\_indev\_data\_t (C++ struct), 42  
 lv\_indev\_data\_t::btn\_id (C++ member), 43  
 lv\_indev\_data\_t::continue\_reading (C++ member), 43  
 lv\_indev\_data\_t::enc\_diff (C++ member), 43  
 lv\_indev\_data\_t::key (C++ member), 43  
 lv\_indev\_data\_t::point (C++ member), 43  
 lv\_indev\_data\_t::state (C++ member), 43  
 lv\_indev\_drv\_init (C++ function), 42  
 lv\_indev\_drv\_register (C++ function), 42  
 lv\_indev\_drv\_t (C++ type), 41  
 lv\_indev\_drv\_update (C++ function), 42

lv\_indev\_enable (C++ function), 116  
 lv\_indev\_get\_act (C++ function), 116  
 lv\_indev\_get\_gesture\_dir (C++ function), 117  
 lv\_indev\_get\_key (C++ function), 117  
 lv\_indev\_get\_next (C++ function), 42  
 lv\_indev\_get\_obj\_act (C++ function), 118  
 lv\_indev\_get\_point (C++ function), 117  
 lv\_indev\_get\_read\_timer (C++ function), 118  
 lv\_indev\_get\_scroll\_dir (C++ function), 118  
 lv\_indev\_get\_scroll\_obj (C++ function), 118  
 lv\_indev\_get\_type (C++ function), 116  
 lv\_indev\_get\_vect (C++ function), 118  
 lv\_indev\_read\_timer\_cb (C++ function), 116  
 lv\_indev\_reset (C++ function), 117  
 lv\_indev\_reset\_long\_press (C++ function), 117  
 lv\_indev\_search\_obj (C++ function), 118  
 lv\_indev\_set\_button\_points (C++ function), 117  
 lv\_indev\_set\_cursor (C++ function), 117  
 lv\_indev\_set\_group (C++ function), 117  
 lv\_indev\_state\_t (C++ enum), 42  
 lv\_indev\_state\_t::LV\_INDEV\_STATE\_PRESSED (C++ enumerator), 42  
 lv\_indev\_state\_t::LV\_INDEV\_STATE\_RELEASED (C++ enumerator), 42  
 lv\_indev\_t (C++ type), 41  
 lv\_indev\_type\_t (C++ enum), 41  
 lv\_indev\_type\_t::LV\_INDEV\_TYPE\_BUTTON (C++ enumerator), 41  
 lv\_indev\_type\_t::LV\_INDEV\_TYPE\_ENCODER (C++ enumerator), 41  
 lv\_indev\_type\_t::LV\_INDEV\_TYPE\_KEYPAD (C++ enumerator), 41  
 lv\_indev\_type\_t::LV\_INDEV\_TYPE\_NONE (C++ enumerator), 41  
 lv\_indev\_type\_t::LV\_INDEV\_TYPE\_POINTER (C++ enumerator), 41  
 lv\_indev\_wait\_release (C++ function), 118  
 lv\_init (C++ function), 189  
 lv\_key\_t (C++ type), 119  
 lv\_keyboard\_class (C++ member), 338  
 lv\_keyboard\_create (C++ function), 337  
 lv\_keyboard\_def\_event\_cb (C++ function), 338  
 lv\_keyboard\_get\_map\_array (C++ function), 338  
 lv\_keyboard\_get\_mode (C++ function), 338  
 lv\_keyboard\_get\_textarea (C++ function), 338  
 lv\_keyboard\_mode\_t (C++ type), 337  
 lv\_keyboard\_set\_map (C++ function), 337  
 lv\_keyboard\_set\_mode (C++ function), 337  
 lv\_keyboard\_set\_textarea (C++ function), 337  
 lv\_keyboard\_t (C++ type), 337  
 lv\_label\_class (C++ member), 260  
 lv\_label\_create (C++ function), 258  
 lv\_label\_cut\_text (C++ function), 260  
 lv\_label\_get\_letter\_on (C++ function), 259  
 lv\_label\_get\_letter\_pos (C++ function), 259  
 lv\_label\_get\_long\_mode (C++ function), 259  
 lv\_label\_get\_recolor (C++ function), 259  
 lv\_label\_get\_text (C++ function), 259  
 lv\_label\_get\_text\_selection\_end (C++ function), 260  
 lv\_label\_get\_text\_selection\_start (C++ function), 260  
 lv\_label\_ins\_text (C++ function), 260  
 lv\_label\_is\_char\_under\_pos (C++ function), 259  
 lv\_label\_long\_mode\_t (C++ type), 257  
 lv\_label\_set\_long\_mode (C++ function), 258  
 lv\_label\_set\_recolor (C++ function), 258  
 lv\_label\_set\_text (C++ function), 258  
 lv\_label\_set\_text\_fmt (C++ function), 258  
 lv\_label\_set\_text\_sel\_end (C++ function), 259  
 lv\_label\_set\_text\_sel\_start (C++ function), 258  
 lv\_label\_set\_text\_static (C++ function), 258  
 lv\_label\_t (C++ type), 257  
 lv\_layer\_sys (C++ function), 129  
 lv\_layer\_top (C++ function), 129  
 LV\_LAYOUT\_FLEX (C++ member), 387  
 LV\_LAYOUT\_GRID (C++ member), 399  
 lv\_led\_class (C++ member), 341  
 lv\_led\_create (C++ function), 340  
 lv\_led\_get\_brightness (C++ function), 340  
 lv\_led\_off (C++ function), 340  
 lv\_led\_on (C++ function), 340  
 lv\_led\_set\_brightness (C++ function), 340  
 lv\_led\_set\_color (C++ function), 340  
 lv\_led\_t (C++ type), 340  
 lv\_led\_toggle (C++ function), 340  
 lv\_line\_class (C++ member), 264  
 lv\_line\_create (C++ function), 263  
 lv\_line\_get\_y\_invert (C++ function), 263  
 lv\_line\_set\_points (C++ function), 263  
 lv\_line\_set\_y\_invert (C++ function), 263  
 lv\_line\_t (C++ type), 263  
 lv\_list\_add\_btn (C++ function), 342  
 lv\_list\_add\_text (C++ function), 342  
 lv\_list\_btn\_class (C++ member), 342  
 lv\_list\_class (C++ member), 342  
 lv\_list\_create (C++ function), 342  
 lv\_list\_get\_btn\_text (C++ function), 342  
 lv\_list\_text\_class (C++ member), 342  
 lv\_meter\_add\_arc (C++ function), 350  
 lv\_meter\_add\_needle\_img (C++ function), 350  
 lv\_meter\_add\_needle\_line (C++ function), 350

---

`lv_meter_add_scale` (C++ function), 349  
`lv_meter_add_scale_lines` (C++ function), 350  
`lv_meter_class` (C++ member), 352  
`lv_meter_create` (C++ function), 349  
`lv_meter_indicator_t` (C++ type), 348  
`lv_meter_indicator_type_t` (C++ enum), 348  
`lv_meter_indicator_type_t::LV_METER_INDICATOR_TYPE_ARC` (C++ enumerator), 348  
`lv_meter_indicator_type_t::LV_METER_INDICATOR_TYPE_NEEDLE_IMG` (C++ enumerator), 348  
`lv_meter_indicator_type_t::LV_METER_INDICATOR_TYPE_NEEDLE_LINE` (C++ enumerator), 348  
`lv_meter_indicator_type_t::LV_METER_INDICATOR_TYPE_SCALE_LINES` (C++ enumerator), 348  
`lv_meter_scale_t` (C++ type), 348  
`lv_meter_set_indicator_end_value` (C++ function), 351  
`lv_meter_set_indicator_start_value` (C++ function), 351  
`lv_meter_set_indicator_value` (C++ function), 351  
`lv_meter_set_scale_major_ticks` (C++ function), 349  
`lv_meter_set_scale_range` (C++ function), 349  
`lv_meter_set_scale_ticks` (C++ function), 349  
`lv_meter_t` (C++ type), 348  
`lv_msgbox_class` (C++ member), 356  
`lv_msgbox_close` (C++ function), 356  
`lv_msgbox_create` (C++ function), 355  
`lv_msgbox_get_active_btn_text` (C++ function), 356  
`lv_msgbox_get_btns` (C++ function), 355  
`lv_msgbox_get_close_btn` (C++ function), 355  
`lv_msgbox_get_text` (C++ function), 355  
`lv_msgbox_get_title` (C++ function), 355  
`lv_obj_add_flag` (C++ function), 189  
`lv_obj_add_state` (C++ function), 189  
`lv_obj_allocate_spec_attr` (C++ function), 191  
`lv_obj_check_type` (C++ function), 191  
`lv_obj_class` (C++ member), 192  
`lv_obj_clear_flag` (C++ function), 189  
`lv_obj_clear_state` (C++ function), 190  
`lv_obj_create` (C++ function), 189  
`lv_obj_dpx` (C++ function), 191  
`lv_obj_flag_t` (C++ type), 186  
`lv_obj_get_class` (C++ function), 191  
`lv_obj_get_group` (C++ function), 190  
`lv_obj_get_state` (C++ function), 190  
`lv_obj_get_style_align` (C++ function), 81  
`lv_obj_get_style_anim_speed` (C++ function), 82  
`lv_obj_get_style_anim_time` (C++ function), 82  
`lv_obj_get_style_arc_color` (C++ function), 85  
`lv_obj_get_style_arc_color_filtered` (C++ function), 85  
`lv_obj_get_style_arc_img_src` (C++ function), 85  
`lv_obj_get_style_arc_opa` (C++ function), 85  
`lv_obj_get_style_arc_rounded` (C++ function), 85  
`lv_obj_get_style_arc_width` (C++ function), 85  
`lv_obj_get_style_base_dir` (C++ function), 82  
`lv_obj_get_style_bg_color` (C++ function), 82  
`lv_obj_get_style_bg_color_filtered` (C++ function), 82  
`lv_obj_get_style_bg_grad_color` (C++ function), 82  
`lv_obj_get_style_bg_grad_color_filtered` (C++ function), 82  
`lv_obj_get_style_bg_grad_dir` (C++ function), 82  
`lv_obj_get_style_bg_grad_stop` (C++ function), 82  
`lv_obj_get_style_bg_img_opa` (C++ function), 82  
`lv_obj_get_style_bg_img_recolor` (C++ function), 83  
`lv_obj_get_style_bg_img_recolor_filtered` (C++ function), 83  
`lv_obj_get_style_bg_img_recolor_opa` (C++ function), 83  
`lv_obj_get_style_bg_img_src` (C++ function), 82  
`lv_obj_get_style_bg_img_tiled` (C++ function), 83  
`lv_obj_get_style_bg_main_stop` (C++ function), 82  
`lv_obj_get_style_bg_opa` (C++ function), 82  
`lv_obj_get_style_blend_mode` (C++ function), 82  
`lv_obj_get_style_border_color` (C++ function), 83  
`lv_obj_get_style_border_color_filtered` (C++ function), 83  
`lv_obj_get_style_border_opa` (C++ function), 83  
`lv_obj_get_style_border_post` (C++ function), 83  
`lv_obj_get_style_border_side` (C++ function), 83  
`lv_obj_get_style_border_width` (C++ function), 83  
`lv_obj_get_style_clip_corner` (C++ function), 82

<code>lv_obj_get_style_color_filter_dsc</code> (C++ function), 82	<code>lv_obj_get_style_line_width</code> (C++ function), 84
<code>lv_obj_get_style_color_filter_opa</code> (C++ function), 82	<code>lv_obj_get_style_max_height</code> (C++ function), 81
<code>lv_obj_get_style_flex_cross_place</code> (C++ function), 387	<code>lv_obj_get_style_max_width</code> (C++ function), 81
<code>lv_obj_get_style_flex_flow</code> (C++ function), 387	<code>lv_obj_get_style_min_height</code> (C++ function), 81
<code>lv_obj_get_style_flex_grow</code> (C++ function), 387	<code>lv_obj_get_style_min_width</code> (C++ function), 81
<code>lv_obj_get_style_flex_main_place</code> (C++ function), 387	<code>lv_obj_get_style_opa</code> (C++ function), 82
<code>lv_obj_get_style_flex_track_place</code> (C++ function), 387	<code>lv_obj_get_style_outline_color</code> (C++ function), 84
<code>lv_obj_get_style_grid_cell_column_pos</code> (C++ function), 398	<code>lv_obj_get_style_outline_color_filtered</code> (C++ function), 84
<code>lv_obj_get_style_grid_cell_column_span</code> (C++ function), 398	<code>lv_obj_get_style_outline_opa</code> (C++ function), 84
<code>lv_obj_get_style_grid_cell_row_pos</code> (C++ function), 398	<code>lv_obj_get_style_outline_pad</code> (C++ function), 84
<code>lv_obj_get_style_grid_cell_row_span</code> (C++ function), 398	<code>lv_obj_get_style_outline_width</code> (C++ function), 84
<code>lv_obj_get_style_grid_cell_x_align</code> (C++ function), 398	<code>lv_obj_get_style_pad_bottom</code> (C++ function), 81
<code>lv_obj_get_style_grid_cell_y_align</code> (C++ function), 398	<code>lv_obj_get_style_pad_column</code> (C++ function), 81
<code>lv_obj_get_style_grid_column_align</code> (C++ function), 398	<code>lv_obj_get_style_pad_left</code> (C++ function), 81
<code>lv_obj_get_style_grid_column_dsc_array</code> (C++ function), 398	<code>lv_obj_get_style_pad_right</code> (C++ function), 81
<code>lv_obj_get_style_grid_row_align</code> (C++ function), 398	<code>lv_obj_get_style_pad_row</code> (C++ function), 81
<code>lv_obj_get_style_grid_row_dsc_array</code> (C++ function), 398	<code>lv_obj_get_style_pad_top</code> (C++ function), 81
<code>lv_obj_get_style_height</code> (C++ function), 81	<code>lv_obj_get_style_radius</code> (C++ function), 81
<code>lv_obj_get_style_img_opa</code> (C++ function), 83	<code>lv_obj_get_style_shadow_color</code> (C++ function), 84
<code>lv_obj_get_style_img_recolor</code> (C++ function), 83	<code>lv_obj_get_style_shadow_color_filtered</code> (C++ function), 84
<code>lv_obj_get_style_img_recolor_filtered</code> (C++ function), 84	<code>lv_obj_get_style_shadow_ofs_x</code> (C++ function), 84
<code>lv_obj_get_style_img_recolor_opa</code> (C++ function), 84	<code>lv_obj_get_style_shadow_ofs_y</code> (C++ function), 84
<code>lv_obj_get_style_layout</code> (C++ function), 82	<code>lv_obj_get_style_shadow_opa</code> (C++ function), 84
<code>lv_obj_get_style_line_color</code> (C++ function), 84	<code>lv_obj_get_style_shadow_spread</code> (C++ function), 84
<code>lv_obj_get_style_line_color_filtered</code> (C++ function), 84	<code>lv_obj_get_style_shadow_width</code> (C++ function), 84
<code>lv_obj_get_style_line_dash_gap</code> (C++ function), 84	<code>lv_obj_get_style_text_align</code> (C++ function), 83
<code>lv_obj_get_style_line_dash_width</code> (C++ function), 84	<code>lv_obj_get_style_text_color</code> (C++ function), 83
<code>lv_obj_get_style_line_opa</code> (C++ function), 85	<code>lv_obj_get_style_text_color_filtered</code> (C++ function), 83
<code>lv_obj_get_style_line_rounded</code> (C++ function), 84	<code>lv_obj_get_style_text_decor</code> (C++ function), 83
	<code>lv_obj_get_style_text_font</code> (C++ function),



[83](#)  
 lv\_obj\_get\_style\_text\_letter\_space (C++ function), [83](#)  
 lv\_obj\_get\_style\_text\_line\_space (C++ function), [83](#)  
 lv\_obj\_get\_style\_text\_opa (C++ function), [83](#)  
 lv\_obj\_get\_style\_transform\_angle (C++ function), [81](#)  
 lv\_obj\_get\_style\_transform\_height (C++ function), [81](#)  
 lv\_obj\_get\_style\_transform\_width (C++ function), [81](#)  
 lv\_obj\_get\_style\_transform\_zoom (C++ function), [81](#)  
 lv\_obj\_get\_style\_transition (C++ function), [82](#)  
 lv\_obj\_get\_style\_translate\_x (C++ function), [81](#)  
 lv\_obj\_get\_style\_translate\_y (C++ function), [81](#)  
 lv\_obj\_get\_style\_width (C++ function), [81](#)  
 lv\_obj\_get\_style\_x (C++ function), [81](#)  
 lv\_obj\_get\_style\_y (C++ function), [81](#)  
 lv\_obj\_get\_user\_data (C++ function), [191](#)  
 lv\_obj\_has\_class (C++ function), [191](#)  
 lv\_obj\_has\_flag (C++ function), [190](#)  
 lv\_obj\_has\_flag\_any (C++ function), [190](#)  
 lv\_obj\_has\_state (C++ function), [190](#)  
 lv\_obj\_is\_valid (C++ function), [191](#)  
 lv\_obj\_set\_flex\_align (C++ function), [386](#)  
 lv\_obj\_set\_flex\_flow (C++ function), [386](#)  
 lv\_obj\_set\_flex\_grow (C++ function), [386](#)  
 lv\_obj\_set\_grid\_align (C++ function), [396](#)  
 lv\_obj\_set\_grid\_cell (C++ function), [396](#)  
 lv\_obj\_set\_grid\_dsc\_array (C++ function), [396](#)  
 lv\_obj\_set\_style\_align (C++ function), [85](#)  
 lv\_obj\_set\_style\_anim\_speed (C++ function), [87](#)  
 lv\_obj\_set\_style\_anim\_time (C++ function), [87](#)  
 lv\_obj\_set\_style\_arc\_color (C++ function), [90](#)  
 lv\_obj\_set\_style\_arc\_color\_filtered (C++ function), [90](#)  
 lv\_obj\_set\_style\_arc\_img\_src (C++ function), [91](#)  
 lv\_obj\_set\_style\_arc\_opa (C++ function), [91](#)  
 lv\_obj\_set\_style\_arc\_rounded (C++ function), [90](#)  
 lv\_obj\_set\_style\_arc\_width (C++ function), [90](#)  
 lv\_obj\_set\_style\_base\_dir (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_color (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_color\_filtered (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_grad\_color (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_grad\_color\_filtered (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_grad\_dir (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_grad\_stop (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_img\_opa (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_img\_recolor (C++ function), [88](#)  
 lv\_obj\_set\_style\_bg\_img\_recolor\_filtered (C++ function), [88](#)  
 lv\_obj\_set\_style\_bg\_img\_recolor\_opa (C++ function), [88](#)  
 lv\_obj\_set\_style\_bg\_img\_src (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_img\_tiled (C++ function), [88](#)  
 lv\_obj\_set\_style\_bg\_main\_stop (C++ function), [87](#)  
 lv\_obj\_set\_style\_bg\_opa (C++ function), [87](#)  
 lv\_obj\_set\_style\_blend\_mode (C++ function), [87](#)  
 lv\_obj\_set\_style\_border\_color (C++ function), [88](#)  
 lv\_obj\_set\_style\_border\_color\_filtered (C++ function), [88](#)  
 lv\_obj\_set\_style\_border\_opa (C++ function), [88](#)  
 lv\_obj\_set\_style\_border\_post (C++ function), [88](#)  
 lv\_obj\_set\_style\_border\_side (C++ function), [88](#)  
 lv\_obj\_set\_style\_border\_width (C++ function), [88](#)  
 lv\_obj\_set\_style\_clip\_corner (C++ function), [86](#)  
 lv\_obj\_set\_style\_color\_filter\_dsc (C++ function), [86](#)  
 lv\_obj\_set\_style\_color\_filter\_opa (C++ function), [86](#)  
 lv\_obj\_set\_style\_flex\_cross\_place (C++ function), [387](#)  
 lv\_obj\_set\_style\_flex\_flow (C++ function), [387](#)  
 lv\_obj\_set\_style\_flex\_grow (C++ function), [387](#)  
 lv\_obj\_set\_style\_flex\_main\_place (C++ function), [387](#)  
 lv\_obj\_set\_style\_flex\_track\_place (C++

*function*), 387  
 lv\_obj\_set\_style\_grid\_cell\_column\_pos  
   (*C++ function*), 398  
 lv\_obj\_set\_style\_grid\_cell\_column\_span  
   (*C++ function*), 398  
 lv\_obj\_set\_style\_grid\_cell\_row\_pos (*C++  
   function*), 398  
 lv\_obj\_set\_style\_grid\_cell\_row\_span  
   (*C++ function*), 398  
 lv\_obj\_set\_style\_grid\_cell\_x\_align (*C++  
   function*), 398  
 lv\_obj\_set\_style\_grid\_cell\_y\_align (*C++  
   function*), 398  
 lv\_obj\_set\_style\_grid\_column\_align (*C++  
   function*), 397  
 lv\_obj\_set\_style\_grid\_column\_dsc\_array  
   (*C++ function*), 397  
 lv\_obj\_set\_style\_grid\_row\_align   (*C++  
   function*), 397  
 lv\_obj\_set\_style\_grid\_row\_dsc\_array  
   (*C++ function*), 397  
 lv\_obj\_set\_style\_height (*C++ function*), 85  
 lv\_obj\_set\_style\_img\_opa (*C++ function*), 89  
 lv\_obj\_set\_style\_img\_recolor (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_img\_recolor\_filtered  
   (*C++ function*), 89  
 lv\_obj\_set\_style\_img\_recolor\_opa   (*C++  
   function*), 89  
 lv\_obj\_set\_style\_layout (*C++ function*), 87  
 lv\_obj\_set\_style\_line\_color (*C++ function*),  
   90  
 lv\_obj\_set\_style\_line\_color\_filtered  
   (*C++ function*), 90  
 lv\_obj\_set\_style\_line\_dash\_gap (*C++ func-  
   tion*), 90  
 lv\_obj\_set\_style\_line\_dash\_width   (*C++  
   function*), 90  
 lv\_obj\_set\_style\_line\_opa (*C++ function*), 90  
 lv\_obj\_set\_style\_line\_rounded (*C++ func-  
   tion*), 90  
 lv\_obj\_set\_style\_line\_width (*C++ function*),  
   90  
 lv\_obj\_set\_style\_max\_height (*C++ function*),  
   85  
 lv\_obj\_set\_style\_max\_width (*C++ function*),  
   85  
 lv\_obj\_set\_style\_min\_height (*C++ function*),  
   85  
 lv\_obj\_set\_style\_min\_width (*C++ function*),  
   85  
 lv\_obj\_set\_style\_opa (*C++ function*), 86  
 lv\_obj\_set\_style\_outline\_color (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_outline\_color\_filtered  
   (*C++ function*), 89  
 lv\_obj\_set\_style\_outline\_opa (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_outline\_pad (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_outline\_width (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_pad\_bottom (*C++ function*),  
   86  
 lv\_obj\_set\_style\_pad\_column (*C++ function*),  
   86  
 lv\_obj\_set\_style\_pad\_left (*C++ function*), 86  
 lv\_obj\_set\_style\_pad\_right (*C++ function*),  
   86  
 lv\_obj\_set\_style\_pad\_row (*C++ function*), 86  
 lv\_obj\_set\_style\_pad\_top (*C++ function*), 86  
 lv\_obj\_set\_style\_radius (*C++ function*), 86  
 lv\_obj\_set\_style\_shadow\_color (*C++ func-  
   tion*), 90  
 lv\_obj\_set\_style\_shadow\_color\_filtered  
   (*C++ function*), 90  
 lv\_obj\_set\_style\_shadow\_ofs\_x (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_shadow\_ofs\_y (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_shadow\_opa (*C++ function*),  
   90  
 lv\_obj\_set\_style\_shadow\_spread (*C++ func-  
   tion*), 90  
 lv\_obj\_set\_style\_shadow\_width (*C++ func-  
   tion*), 89  
 lv\_obj\_set\_style\_text\_align (*C++ function*),  
   89  
 lv\_obj\_set\_style\_text\_color (*C++ function*),  
   88  
 lv\_obj\_set\_style\_text\_color\_filtered  
   (*C++ function*), 88  
 lv\_obj\_set\_style\_text\_decor (*C++ function*),  
   89  
 lv\_obj\_set\_style\_text\_font (*C++ function*),  
   88  
 lv\_obj\_set\_style\_text\_letter\_space (*C++  
   function*), 88  
 lv\_obj\_set\_style\_text\_line\_space   (*C++  
   function*), 89  
 lv\_obj\_set\_style\_text\_opa (*C++ function*), 88  
 lv\_obj\_set\_style\_transform\_angle   (*C++  
   function*), 86  
 lv\_obj\_set\_style\_transform\_height (*C++  
   function*), 85  
 lv\_obj\_set\_style\_transform\_width   (*C++  
   function*), 85  
 lv\_obj\_set\_style\_transform\_zoom   (*C++*

*function*), 86  
 lv\_obj\_set\_style\_transition (C++ *function*), 87  
 lv\_obj\_set\_style\_translate\_x (C++ *function*), 86  
 lv\_obj\_set\_style\_translate\_y (C++ *function*), 86  
 lv\_obj\_set\_style\_width (C++ *function*), 85  
 lv\_obj\_set\_style\_x (C++ *function*), 85  
 lv\_obj\_set\_style\_y (C++ *function*), 85  
 lv\_obj\_set\_tile (C++ *function*), 373  
 lv\_obj\_set\_tile\_id (C++ *function*), 373  
 lv\_obj\_set\_user\_data (C++ *function*), 190  
 lv\_obj\_t (C++ *type*), 186  
 lv\_palette\_darken (C++ *function*), 132  
 lv\_palette\_lighten (C++ *function*), 132  
 lv\_palette\_main (C++ *function*), 132  
 lv\_palette\_t (C++ *enum*), 130  
 lv\_palette\_t::LV\_PALETTE\_LAST (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_AMBER (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_BLUE (C++ *enumerator*), 130  
 lv\_palette\_t::LV\_PALETTE\_BLUE\_GREY (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_BROWN (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_CYAN (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_DEEP\_ORANGE (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_DEEP\_PURPLE (C++ *enumerator*), 130  
 lv\_palette\_t::LV\_PALETTE\_GREEN (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_GREY (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_INDIGO (C++ *enumerator*), 130  
 lv\_palette\_t::LV\_PALETTE\_LIGHT\_BLUE (C++ *enumerator*), 130  
 lv\_palette\_t::LV\_PALETTE\_LIGHT\_GREEN (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_LIME (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_NONE (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_ORANGE (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_PINK (C++ *enumerator*), 130  
 lv\_palette\_t::LV\_PALETTE\_PURPLE (C++ *enumerator*), 130  
 lv\_palette\_t::LV\_PALETTE\_RED (C++ *enumerator*), 130  
 lv\_palette\_t::LV\_PALETTE\_TEAL (C++ *enumerator*), 131  
 lv\_palette\_t::LV\_PALETTE\_YELLOW (C++ *enumerator*), 131  
 lv\_part\_t (C++ *type*), 186  
 lv\_roller\_class (C++ *member*), 271  
 lv\_roller\_create (C++ *function*), 270  
 lv\_roller\_get\_option\_cnt (C++ *function*), 271  
 lv\_roller\_get\_options (C++ *function*), 270  
 lv\_roller\_get\_selected (C++ *function*), 270  
 lv\_roller\_get\_selected\_str (C++ *function*), 270  
 lv\_roller\_mode\_t (C++ *type*), 269  
 lv\_roller\_set\_options (C++ *function*), 270  
 lv\_roller\_set\_selected (C++ *function*), 270  
 lv\_roller\_set\_visible\_row\_count (C++ *function*), 270  
 lv\_roller\_t (C++ *type*), 269  
 lv\_scr\_act (C++ *function*), 129  
 lv\_scr\_load (C++ *function*), 129  
 lv\_scr\_load\_anim (C++ *function*), 128  
 lv\_scr\_load\_anim\_t (C++ *enum*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_FADE\_ON (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_MOVE\_BOTTOM (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_MOVE\_LEFT (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_MOVE\_RIGHT (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_MOVE\_TOP (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_NONE (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_OVER\_BOTTOM (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_OVER\_LEFT (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_OVER\_RIGHT (C++ *enumerator*), 127  
 lv\_scr\_load\_anim\_t::LV\_SCR\_LOAD\_ANIM\_OVER\_TOP (C++ *enumerator*), 127  
 lv\_slider\_class (C++ *member*), 278  
 lv\_slider\_create (C++ *function*), 276  
 lv\_slider\_get\_left\_value (C++ *function*), 277  
 lv\_slider\_get\_max\_value (C++ *function*), 277  
 lv\_slider\_get\_min\_value (C++ *function*), 277  
 lv\_slider\_get\_mode (C++ *function*), 277  
 lv\_slider\_get\_value (C++ *function*), 277  
 lv\_slider\_is\_dragged (C++ *function*), 277  
 lv\_slider\_mode\_t (C++ *type*), 276  
 lv\_slider\_set\_left\_value (C++ *function*), 276



`lv_slider_set_mode` (C++ function), 277  
`lv_slider_set_range` (C++ function), 277  
`lv_slider_set_value` (C++ function), 276  
`lv_slider_t` (C++ type), 276  
`lv_span_mode_t` (C++ type), 359  
`lv_span_overflow_t` (C++ type), 359  
`lv_span_set_text` (C++ function), 360  
`lv_span_set_text_static` (C++ function), 360  
`lv_span_t` (C++ type), 359  
`lv_spangroup_class` (C++ member), 361  
`lv_spangroup_create` (C++ function), 359  
`lv_spangroup_del_span` (C++ function), 359  
`lv_spangroup_get_align` (C++ function), 360  
`lv_spangroup_get_expand_height` (C++ function), 361  
`lv_spangroup_get_expand_width` (C++ function), 361  
`lv_spangroup_get_indent` (C++ function), 361  
`lv_spangroup_get_max_line_h` (C++ function), 361  
`lv_spangroup_get_mode` (C++ function), 361  
`lv_spangroup_get_overflow` (C++ function), 360  
`lv_spangroup_new_span` (C++ function), 359  
`lv_spangroup_refr_mode` (C++ function), 361  
`lv_spangroup_set_align` (C++ function), 360  
`lv_spangroup_set_indent` (C++ function), 360  
`lv_spangroup_set_mode` (C++ function), 360  
`lv_spangroup_set_overflow` (C++ function), 360  
`lv_spangroup_t` (C++ type), 359  
`lv_spinbox_class` (C++ member), 366  
`lv_spinbox_create` (C++ function), 364  
`lv_spinbox_decrement` (C++ function), 366  
`lv_spinbox_get_rollover` (C++ function), 365  
`lv_spinbox_get_step` (C++ function), 365  
`lv_spinbox_get_value` (C++ function), 365  
`lv_spinbox_increment` (C++ function), 365  
`lv_spinbox_set_digit_format` (C++ function), 365  
`lv_spinbox_set_range` (C++ function), 365  
`lv_spinbox_set_rollover` (C++ function), 364  
`lv_spinbox_set_step` (C++ function), 365  
`lv_spinbox_set_value` (C++ function), 364  
`lv_spinbox_step_next` (C++ function), 365  
`lv_spinbox_step_prev` (C++ function), 365  
`lv_spinbox_t` (C++ type), 364  
`lv_spinner_create` (C++ function), 368  
`lv_state_t` (C++ type), 186  
`lv_style_const_prop_t` (C++ struct), 78  
`lv_style_const_prop_t::prop` (C++ member), 79  
`lv_style_const_prop_t::value` (C++ member), 79  
`LV_STYLE_FLEX_CROSS_PLACE` (C++ member), 387  
`LV_STYLE_FLEX_FLOW` (C++ member), 387  
`LV_STYLE_FLEX_GROW` (C++ member), 387  
`LV_STYLE_FLEX_MAIN_PLACE` (C++ member), 387  
`LV_STYLE_FLEX_TRACK_PLACE` (C++ member), 387  
`lv_style_get_prop` (C++ function), 76  
`lv_style_get_prop_inlined` (C++ function), 77  
`LV_STYLE_GRID_CELL_COLUMN_POS` (C++ member), 399  
`LV_STYLE_GRID_CELL_COLUMN_SPAN` (C++ member), 399  
`LV_STYLE_GRID_CELL_ROW_POS` (C++ member), 399  
`LV_STYLE_GRID_CELL_ROW_SPAN` (C++ member), 399  
`LV_STYLE_GRID_CELL_X_ALIGN` (C++ member), 399  
`LV_STYLE_GRID_CELL_Y_ALIGN` (C++ member), 399  
`LV_STYLE_GRID_COLUMN_ALIGN` (C++ member), 399  
`LV_STYLE_GRID_COLUMN_DSC_ARRAY` (C++ member), 399  
`LV_STYLE_GRID_ROW_ALIGN` (C++ member), 399  
`LV_STYLE_GRID_ROW_DSC_ARRAY` (C++ member), 399  
`lv_style_init` (C++ function), 76  
`lv_style_is_empty` (C++ function), 77  
`lv_style_prop_get_default` (C++ function), 77  
`lv_style_prop_t` (C++ enum), 73  
`lv_style_prop_t::LV_STYLE_LAST_BUILT_IN_PROP` (C++ enumerator), 76  
`lv_style_prop_t::LV_STYLE_ALIGN` (C++ enumerator), 73  
`lv_style_prop_t::LV_STYLE_ANIM_SPEED` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_ANIM_TIME` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_ARC_COLOR` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_ARC_COLOR_FILTERED` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_ARC_IMG_SRC` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_ARC_OPA` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_ARC_ROUNDED` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_ARC_WIDTH` (C++ enumerator), 75  
`lv_style_prop_t::LV_STYLE_BASE_DIR` (C++ enumerator), 76

lv_style_prop_t::LV_STYLE_BG_COLOR (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_IMG_RECOLOR_FILTERED (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_COLOR_FILTERED (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_IMG_RECOLOR_OPA (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_GRAD_COLOR (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LAYOUT (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_GRAD_COLOR_FILTERED (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LINE_COLOR (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_GRAD_DIR (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LINE_COLOR_FILTERED (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_GRAD_STOP (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LINE_DASH_GAP (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_IMG_OPA (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LINE_DASH_WIDTH (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_IMG_RECOLOR (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LINE_OPA (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_IMG_RECOLOR_FILTERED (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LINE_ROUNDED (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_IMG_RECOLOR_OPA (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_LINE_WIDTH (C++ enumerator), 75
lv_style_prop_t::LV_STYLE_BG_IMG_SRC (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_MAX_HEIGHT (C++ enumerator), 73
lv_style_prop_t::LV_STYLE_BG_IMG_TILED (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_MAX_WIDTH (C++ enumerator), 73
lv_style_prop_t::LV_STYLE_BG_MAIN_STOP (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_MIN_HEIGHT (C++ enumerator), 73
lv_style_prop_t::LV_STYLE_BG_OPA (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_MIN_WIDTH (C++ enumerator), 73
lv_style_prop_t::LV_STYLE_BLEND_MODE (C++ enumerator), 75	lv_style_prop_t::LV_STYLE_OPA (C++ enu- merator), 75
lv_style_prop_t::LV_STYLE_BORDER_COLOR (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_OUTLINE_COLOR (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_BORDER_COLOR_FILTERED (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_OUTLINE_COLOR_FILTERED (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_BORDER_OPA (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_OUTLINE_OPA (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_BORDER_POST (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_OUTLINE_PAD (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_BORDER_SIDE (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_OUTLINE_WIDTH (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_BORDER_WIDTH (C++ enumerator), 74	lv_style_prop_t::LV_STYLE_PAD_BOTTOM (C++ enumerator), 73
lv_style_prop_t::LV_STYLE_CLIP_CORNER (C++ enumerator), 75	lv_style_prop_t::LV_STYLE_PAD_COLUMN (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_COLOR_FILTER_DISABLED (C++ enumerator), 75	lv_style_prop_t::LV_STYLE_PAD_LEFT (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_COLOR_FILTER_OPA (C++ enumerator), 75	lv_style_prop_t::LV_STYLE_PAD_RIGHT (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_HEIGHT (C++ enumerator), 73	lv_style_prop_t::LV_STYLE_PAD_ROW (C++ enumerator), 74
lv_style_prop_t::LV_STYLE_IMG_OPA (C++ enumerator), 75	lv_style_prop_t::LV_STYLE_PAD_TOP (C++ enumerator), 73
lv_style_prop_t::LV_STYLE_IMG_RECOLOR (C++ enumerator), 75	lv_style_prop_t::LV_STYLE_PROP_ANY (C++ enumerator), 76

<code>lv_style_prop_t::LV_STYLE_PROP_INV</code> (C++ enumerator), 73	<code>lv_style_register_prop</code> (C++ function), 76
<code>lv_style_prop_t::LV_STYLE_RADIUS</code> (C++ enumerator), 75	<code>lv_style_remove_prop</code> (C++ function), 76
<code>lv_style_prop_t::LV_STYLE_SHADOW_COLOR</code> (C++ enumerator), 74	<code>lv_style_reset</code> (C++ function), 76
<code>lv_style_prop_t::LV_STYLE_SHADOW_COLOR_FILTERED</code> (C++ enumerator), 74	<code>lv_style_set_align</code> (C++ function), 91
<code>lv_style_prop_t::LV_STYLE_SHADOW_OFS_X</code> (C++ enumerator), 74	<code>lv_style_set_anim_speed</code> (C++ function), 92
<code>lv_style_prop_t::LV_STYLE_SHADOW_OFS_Y</code> (C++ enumerator), 74	<code>lv_style_set_anim_time</code> (C++ function), 92
<code>lv_style_prop_t::LV_STYLE_SHADOW_OPA</code> (C++ enumerator), 75	<code>lv_style_set_arc_color</code> (C++ function), 95
<code>lv_style_prop_t::LV_STYLE_SHADOW_SPREAD</code> (C++ enumerator), 74	<code>lv_style_set_arc_color_filtered</code> (C++ function), 95
<code>lv_style_prop_t::LV_STYLE_SHADOW_WIDTH</code> (C++ enumerator), 74	<code>lv_style_set_arc_img_src</code> (C++ function), 95
<code>lv_style_prop_t::LV_STYLE_TEXT_ALIGN</code> (C++ enumerator), 75	<code>lv_style_set_arc_opa</code> (C++ function), 95
<code>lv_style_prop_t::LV_STYLE_TEXT_COLOR</code> (C++ enumerator), 75	<code>lv_style_set_arc_rounded</code> (C++ function), 95
<code>lv_style_prop_t::LV_STYLE_TEXT_COLOR_FILTERED</code> (C++ enumerator), 75	<code>lv_style_set_arc_width</code> (C++ function), 95
<code>lv_style_prop_t::LV_STYLE_TEXT_DECOR</code> (C++ enumerator), 75	<code>lv_style_set_base_dir</code> (C++ function), 92
<code>lv_style_prop_t::LV_STYLE_TEXT_FONT</code> (C++ enumerator), 75	<code>lv_style_set_bg_color</code> (C++ function), 92
<code>lv_style_prop_t::LV_STYLE_TEXT_LETTER_SPACING</code> (C++ enumerator), 75	<code>lv_style_set_bg_color_filtered</code> (C++ func- tion), 92
<code>lv_style_prop_t::LV_STYLE_TEXT_LINE_SPACING</code> (C++ enumerator), 75	<code>lv_style_set_bg_grad_color</code> (C++ function), 92
<code>lv_style_prop_t::LV_STYLE_TEXT_OPA</code> (C++ enumerator), 75	<code>lv_style_set_bg_grad_color_filtered</code> (C++ function), 92
<code>lv_style_prop_t::LV_STYLE_TRANSFORM_ANGLE</code> (C++ enumerator), 73	<code>lv_style_set_bg_grad_dir</code> (C++ function), 92
<code>lv_style_prop_t::LV_STYLE_TRANSFORM_HEIGHT</code> (C++ enumerator), 73	<code>lv_style_set_bg_grad_stop</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_TRANSFORM_WIDTH</code> (C++ enumerator), 73	<code>lv_style_set_bg_img_opa</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_TRANSFORM_ZOOM</code> (C++ enumerator), 73	<code>lv_style_set_bg_img_recolor</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_TRANSITION</code> (C++ enumerator), 75	<code>lv_style_set_bg_img_recolor_filtered</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_TRANSLATE_X</code> (C++ enumerator), 73	<code>lv_style_set_bg_img_recolor_opa</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_TRANSLATE_Y</code> (C++ enumerator), 73	<code>lv_style_set_bg_img_src</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_WIDTH</code> (C++ enumerator), 73	<code>lv_style_set_bg_img_tiled</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_X</code> (C++ enumera- tor), 73	<code>lv_style_set_bg_main_stop</code> (C++ function), 93
<code>lv_style_prop_t::LV_STYLE_Y</code> (C++ enumera- tor), 73	<code>lv_style_set_bg_opa</code> (C++ function), 92
	<code>lv_style_set_blend_mode</code> (C++ function), 92
	<code>lv_style_set_border_color</code> (C++ function), 93
	<code>lv_style_set_border_color_filtered</code> (C++ function), 93
	<code>lv_style_set_border_opa</code> (C++ function), 93
	<code>lv_style_set_border_post</code> (C++ function), 93
	<code>lv_style_set_border_side</code> (C++ function), 93
	<code>lv_style_set_border_width</code> (C++ function), 93
	<code>lv_style_set_clip_corner</code> (C++ function), 92
	<code>lv_style_set_color_filter_dsc</code> (C++ func- tion), 92
	<code>lv_style_set_color_filter_opa</code> (C++ func- tion), 92
	<code>lv_style_set_flex_cross_place</code> (C++ func- tion), 387
	<code>lv_style_set_flex_flow</code> (C++ function), 386
	<code>lv_style_set_flex_grow</code> (C++ function), 387
	<code>lv_style_set_flex_main_place</code> (C++ func- tion), 386

`lv_style_set_flex_track_place` (C++ function), 387  
`lv_style_set_grid_cell_column_pos` (C++ function), 397  
`lv_style_set_grid_cell_column_span` (C++ function), 397  
`lv_style_set_grid_cell_row_pos` (C++ function), 397  
`lv_style_set_grid_cell_row_span` (C++ function), 397  
`lv_style_set_grid_cell_x_align` (C++ function), 397  
`lv_style_set_grid_cell_y_align` (C++ function), 397  
`lv_style_set_grid_column_align` (C++ function), 397  
`lv_style_set_grid_column_dsc_array` (C++ function), 397  
`lv_style_set_grid_row_align` (C++ function), 397  
`lv_style_set_grid_row_dsc_array` (C++ function), 397  
`lv_style_set_height` (C++ function), 91  
`lv_style_set_img_opa` (C++ function), 94  
`lv_style_set_img_recolor` (C++ function), 94  
`lv_style_set_img_recolor_filtered` (C++ function), 94  
`lv_style_set_img_recolor_opa` (C++ function), 94  
`lv_style_set_layout` (C++ function), 92  
`lv_style_set_line_color` (C++ function), 95  
`lv_style_set_line_color_filtered` (C++ function), 95  
`lv_style_set_line_dash_gap` (C++ function), 94  
`lv_style_set_line_dash_width` (C++ function), 94  
`lv_style_set_line_opa` (C++ function), 95  
`lv_style_set_line_rounded` (C++ function), 94  
`lv_style_set_line_width` (C++ function), 94  
`lv_style_set_max_height` (C++ function), 91  
`lv_style_set_max_width` (C++ function), 91  
`lv_style_set_min_height` (C++ function), 91  
`lv_style_set_min_width` (C++ function), 91  
`lv_style_set_opa` (C++ function), 92  
`lv_style_set_outline_color` (C++ function), 94  
`lv_style_set_outline_color_filtered` (C++ function), 94  
`lv_style_set_outline_opa` (C++ function), 94  
`lv_style_set_outline_pad` (C++ function), 94  
`lv_style_set_outline_width` (C++ function), 94  
`lv_style_set_pad_all` (C++ function), 77  
`lv_style_set_pad_bottom` (C++ function), 91  
`lv_style_set_pad_column` (C++ function), 92  
`lv_style_set_pad_gap` (C++ function), 78  
`lv_style_set_pad_hor` (C++ function), 77  
`lv_style_set_pad_left` (C++ function), 92  
`lv_style_set_pad_right` (C++ function), 92  
`lv_style_set_pad_row` (C++ function), 92  
`lv_style_set_pad_top` (C++ function), 91  
`lv_style_set_pad_ver` (C++ function), 77  
`lv_style_set_prop` (C++ function), 76  
`lv_style_set_radius` (C++ function), 92  
`lv_style_set_shadow_color` (C++ function), 94  
`lv_style_set_shadow_color_filtered` (C++ function), 94  
`lv_style_set_shadow_ofs_x` (C++ function), 94  
`lv_style_set_shadow_ofs_y` (C++ function), 94  
`lv_style_set_shadow_opa` (C++ function), 94  
`lv_style_set_shadow_spread` (C++ function), 94  
`lv_style_set_shadow_width` (C++ function), 94  
`lv_style_set_size` (C++ function), 78  
`lv_style_set_text_align` (C++ function), 94  
`lv_style_set_text_color` (C++ function), 93  
`lv_style_set_text_color_filtered` (C++ function), 93  
`lv_style_set_text_decor` (C++ function), 93  
`lv_style_set_text_font` (C++ function), 93  
`lv_style_set_text_letter_space` (C++ function), 93  
`lv_style_set_text_line_space` (C++ function), 93  
`lv_style_set_text_opa` (C++ function), 93  
`lv_style_set_transform_angle` (C++ function), 91  
`lv_style_set_transform_height` (C++ function), 91  
`lv_style_set_transform_width` (C++ function), 91  
`lv_style_set_transform_zoom` (C++ function), 91  
`lv_style_set_transition` (C++ function), 92  
`lv_style_set_translate_x` (C++ function), 91  
`lv_style_set_translate_y` (C++ function), 91  
`lv_style_set_width` (C++ function), 91  
`lv_style_set_x` (C++ function), 91  
`lv_style_set_y` (C++ function), 91  
`lv_style_t` (C++ type), 72  
`lv_style_transition_dsc_init` (C++ function), 77  
`lv_style_transition_dsc_t` (C++ type), 72  
`lv_style_value_t` (C++ union), 78  
`lv_style_value_t::color` (C++ member), 78  
`lv_style_value_t::num` (C++ member), 78  
`lv_style_value_t::ptr` (C++ member), 78

lv\_switch\_class (C++ member), 280  
 lv\_switch\_create (C++ function), 280  
 lv\_switch\_t (C++ type), 280  
 lv\_table\_add\_cell\_ctrl (C++ function), 287  
 lv\_table\_cell\_ctrl\_t (C++ type), 285  
 lv\_table\_class (C++ member), 288  
 lv\_table\_clear\_cell\_ctrl (C++ function), 287  
 lv\_table\_create (C++ function), 286  
 lv\_table\_get\_cell\_value (C++ function), 287  
 lv\_table\_get\_col\_cnt (C++ function), 288  
 lv\_table\_get\_col\_width (C++ function), 288  
 lv\_table\_get\_row\_cnt (C++ function), 287  
 lv\_table\_get\_selected\_cell (C++ function), 288  
 lv\_table\_has\_cell\_ctrl (C++ function), 288  
 lv\_table\_set\_cell\_value (C++ function), 286  
 lv\_table\_set\_cell\_value\_fmt (C++ function), 286  
 lv\_table\_set\_col\_cnt (C++ function), 287  
 lv\_table\_set\_col\_width (C++ function), 287  
 lv\_table\_set\_row\_cnt (C++ function), 287  
 lv\_table\_t (C++ type), 285  
 lv\_tabview\_add\_tab (C++ function), 370  
 lv\_tabview\_class (C++ member), 371  
 lv\_tabview\_create (C++ function), 370  
 lv\_tabview\_get\_content (C++ function), 370  
 lv\_tabview\_get\_tab\_act (C++ function), 370  
 lv\_tabview\_get\_tab\_btns (C++ function), 370  
 lv\_tabview\_set\_act (C++ function), 370  
 lv\_tabview\_t (C++ type), 370  
 lv\_text\_decor\_t (C++ type), 72  
 lv\_textarea\_add\_char (C++ function), 295  
 lv\_textarea\_add\_text (C++ function), 295  
 lv\_textarea\_class (C++ member), 299  
 lv\_textarea\_clear\_selection (C++ function), 298  
 lv\_textarea\_create (C++ function), 295  
 lv\_textarea\_cursor\_down (C++ function), 299  
 lv\_textarea\_cursor\_left (C++ function), 299  
 lv\_textarea\_cursor\_right (C++ function), 298  
 lv\_textarea\_cursor\_up (C++ function), 299  
 lv\_textarea\_del\_char (C++ function), 295  
 lv\_textarea\_del\_char\_forward (C++ function), 295  
 lv\_textarea\_get\_accepted\_chars (C++ function), 298  
 lv\_textarea\_get\_cursor\_click\_pos (C++ function), 298  
 lv\_textarea\_get\_cursor\_pos (C++ function), 297  
 lv\_textarea\_get\_label (C++ function), 297  
 lv\_textarea\_get\_max\_length (C++ function), 298  
 lv\_textarea\_get\_one\_line (C++ function), 298  
 lv\_textarea\_get\_password\_mode (C++ function), 298  
 lv\_textarea\_get\_password\_show\_time (C++ function), 298  
 lv\_textarea\_get\_placeholder\_text (C++ function), 297  
 lv\_textarea\_get\_text (C++ function), 297  
 lv\_textarea\_get\_text\_selection (C++ function), 298  
 lv\_textarea\_set\_accepted\_chars (C++ function), 296  
 lv\_textarea\_set\_align (C++ function), 297  
 lv\_textarea\_set\_cursor\_click\_pos (C++ function), 296  
 lv\_textarea\_set\_cursor\_pos (C++ function), 296  
 lv\_textarea\_set\_insert\_replace (C++ function), 297  
 lv\_textarea\_set\_max\_length (C++ function), 296  
 lv\_textarea\_set\_one\_line (C++ function), 296  
 lv\_textarea\_set\_password\_mode (C++ function), 296  
 lv\_textarea\_set\_password\_show\_time (C++ function), 297  
 lv\_textarea\_set\_placeholder\_text (C++ function), 296  
 lv\_textarea\_set\_text (C++ function), 295  
 lv\_textarea\_set\_text\_selection (C++ function), 297  
 lv\_textarea\_t (C++ type), 295  
 lv\_textarea\_text\_is\_selected (C++ function), 298  
 lv\_theme\_apply (C++ function), 79  
 lv\_theme\_apply\_cb\_t (C++ type), 79  
 lv\_theme\_get\_color\_primary (C++ function), 80  
 lv\_theme\_get\_color\_secondary (C++ function), 80  
 lv\_theme\_get\_font\_large (C++ function), 80  
 lv\_theme\_get\_font\_normal (C++ function), 80  
 lv\_theme\_get\_font\_small (C++ function), 80  
 lv\_theme\_get\_from\_obj (C++ function), 79  
 lv\_theme\_set\_apply\_cb (C++ function), 79  
 lv\_theme\_set\_parent (C++ function), 79  
 lv\_theme\_t (C++ type), 79  
 lv\_tick\_elaps (C++ function), 46  
 lv\_tick\_get (C++ function), 46  
 lv\_tileview\_add\_tile (C++ function), 373  
 lv\_tileview\_class (C++ member), 374  
 lv\_tileview\_create (C++ function), 373  
 lv\_tileview\_get\_tile\_act (C++ function), 373  
 lv\_tileview\_t (C++ type), 373  
 lv\_tileview\_tile\_class (C++ member), 374



---

`lv_tileview_tile_t` (C++ *type*), 373  
`lv_timer_cb_t` (C++ *type*), 173  
`lv_timer_create` (C++ *function*), 173  
`lv_timer_create_basic` (C++ *function*), 173  
`lv_timer_del` (C++ *function*), 173  
`lv_timer_enable` (C++ *function*), 174  
`lv_timer_get_idle` (C++ *function*), 174  
`lv_timer_get_next` (C++ *function*), 174  
`lv_timer_pause` (C++ *function*), 173  
`lv_timer_ready` (C++ *function*), 174  
`lv_timer_reset` (C++ *function*), 174  
`lv_timer_resume` (C++ *function*), 173  
`lv_timer_set_cb` (C++ *function*), 173  
`lv_timer_set_period` (C++ *function*), 174  
`lv_timer_set_repeat_count` (C++ *function*),  
174  
`lv_timer_t` (C++ *type*), 173  
`lv_win_add_btn` (C++ *function*), 377  
`lv_win_add_title` (C++ *function*), 377  
`lv_win_class` (C++ *member*), 377  
`lv_win_create` (C++ *function*), 377  
`lv_win_get_content` (C++ *function*), 377  
`lv_win_get_header` (C++ *function*), 377  
`lv_win_t` (C++ *type*), 376