1.5m³ Self-loading Concrete Mixer

TECHNICAL SPECIFICATIONS			
Place of Origin	Shandong, China	**Dimension (L*W*H)**	6340*1857*2920 mm
Tank Volume	1.93 m^3	**Tank discharge**	1.5 m^3
Curb Weight	4500 kg	**Ground clearance**	292 mm
Hydraulic Tank Capacity	72 L	**Diesel Fuel Tank Volume**	72 L
Wheebase	2440 mm	**Max. Gradeability**	30 °

TANK/POWER SYSTEM			Standard ● Options ○
Engine Model	● Yunei 490 Turbo	**Rated Power**	● 58 kw
Torque Converter Model	● JBJ-278 Split torque converter	**Drive Axle**	● JBJ-8T Full-time 4WD
Tyre Size	● 23.5/70-16 ● 4 Rounds	**Brake Type**	● Pneumatic Brakes Dual Circuit System
Speed of agitator	20 r/min		

DRIVE & CONTROL SYSTEM			Standard ● Options ○
Cab Location	● Rear-mounted	**Air Conditioning**	○
Max. Travel Speed	≤35 km/h	**Hydraulic Motor**	● A2FM63 Cycloid Motor
Water Tank Capacity	● 550 L	**Dipper Capacity**	0.55 m^3

OTHER STANDARD & OPTIONAL	
Standard	Unloading Vibrator / Dual Camera System / Display Screen Luxury Suspension Seat / Digital Dashboard / Timed Water Intake System
Optional	Electronic Weighing System / Air Conditioning (A/C) with Heating Cement Hopper

Product Advantages

All-in-One Integration: Combines loading, mixing, and discharging—a mobile batching plant on wheels.

Enhanced Efficiency: Streamlines operations to boost productivity while minimizing labor and time costs.

Superior Versatility: From crowded urban centers to remote regions. It excels in concrete road maintenance, industrial parks, construction projects, mining, and forestry.

Product Display
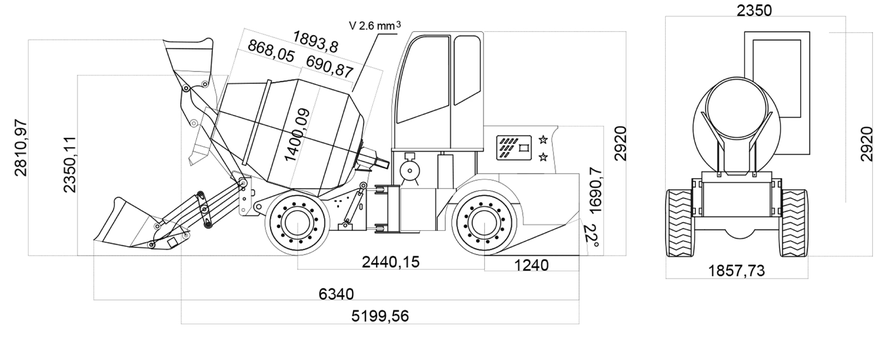
Technical Drawings