


INSTRUMENT APPROACH CHART-ICAO

VAR2° W

AERODROME ELEV 4
THR RWY15 ELEV 3.7

D-ATIS 126.85(ARR)
TWR 130.35(118.05)(E)
118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan
RNAV ILS/DME z RWY15

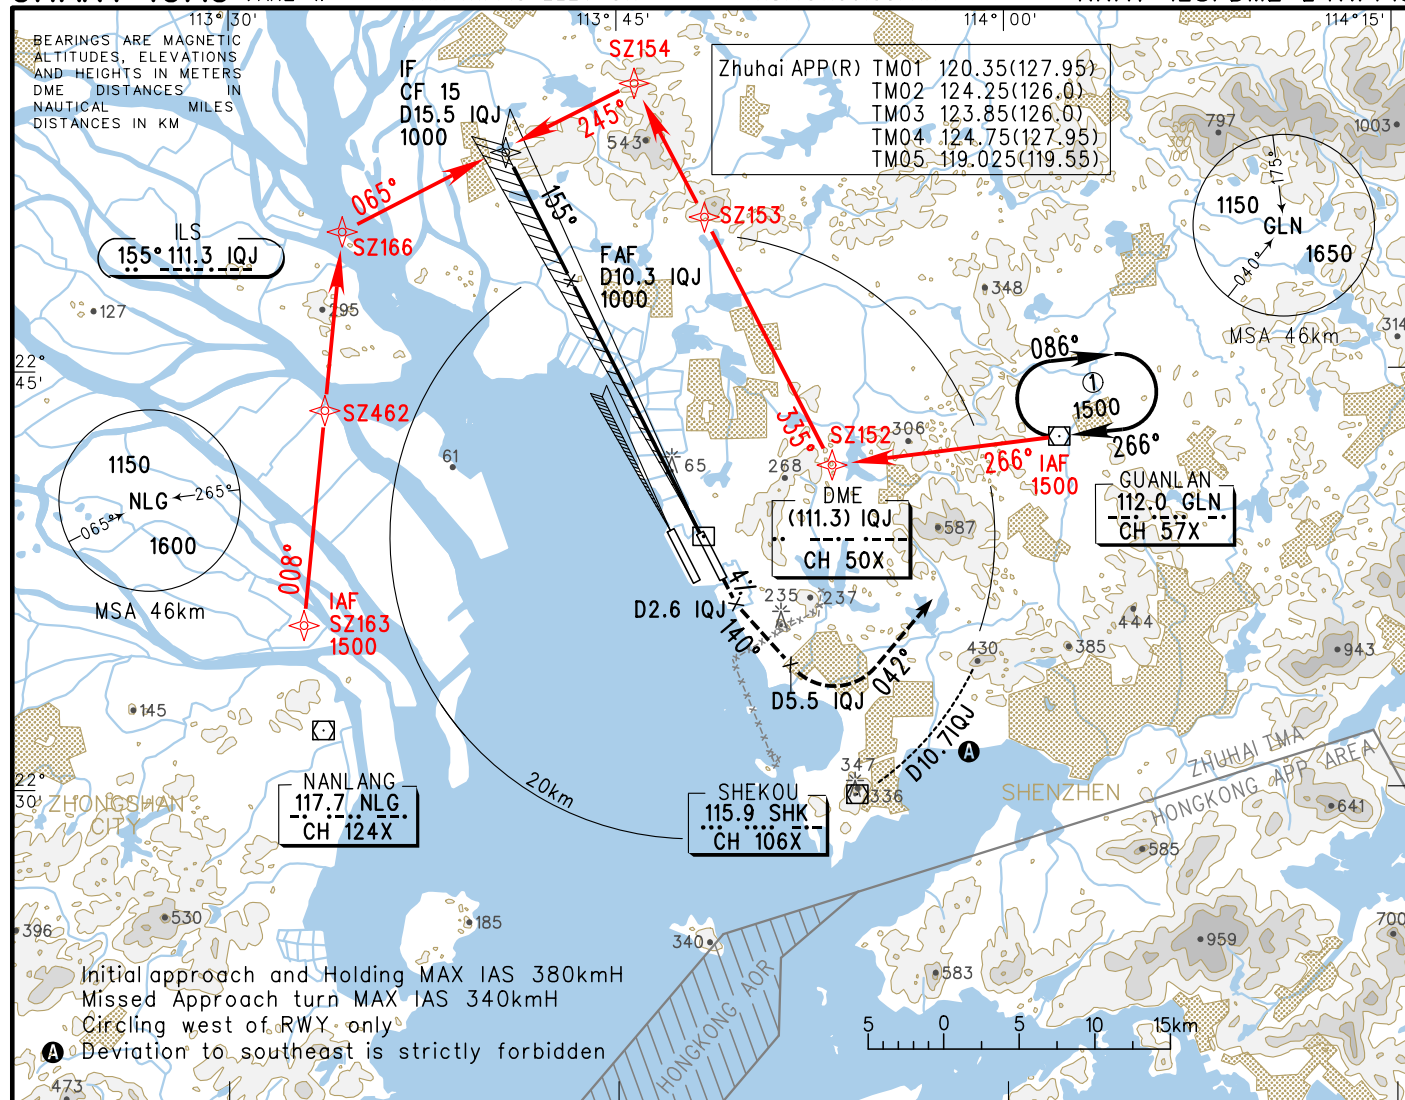


GP INOP	DME (IQJ) (NM)	14	12	10	8	6	4	2	0
	ALT (m)			974	780	586	391	197	

TL 3600(QNH <980hPa)
3300(QNH ≥980hPa)
TA 2700

MISSED APPROACH

Climb straight ahead with gradient 4% to D2.6 IQJ, turn LEFT on track 140° to D5.5 IQJ, then turn LEFT and climb along R222° GLN to 1200, climb to 1500 after obtaining ATC clearance, then fly over GLN, join holding or approach again after ATC clearance.

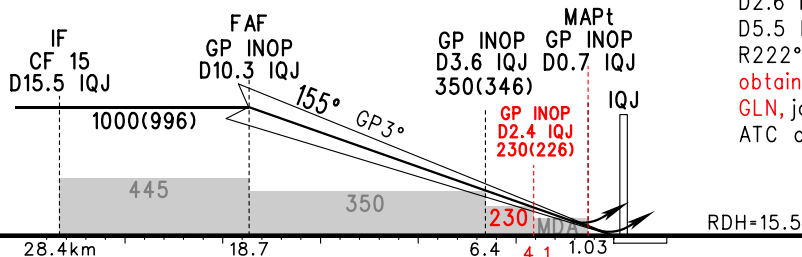

		A	B	C	D	FAF-MAPt(GP INOP) 17.67km							
ILS/DME	DA(H) RVR/VIS	64(60) 550/800				GS in	kt kmH	80 150	100 185	120 220	140 260	160 295	180 335
		219(215) -/3300	224(220) -/3300	229(225) -/3400		Time	min:sec	7:09	5:43	4:46	4:05	3:35	3:11
GP INOP		140(136) 1700				Rate of descent m/s		2.2	2.7	3.2	3.8	4.3	4.9
CIRCLING		220(216) 3300	225(221) 3300	275(271) 4000	275(271) 4400	SA CAT I: (DH)(45),(RA)(48),RVR450. Note: Missed approach climb gradient. Changes: Procedure, standards, LMM 'Q' withdrawn.							