

Note 1.1: Possible alternative AUFR5305, SUD19P06-60, SPD30P06P or other with similar or lower input capacitance
 Note 1.2: WE 7447709330, WE 7443551331, Coilcraft MSS1210-333, Coilcraft XAL1510-333, Vishay IHL4040DZER470M11, etc.
 Note 1.3: Use 240K for 30 VAC main transformer
 Note 1.4: Install 0R only if 100% Duty cycle feature for Low Ripple mode is not needed
 Note 1.5: Use R020 for 0-3.12 A or R015 for 0-4.16 A range
 Note 1.6: Replace ZD1 and C3, C5, C6 if Vin is above 50 V

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
 More info at <http://www.envox.hr/eez>
 Repository: <https://github.com/eez-open>



SMPS power pre-regulator with 100% duty cycle


TITLE: EEZ PSU consolidated r5B12

Document Number:

REV:

Date: 11. 03. 2017. 11:18

Sheet: 1/12

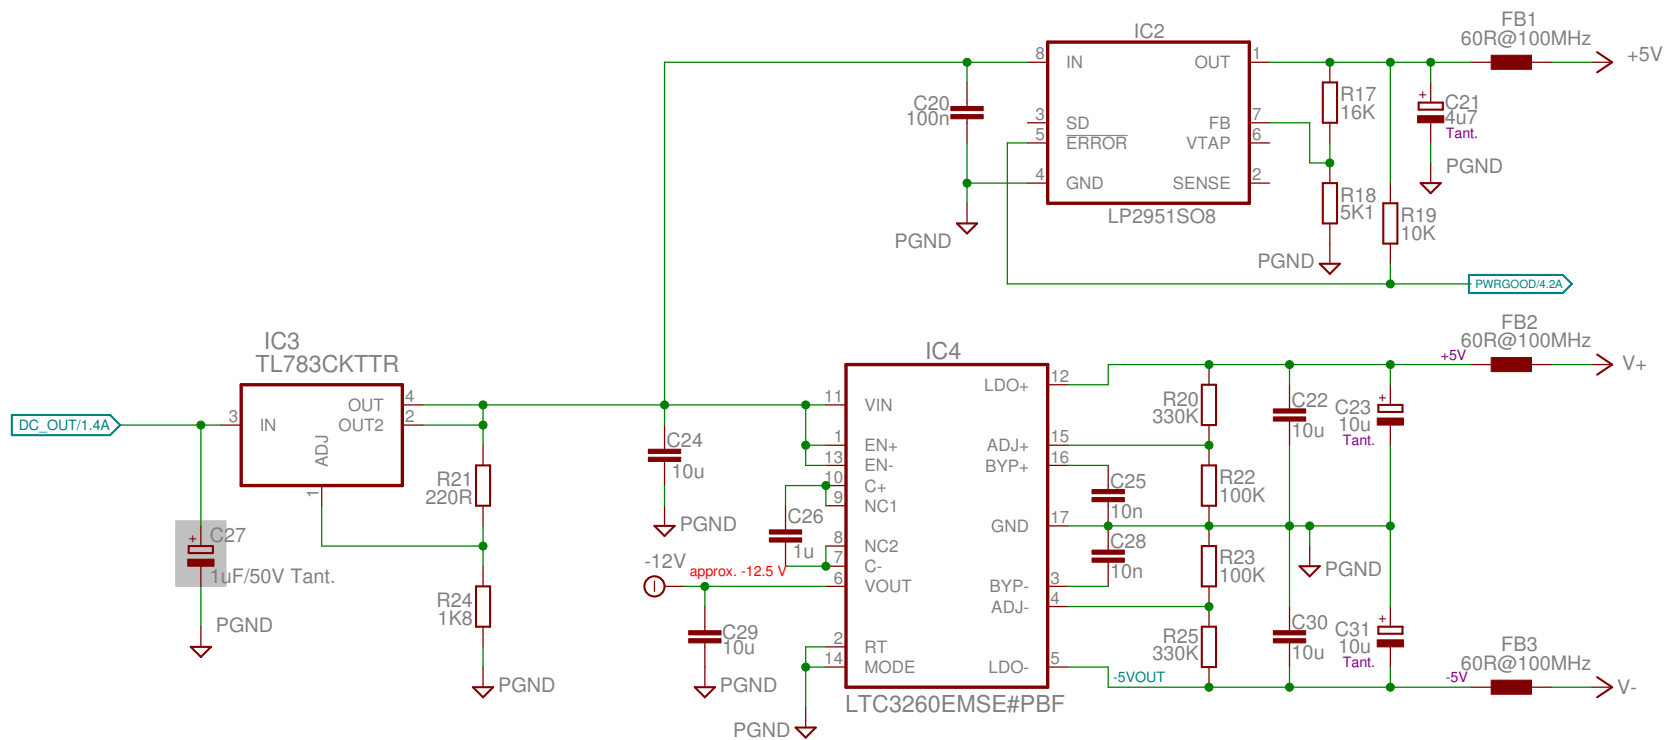

Bias power supply (+/-5V, +5V, -12V)
Powergood signal


TITLE: EEZ PSU consolidated r5B12

Document Number:

REV:

Date: 11. 03. 2017. 11:18

Sheet: 2/12

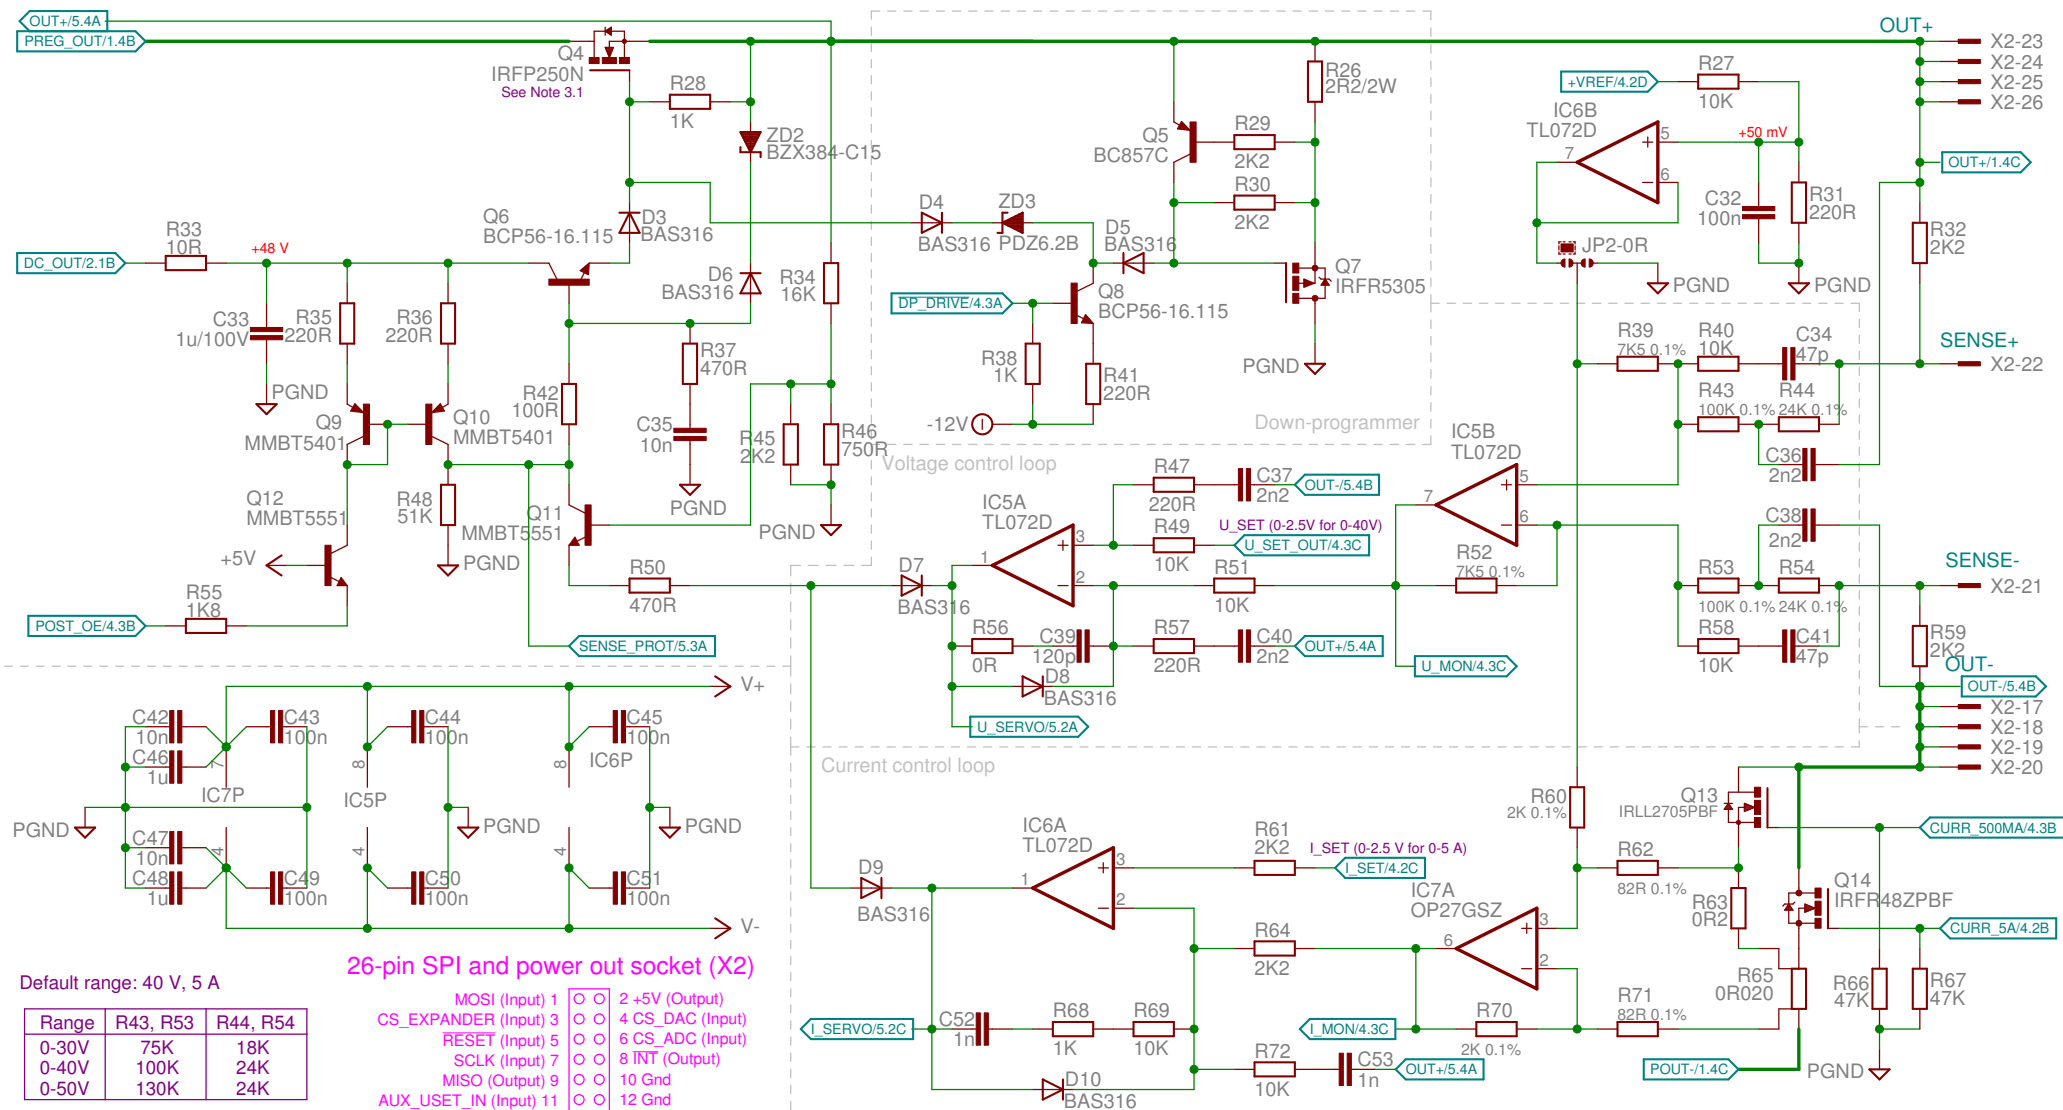

Note 3.1: Q4 is mounted on the external heatsink (e.g. RAD-A4463/120)

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
 More info at <http://www.envox.hr/eez>
 Repository: <https://github.com/eez-open>

CV/CC linear post-regulator
 Output enable and "down-programmer"

TITLE: EEZ PSU consolidated r5B12


Document Number:

REV:

Date: 11. 03. 2017. 11:18

Sheet: 3/12

Digital control (SPI)

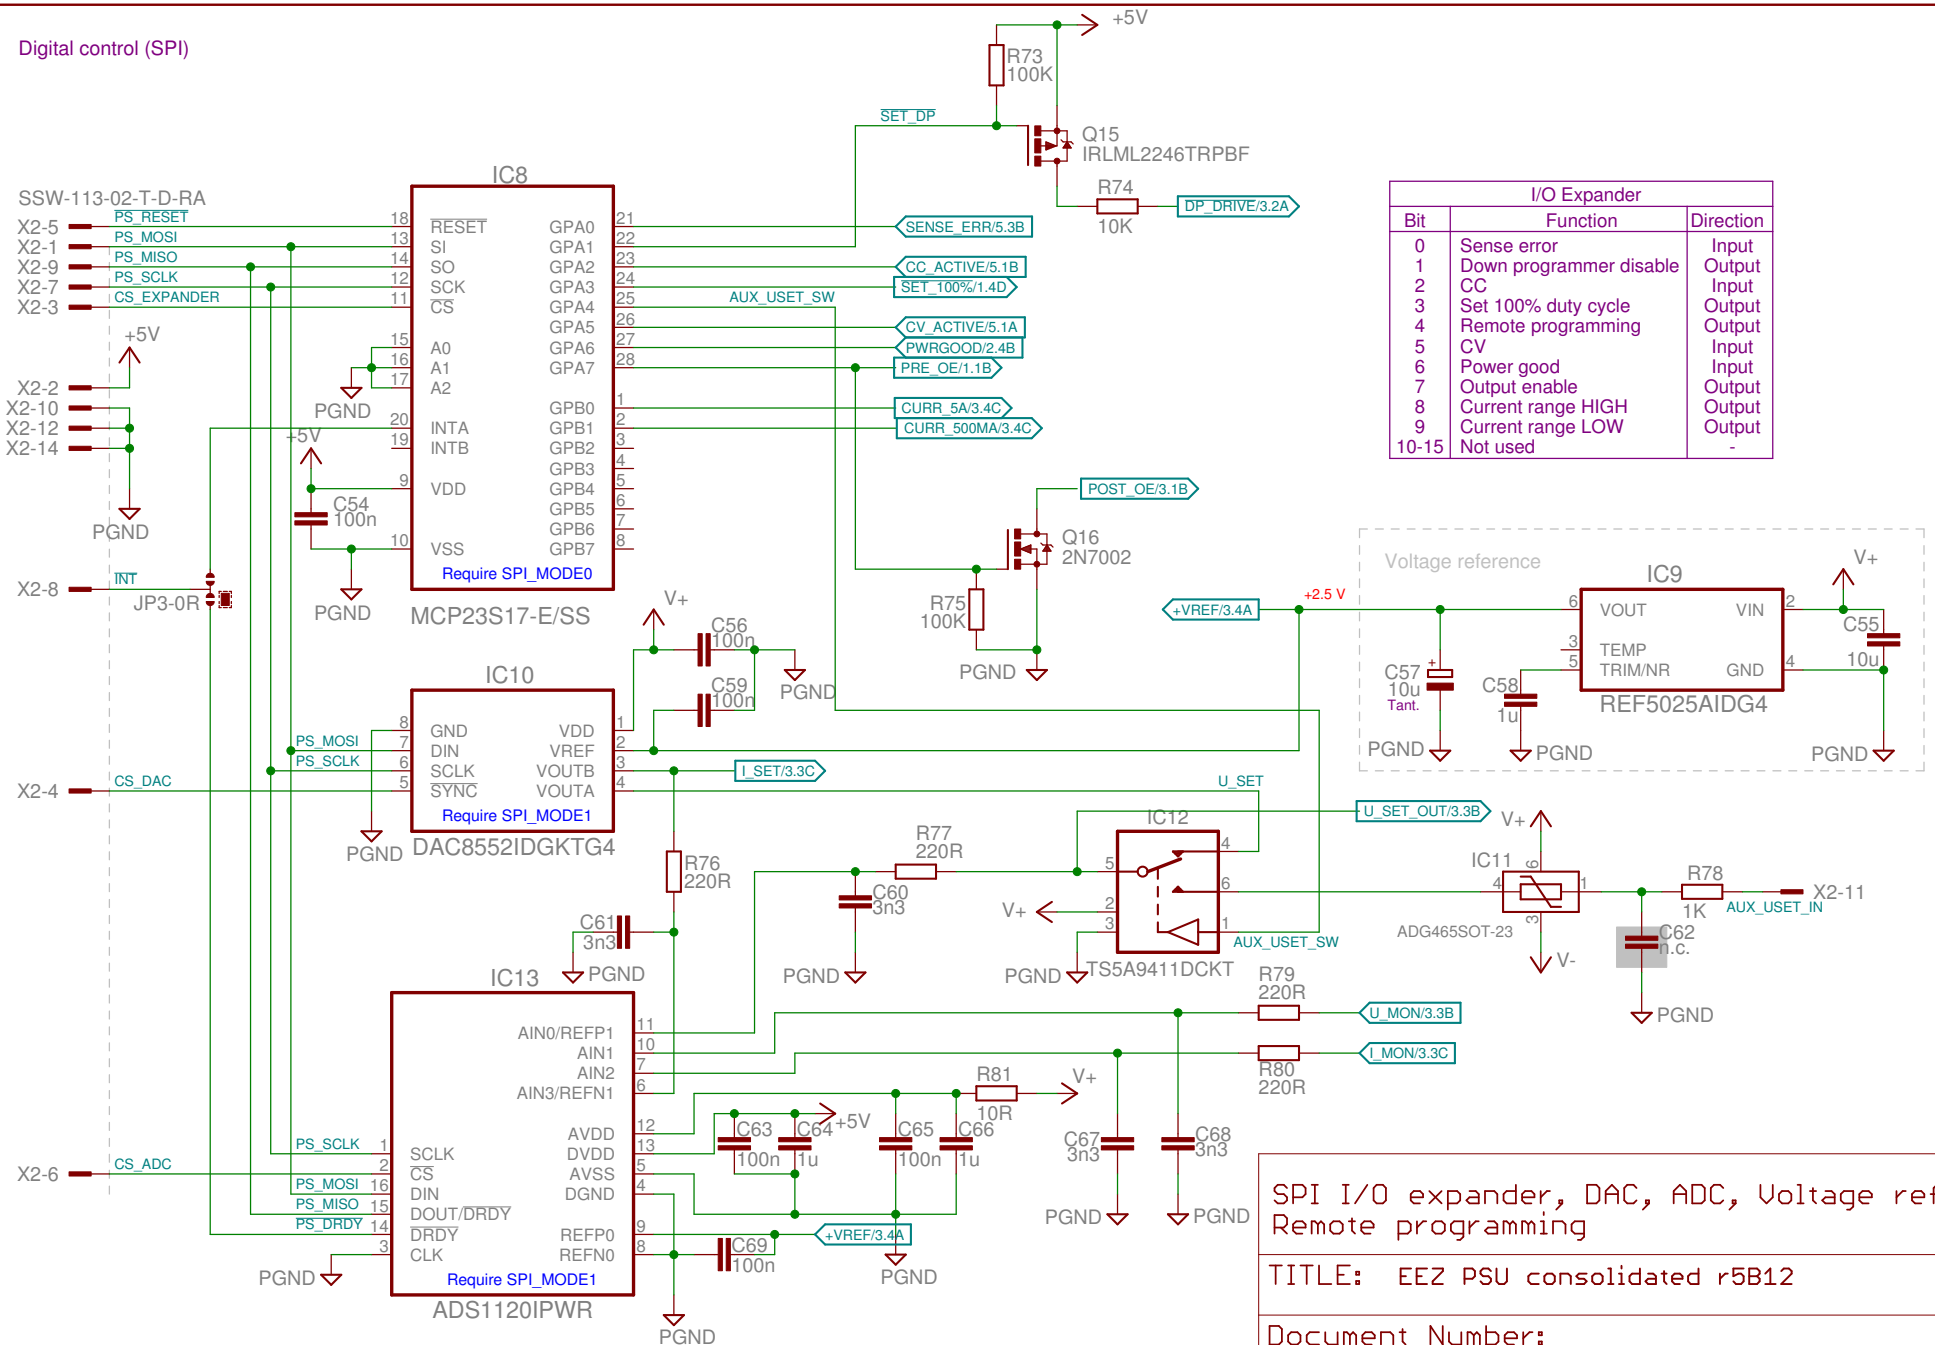

SPI I/O expander, DAC, ADC, Voltage reference
Remote programming

TITLE: EEZ PSU consolidated r5B12


Document Number:

REV:


Date: 11. 03. 2017. 11:18

Sheet: 4/12

Constant Voltage (CV) and Constant Current (CC) mode indicator

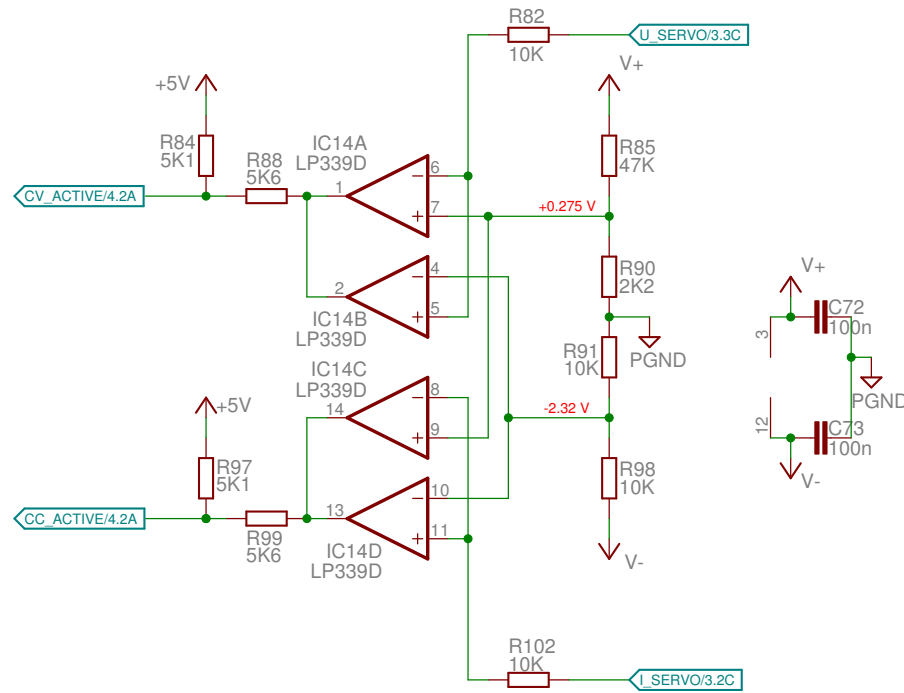

Remote sense reverse polarity detection

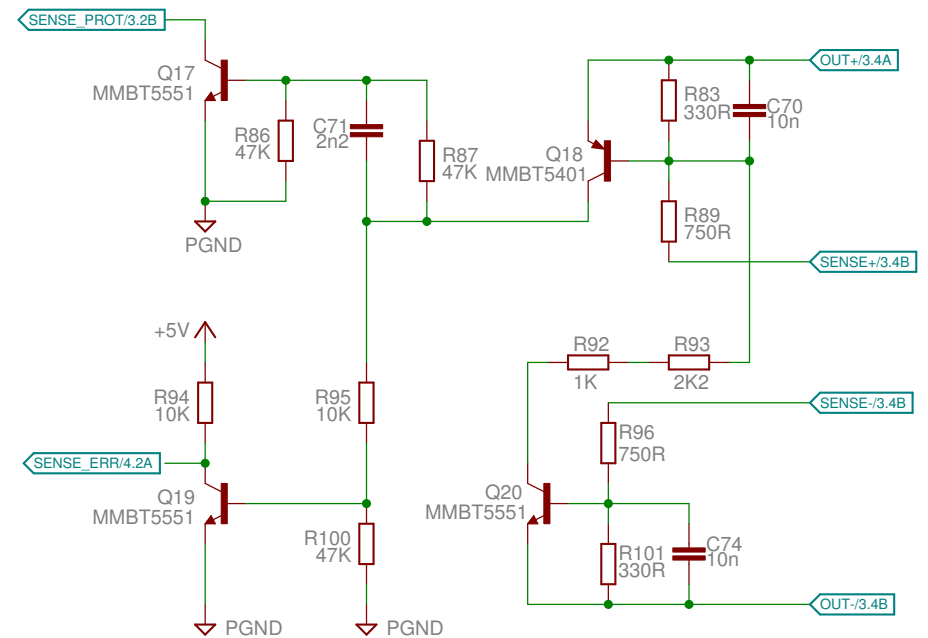

CC/CV indicators, Sense error detection

TITLE: EEZ PSU consolidated r5B12


Document Number:

REV:

Date: 11. 03. 2017. 11:18

Sheet: 5/12


AC input protection and soft-start/stand-by

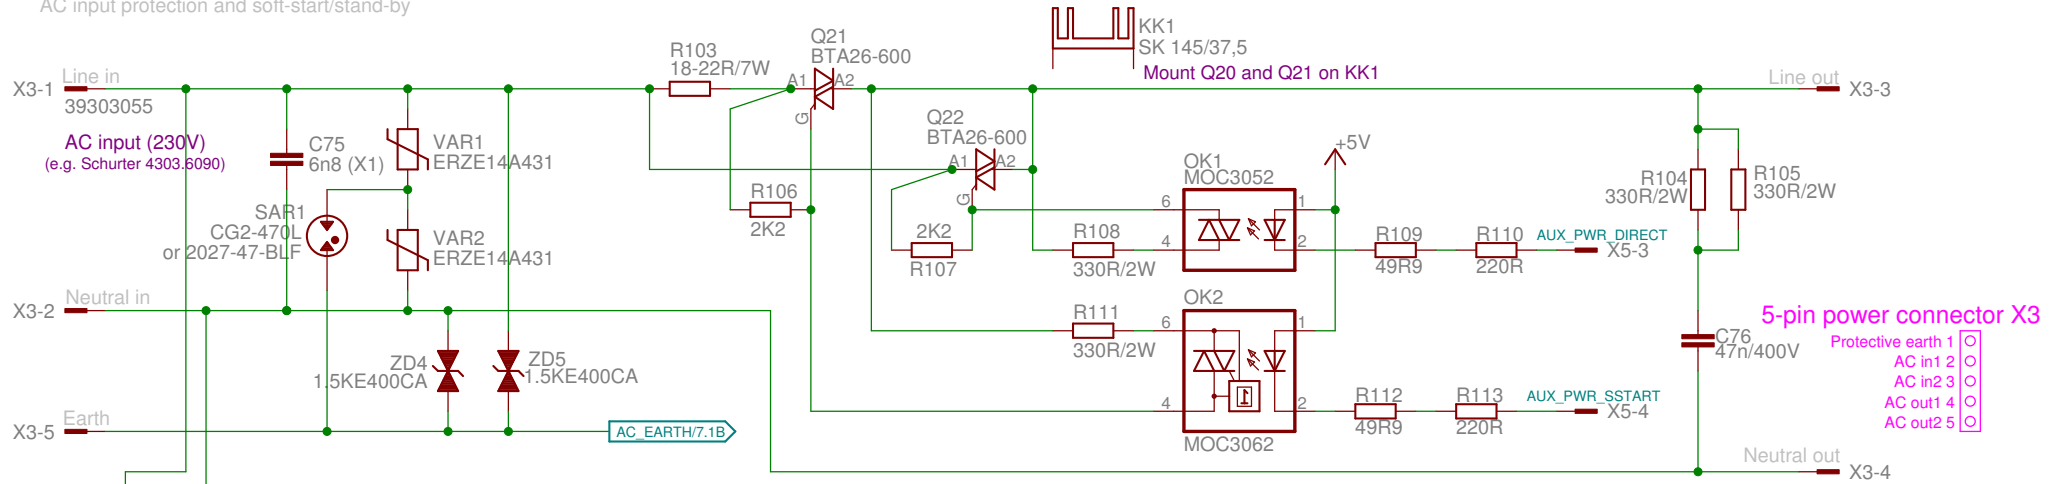

+5 V, +12 V power supply (max. 5W)

+12VDC fan control

Fan sense (tachometer out)

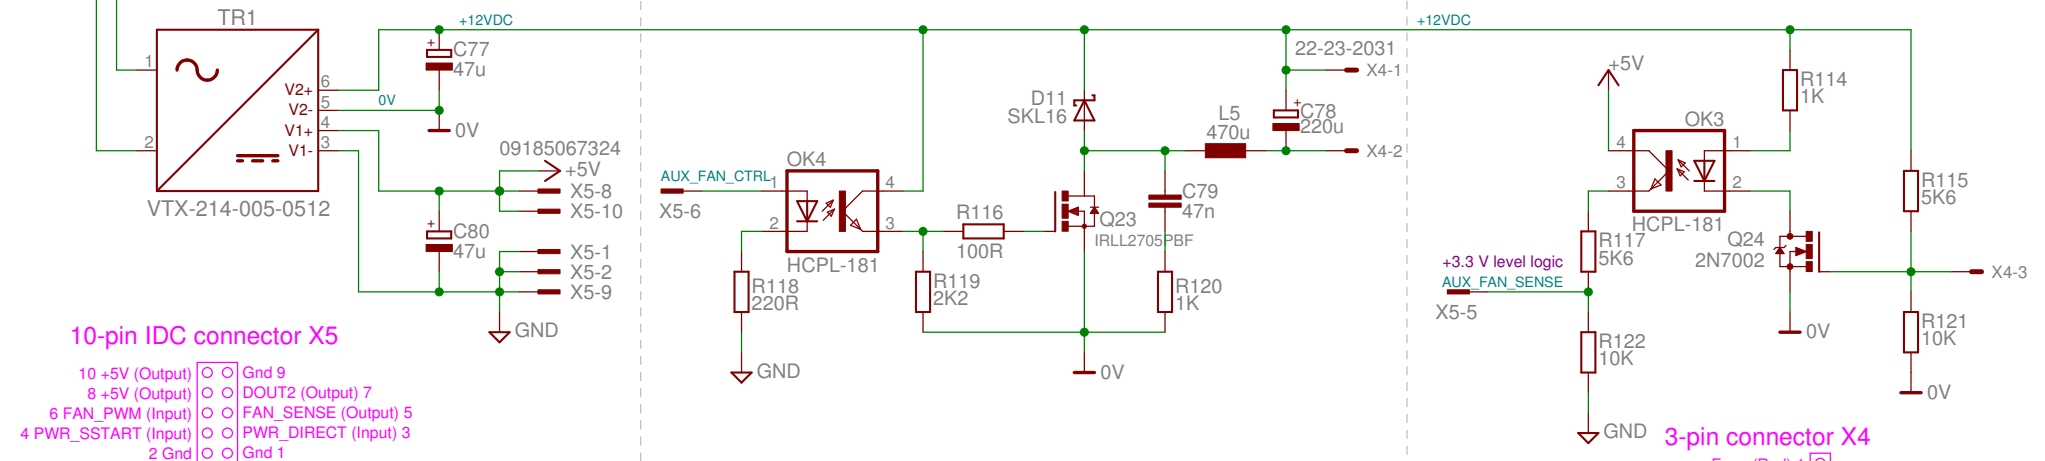

10-pin IDC connector X5

10 +5V (Output)	○	○	Gnd 9
8 +5V (Output)	○	○	DOUT2 (Output) 7
6 FAN_PWM (Input)	○	○	FAN_SENSE (Output) 5
4 PWR_SSTART (Input)	○	○	PWR_DIRECT (Input) 3
2 Gnd	○	○	Gnd 1

115VAC option:

Name	Value	Code
SAR1	2027-23-BLF	Farnell: 1780455, TME: CG2-230L
TR2	VPP24-210	Digikey: 237-1085-ND
		Mouser: 553-VPP24-210
		Newark: 93F8764
VAR1, VAR2	or AC/DC module	Farnell: 2469211
ZD1, ZD2	Myrra 47202	Farnell: 1004387, TME: SIOV-S20K140
	S20K140	Farnell: 1837117, TME: 1.5KE200CA
	1.5KE200CA	

AC input protection, in-rush current limiter
+5V/+12V 5W power supply, fan control

TITLE: EEZ PSU consolidated r5B12

Document Number:


REV:

Date: 11. 03. 2017. 11:18

Sheet: 6/12




Ethernet connector with optional surge protection

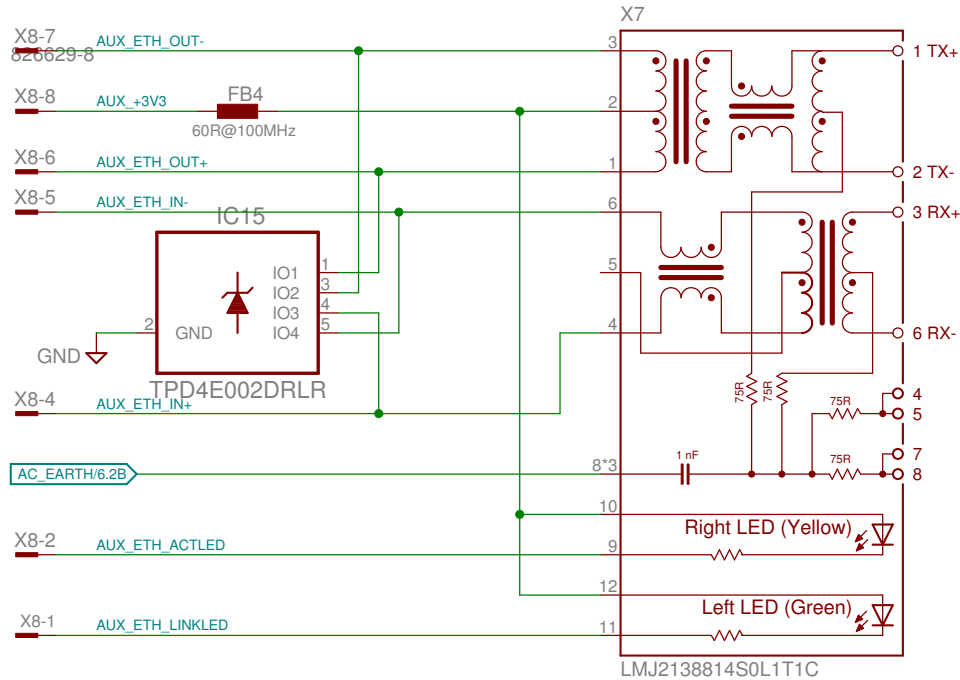

8-pin connector X8

- LED Link (Input) 1
- LED Act (Input) 2
- Shield 3
- RX+ (Output) 4
- RX- (Output) 5
- TX+ (Input) 6
- TX- (Input) 7
- +3.3V (Input) 8


Digital OUT2 relay

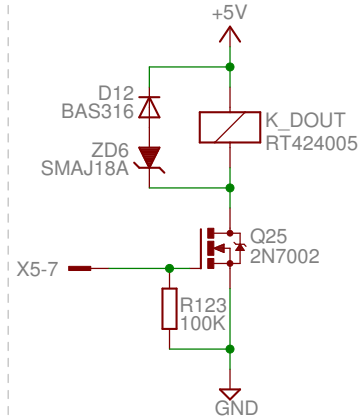

3-pin connector X6

- NO contact 1
- Common 2
- NC contact 3

USB connector with optional isolator and surge protection

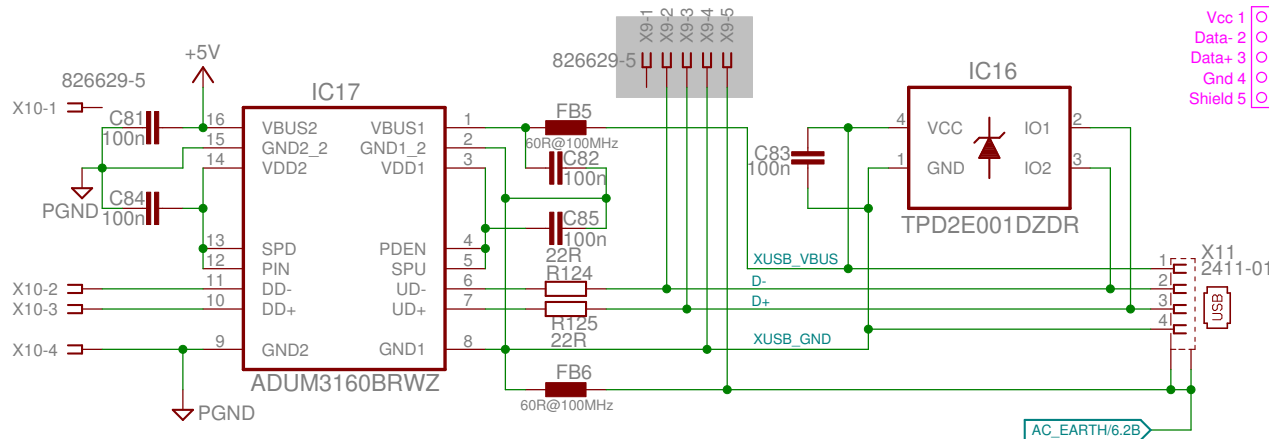

5-pin connector X9, X10

- Vcc 1
- Data- 2
- Data+ 3
- Gnd 4
- Shield 5

Note 7.1: Mount X4 and X8 on the opposite (top) side of the PCB. Use 14 mm (e.g. Bossard B3X14/BN3320) for enclosure with 3 mm rear panel

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
 More info at <http://www.envox.hr/eez>
 Repository: <https://github.com/eez-open>

Ethernet and USB PCB connectors


TITLE: EEZ PSU consolidated r5B12


Document Number:


REV:

Date: 11. 03. 2017. 11:18

Sheet: 7/12

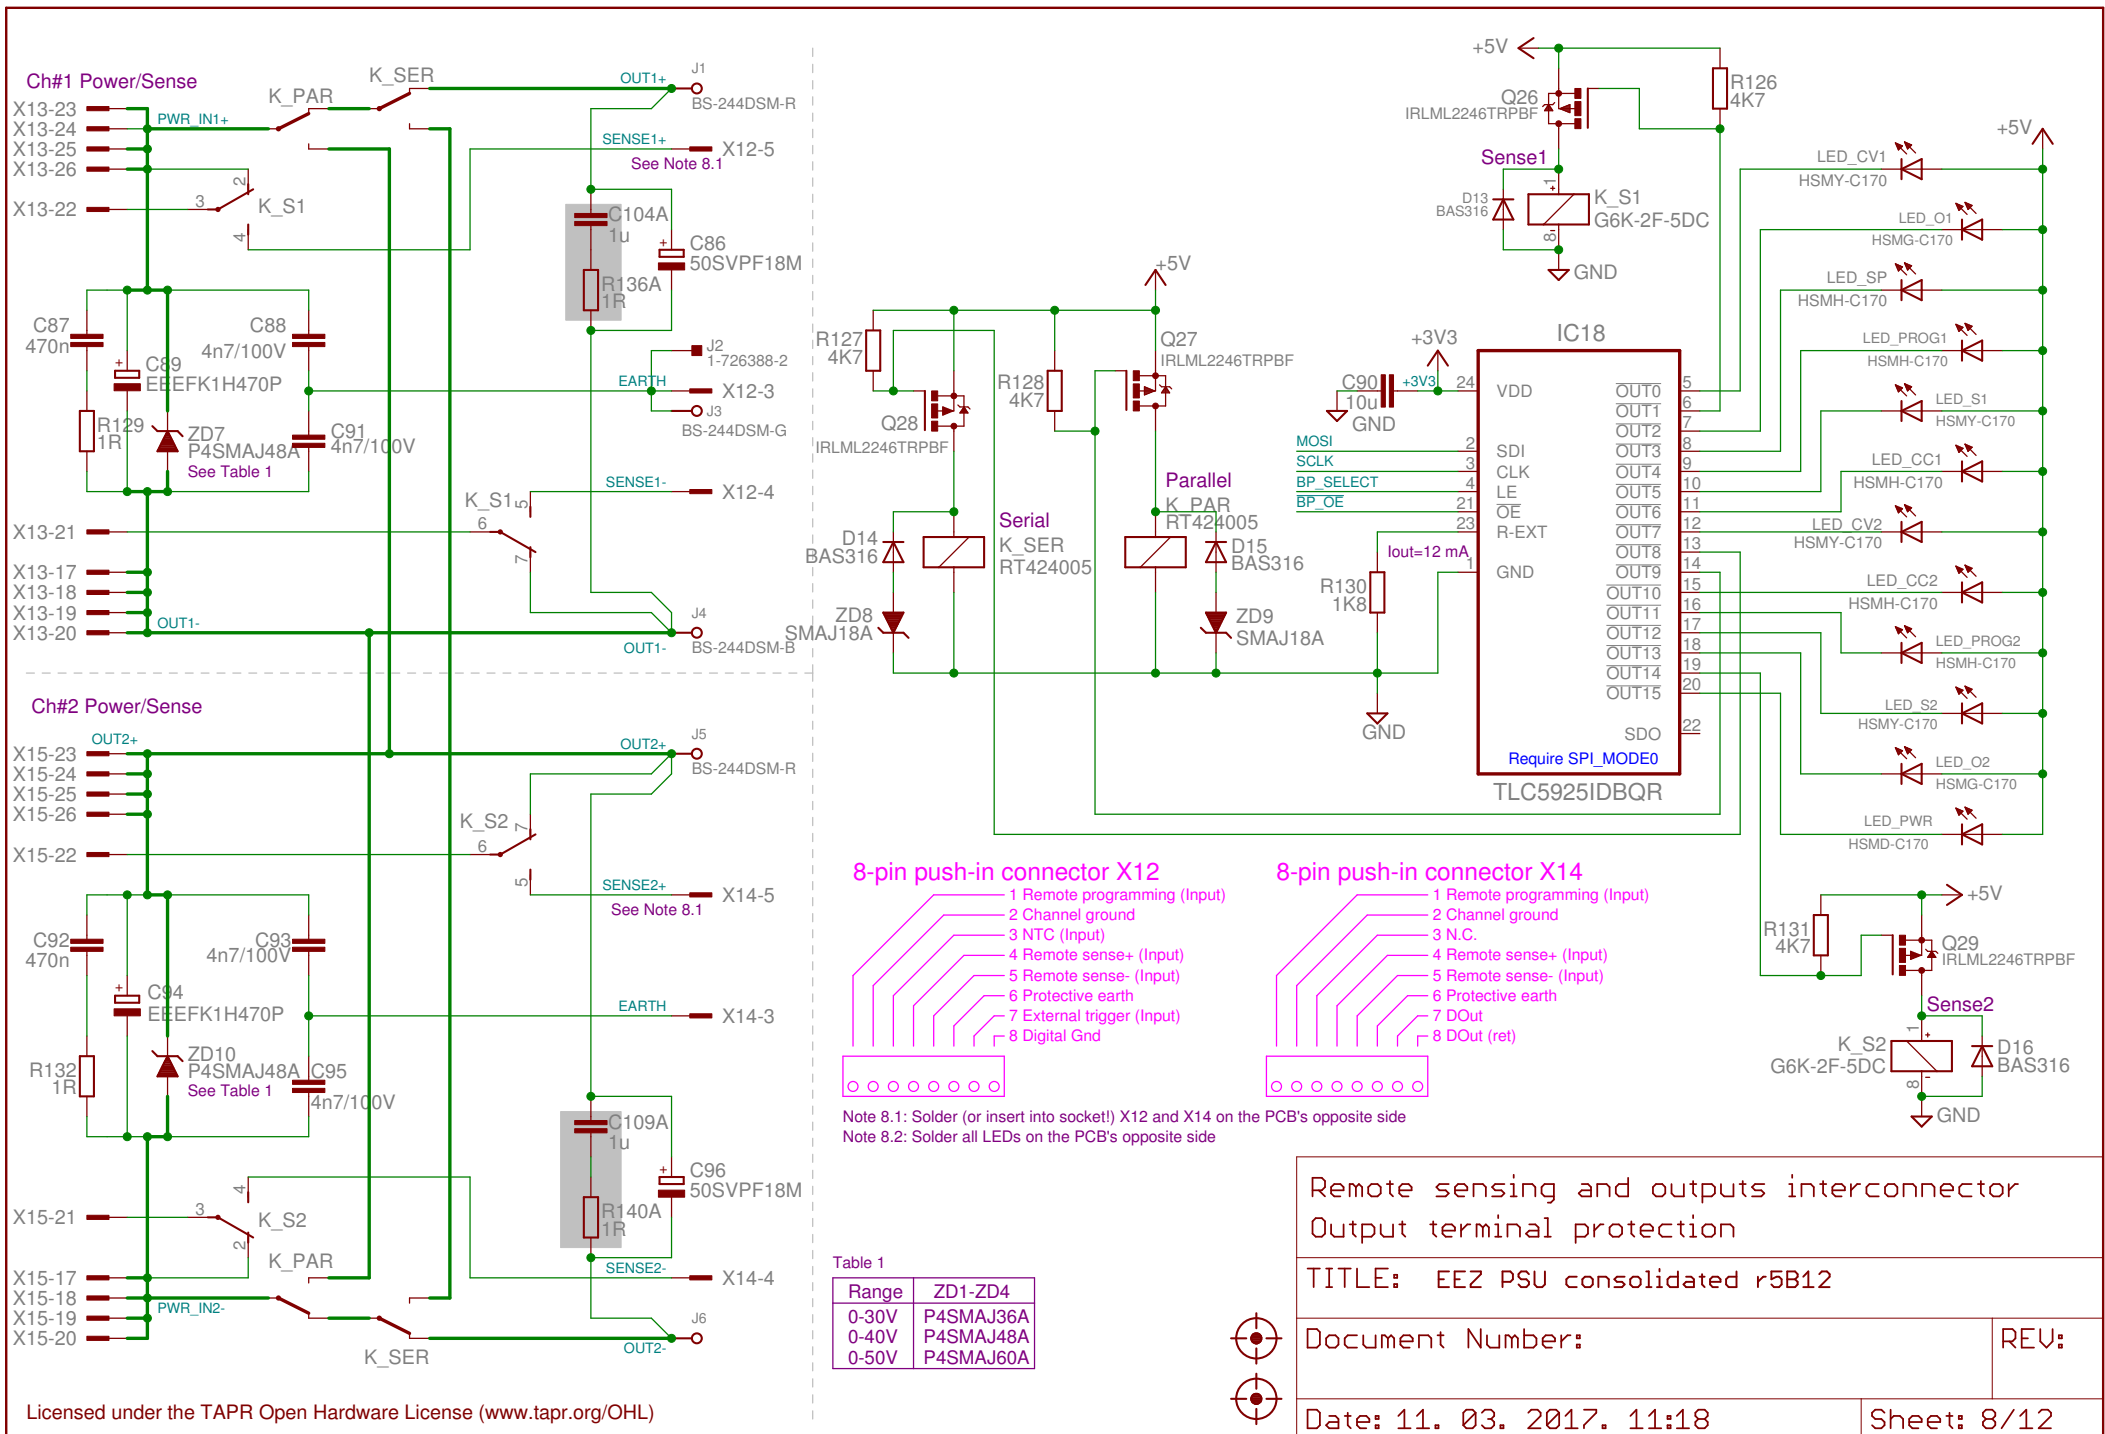

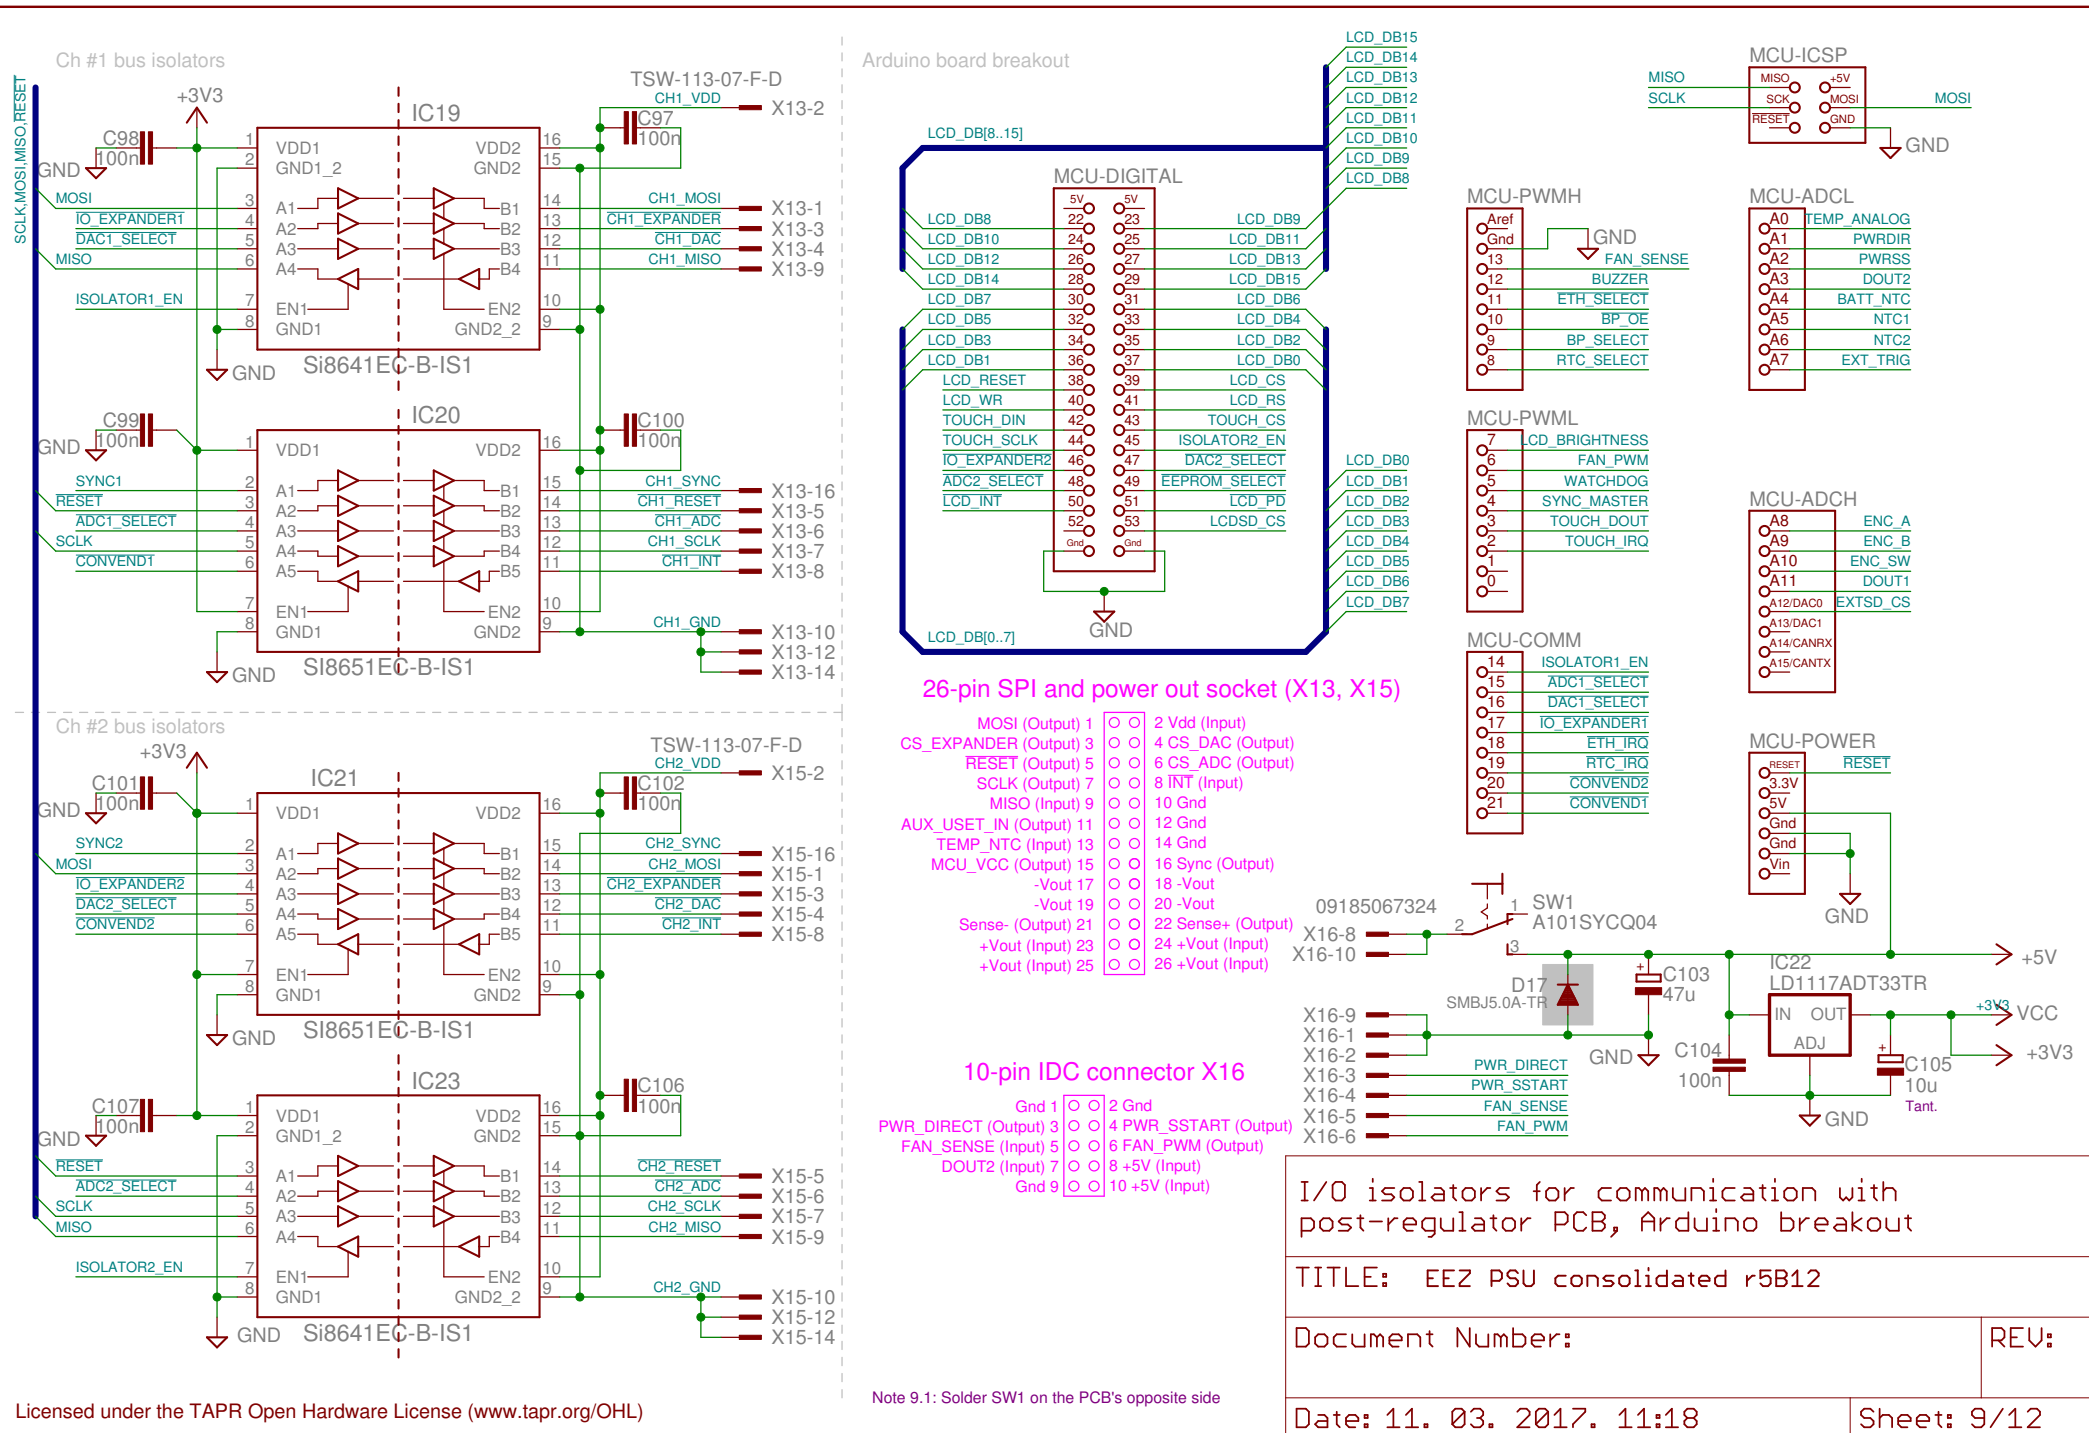


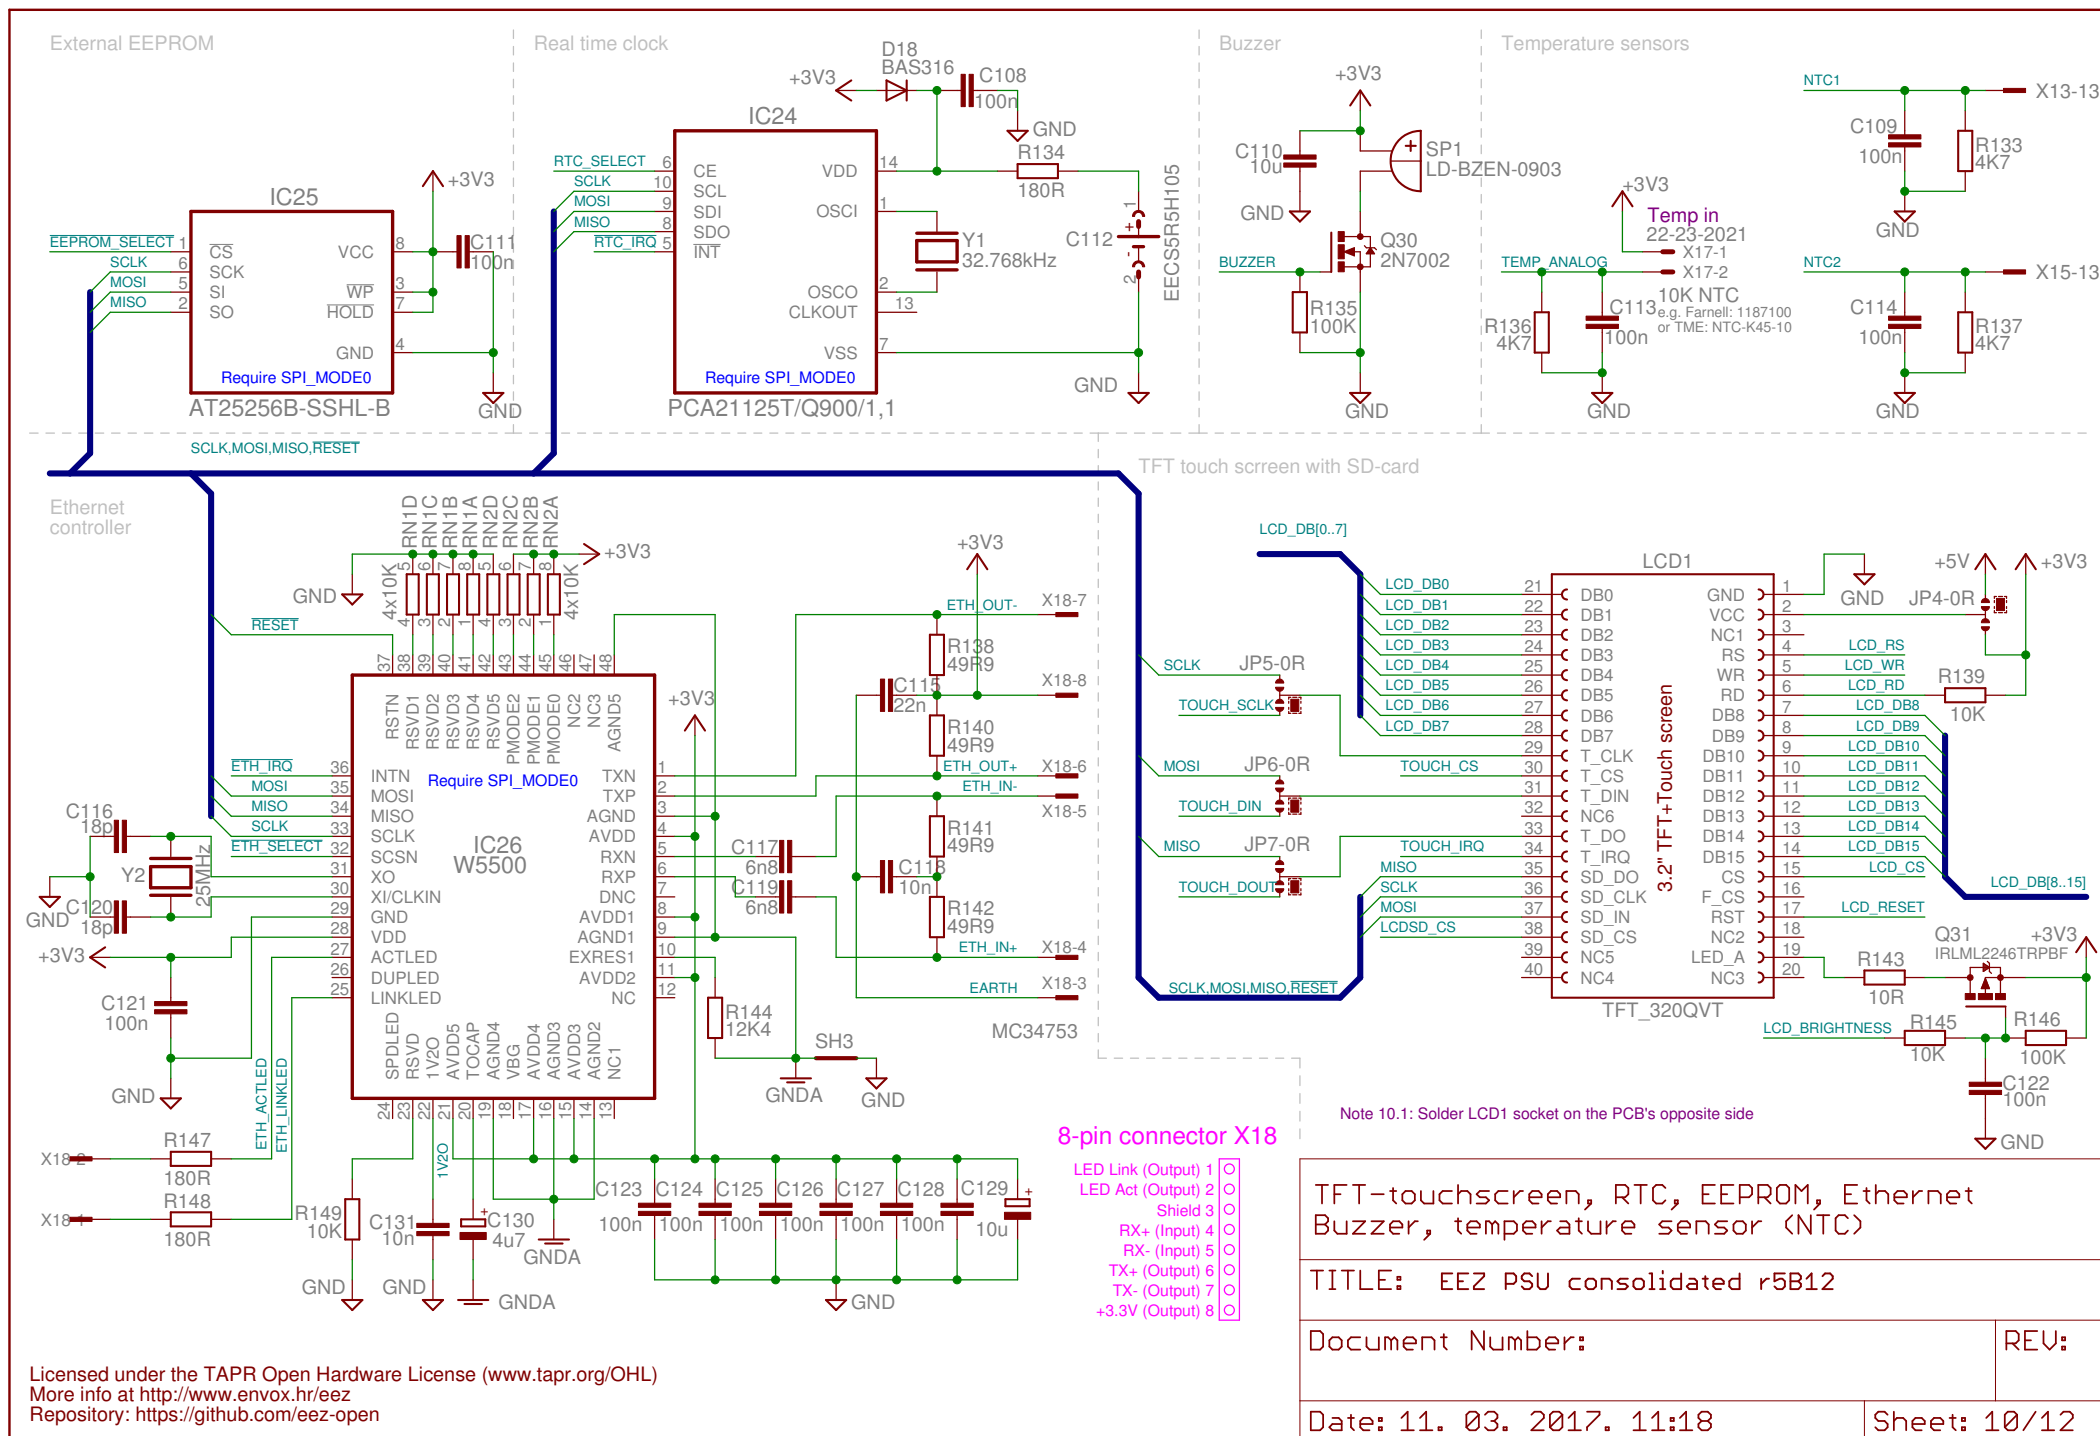


Remote programming inputs




Power-on reset generator and power control

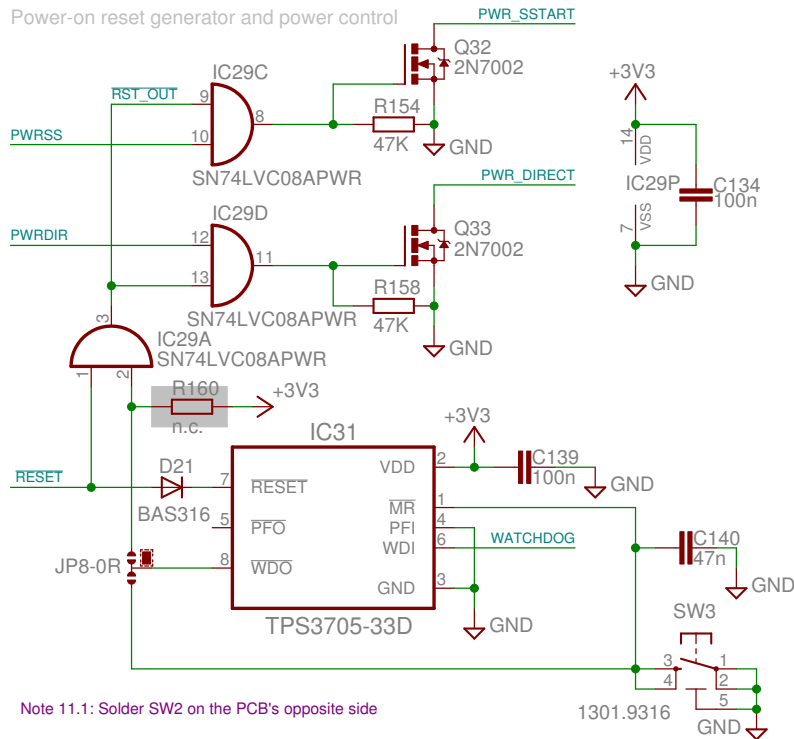


Master sync signal phase shifting

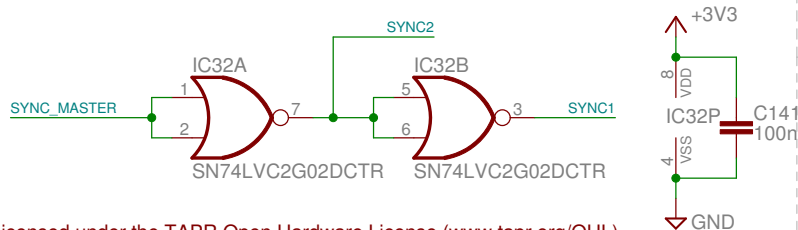


Channel 1 V/F converter for battery NTC (optional)

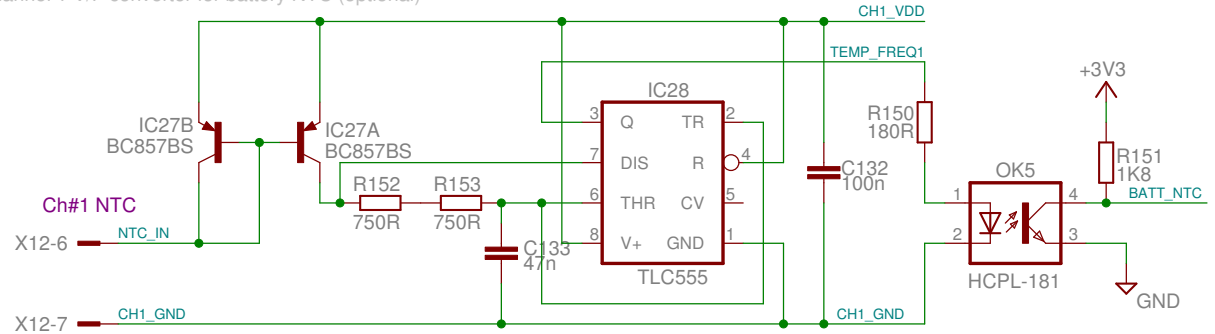


External trigger protection and level shifter/buffer

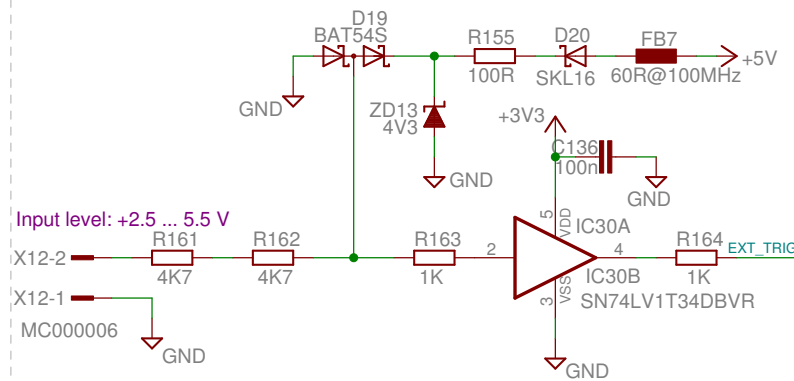


Rotary encoder

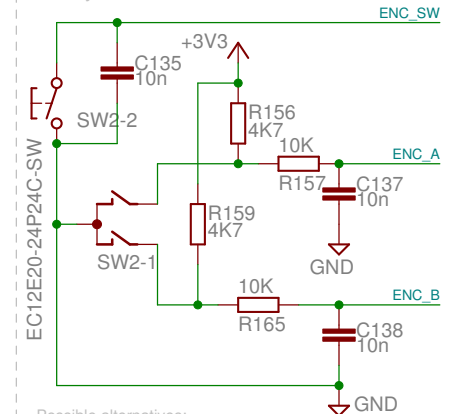

Opto-isolated digital output

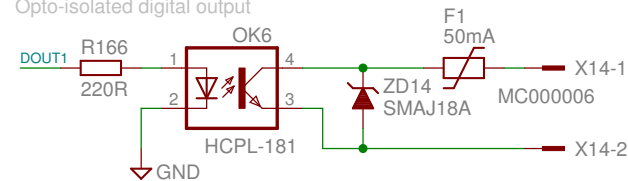

DOUT2 driver



Reset control, soft-start driver, encoder
V/F converter for battery NTC, External trigger

TITLE: EEZ PSU consolidated r5B12


Document Number:

REV:


Date: 11. 03. 2017. 11:18

Sheet: 11/12


AC input option

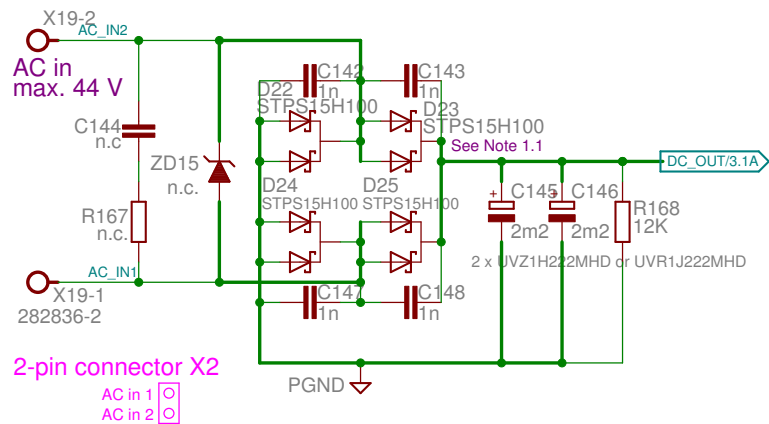


Micro SD card (optional)

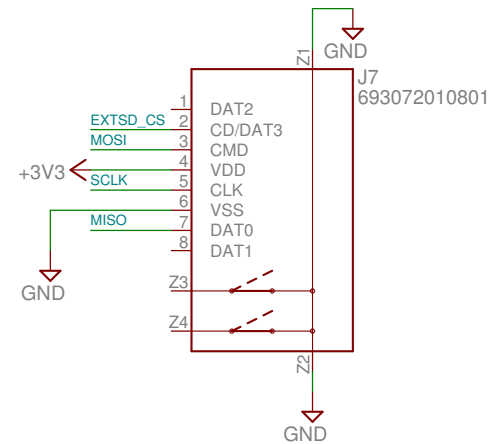

Riverdi 3.5" LCD (optional)

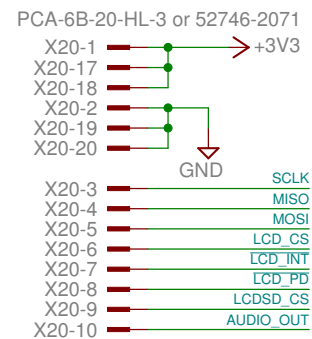

Riverdi 3.5" Audio amplifier (optional)

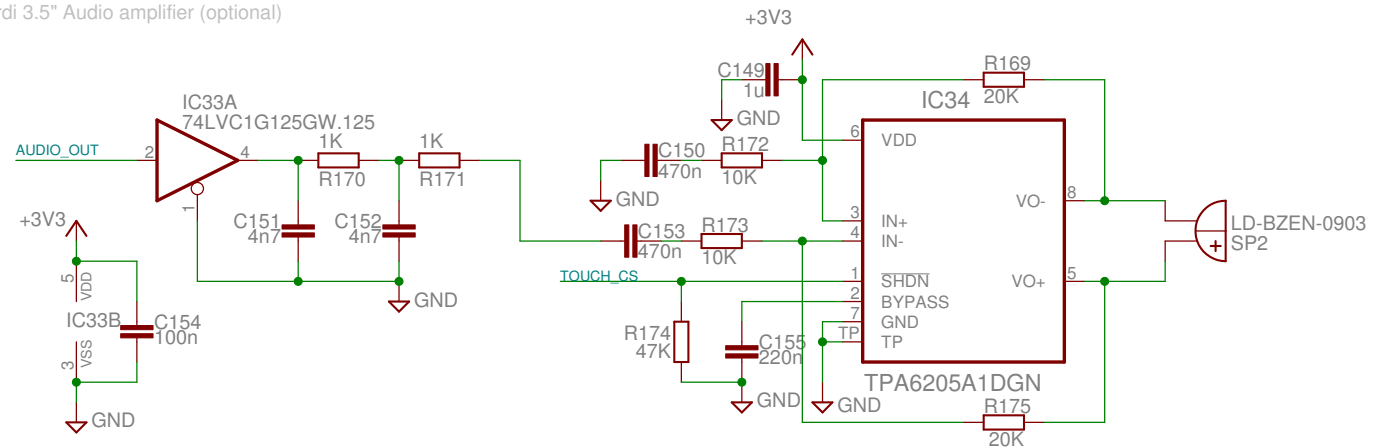

Optional sections: AC input, 20-pin 3.5" TFT display
Audio amplifier for 3.5" TFT display, Micro SD card

TITLE: EEZ PSU consolidated r5B12

Document Number:

REV:

Date: 11. 03. 2017. 11:18

Sheet: 12/12