




Top Layer (Scale 1:1.43)

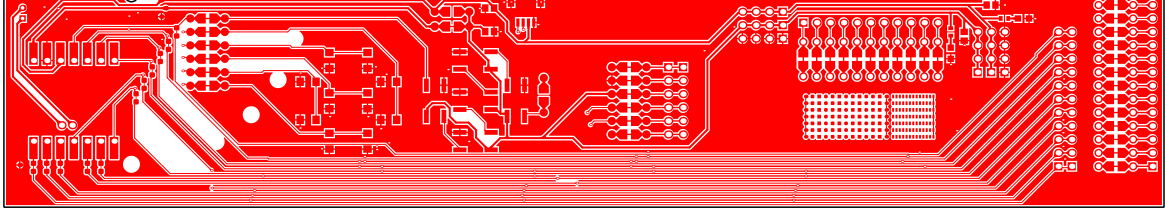


Bottom Layer (Scale 1:1.43)

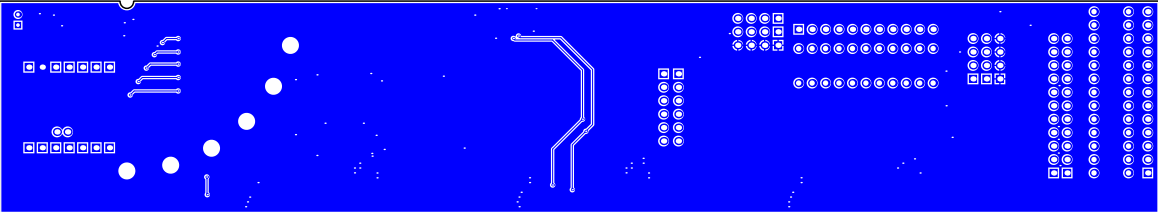


Top Solder (Scale 1:1.43)

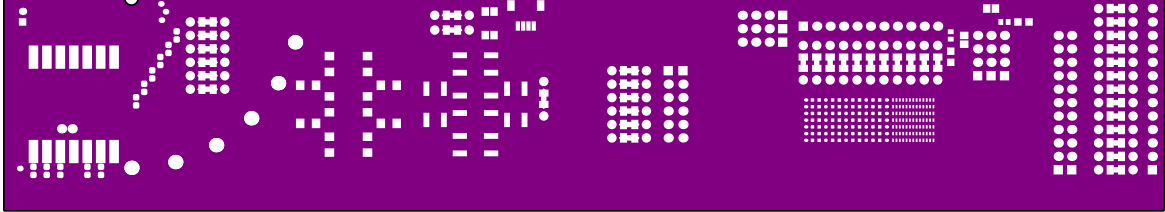

Bottom Solder (Scale 1:1.43)

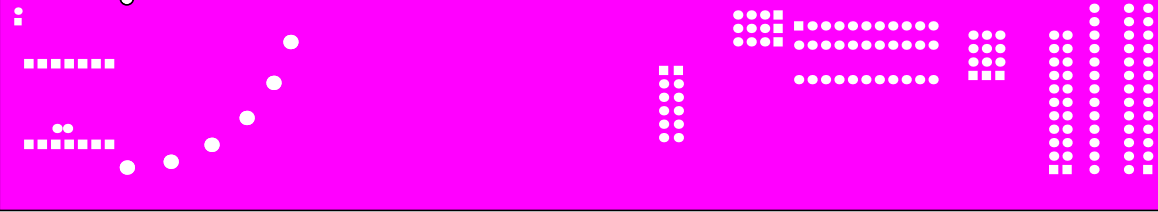


Top Paste (Scale 1:1.43)

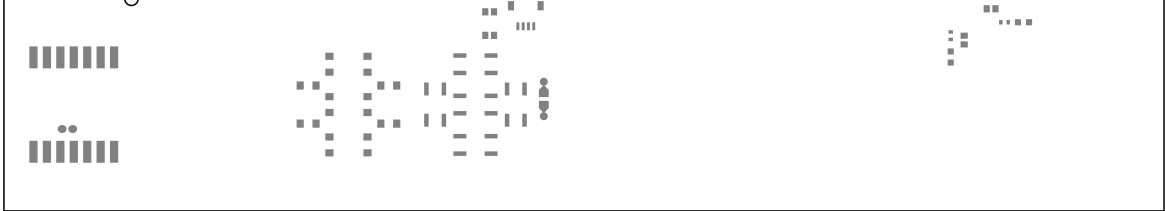


Bottom Paste (Scale 1:1.43)



Top Overlay (Scale 1:1.43)

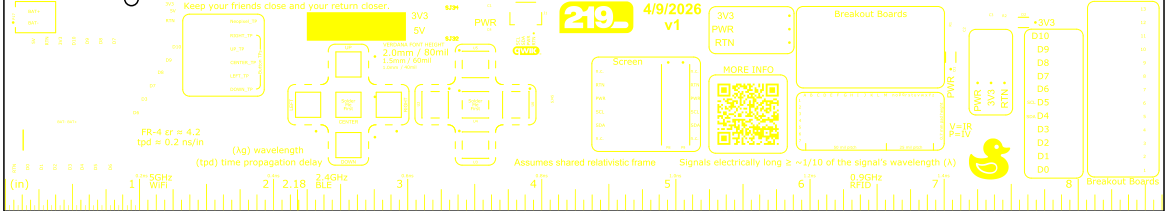


Bottom Overlay (Scale 1:1.43)

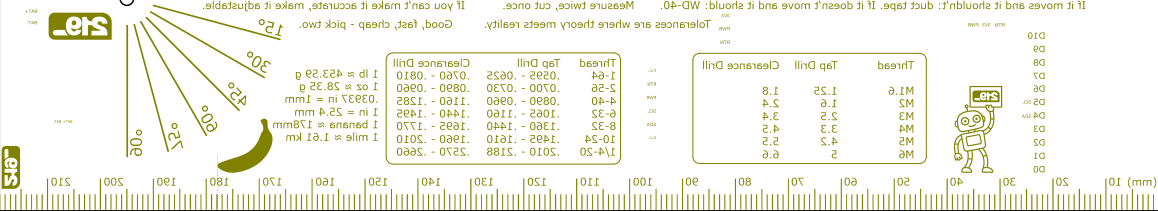

FABRICATION NOTES

1. Copper layers 2
2. 1oz Finished Copper
3. Silkscreen Color: White
4. Soldmask Color: Black
5. Finish Shall be ENIG and RoHS Compliant
6. Fabrication of PCB shall meet IPC-6012 (Latest Version) Class 2 Performance Specification for Rigid Printed Boards.
7. Thickness 1.60mm
8. Copper-to-Copper Clearance Minimum 5 mil

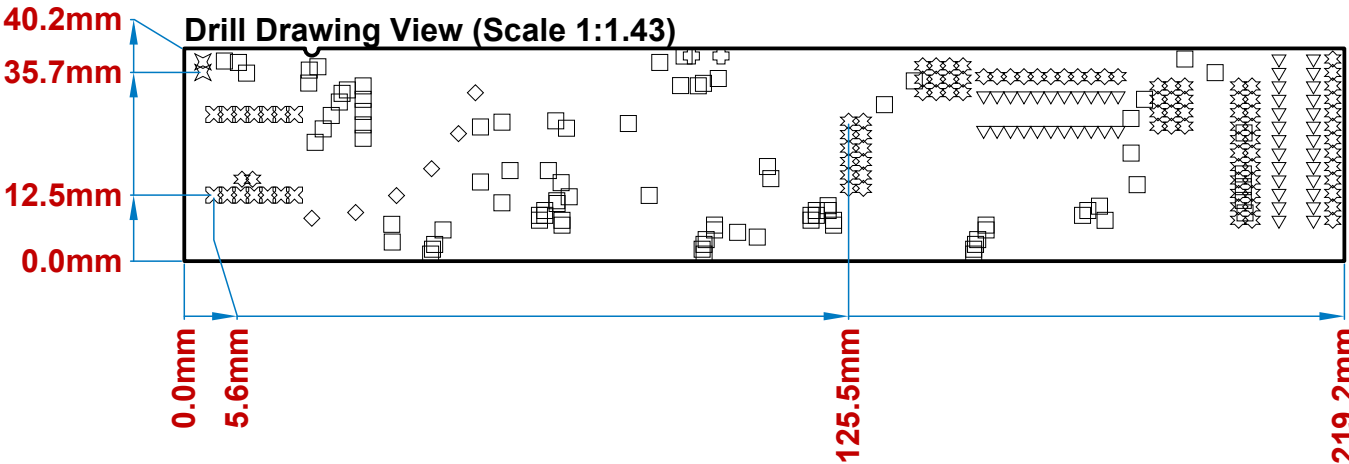


Layer Stack Legend

Layer	Gerber
Top Overlay	GTO
Top Solder	GTS
Top Layer	GTL
Bottom Layer	GBL
Bottom Solder	GBS
Bottom Overlay	GBO
Total thickness: 1.6mm	


Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
⊕	2	0.20mm	Plated	
□	90	0.25mm	Plated	
⊗	2	0.70mm	Plated	
⊗	14	1.00mm	Plated	
☆	84	1.02mm	Plated	
▽	48	1.02mm	Plated	
◇	6	2.70mm	Non-Plated	
246 Total				

Realistic View: Bare Board Top

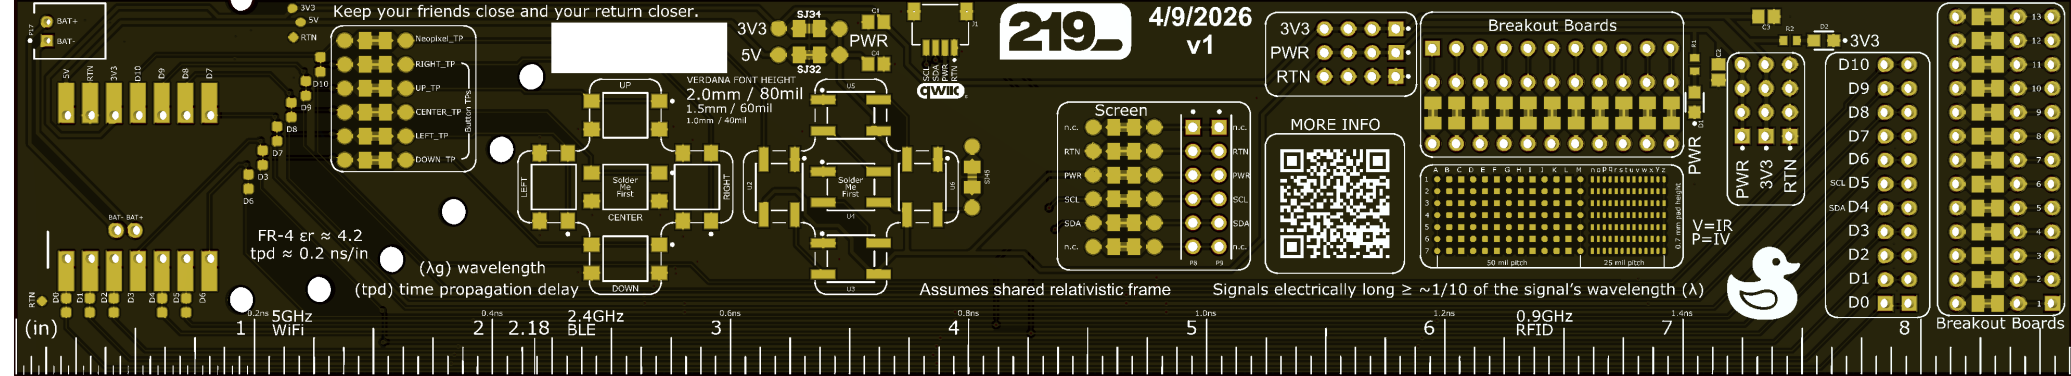

Realistic View: Bare Board Bottom

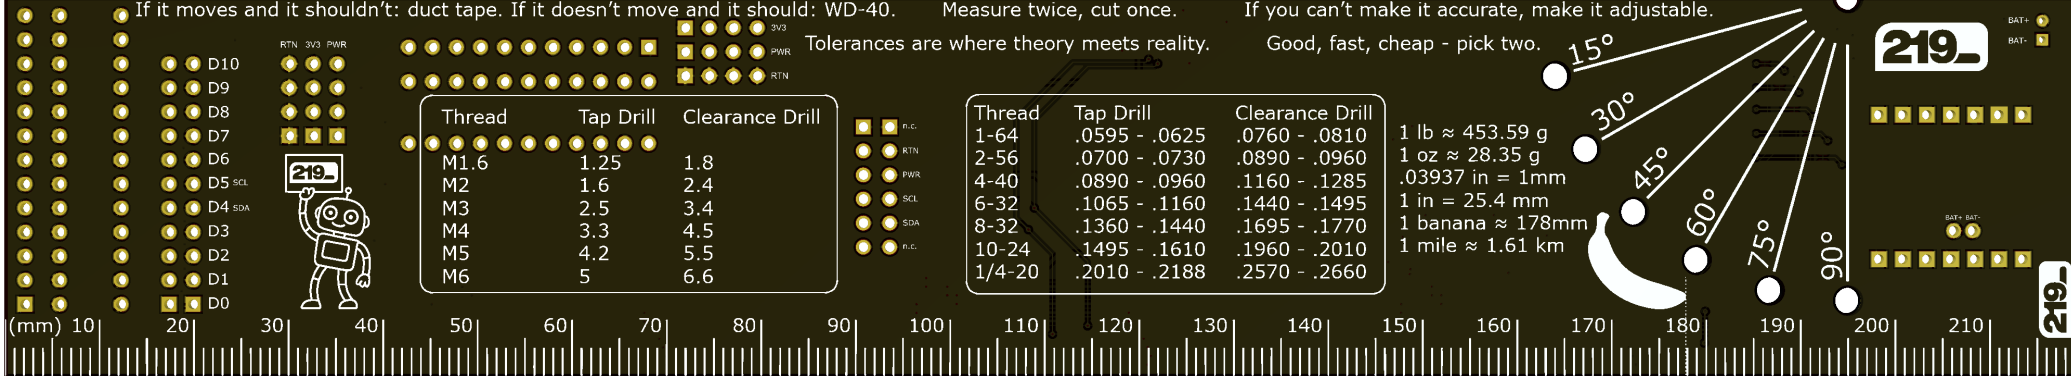

67 E. Evelyn Ave, Suite 1
Mountain View, CA 94041
(650) 969-4219

PART NO:

(N/A)

DATE:

4/9/2026

ENGINEER:

219 Design

TITLE:

219 PCB Ruler

REV:

v1

FILE NAME:

PCB.PcbDoc