KEY FEATURES

✓ No programming skills are needed

✓ Functions like center pointing, insertion, hand guiding or path recording

✓ Precise presence detection

✓ Keep constant force while moving

✓ Adds the sense of touch to your robot

✓ Dust and water resistant (IP67[1])

TECHNICAL SPECIFICATIONS

Sensor Type	6-Axis Force/Torque Sensor			
Dimensions (Height x Diameter)	37.5 x 70 mm			
Weight (with built-in adapter plates)	245 g			
	Fxy	**Fz**	**Txy**	**Tz**
Nominal Capacity (N.C)	200 N	200 N	10 Nm	6.5 Nm
Single axis deformation at N.C (typical)	± 1.7 mm	± 0.3 mm	± 2.5 °	± 5 °
Single axis overload	500 %	500 %	500 %	500 %
Signal noise[2] (typical)	0.035 N	0.15 N	0.002 Nm	0.001 Nm
Noise-free resolution (typical)	0.2 N	0.8 N	0.010 Nm	0.002 Nm
Full scale nonlinearity	< 2%	< 2%	< 2%	< 2%
Hysteresis (measured on Fz axis , typical)	< 2 %	< 2 %	< 2 %	< 2 %
Crosstalk (typical)	< 5 %	< 5 %	< 5 %	< 5 %
Working temperature range	0 C° / +55 °C			
Power requirement	DC input range 7-24V	0.8 W		
Mounting screws	5 x M4 x 6 mm 1 x M4 x 12 mm (for the Cable Holder)		ISO14581	

[1] It needs protection when working in corrosive liquid environments
[2] Signal noise is defined as the standard deviation (1 σ) of a typical one second no-load signal.

MECHANICAL DIMENSIONS

Ø6 ▽7
Positioning Pin

4x M6 ▽6
Ø50

Ø31,5 ▽6.5

-Y

+x

-X

+Y

43,5

37,5

Ø63

Ø70
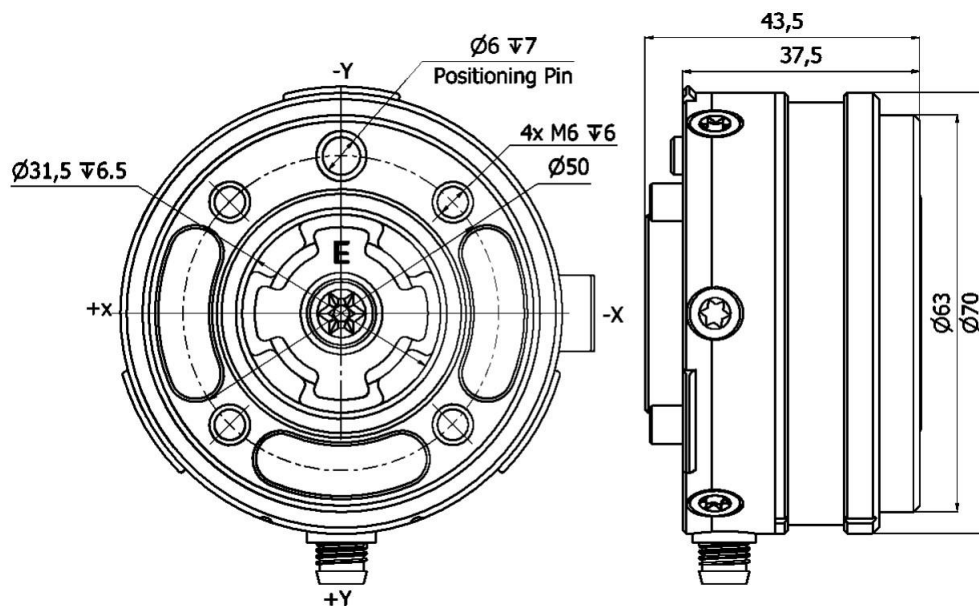
COMPLEX LOADING

During single-axis loading, the sensor can be operated up to its nominal capacity. Above the nominal capacity the reading is inaccurate and invalid.

During complex loading (*when more than one axis is loaded*) the nominal capacities are reduced. The following diagrams show the complex loading scenarios.

The sensor **cannot be operated** outside of the Normal Operating Area.

Txy & Fxyz

T_{xy} (Nm)

Normal
Operating Area

Fxyz (N)

Tz & Fxyz

T_z (Nm)

Normal
Operating Area

Fxyz (N)
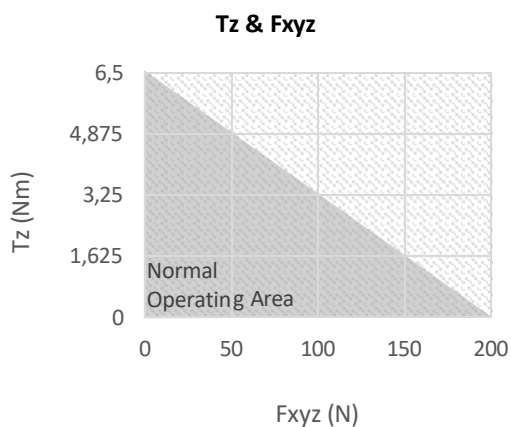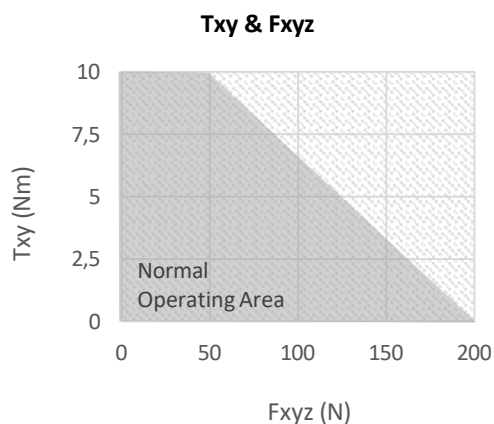
ADAPTER OPTIONS

Adapter "A2"

Adapter "B2"

Adapter "C2"

Adapter "A2" Mounting screws: M6x8 BN20146 (x4)	Adapter "B2" Mounting screws: M5x8 BN20146 (x7)	Adapter "C2" Mounting screws: M6x8 BN20146 (x4)
Universal Robots UR3, UR5, UR10	KUKA KR 3 R540	KUKA KR 6
KUKA KR 16, KR 16 S, KR 16 R1610	KUKA KR 6 fivve, KR 6 sixx WP, KR 6 R1820, KR 6 R1820 HP	KUKA KR 16 L6
KUKA KR 20-3, KR 20-3 C, KR 20 R1810	KUKA KR10 fivve, KR 10 sixx WP, KR 10 R1420, KR 10 R1420 HP	ABB 140, 1410 *
KUKA KR 8 R2010	KUKA KR 8 R1620, KR 8 R1620 HP	ABB 1600 *
KUKA KR 12 R1810	ABB 120, 1200 *	
KUKA KR 22 R1610		
KUKA LBR iiwa 7 R800, LBR iiwa 14 R820		

* Only mechanical compatibility

INTERFACE TYPES

USB	CAN	Ethernet - TCP/UDP	EtherCAT
Maximum sampling frequency 100 Hz			

CONNECTOR PINOUT

1 : V+
2 : CAN High
3 : V-
4 : CAN Low