BLINK 2026 · SITE 5.2

HANNAFORD

PROJECTOR STUDY

04/24/2026

OVERVIEW

EQUIPMENT

PROJECTOR	LENS	LENS	SERVER
×5	×1	×4	GX1
Panasonic RZ21K	ET-D75LE6	ET-D3LEW201	

DIMENSIONS

BUILDING	
WIDTH	187'-0"
HEIGHT	47'-6"
FROM GROUND	16'-6"

COVERAGE	
WIDTH	187'-0"
HEIGHT	31'-0"
AVG LUMINANCE	11 fc

RESOLUTION	
RESOLUTION	6032 × 1000 px

ROUGH COVERAGE

OVERLAP ZONES

LUMINANCE HEATMAP

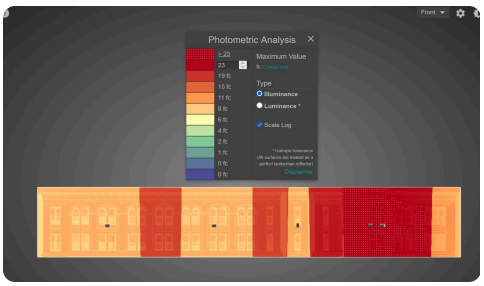

DELIVERY

PROJECTORS

PJ 5.2.1

Panasonic RZ21K · ET-D3LEW201

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
52'-0"

ANGLE
8°

FOCUS
Surface 1 Left

OPTICS

EST. THROW RATIO **0.85 : 1**

0.645 — 0.85

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-48% — 0 — +48%

HORIZONTAL **0%**

-15% — 0 — +15%

PJ 5.2.2
Panasonic RZ21K · ET-D3LEW201

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
52'-0"

ANGLE
8°

FOCUS
Surface 1 Right

OPTICS

EST. THROW RATIO **0.85 : 1**

0.645 — 0.85

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-48% — 0 — +48%

HORIZONTAL **0%**

-15% — 0 — +15%

PJ 5.2.3
Panasonic RZ21K · ET-D75LE6

PLACEMENT

ORIENTATION
Portrait

LENS TO GROUND
25'-0"

THROW DISTANCE
64'-0"

ANGLE
8°

FOCUS
Surface 2

OPTICS

EST. THROW RATIO **1.30 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-44% — 0 — +44%

HORIZONTAL **0%**

-15% — 0 — +15%

PJ 5.2.4
Panasonic RZ21K · ET-D3LEW201

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
48'-0"

ANGLE
8°

FOCUS
Surface 3 Left

OPTICS

EST. THROW RATIO **0.90 : 1**

0.645 — 0.85

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-48% — 0 — +48%

HORIZONTAL **0%**

-15% — 0 — +15%

PJ 5.2.5

Panasonic RZ21K · ET-D3LEW201

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
48'-0"

ANGLE
8°

FOCUS
Surface 3 Right

OPTICS

EST. THROW RATIO **0.90 : 1**

0.645 — 0.85

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-48% — 0 — +48%

HORIZONTAL **0%**

-15% — 0 — +15%

VERSION HISTORY

VERSION 1 04/24/2026 *Cheyenne Doczi*