BLINK 2026 · SITE 3.1

INTERACTIVE STAGE #1

PROJECTOR STUDY

04/24/2026

OVERVIEW

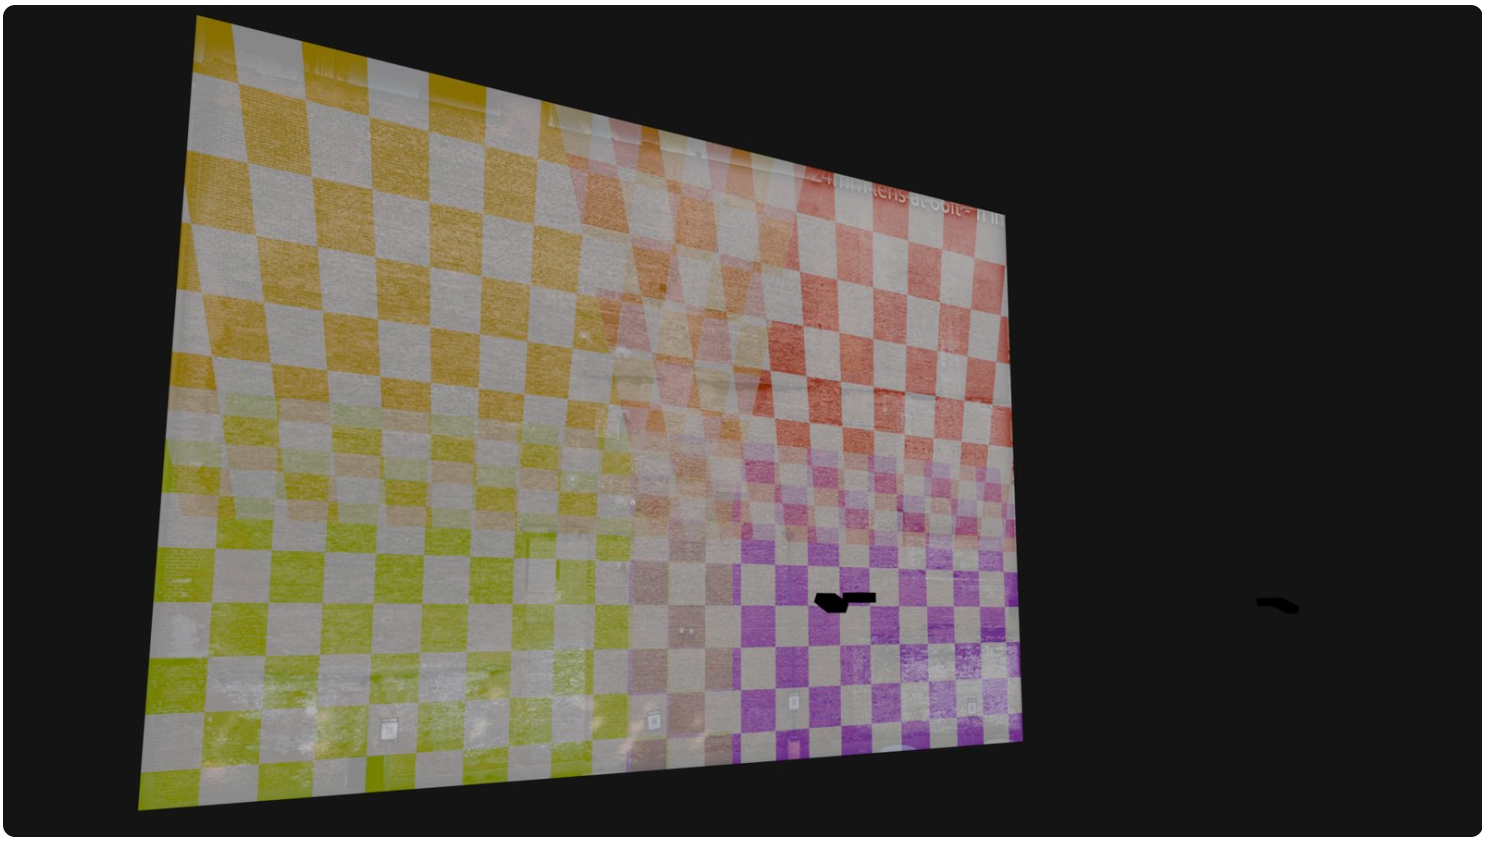

EQUIPMENT

PROJECTOR	LENS	SERVER
×4	×4	GX3
Panasonic RZ21K	ET-D75LE6	

DIMENSIONS

BUILDING	
WIDTH	94'-0"
HEIGHT	64'-0"
FROM GROUND	0'-0"

COVERAGE	
WIDTH	104'-0"
HEIGHT	65'-0"
AVG LUMINANCE	9 fc

RESOLUTION	
RESOLUTION	4650 × 3360 px

ROUGH COVERAGE

OVERLAP ZONES

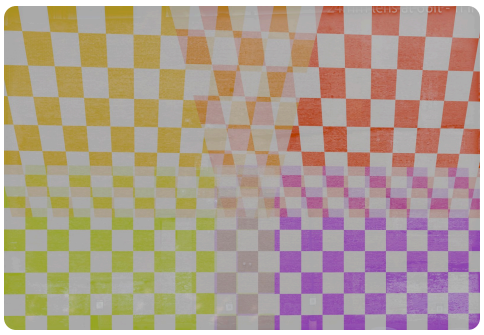

LUMINANCE HEATMAP

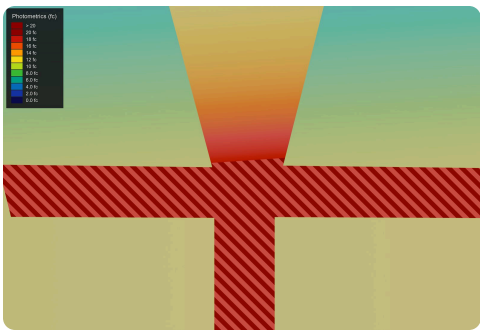

DELIVERY

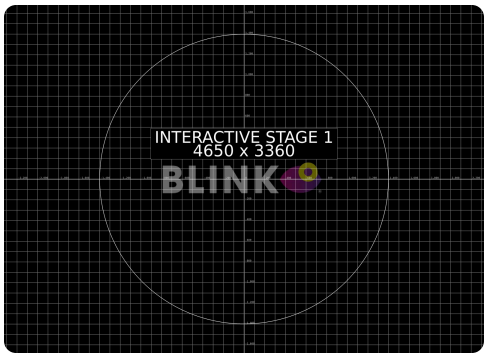

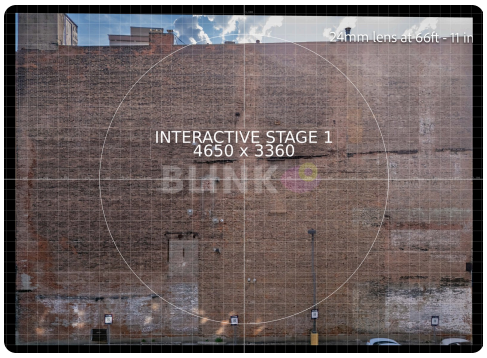

PROJECTORS

3.1.1
Panasonic RZ21K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
15'-0"

THROW DISTANCE
48'-0"

ANGLE
27°

FOCUS
Top Left

OPTICS

EST. THROW RATIO **0.90 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-44% — 0 — +44%

HORIZONTAL **0%**

-15% — 0 — +15%

3.1.2
Panasonic RZ21K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
15'-0"

THROW DISTANCE
48'-0"

ANGLE
27°

FOCUS
Top Right

OPTICS

EST. THROW RATIO **0.90 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-44% 0 +44%

HORIZONTAL **0%**

-15% 0 +15%

3.1.3
Panasonic RZ21K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
15'-0"

THROW DISTANCE
48'-0"

ANGLE
0°

FOCUS
Bottom Left

OPTICS

EST. THROW RATIO **0.90 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-44% 0 +44%

HORIZONTAL **0%**

-15% 0 +15%

3.1.4
Panasonic RZ21K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
15'-0"

THROW DISTANCE
48'-0"

ANGLE
0°

FOCUS
Bottom Right

OPTICS

EST. THROW RATIO **0.90 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-44% 0 +44%

HORIZONTAL **0%**

-15% 0 +15%

VERSION HISTORY

VERSION 1 04/24/2026

Ted Brown

Initial version