BLINK 2026 · SITE 3.7

NEIL ARMSTRONG MURAL

PROJECTOR STUDY

04/23/2026

OVERVIEW

EQUIPMENT

PROJECTOR	LENS	SERVER
×4	×4	GX1
Panasonic RZ31K	ET-D75LE6	

DIMENSIONS

BUILDING	
WIDTH	151'-0"
HEIGHT	53'-0"
FROM GROUND	25'-0"

COVERAGE	
WIDTH	85'-0"
HEIGHT	53'-0"
AVG LUMINANCE	14.5 fc

RESOLUTION	
RESOLUTION	4252 × 1800 px

ROUGH COVERAGE

OVERLAP ZONES

LUMINANCE HEATMAP

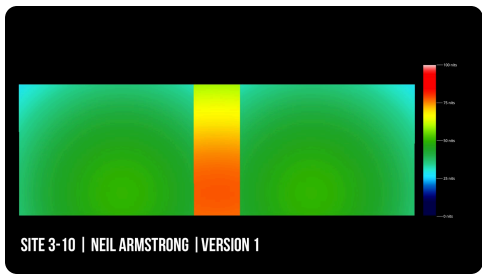

DELIVERY

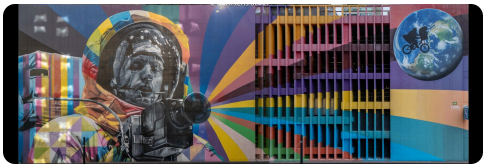

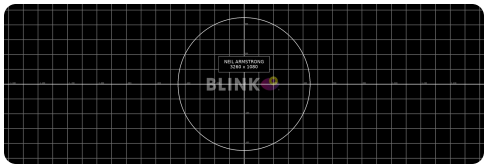

PROJECTORS

PJ-101

Panasonic RZ31K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
85'-4"

ANGLE
0°

FOCUS
Left

OPTICS

EST. THROW RATIO **0.95 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **+0.6%**

-44% — 0 — +44%

HORIZONTAL **0%**

-15% — 0 — +15%

PJ-102
Panasonic RZ31K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
85'-4"

ANGLE
0°

FOCUS
Left (Double

OPTICS

EST. THROW RATIO **0.95 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **+0.6%**

-44% — 0 — +44%

HORIZONTAL **0%**

-15% — 0 — +15%

PJ-103
Panasonic RZ31K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
85'-4"

ANGLE
0°

FOCUS
Right

OPTICS

EST. THROW RATIO **0.95 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **+0.6%**

-44% — 0 — +44%

HORIZONTAL **0%**

-15% — 0 — +15%

PJ-104
Panasonic RZ31K · ET-D75LE6

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
25'-0"

THROW DISTANCE
85'-4"

ANGLE
0°

FOCUS
Right (Double

OPTICS

EST. THROW RATIO **0.95 : 1**

0.924 — 1.1

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **+0.6%**

-44% — 0 — +44%

HORIZONTAL **0%**

-15% — 0 — +15%

NOTES

Actual brighness may be reduced by transmission index of building window.

VERSION HISTORY

VERSION 1 04/23/2026 *William Milligan*