
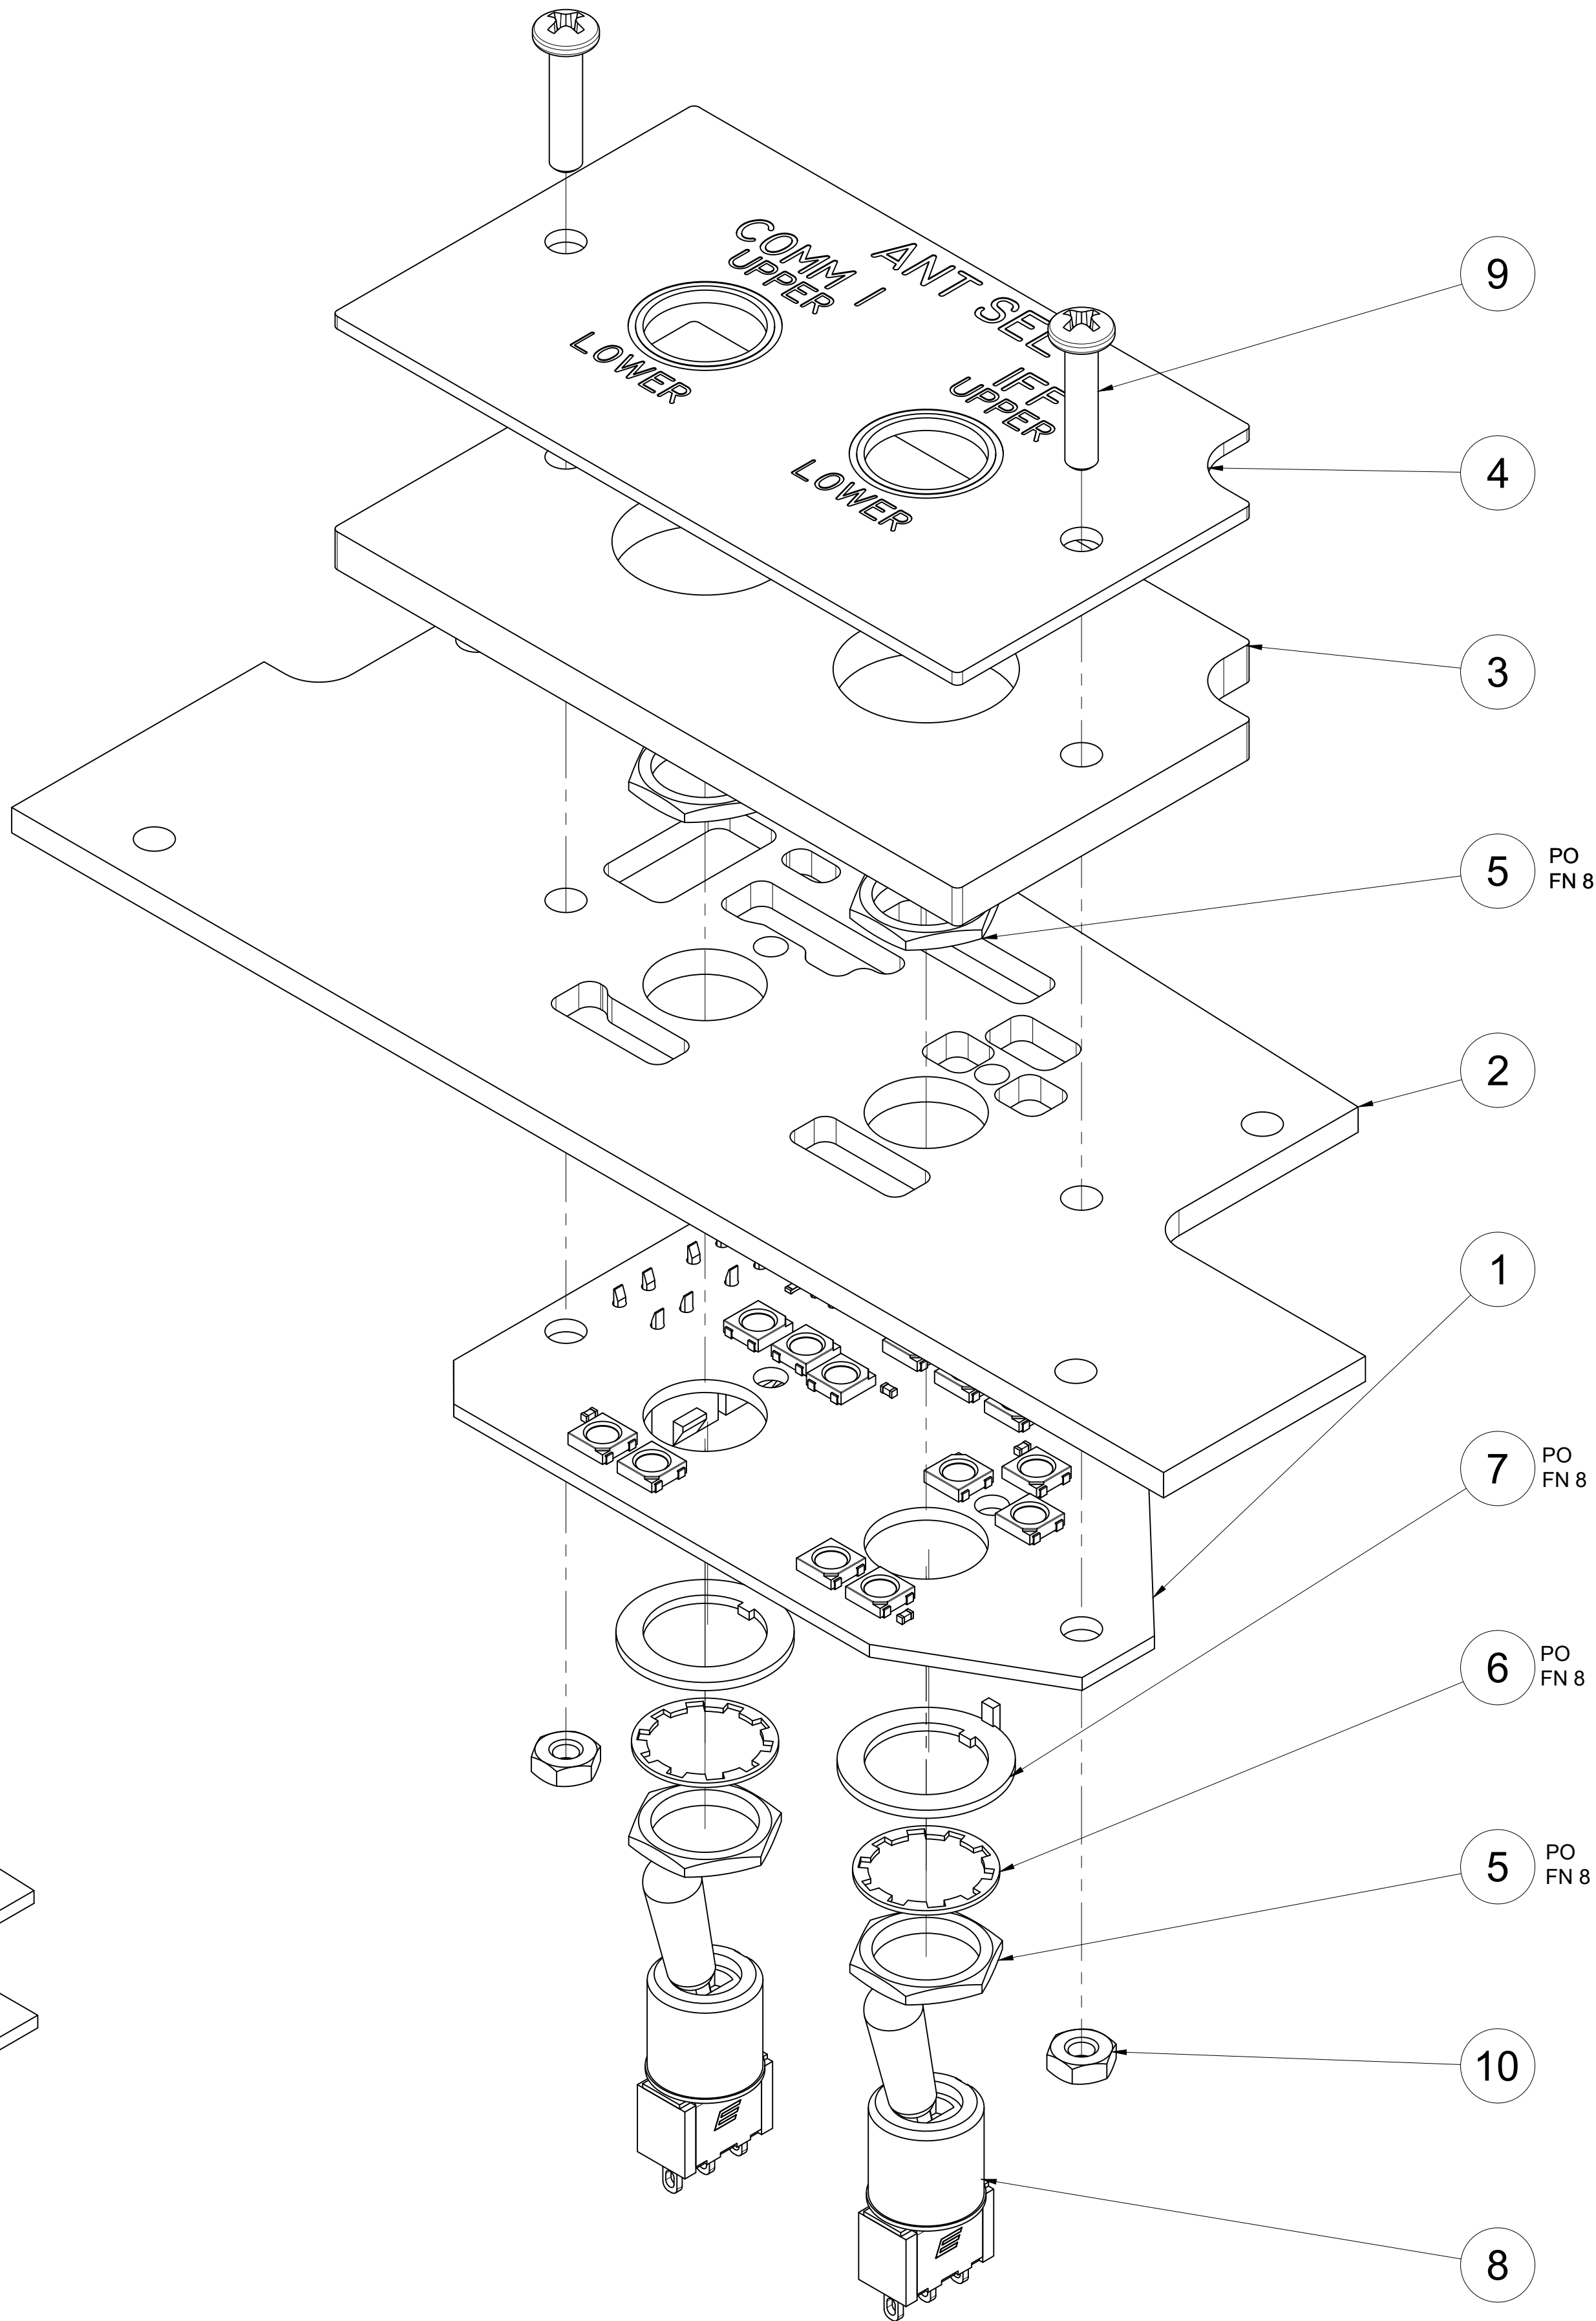


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SPECIFICATIONS AND DOCUMENTS:
- 1.1. PANEL CONSTRUCTION SHALL BE IAW OH-SPEC-001, PANEL TYPE A, METHOD 1.
- 1.2. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS. ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING INTERMEDIATE FILES:
- 2.1. FLAT PARTS: <MATERIAL> <MATERIAL COLOR, IF APPLICABLE>_<THICKNESS, IN DECIMAL INCHES> <PN>_<REV>.<VERSION NUMBER OF MODEL>.DXF
- 2.2. FDM 3D PRINTED PARTS: FDM_<PN>_<REV>.<VERSION # OF MODEL>.STL
- 2.3. RESIN 3D PRINTED PARTS: RESIN_<PN>_<REV>.<VERSION # OF MODEL>.STL
- 2.4. MACHINED OR BENT PARTS: <PN>_<REV>.<VERSION # OF MODEL>.STEP

| REVISION HISTORY | | | |
|------------------|-----------------|-----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| - | INITIAL RELEASE | 9/25/2022 | |

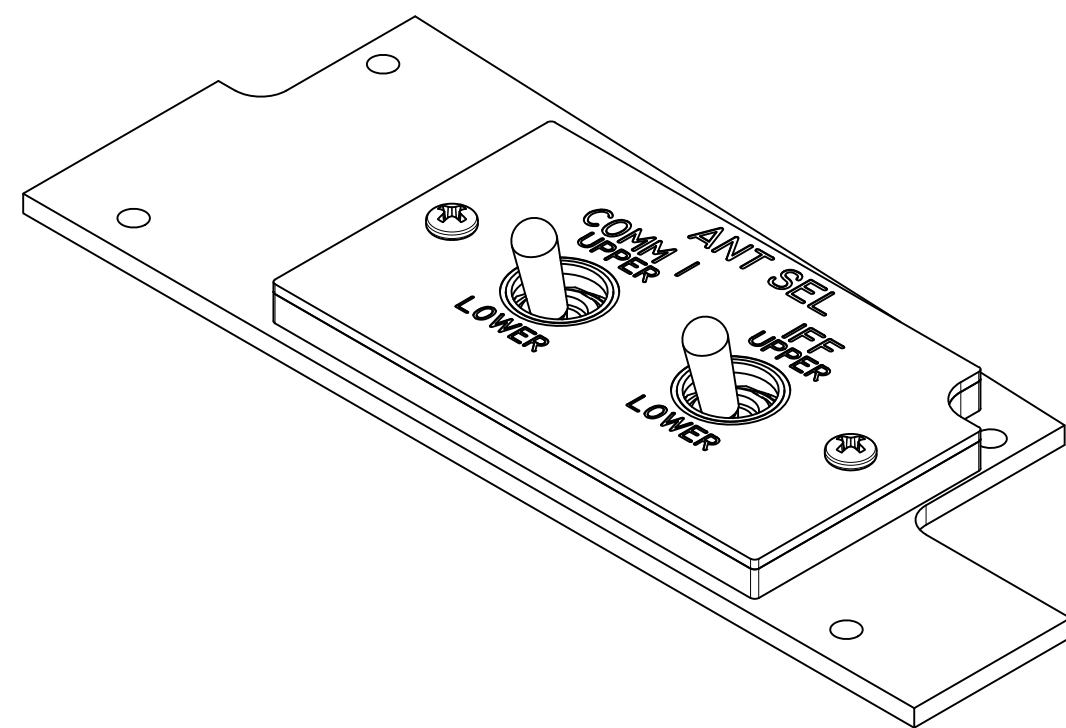

| 10 | 2 | 90760A007 | NUT, JAM, #6-32, STEEL | STL |
|------|-----|------------------|---|----------|
| 9 | 2 | 91249A151 | PHS, #6-32 X .625, 18-8, BLK | SS |
| 8 | 2 | 100SP1T8B13M1QEH | SWITCH, TOGGLE, ON-ON, SPDT, 2-POSN, 18MM BAT | N/A |
| 7 | 2 | HDW17 | LOCKING RING FOR SWITCH, B13 | N/A |
| 6 | 2 | HDW12 | LOCK WASHER FOR SWITCH, B13 | N/A |
| 5 | 4 | HDW4 | HEX NUT FOR SWITCH, 15/32-32NS | N/A |
| 4 | 1 | OH4A7A4-13 | ANT SEL LEGEND PLATE | RMRK |
| 3 | 1 | OH4A7A4-12 | ANT SEL LIGHTPLATE | ACRL |
| 2 | 1 | OH4A7A4-11 | ANT SEL BACKPLATE | ACRL |
| 1 | 1 | OH4A7A4-10 | ANT SEL PANEL PCB V2 | N/A |
| ITEM | QTY | PART NUMBER | DESCRIPTION | MATERIAL |

| UNLESS OTHERWISE SPECIFIED: | | UOS INCH TOLERANCES ARE: | |
|---|-------------|-----------------------------|----------------|
| DIMENSIONS ARE IN INCHES. | | DECIMALS: | ANGLES: |
| DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS. | | .X ± .1 | MACHINED ± .5° |
| INTERPRET DRAWING IAW ASME Y14.100-2017. | | .XX ± .03 | LOCATING ± .5° |
| INTERPRET DIM AND TOL IAW ASME Y14.5-2009. | | .XXX ± .010 | FORMED ± 2° |
| REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX. | | | CHAMFERS ± 5° |
| DIMENSIONS APPLY BEFORE FINISH. | | DRILLED HOLE DIAMETERS: | |
| | | .0135 - .125: +.004/- .001 | |
| | | .126 - .250: +.005/- .001 | |
| | | .251 - .500: +.006/- .001 | |
| | | .501 - .750: +.008/- .001 | |
| | | .751 - 1.000: +.010/- .001 | |
| | | 1.001 - 2.000: +.012/- .001 | |
| DESIGNED | J. STEENSEN | 9/25/2022 | |
| CHECKED | | | |
| DRAWN | J. STEENSEN | 9/25/2022 | |
| SIZE | D | DWG NO | OH4A7A4-1 |
| SCALE | 1:1 | DO NOT SCALE DWG | SHEET 1/1 |



ASSY, ANT SEL PANEL

LEFT CONSOLE