


PLAIN CHANNELS

G 3350-1987

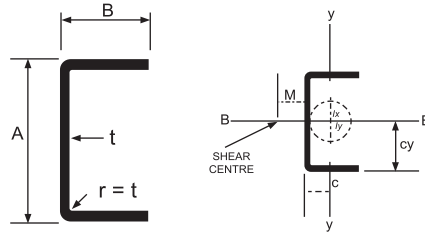

Section size A x B mm	Unit Weight M kg/m	Thick- ness t mm	Area A cm ²	Position of Centroid Cx cm Cy cm		Moment of Inertia Ix cm ⁴ Iy cm ⁴		Radius of gyration Rx cm Ry cm		Modulus of Section Zx cm ³ Zy cm ³		Moment Capacity Mx kg/m	Shear Centre M cm	Column Factor Q
60 x 30	1.44	1.6	1.83	0.82	3.00	10.33	1.63	2.37	0.94	3.44	0.75	46.08	1.12	0.77
	2.03	2.3	2.58	0.85	3.00	15.13	2.25	2.33	0.93	4.71	1.05	76.97	1.12	0.96
75 x 45	2.00	1.6	2.55	1.30	3.75	23.86	5.38	3.05	1.45	6.36	1.68	53.04	1.76	0.46
	2.84	2.3	3.62	1.33	3.75	33.08	7.51	3.02	1.44	8.82	2.37	114.32	1.76	0.76
	3.65	3.0	4.75	1.37	3.75	41.58	9.51	2.98	1.42	11.08	3.04	169.91	1.76	0.90
100 x 50	2.44	1.6	3.11	1.32	5.00	50.00	7.88	4.00	1.59	10.00	2.14	66.48	1.87	0.33
	3.47	2.3	4.42	1.35	5.00	69.83	11.05	3.97	1.58	13.96	3.03	165.23	1.87	0.66
	4.47	3.0	5.70	1.38	5.00	88.45	14.05	3.93	1.56	17.69	3.89	255.77	1.87	0.85
125 x 50	3.92	2.3	5.00	1.21	6.25	117.36	11.84	4.84	1.53	18.77	3.12	222.17	1.76	0.61
	5.06	3.0	6.45	1.24	6.25	149.25	15.07	4.80	1.52	23.88	5.01	345.27	1.75	0.81
	7.42	4.5	9.45	1.31	6.25	211.76	31.43	4.73	1.50	33.88	5.81	571.75	1.75	1.00
150 x 65	4.91	2.3	6.26	1.61	7.50	218.16	25.86	5.90	2.03	29.08	5.29	239.92	2.34	0.40
	6.36	3.0	8.10	1.64	7.50	278.84	33.12	5.86	2.02	37.17	6.82	441.26	2.34	0.63
	9.36	4.5	11.93	1.71	7.50	400.15	47.69	5.79	1.99	53.35	9.96	832.81	2.34	0.91
175 x 75	5.73	2.3	7.30	1.83	8.75	346.87	40.19	6.89	2.34	39.64	7.09	240.68	2.69	0.28
	7.42	3.0	9.45	1.86	8.75	444.65	51.59	6.85	2.33	50.81	9.15	515.38	2.69	0.51
	10.95	4.5	13.95	1.93	8.75	642.23	74.74	6.78	2.31	73.39	13.42	1061.21	2.69	0.82
200 x 75	6.18	2.3	7.87	1.70	10.00	473.31	41.76	7.75	2.30	47.33	7.21	287.35	2.48	0.26
	8.01	3.0	10.20	1.73	10.00	607.58	53.63	7.71	2.29	60.75	9.31	616.21	2.58	0.48
	11.84	4.5	15.08	1.80	10.00	880.30	77.78	7.63	2.27	88.03	13.65	1272.76	2.58	0.79
225 x 75	6.63	2.3	8.45	1.59	11.25	624.36	43.12	8.59	2.25	55.49	7.30	336.94	2.49	0.24
	8.59	3.0	10.95	1.63	11.25	802.40	55.40	8.55	2.24	71.32	9.43	723.37	2.48	0.45
	12.72	4.5	16.20	1.69	11.25	1145.51	80.39	8.47	2.22	103.60	13.85	1497.89	2.48	0.76
250 x 75	7.08	2.3	9.02	1.50	12.50	801.81	44.31	9.42	2.21	64.14	7.39	389.44	2.39	0.23
	9.18	3.0	11.70	1.53	12.50	1031.46	56.94	9.38	2.20	82.51	9.54	836.88	2.39	0.43
	13.60	4.5	17.33	1.60	12.50	1501.38	82.67	9.30	2.18	120.11	14.01	1736.58	2.39	0.72