


STAINLESS STEEL WELDED CHANNELS

AISI 304

Size (in.)	Tolerance		AISI 304. 304L	AISI 316. 316L
d x bf x t	d	bf	Unit weight (lb/ft)	Unit weight (lb/ft)
3 x 1 $\frac{1}{2}$ x $\frac{3}{16}$	$\pm\frac{1}{8}$	$\pm\frac{1}{8}$	3.70	3.70
4 x 2 x $\frac{3}{16}$	$\pm\frac{1}{8}$	$\pm\frac{1}{8}$	5.03	5.03
4 x 2 x $\frac{1}{4}$	$\pm\frac{1}{8}$	$\pm\frac{1}{8}$	6.58	6.58
5 x 2 $\frac{1}{2}$ x $\frac{1}{4}$	$\pm\frac{3}{16}$	$\pm\frac{1}{8}$	8.40	8.40
6 x 3 x $\frac{1}{4}$	$\pm\frac{3}{16}$	$\pm\frac{1}{8}$	10.14	10.14
6 x 3 x $\frac{3}{8}$	$\pm\frac{3}{16}$	$\pm\frac{1}{8}$	14.77	14.77
8 x 4 x $\frac{3}{8}$	$\pm\frac{3}{16}$	$+\frac{3}{16} - \frac{1}{8}$	20.02	20.02

Size (mm)	Tolerance		AISI 304 . 304L	AISI 316. 316L
d x bf x t	d	bf	Unit weight (kg/m)	Unit weight (kg/m)
80 x 40 x 5	± 2.00	± 2.00	6.08	6.08
100 x 50 x 4	± 2.00	± 2.00	6.28	6.28
100 x 50 x 6	± 2.00	± 2.00	9.16	9.16
130 x 65 x 6	± 3.00	± 3.00	12.20	12.20
150 x 75 x 6	± 3.00	± 3.00	14.13	14.13
150 x 75 x 9	± 3.00	± 3.00	20.53	20.53
200 x 100 x 10	± 4.00	± 4.00	30.80	30.80

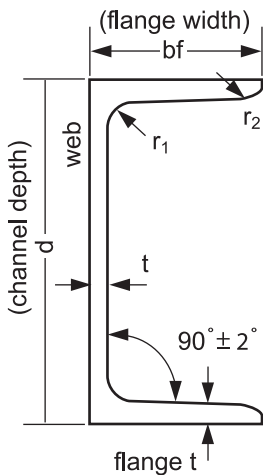

MECHANICAL PROPERTIES OF AISI 304 BUTT WELDED JOINT

Joint Thickness (inch)	Tension test			Bend Test (180°)	
	Y.S. 0.2% P.S.I.	T.S. P.S.I.	E.L. %	Face	Root
$\frac{3}{16}$	50200	95800	57.7	Good	Good
$\frac{1}{4}$	48800	93100	57.2	Good	Good
$\frac{3}{8}$	41200	85200	43.2	Good	Good

Joint Thickness (mm)	Tension test			Bend Test (180°)	
	Y.S. 0.2% (kg/mm ²)	T.S. (kg/mm ²)	E.L. %	Face	Root
5	34	62	57.7	Good	Good
6	35	62	57.2	Good	Good
10	37	60	43.2	Good	Good