




Frank Mohn Services AS

NO. 3 - 1990

Service Bulletin

MAKE YOU UP TO DATE WITH THE LATEST NEWS FROM FRANK MOHN SERVICES AS

How to obtain the best stripping result on existing "FRAMO" ships

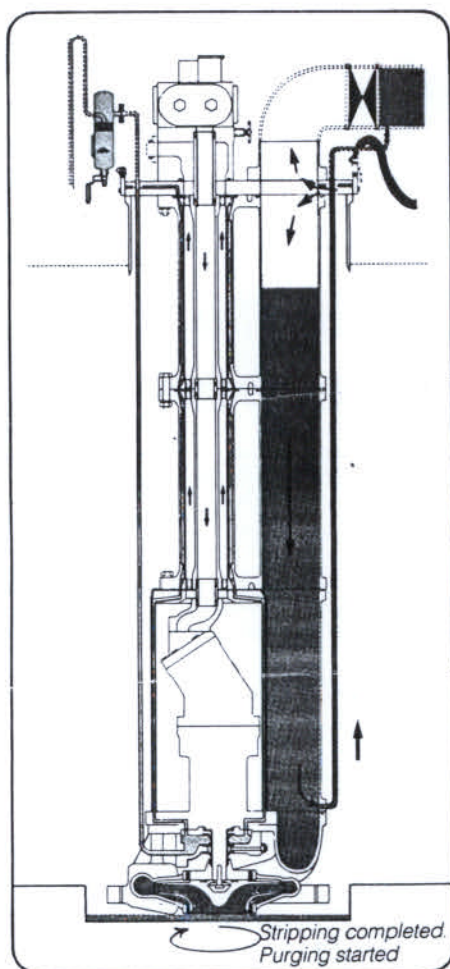

IMPORTANT FOR THE RESULT

- ▶ Trim / List of vessel
- ▶ Back pressure
- ▶ Wearing-ring condition
- ▶ Type of ship - Single bottom, Double bottom
- ▶ Cargo pump speed
- ▶ Suction well design
- ▶ No leakage on cargo discharge valve
- ▶ Type and production year of cargo pump

RELATED TO MARPOOL 73/78 ANNEX II



FRANK MOHN
SERVICES AS
Hardangerveien 150
P.O. Box 98
N-5051 Nesttun
Norway
Phone: 47 5 99 92 00
Telex: 42 927 framo n
Telefax: 47 5 99 93 82

FRANK MOHN
NEDERLAND BV
Edisonweg 14
P.O. Box 305
NL-3200 AH Spijkenisse
The Netherlands
Phone: 31 1880 19 311
Telex: 29 643 framo nl
Telefax: 31 1880 11 193

FRANK MOHN
HOUSTON INC
1802 West D-Street
P.O. Box 1586, La Porte
Texas 77571
USA
Phone: 1 713 471 7920
Telex: 68 68 120 framo lapl
Telefax: 1 713 470 1258

FRANK MOHN
SINGAPORE PTE LTD
16 Tuas Crescent
Singapore 2263
Republic of Singapore
Phone: 65 861 4455
Telex: 35 446 framo rs
Telefax: 65 861 5910

DEAR FRAMO CUSTOMER!

STRIPPING PROCEDURE - FRAMO CARGO PUMPING SYSTEMS

Full scale tests have shown that a standard FRAMO cargo pump of today has an excellent stripping performance, and fulfil the strict rules and regulations given by IMO-organization regarding cargo left after discharging.

However, it is more than 20 years since the first FRAMO cargo pumping system was installed on board a ship, and during this period more than 750 ships have been equipped with a FRAMO submerged cargo pumping system.

There have of course been a lot of development and improvements during this period also regarding stripping, and we have tried to highlight some in this service bulletin.

If you have stripping problems of any kind on board your ship, or for some reason have to empty the cargo tank completely (FRAMO super strip), please study the following items closely, and do not hesitate to contact us for a stripping discussion.

Yours Faithfully
pr. FRAMO SERVICES A/S



Svein Andersen

Improved stripping on old pumps

Connection for
compressed
air/nitrogen/IGS

Connection for
compressed
air/nitrogen/IGS



- *Original type*

- *Modified type*

- *Reversed stripping*


- *Extended pipestack*

- *Removed bellmouth*

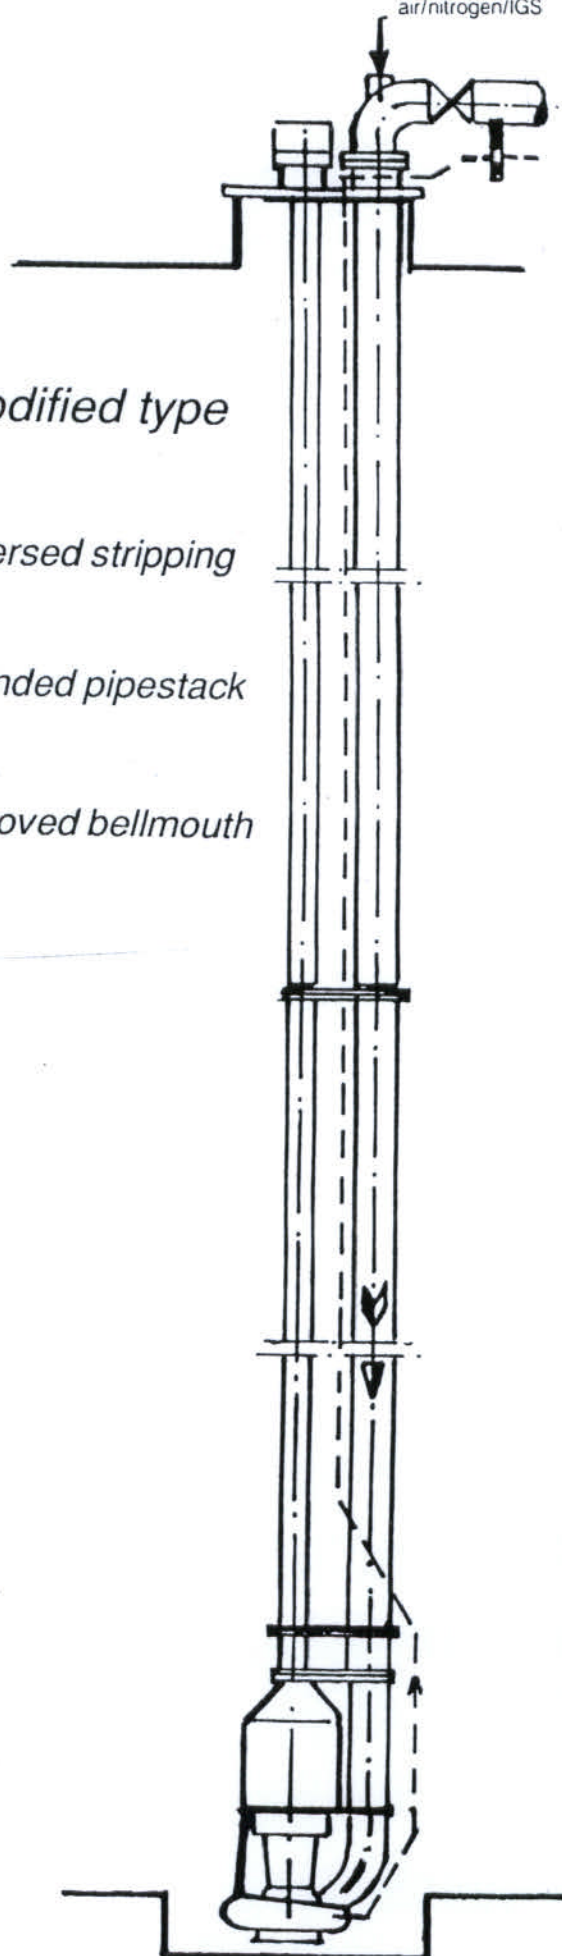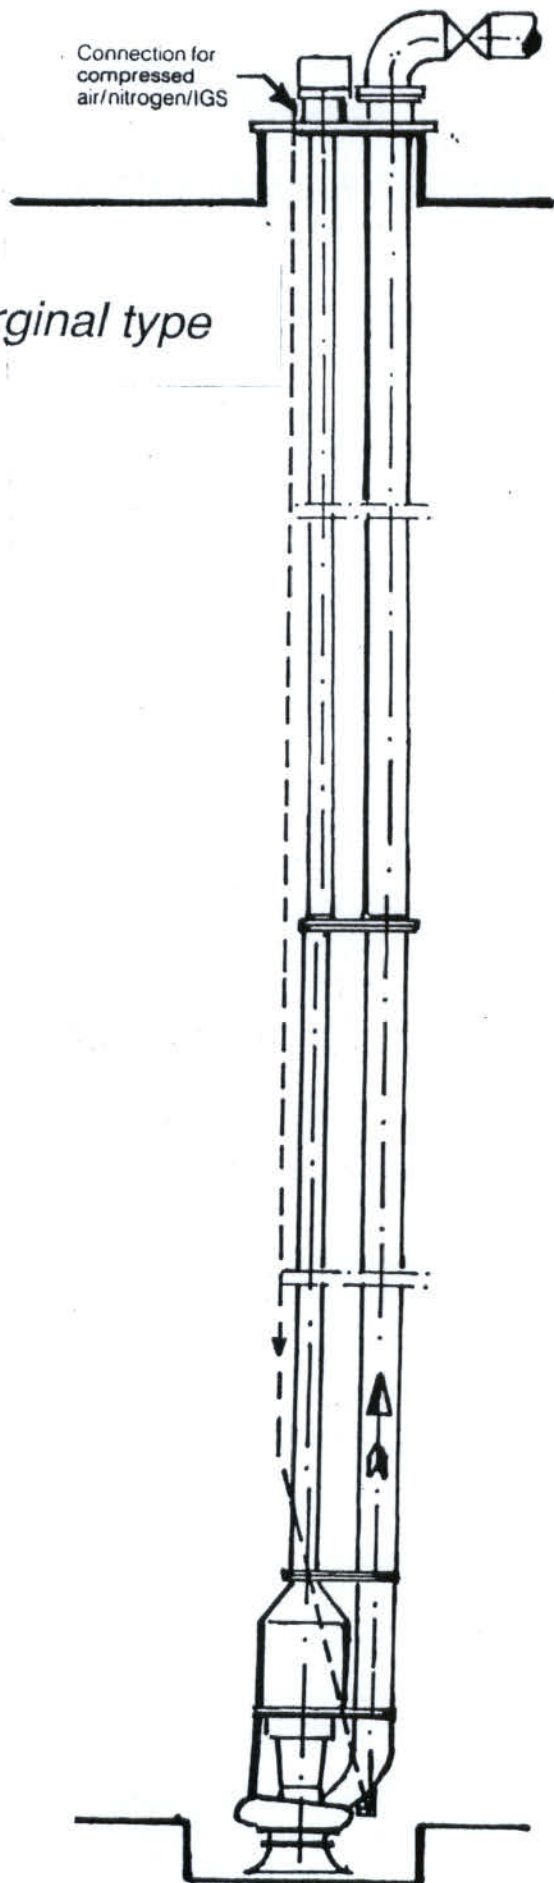


FRAMO Super-strip

I DISCHARGE

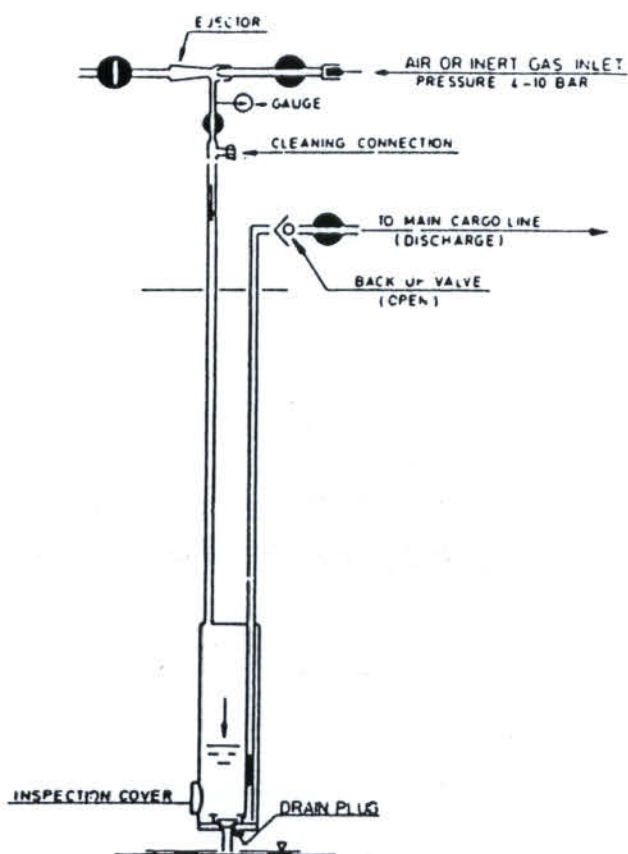

II EVACUATION

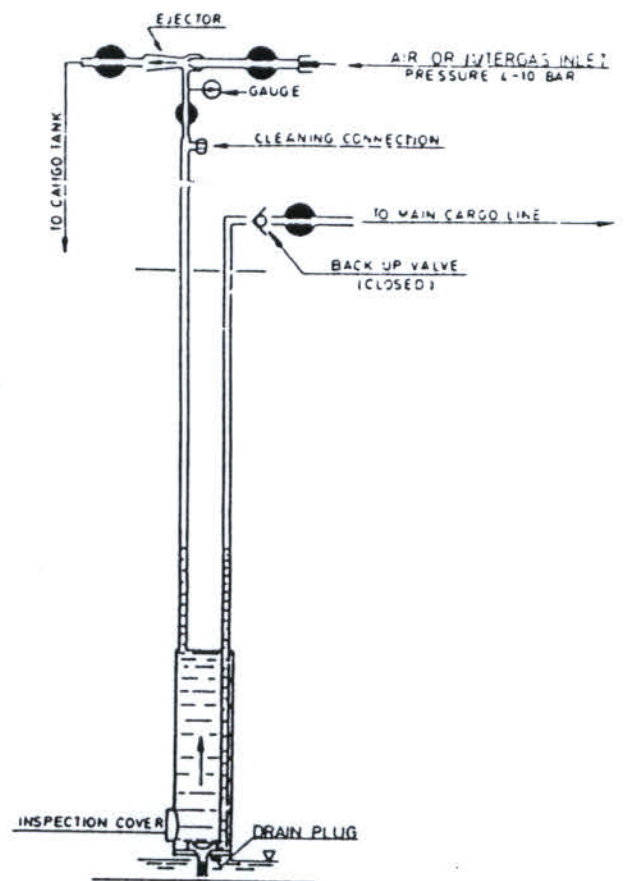

Installed on bulkhead or on pumpstack

Deck - line improvement

PROCEDURE FOR CARGO SYSTEM WITHOUT SPECIAL STRIPPING PIPE (SEE FIG. 1)

WITHOUT STRIPPING PIPE

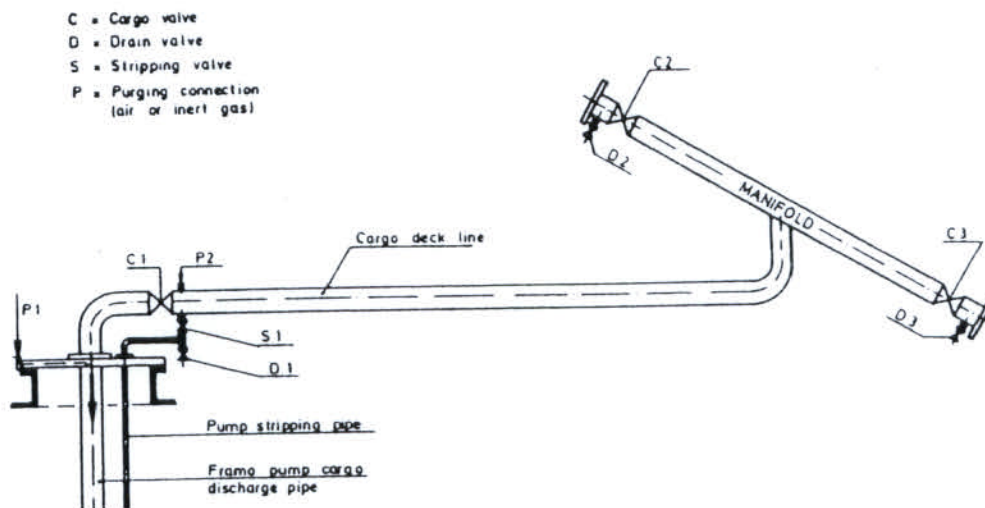


Fig. 1

PROCEDURE FOR CARGO SYSTEMS WITH SPECIAL STRIPPING PIPE (SEE FIG. 2)

WITH STRIPPING PIPE

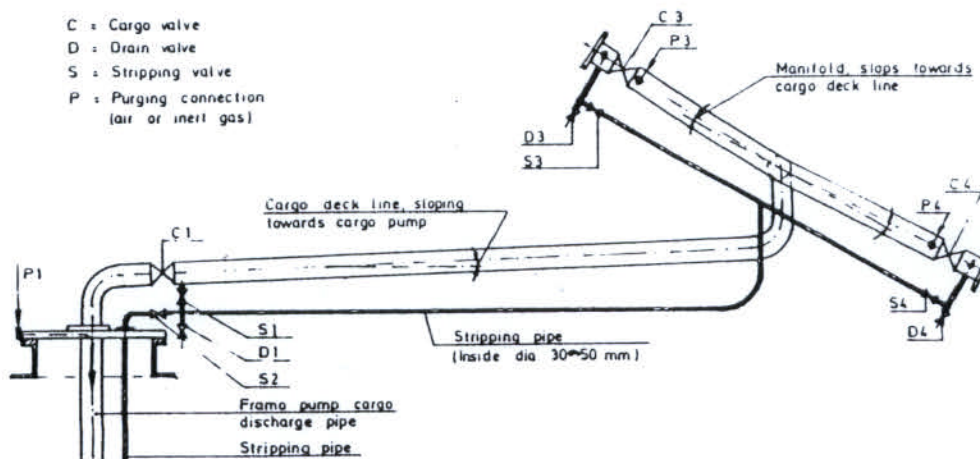


Fig. 2