


# ETDS QA Overview - L0 | Pads RT°C | Couch 0deg

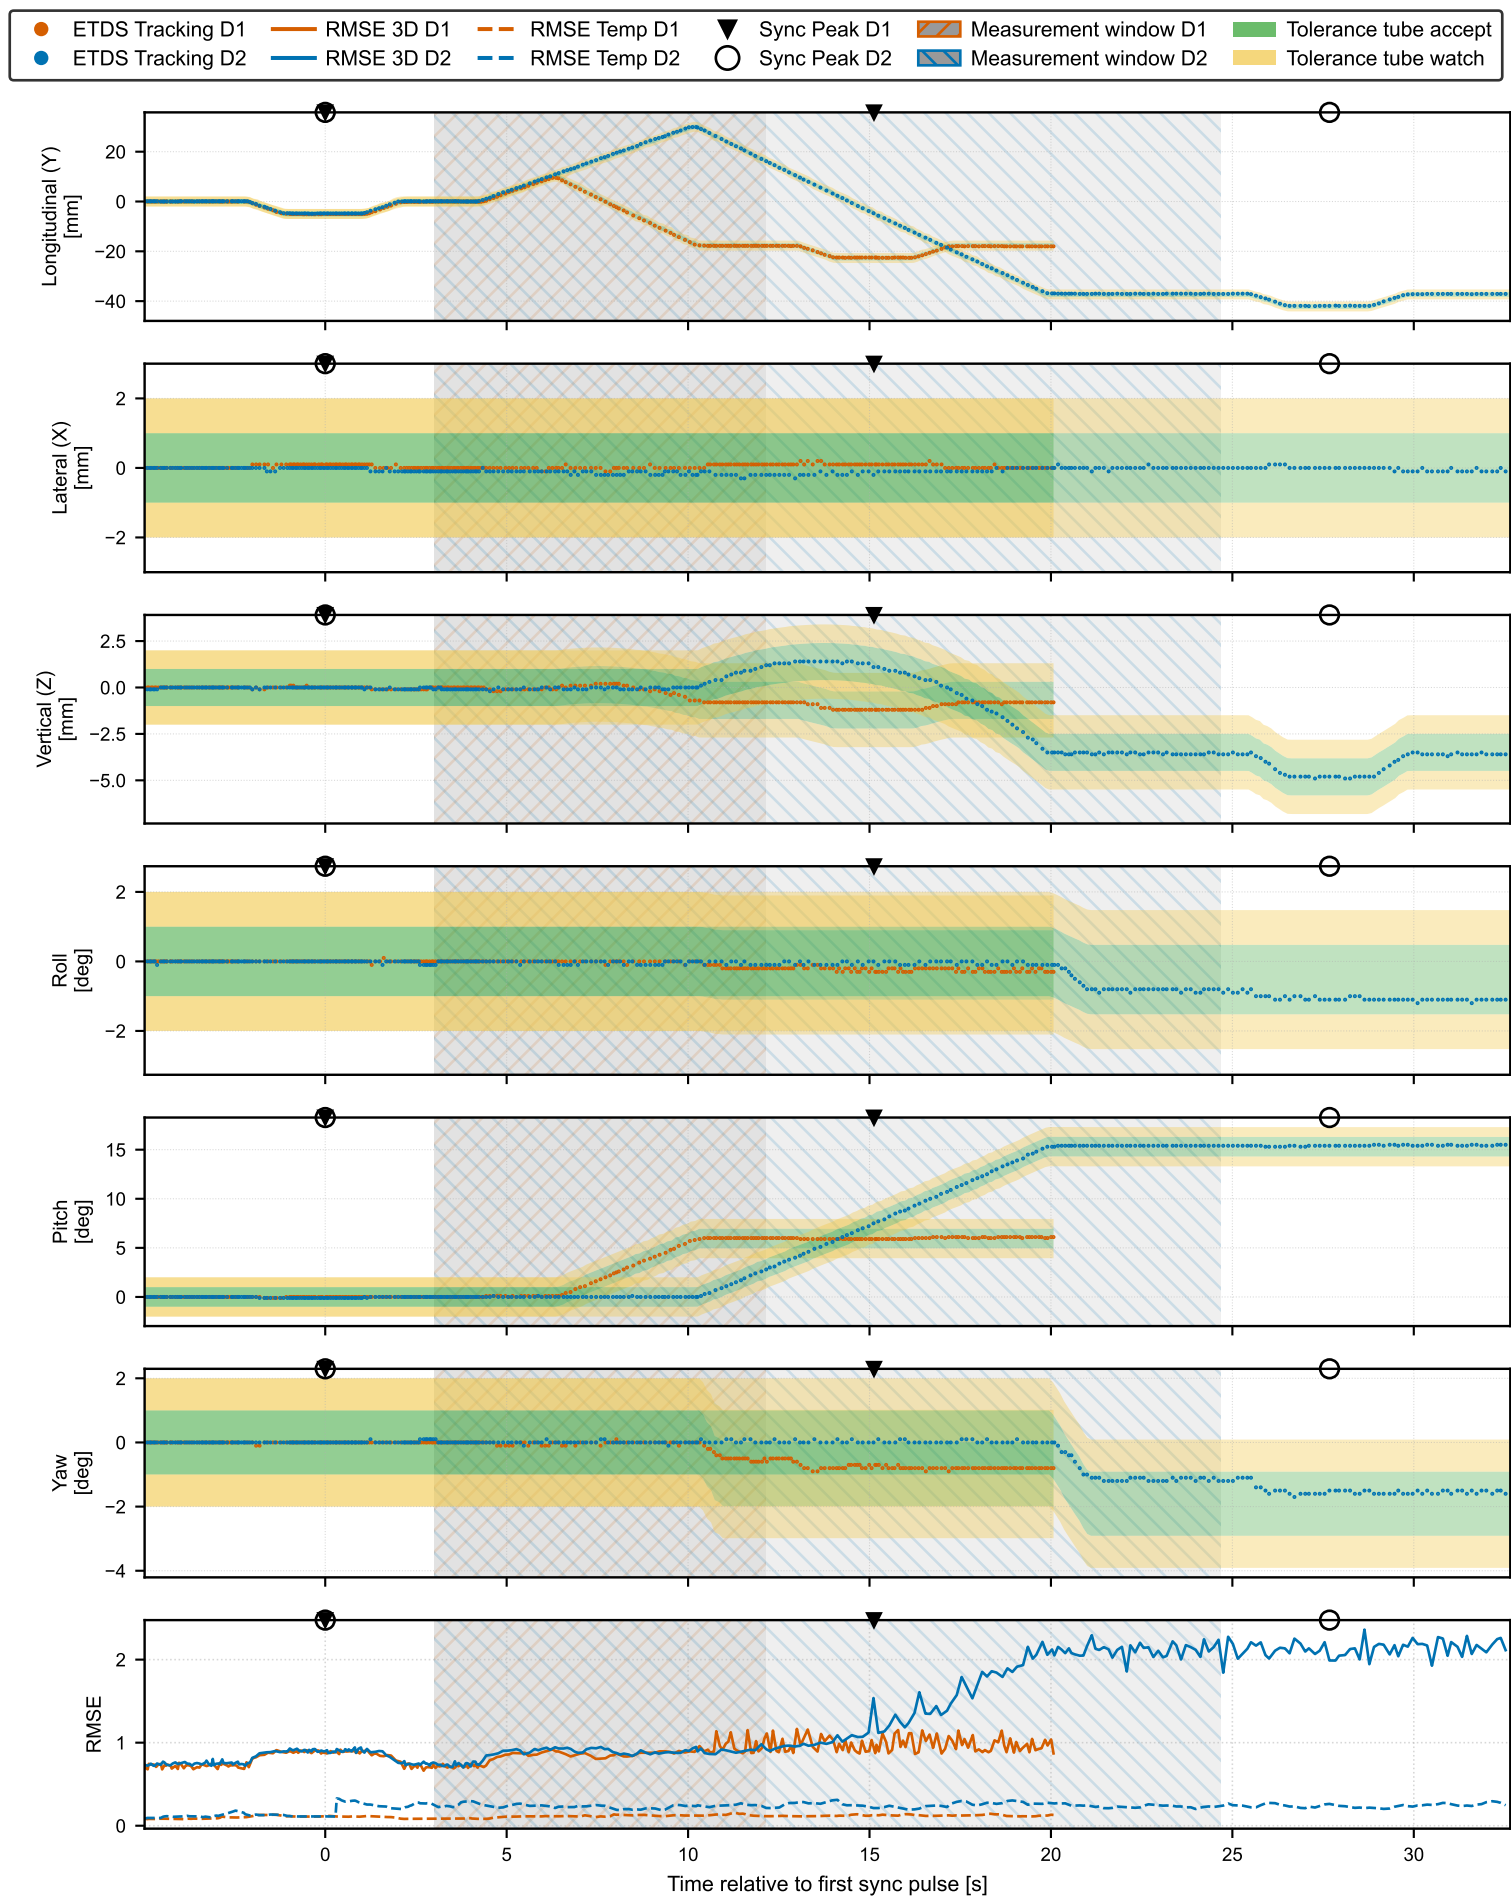



Sphere detection comparison - vectors as (x, y, z) in mm

| Defl. | SD Reference Coordinates | SD Movement Vector     | Phantom Movement Vector | Movement Error (SD - Phantom) | Surface Tracking Vector |
|-------|--------------------------|------------------------|-------------------------|-------------------------------|-------------------------|
| 1     | (0.10, 1.20, 0.30)       | (0.00, -17.90, -0.70)  | (0.00, -17.72, -0.69)   | (0.00, -0.18, -0.01)          | (0.10, -17.80, -0.80)   |
| 2     | (0.20, 1.00, 0.30)       | (-0.10, -37.10, -3.40) | (0.00, -37.31, -3.49)   | (-0.10, 0.21, 0.09)           | (0.00, -37.10, -3.60)   |

# Sphere detection - absolute deviations

ETDS QA Overview - L0 | Pads RT°C | Couch 0deg

Lateral (X)

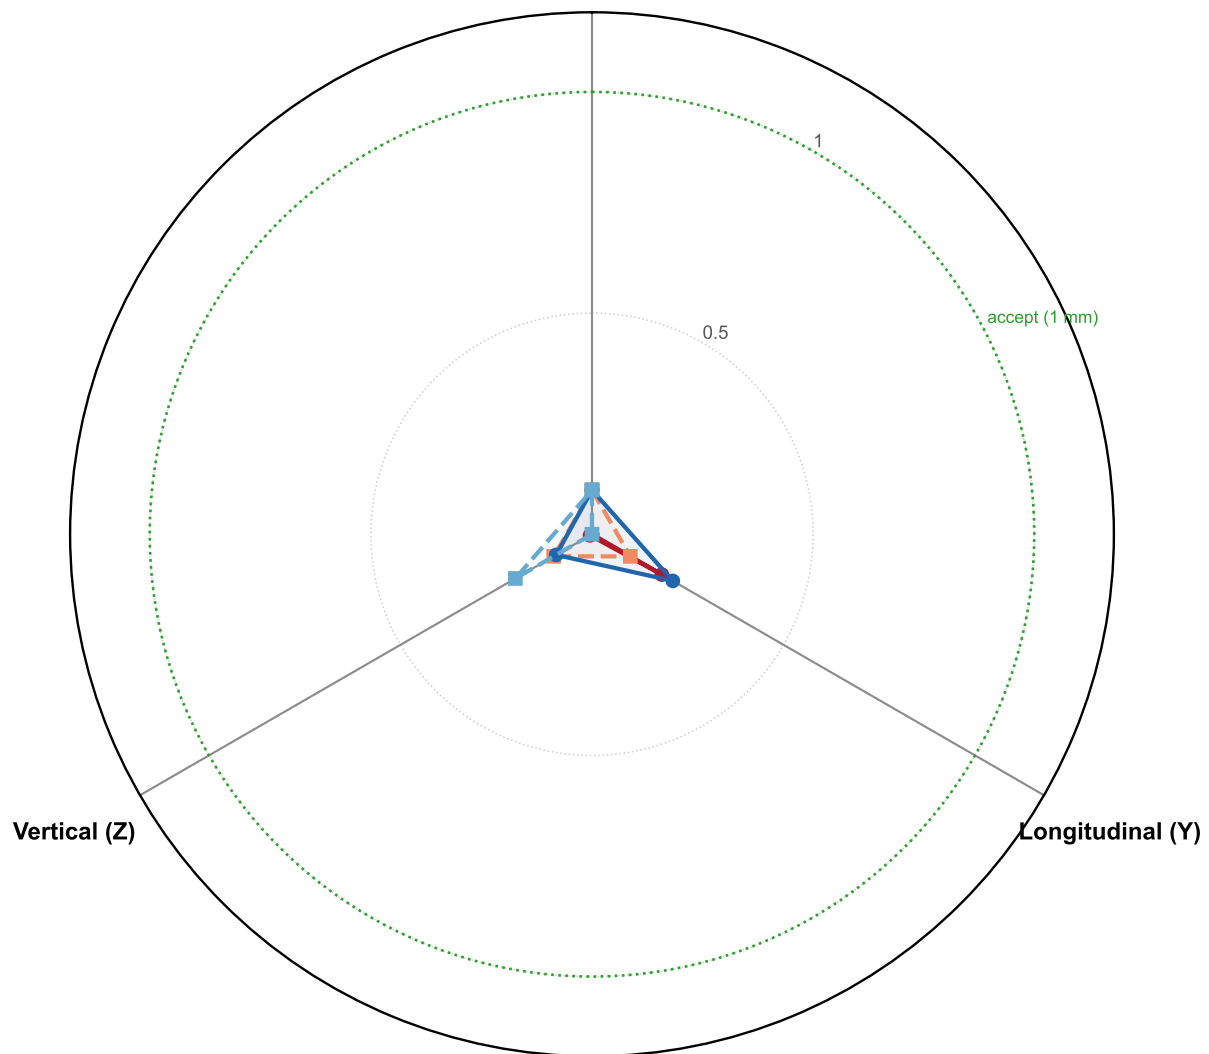

| Defl. | Deviation             | Lateral (X) [mm] | Longitudinal (Y) [mm] | Vertical (Z) [mm] |
|-------|-----------------------|------------------|-----------------------|-------------------|
| D1    | SD - Phantom          | 0.00             | 0.18                  | 0.01              |
| D1    | SD - Surface Tracking | 0.10             | 0.10                  | 0.10              |
| D2    | SD - Phantom          | 0.10             | 0.21                  | 0.09              |
| D2    | SD - Surface Tracking | 0.10             | 0.00                  | 0.20              |

Absolute deviations of the X-ray based sphere detection from the phantom axis setpoint and from the ETD surface tracking, evaluated at the deflected position (end of measurement window). Tolerance rings: accept 1 mm, watch 2 mm.