



180° Panoramic Camera

ASK-290B-IR



Overview

This dual-lens 4MP+4MP camera delivers wide-area coverage with crisp imaging and built-in audio. With PoE, edge storage, 20 FPS recording, and IP66 weatherproofing, it's perfect for efficient all-around surveillance.

Key Features

- 4MP+4MP Resolution
- Dual Fixed Lens
- Day/Night Functionality
- H.264 / H.265 Compression
- Supports Multiple Video Streams
- ONVIF Support
- Wall Mount
- 20 FPS at Full Resolution
- Edge Storage Support
- Built-in Audio
- PoE Support
- IP66 Weatherproof Rating
- IR Distance up to 30 Meters
- 5-Year Replacement Warranty
- No Written Hardware Warranty

SPECIFICATIONS | ASK-290B-IR



CAMERA

Image Sensor	Sony 1/2.7" Progressive Scan CMOS Sensor Sony Starvis™ Technology
Maximum Resolution	4MP + 4 MP 4096 (H) , 1944 (V)
Compression	H.264/H.265
Electronic Shutter Time	Auto , Manual 1/25–1/10000Sec
Minimum Illumination	0.1 – 0.2 lux @ F 1.6 (Color), 0.005 – 0.01lux @ F1.6 (B/W), 0 lux with IR On
S/N Ratio	≥52dB
WDR	≥120dB
Focus Length	DUAL LENS 3.6mm + 3.6 mm
FOV	H:78.9°; V: 46°;D: 180°
Lens Type	Fixed Focal
Iris type	Fixed
DORI Distance In Meters	33 m(Detect) , 13.4m(Observe) , 6.7m(Recognize) , 3.3 m(Identify)
Day/Night	Auto,Manual,Smart
Infrared LED	2 IRED ARRAY
Infrared Distance	30M
IR Status	Under 10 Lux By Sensor
IR Power On	Sensor Auto Control



VIDEO

Compression	H264 ,H265
FRAME RATE	
Main Stream	4096X1944 @ 20fps
Sub Stream	1024x480@20fps
BIT RATE	CBR, VBR, (512kbps–8000 kbps)
OTHER SETTINGS	BLC,HLC,White Balance, AGC,3D NR, Motion Detection,ROI,Privacy Mask,Defog



AUDIO

Input/Output	Built in mic & speaker
--------------	------------------------



NETWORK

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP
ONVIF	Profile S
POE	802.3af/at 48V




GENERAL

Housing	Metal ,IP66
Anti-cut Bracket	YES
Operation Temperature	–30°C ~ +65°C RH95% Max
Storage Temperature	–30°C ~ +65°C RH95% Max
Power Source	DC12V±10%, 600mA / POE
Dimension	75mm (H) , 70 mm (W) 190 mm (L)
Weight	470g
Language	English,Russian,Arabic and Spanish
Certification	IEC-62368-1 ,CE-EMC , FCC:47 CFR FCC Part 15; Subpart B; SASO



DIMENSION

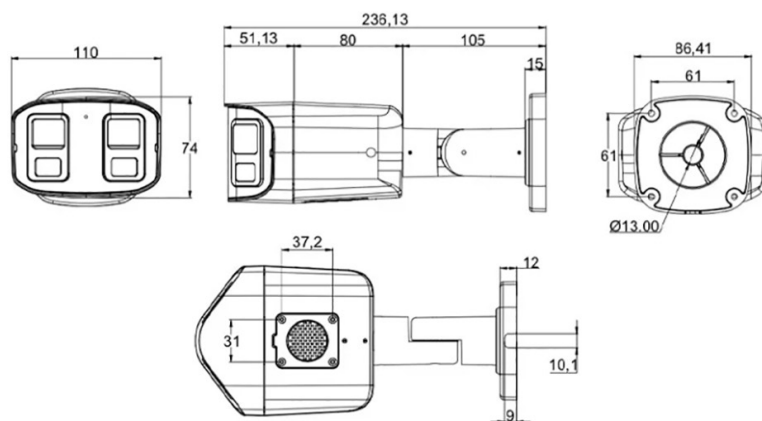

AEROSKOP W.L.L

✉ info@aeroskop.com

🌐 www.aeroskop.com

MIDDLE EAST & AFRICA

📍 Umm Al Hassam, Bahrain

☎ +973 77992203

EUROPE

📍 ul. Hoża 86 lok. 410, 00-682 Warszawa

☎ +48 732 082 387

*Product specifications and availability are subject to change without notice.