


# BF-6900 NEW

Automatic Hematology Analyzer

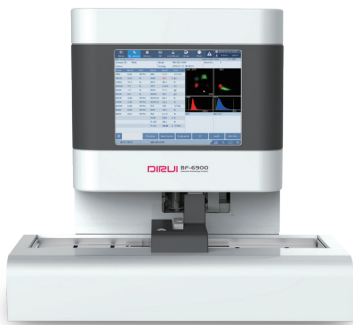

## Technical Specifications

|                       |                                                                                                                                                                              |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameter             | 25 reportable parameters: WBC, BASO#, NEU#, EOS#, LYM#,MON#, BASO%, NEU%, EOS%,LYM%,<br>MON%, RBC, HGB, MCV, MCH, MCHC, RDW-CV, RDW-SD, HCT, PLT, MPV, PDW, PCT,P-LCR, P-LCC |
|                       | 10 research parameters: Blast#, Blast%, ALM#, ALM%, IMM#, IMM%, Left#, Left%, NRBC#, NRBC%                                                                                   |
|                       | 2 scattergrams, 2 histograms                                                                                                                                                 |
| Test Principle        | Semiconductor laser flow cytometry+Cytochemical staining+Impedance method for WBC differential                                                                               |
|                       | Cyanide-free colorimetry for hemoglobin test                                                                                                                                 |
|                       | Impedance method for RBC and PLT counting                                                                                                                                    |
| Throughput            | 60 samples per hour                                                                                                                                                          |
| Sample mode           | Whole blood mode                                                                                                                                                             |
|                       | Micro-WB mode                                                                                                                                                                |
|                       | Pre-dilute mode                                                                                                                                                              |
| Sampling type         | Manual or automated sampling (Auto-loader is optional)                                                                                                                       |
| Data Storage Capacity | At least 200,000 results                                                                                                                                                     |
| Data system           | RJ45 network interface, USB interface, Support bi-directional LIS                                                                                                            |
| Power consumption     | 240VA                                                                                                                                                                        |
| Dimension(D×W×H)      | 679mm×556mm×531mm (with auto-loader), 520mm×380mm×531mm (without auto-loader)                                                                                                |
| Weight                | BF-6900: 48kg (with auto-loader), 40kg (without auto-loader)                                                                                                                 |

DIRUI

DIRUI INDUSTRIAL CO.,LTD.

3333 Yiju Street,New&High Tech. Development Zone Changchun,Jilin 130103,P.R.China  
E-mail:marketing@dirui.com.cn    Http://www.dirui.com.cn/en  
Tel:+86(431)85083721

·Specifications subject to change without notice.  
20211215



Official WeChat  
official account



# BF-6900 NEW

Automatic Hematology Analyzer




DIRUI




After years of technological accumulation in Hematology analysis field, we develop an instrument named BF-6900 which is reliable for your choice.

BF-6900 is a very compact 5 part DIFF instrument. Ensuring efficiency and accuracy, guaranteeing reliability and robustness, BF-6900 becomes the indispensable hematology analyzer for your laboratory.

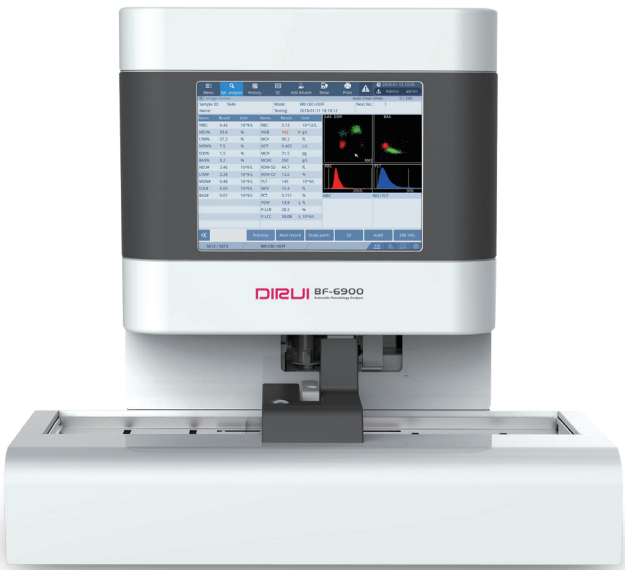

**Advanced Principle**

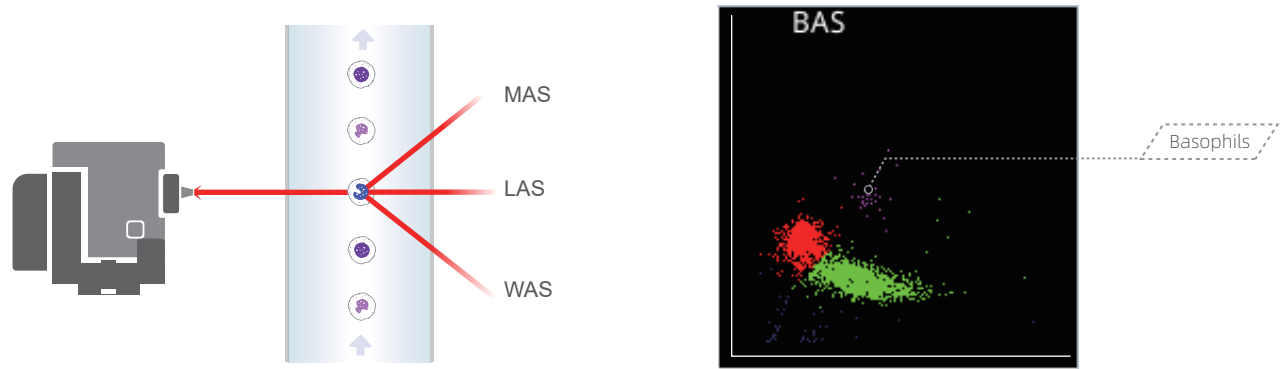


- Tri-angle laser scatter + flow cytometry+ cytochemical staining, achieving a betterment of 5-part WBC differentiation
- Basophils are counted by laser scatter that detects information about cell volume and cellular complexity & granularity




**Unique Comprehensive Clinical Information**

- 5-Part WBC differentiation, 35 parameters
- 2 scattergrams, 2 histograms
- 60 Test/Hour
- Only 25 µL sample volume for CBC + DIFF measurement



**User-friendly Design**

- Compact design
- High resolution 10.4 inch touch screen
- Multi-language operating interface
- Large storage capacity up to 200,000 samples
- Closed tube for STAT samples
- Rotate the tube automatically, avoid barcode scanning error
- Reagents could be stored in the instrument to save space



**Flexible Option**

- Auto-loader is optional

