

BUILT FOR FIRE. TRUSTED FOR SAFETY.

**FIRE  
GUN**



# FIRE CABINETS

[www.sescoeg.com](http://www.sescoeg.com)





# FIRE CABINETS



Fire Gun manufactures and supplies high-quality fire cabinets designed to meet project-specific dimensions and site requirements. Our cabinets provide safe, reliable storage for firefighting and safety equipment, with certified options available according to **UL, FM, LPCB & Kitemark** requirements.

Manufactured from premium mild steel, stainless steel and glass, Fire Gun cabinets are built for durability, weather resistance and long service life. They can be supplied as surface-mounted, recessed or semi-recessed units, with hairline and mirror finishes available in **304 & 316 stainless steel**.

All cabinets are produced in-house using advanced machinery, modern production technology and skilled workmanship to meet demanding project standards and relevant international certification requirements.





# RUBBER HOSE ENCLOSURE SINGLE DOOR CABINET

FireGun Rubber Hose Enclosure **FG-300** series are single door for manual and automatic type builds. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The outer edge of the Hose Reel is rolled over for safe handling and aesthetic appearance, The latch mechanism for KM cabinets is turn handle type.

## Minimum Size

### FG300

with Manual Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 800   | 800    | 230   |

### FG300A

with Automatic Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 800   | 800    | 250   |

## Maximum Size

### FG300

with Manual Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 1000  | 1000   | 400   |

### FG300A

with Automatic Fire Hose


| Width | Height | Depth |
|-------|--------|-------|
| 1000  | 1000   | 400   |

\*All LPCB approved cabinets are available in minimum depth of **280 mm** in combination with swinging pipe




## Features


- LPCB Approved
- Turn handle latch mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel

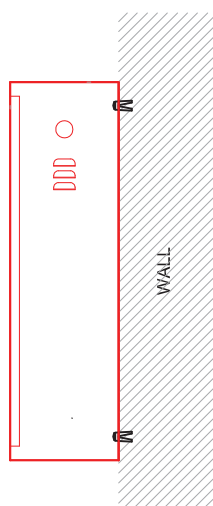

SIDE VIEW

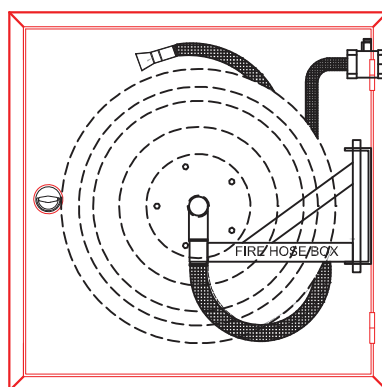

FRONT VIEW

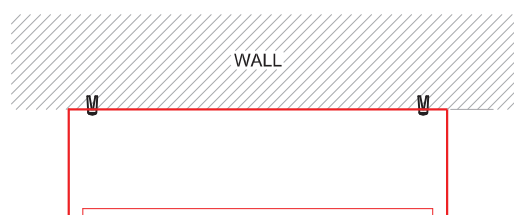

TOP VIEW





# RUBBER HOSE ENCLOSURE

## HORIZONTAL DOUBLE DOOR CABINET

FireGun Rubber Hose Enclosure **FG-600** series are horizontal double compartment door with available space for fire extinguisher with manual and automatic type builds. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The outer edge of the hose reel is rolled over for safe handling and aesthetic appearance, The latch mechanism for KM cabinets is turn handle type.

### Minimum Size **FG600**

with Manual Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 1050  | 800    | 230   |

### **FG600A**

with Automatic Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 1050  | 800    | 250   |

### Maximum Size **FG600**

with Manual Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 1200  | 1000   | 400   |

### **FG600A**

with Automatic Fire Hose


| Width | Height | Depth |
|-------|--------|-------|
| 1200  | 1000   | 400   |

\*All LPCB approved cabinets are available in minimum depth of **280 mm** in combination with swinging pipe




## Features


- LPCB Approved
- Turn handle latch mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel

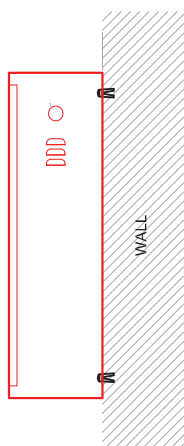

SIDE VIEW

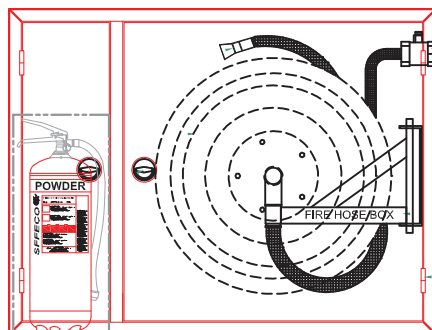

FRONT VIEW

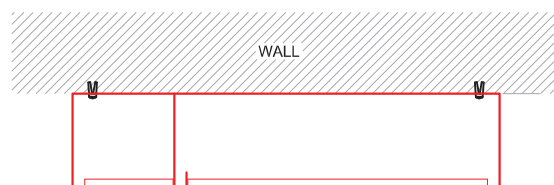

TOP VIEW





# RUBBER HOSE ENCLOSURE

## DOUBLE DOOR VERTICAL CABINET

FireGun Rubber Hose Enclosure **FG-900** series are double door for manual and automatic type builds. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The outer edge of the Hose Reel is rolled over for safe handling and aesthetic appearance, The latch mechanism for KM cabinets is turn handle type.

### Minimum Size **FG900** with Manual Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 800   | 1600   | 230   |

### **FG900A** with Automatic Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 800   | 1600   | 250   |

### Maximum Size **FG900** with Manual Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 1000  | 2100   | 400   |


### **FG900A** with Automatic Fire Hose

| Width | Height | Depth |
|-------|--------|-------|
| 1000  | 2100   | 400   |


\*All LPCB approved cabinets are available in minimum depth of **280 mm** in combination with swinging pipe

## Features

- LPCB Approved
- Turn handle latch mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel



SIDE VIEW

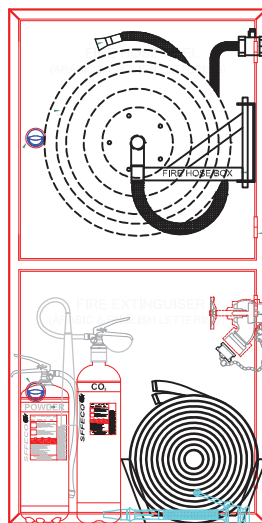

FRONT VIEW



TOP VIEW



# CABINETS FOR HOSE REELS



FireGun Hose Reel cabinets are designed to accommodate fire hose reel and also firefighting equipment. Fire hose reel cabinets are manufactured to comply with **BS EN 671-1** standard.

## TECHNICAL INFORMATION

| Cabinet Model no. | Door Type       | Type of hose                                  | For Use with Additional Equipment | Minimum Size (mm)                 | Maximum Size (mm)                 | Minimum depth for swinging pipe (mm) |
|-------------------|-----------------|-----------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|--------------------------------------|
|                   |                 |                                               |                                   | Width(X) x Height (Y) x Depth (Z) | Width(X) x Height (Y) x Depth (Z) | *Depth (Z)                           |
| FG300             | Single          | Manual Fire Hose (semi-rigid hose) upto 1"    | -                                 | 800x800x230*                      | 1000x1000x400                     | 280                                  |
| FG300A            | Single          | Automatic Fire Hose (semi-rigid hose) upto 1" | -                                 | 800x800x230*                      | 1000x1000x400                     | 280                                  |
| FG600             | Double          | Manual Fire Hose (semi-rigid hose) upto 1"    | Fire Extinguisher                 | 1050x800x230*                     | 1200x1000x400                     | 280                                  |
| FG600A            | Double          | Automatic Fire Hose (semi-rigid hose) upto 1" | Fire Extinguisher                 | 1050x800x230*                     | 1200x1000x400                     | 280                                  |
| FG900             | Double Vertical | Manual Fire Hose (semi-rigid hose) upto 1"    | Fire Extinguisher                 | 800x1600x230*                     | 1000x2100x400                     | 280                                  |
| FG900A            | Double Vertical | Automatic Fire Hose (semi-rigid hose) upto 1" | Fire Extinguisher                 | 800x1600x230*                     | 1000x2100x400                     | 280                                  |

## Sheet Thickness

| Mild Steel | Stainless Steel |
|------------|-----------------|
| 1 mm       | 1 mm            |
| 1.2 mm     | 1.2 mm          |
| 1.5 mm     | 1.5 mm          |
| 2 mm       | -               |

The sheetmetal can be either cold rolled steel, hot dip galvanized, electro-galvanized, galvalume, S.S.

## Finishing

FireGun Fire Rated Cabinet are available in multiple finishes as follows:

- Red Painted (RAL3000) for Mild Steel
- Hairline, Mirror & Brush for Stainless Steel (304 Or 316)

## Installation

FireGun Fire CABINETS FOR HOSE REELS have been manufactured with range of styles.

- Self Standing
- Self Standing With Legs
- Surface Type
- Semi Recessed:Flat Trim
- Semi Recessed:Curved Trim
- Recessed



# SYNTHETIC HOSE Cabinets

## SINGLE DOOR CABINET

FireGun Synthetic Hose Enclosure **FG-4000** and

**FG-5000** series are single door for synthetic hose reel

FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The lock mechanism is either lock type key type or turn handle.

### FG4000

with 1½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 700   | 700    | 230   |

### FG5000




with 2½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 750   | 750    | 230   |



### Features

- Key type or Turn handle locking mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel

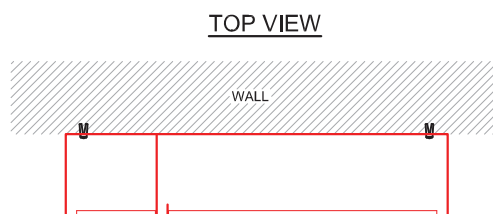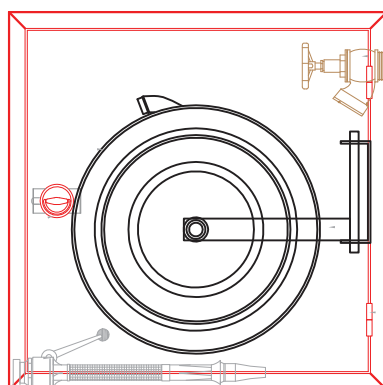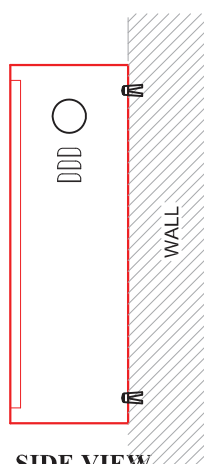

**FIRE  
GUN**





# SYNTHETIC HOSE Cabinets

## HORIZONTAL DOUBLE DOOR CABINET

FireGun Synthetic Hose Enclosure **FG-4200** and **FG-5200** series are horizontal double door for synthetic hose reel. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The lock mechanism is either locktype, key type or turn handle.

### **FG4200** with 1½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 950   | 700    | 230   |




### **FG5200** with 2½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 990   | 750    | 230   |



### Features

- Key type or Turn handle locking mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel

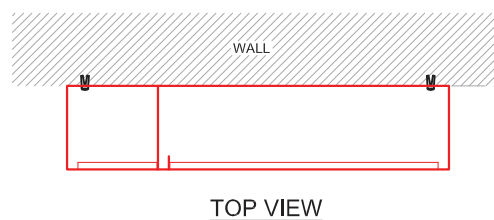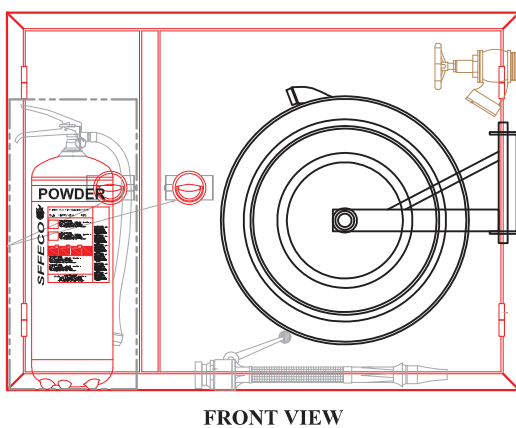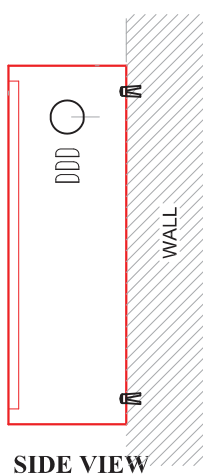



# SYNTHETIC HOSE ENCLOSURE SINGLE DOOR CABINET

FireGun Synthetic Hose Enclosure **FG-4400**, **FG-5400**, **FG-4600** & **FG-5600** series are single door for synthetic hose reel. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The lock mechanism is either lock type key type or turn handle.

## SF4400 with 1½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 900   | 700    | 230   |

## SF5400 with 2½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 950   | 750    | 230   |

## SF4600 with 1½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 850   | 850    | 230   |




## SF5600 with 2½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 950   | 900    | 230   |



## Features

- Key type or Turn handle locking mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel

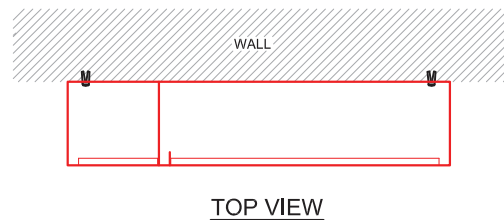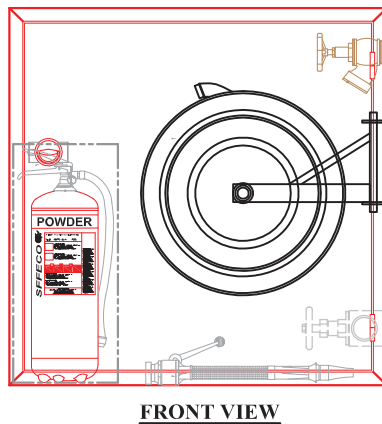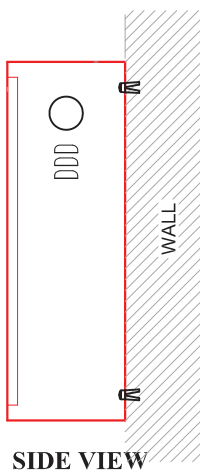

# HOSE RACK ENCLOSURE

## HOSE RACK CABINET

FireGun Fire Hose Rack Cabinet model **FGR-200E** & **FGR-200EV** series are single door with available space for fire extinguisher & additional valve. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The lock mechanism is either lock type, key type or turnhandle.

### **FGR200E/200EV** with 1½" Synthetic Hose Rack

| Width | Height | Depth |
|-------|--------|-------|
| 700   | 850    | 230   |


### Features

- Key type or Turn handle locking mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel




**FGR200EV**  
Space for 6 KG ABC  
Dry Powder Extinguisher  
& Space for Additional  
Valve


**FGR200E**  
Space for 6 KG ABC  
Dry Powder Extinguisher

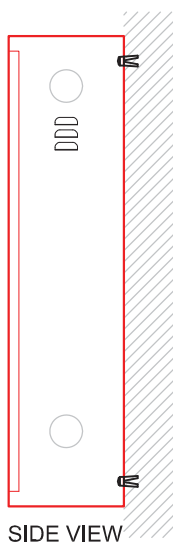

SIDE VIEW

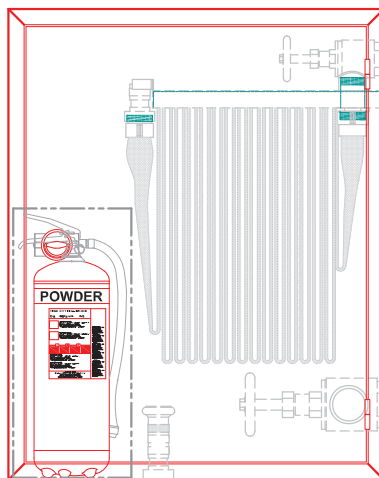

FRONT VIEW

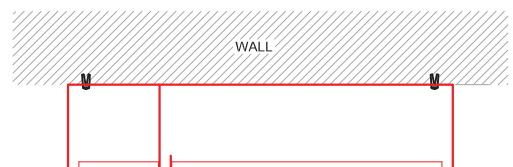

TOP VIEW



# HOSE RACK ENCLOSURE

## STANDARD HOSE RACK WITH ACCESSORIES

FireGun Fire Hose Rack Cabinet model **FGR150** series are designed as single compartment door. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The lock mechanism is either lock type, key type or turn handle.

Electrostatic powder painted and oven baked to 200°C for appearance and protection from rust.

### SFR150


with 1½" Synthetic Hose Rack

| Width  | Height | Depth  |
|--------|--------|--------|
| 700 mm | 850 mm | 230 mm |



### Features

- Key type or Turn handle locking mechanism
- Full Steel or Glass Panel Door
- Mild Steel or Stainless Steel

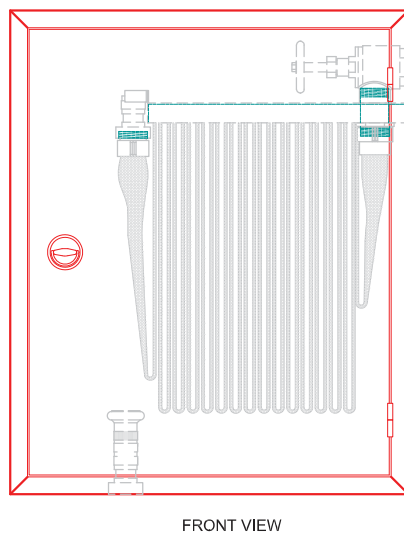



# FIRE RATED CABINETS

## TECHNICAL SPECIFICATION



FGHC-xxxx-x-xxx-x-x

### Type of Material

- S - Stainless Steel
- M - Mild Steel
- C - Combination of SS and MS

### Type of Glazing

- A - ANSI Safety Glass
- C - Clear or Float Glass
- W - Wired Glass
- L - UL listed Glass
- F - Flush (No Glass)

### Number of Compartment (1, 2, 3 etc.)

### Door Configuration

- SD - Single Door
- DH - Double Door Horizontal
- DV - Double Door Vertical
- MD - Multiple Door

### Mounting



- R - Recessed
- S - Surface
- S - Semi-recessed

### Cabinet Size (Nominal) in Cm (W & H)



### Brand

FGHC -FireGun Hose Cabinet


### VERTICAL SINGLE DOOR

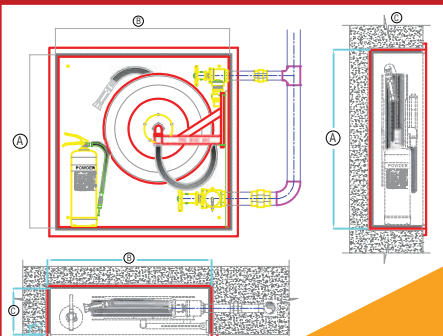

### VERTICAL DOUBLE DOOR

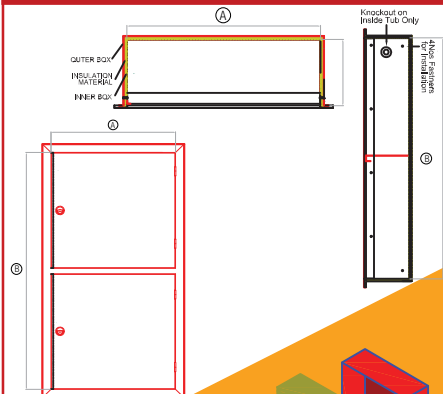

### HORIZONTAL DOUBLE DOOR

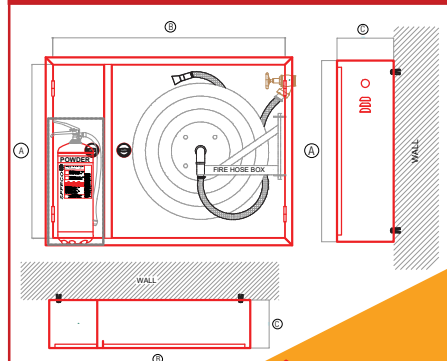

# SPECIAL APPLICATION ENCLOSURE

## Foam/Water Cabinet


FireGun Foam/Water Cabinet Model FG9000 characterized for its high performance for attacking class A, B Fire within seconds. Designed for single man operation. Highly/ efficient in gas stations, Petrochemical Plants, Industrial premises, warehouse and in any areas requiring protection from class A or B fires.

### FG9000\*


With 1½" Synthetic Hose Reel

| Width | Height | Depth |
|-------|--------|-------|
| 700mm | 1120mm | 300mm |


\* Dimensions are subject to change depending on the availability of stock

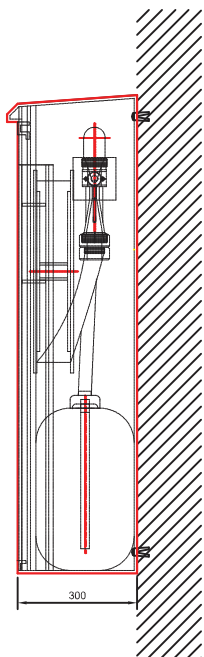

SIDE VIEW

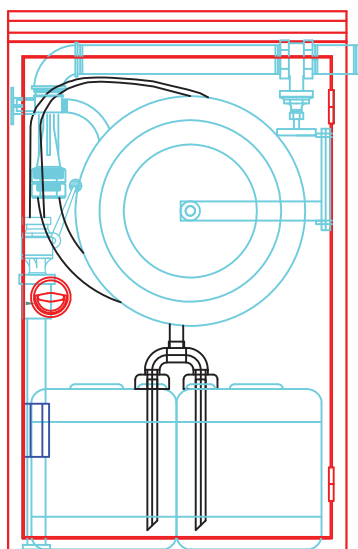

FRONT VIEW

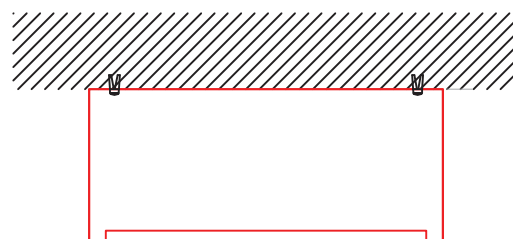

TOP VIEW

**FIRE  
GUN**

# SPECIAL APPLICATION ENCLOSURE

## FIRE EXTINGUISHER CABINET

FireGun fire Extinguisher cabinets are specifically designed and produced to store fire extinguisher safe and securely. FireGun cabinets are made from mild steel with the sheet thickness of 1.0 to 2.0 mm or stainless steel with the sheet thickness of 1.0 to 1.5 mm & also available with Hairline & Mirror finish (304 & 316 Grade). The lock mechanism is either lock type , key type or turn handle.

Cabinets doors are available with options of full metal, full glass frame, center break glass and wired glass door to meet requirements. Instruction sign in Arabic and English are silkscreen printed on the cabinet.

### TECHNICAL INFORMATION

| Model No | Mounting Type | Cabinet Height (cm) | Cabinet Width (cm) | Cabinet Depth (cm) | Wall Opening Height (Cm) | Wall Opening Width (cm) | Wall Opening Depth (cm) | For Use with FireGun Extinguishers (SOLD SEPERATELY)                       |
|----------|---------------|---------------------|--------------------|--------------------|--------------------------|-------------------------|-------------------------|----------------------------------------------------------------------------|
| FG 102   | Recessed      | 45                  | 22                 | 15                 | 47                       | 24                      | 16                      | 5 Lbs/3 Kg Dry Powder                                                      |
| FG 104   | Recessed      | 60                  | 28                 | 18                 | 62                       | 30                      | 19                      | 10 Lbs/6 Kg Dry Powder                                                     |
| FG 106   | Recessed      | 70                  | 30                 | 22                 | 72                       | 32                      | 23                      | 10 Kg/12 Kg Dry Powder or 10 Ltr Water/ Foam or 5 Lbs CO2                  |
| FG 108   | Recessed      | 110                 | 32                 | 25                 | 112                      | 34                      | 26                      | 10 Lbs/6 Kg CO2                                                            |
| FG 202   | Recessed      | 80                  | 28                 | 18                 | 82                       | 30                      | 19                      | 10 Lbs/6 Kg Dry Powder or 6 Ltr Foam with Blanket 4x4                      |
| FG 204   | Recessed      | 90                  | 30                 | 22                 | 92                       | 32                      | 23                      | 10 Kg/12 Kg Dry Powder or 10 Ltr Water or Foam. 5 Lbs CO2 with Blanket 4x4 |
| FG 112   | Semi-Recessed | 60                  | 28                 | 18                 | 62                       | 30                      | 13                      | 10 Lbs/6 Kg Dry Powder                                                     |
| FG 114   | Semi-Recessed | 70                  | 30                 | 22                 | 72                       | 32                      | 17                      | 10 Kg/12 Kg Dry Powder or 10 Ltr Water or Foam. 10 Lbs CO2                 |
| FG 116   | Semi-Recessed | 110                 | 32                 | 25                 | 112                      | 34                      | 21                      | 10 Lbs/6 Kg CO2                                                            |
| FG 210   | Semi-Recessed | 80                  | 28                 | 18                 | 82                       | 30                      | 13                      | 10 Lbs/6 Kg Dry Powder                                                     |
| FG 212   | Semi-Recessed | 90                  | 30                 | 22                 | 92                       | 32                      | 17                      | 10 Kg/12 Kg Dry Powder                                                     |
| FG 120   | Surface       | 45                  | 22                 | 15                 | x                        | x                       | x                       | 5 Lbs/3 Kg Dry Powder                                                      |
| FG 122   | Surface       | 60                  | 28                 | 18                 | x                        | x                       | x                       | - 10 Lbs/6 Kg Dry Powder                                                   |
| FG 124   | Surface       | 70                  | 30                 | 22                 | x                        | x                       | x                       | 10 Kg/12 Kg Dry Powder or 10 Ltr Water or Foam. 5 lbs. CO2                 |
| FG 126   | Surface       | 110                 | 32                 | 25                 | x                        | x                       | x                       | 10 Lbs/6 Kg CO2                                                            |
| FG 220   | Surface       | 80                  | 28                 | 18                 | x                        | x                       | x                       | 10 Lbs/6 Kg Dry Powder or 6 Ltr Foam with Blanket 4x4                      |
| FG 222   | Surface       | 90                  | 30                 | 22                 | x                        | x                       | x                       | 10 Kg/12 Kg Dry Powder or 10Ltr Water/ Foam or 5 Lbs CO2 with Blanket 4x4  |



# SPECIAL APPLICATION ENCLOSURE

## Breeching Inlet Cabinet

### SDR096 2 Way BI

| Width | Height | Depth |
|-------|--------|-------|
| 575mm | 460mm  | 300mm |



### SDR116 4 Way BI

| Width | Height | Depth |
|-------|--------|-------|
| 600mm | 600mm  | 300mm |

FireGun Breaching inlet Cabinets are available in 2 way & 4 way system, Cabinet can be mounted horizontally or vertically based on the requirement. Door are made of mild steel or stainless steel with options of full steel, glass frame or wired glass mesh. Normally available in red color but can be customized upon request.




# TECHNICAL DESIGN

## HOSES & CABINETS


### CABINET & OPENING STYLE

1

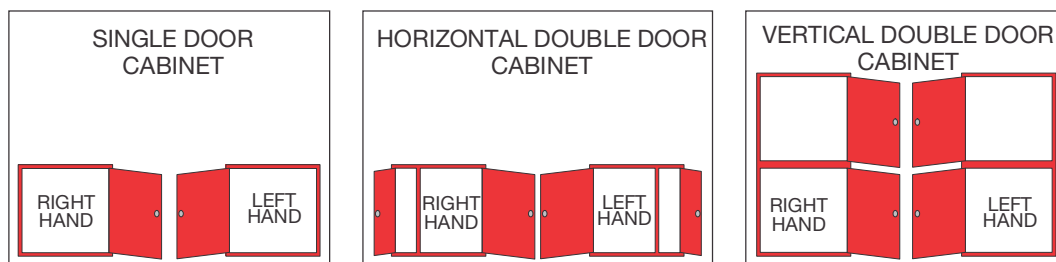


2

### MOUNTING TYPE

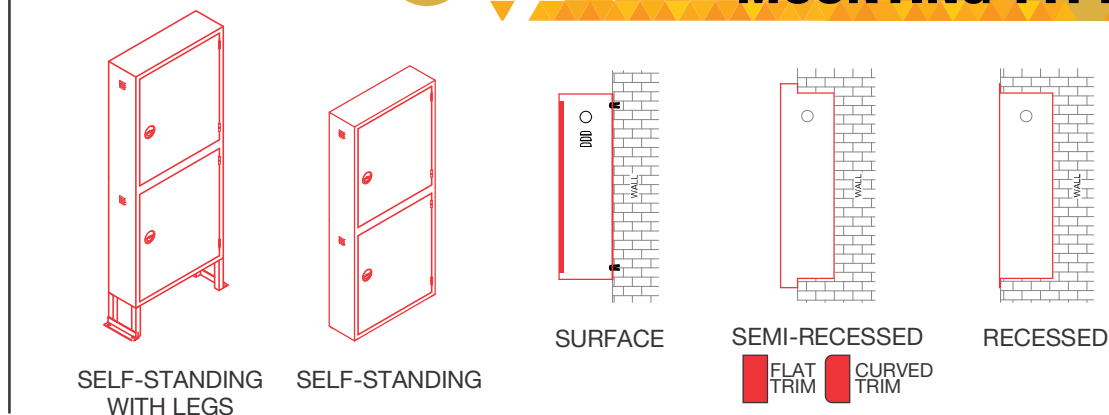

### MATERIAL & FINISH


3

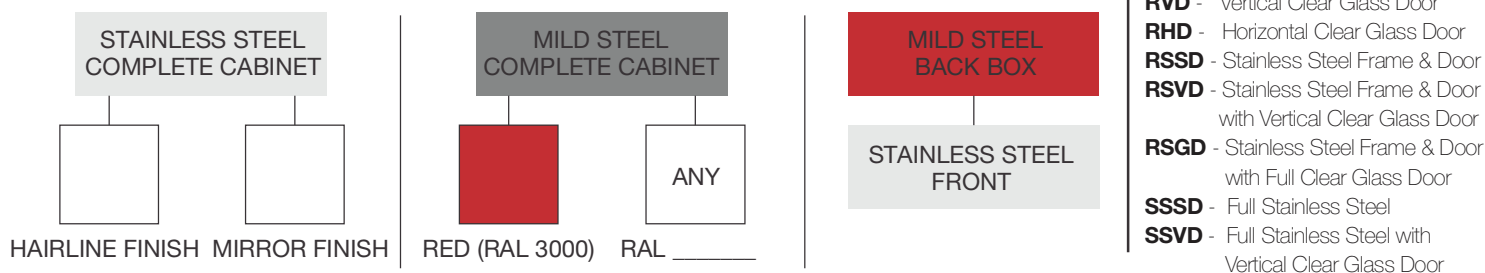

4

### THICKNESS OF SHEET

Back Box and Door Frame can be of different thickness and material.  
HAIRLINE FINISH, MIRROR FINISH & BRUSH FINISH

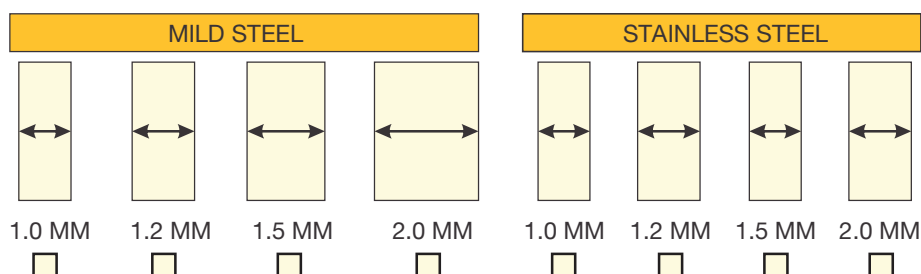


# TECHNICAL DESIGN


## HOSES & CABINETS

### DOOR TYPE


5




STANDARD (S)




VERTICAL (V)



HORIZONTAL (H)




FULL (G)




CIRCLE (C)

### DOOR HINGES


6



PUSH PIN HINGES



PIANO HINGES(SS/MS)



HALF HINGES



PIN HINGES SS


NOTE : KM hose reel cabinets are with push pin / piano hinges only.

7


### GLASS TYPE




CLEAR



TEMPERED



WIRED CLEAR




WIRED MESH

### HOSE TYPE

8

#### HOSE REEL



STANDARD PRODUCT



COLORS:




REEL TYPE


MANUAL

AUTOMATIC


SIZE :



SWINGING ARM




SWINGING PIPE



FIXED

#### SYNTHETIC HOSE



STANDARD PRODUCT




COLORS:



SIZE :




#### HOSE RACK



STANDARD PRODUCT



COLORS:



SIZE :



# TECHNICAL DESIGN

## HOSES & CABINETS

### NOZZLE TYPE

9


#### HOSE REEL NOZZLES



MODEL A



MODEL B




MODEL C

#### HOSE RACK NOZZLE



SFD-NH-83-40

#### SYNTHETIC HOSE NOZZLES



SFD-NH-40  
SFD-NH-65



SFD-NH-65




MODEL C

10

### COUPLINGS & ADAPTER


#### NST




MALE

FEMALE

#### JOHN MORRIS



FEMALE




MALE


### VALVES\*\*

11

#### OBLIQUE LANDING VALVES



THREADED



FLANGED

FINISH:

BRASS

CHROME

RED PAINTED

SIZE:


1"

1½"


2½"

STANDARD PRODUCT

#### STRAIGHT THROUGH LANDING VALVE



THREADED



FLANGED

FINISH:


RED PAINTED

SIZE:


2½"

STANDARD PRODUCT

#### ANGLE VALVE



THREADED



FLANGED

FINISH:

BRASS

SIZE:

1½"

2½"

STANDARD PRODUCT

UL FM APPROVED

WITH PRV

# SPECIAL APPLICATION ENCLOSURE

## Trolley Cabinet


FireGun Trolley Cabinet Model FG9100 characterized for its high performance for attacking class A, B Fire within seconds. Designed for single man operation. Highly/ efficient in Airports, Sea Ports, Industrial premises, warehouse and in any areas requiring Clear land space for and portable fire fighting equipment

### FG9100\*


With 2½" Synthetic Hose

| Width | Height | Depth |
|-------|--------|-------|
| 915mm | 900mm  | 300mm |


\* Dimensions are subject to change depending on the availability and request

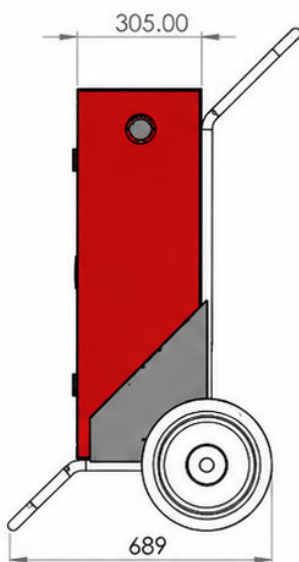

SIDE VIEW

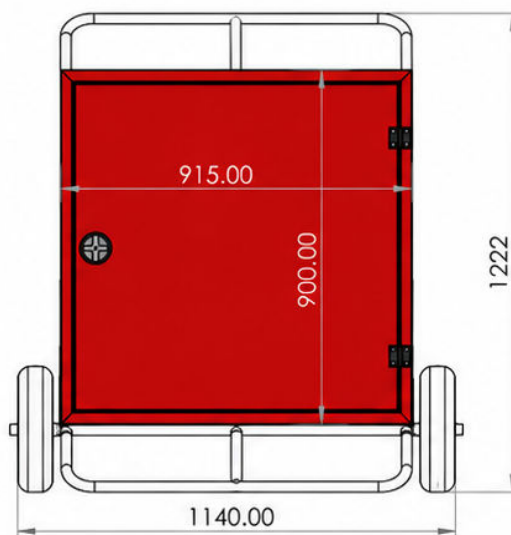

FRONT VIEW

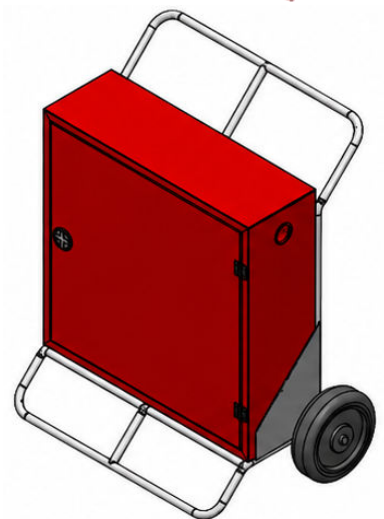

ISOMETRIC VIEW

**FIRE  
GUN**





| +201003029064



| Sales@sescoeg.com



| www.sescoeg.com



| BDG 3, Makram Ebeid, Nasr City, Cairo, Egypt