

# 74VHC161

## 4-Bit Binary Counter with Asynchronous Clear

### Features

- High Speed:  $f_{MAX} = 185\text{MHz}$  (Typ.) at  $T_A = 25^\circ\text{C}$
- Synchronous counting and loading
- High-speed synchronous expansion
- Low power dissipation:  $I_{CC} = 4\mu\text{A}$  (Max.) at  $T_A = 25^\circ\text{C}$
- High noise immunity:  $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (Min.)
- Power down protection provided on all inputs
- Low noise:  $V_{OLP} = 0.8\text{V}$  (Max.)
- Pin and function compatible with 74HC161

### General Description


The VHC161 is an advanced high-speed CMOS device fabricated with silicon gate CMOS technology. It achieves the high-speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation. The VHC161 is a high-speed synchronous modulo-16 binary counter. This device is synchronously presettable for application in programmable dividers and have two types of Count Enable inputs plus a Terminal Count output for versatility in forming synchronous multistage counters. The VHC161 has an asynchronous Master Reset input that overrides all other inputs and forces the outputs LOW. An input protection circuit insures that 0V to 7V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5V to 3V systems and two supply systems such as battery backup. This circuit prevents device destruction due to mismatched supply and input voltages.

### Ordering Information

| Order Number | Package Number | Package Description  |
|--------------|----------------|--|
| 74VHC161M    | M16A           | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow |
| 74VHC161SJ   | M16D           | 16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                |
| 74VHC161MTC  | MTC16          | 16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  |

Surface mount packages are also available on Tape and Reel. Specify by appending the suffix letter "X" to the ordering number.


### Connection Diagram

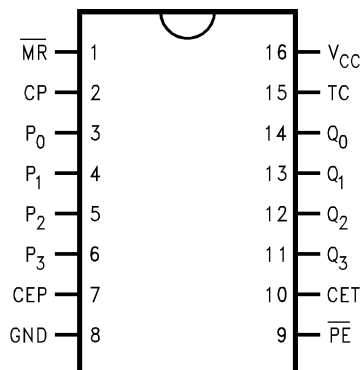

### Pin Description

| Pin Names              | Description                     |
|------------------------|---------------------------------|
| CEP                    | Count Enable Parallel Input     |
| CET                    | Count Enable Trickle Input      |
| CP                     | Clock Pulse Input               |
| $\overline{\text{MR}}$ | Asynchronous Master Reset Input |
| $P_0$ – $P_3$          | Parallel Data Inputs            |
| $\overline{\text{PE}}$ | Parallel Enable Inputs          |
| $Q_0$ – $Q_3$          | Flip-Flop Outputs               |
| TC                     | Terminal Count Output           |

## Logic Symbols

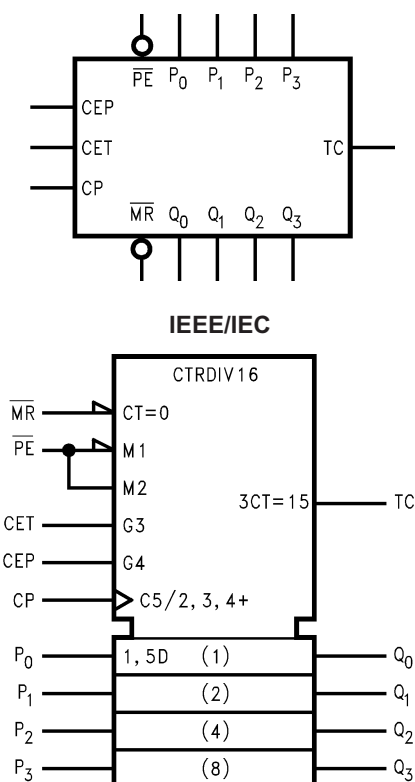

## Functional Description

The VHC161 counts in modulo-16 binary sequence. From state 15 (HHHH) it increments to state 0 (LLLL). The clock inputs of all flip-flops are driven in parallel through a clock buffer. Thus all changes of the Q outputs (except due to Master Reset of the VHC161) occur as a result of, and synchronous with, the LOW-to-HIGH transition of the CP input signal. The circuits have four fundamental modes of operation, in order of precedence: asynchronous reset, parallel load, count-up and hold. Five control inputs—Master Reset, Parallel Enable ( $\overline{PE}$ ), Count Enable Parallel (CEP) and Count Enable Trickle (CET)—determine the mode of operation, as shown in the Mode Select Table. A LOW signal on  $\overline{MR}$  overrides all other inputs and asynchronously forces all outputs LOW. A LOW signal on  $\overline{PE}$  overrides counting and allows information on the Parallel Data ( $P_n$ ) inputs to be loaded into the flip-flops on the next rising edge of CP. With  $\overline{PE}$  and  $\overline{MR}$  HIGH, CEP and CET permit counting when both are HIGH. Conversely, a LOW signal on either CEP or CET inhibits counting.

The VHC161 uses D-type edge-triggered flip-flops and changing the  $\overline{PE}$ , CEP and CET inputs when the CP is in either state does not cause errors, provided that the recommended setup and hold times, with respect to the rising edge of CP, are observed.

The Terminal Count (TC) output is HIGH when CET is HIGH and counter is in state 15. To implement synchronous multistage counters, the TC outputs can be used with the CEP and CET inputs in two different ways.

Figure 1 shows the connections for simple ripple carry, in which the clock period must be longer than the CP to TC delay of the first stage, plus the cumulative CET to TC delays of the intermediate stages, plus the CET to CP setup time of the last stage. This total delay plus setup time sets the upper limit on clock frequency. For faster clock rates, the carry lookahead connections shown in Figure 2 are recommended. In this scheme the ripple delay through the intermediate stages commences with the same clock that causes the first stage to tick over from max to min to start its final cycle. Since this final cycle requires 16 clocks to complete, there is plenty of time for the ripple to progress through the intermediate stages. The critical timing that limits the clock period is the CP to TC delay of the first stage plus the CEP to CP setup time of the last stage. The TC output is subject to decoding spikes due to internal race conditions and is therefore not recommended for use as a clock or asynchronous reset for flip-flops, registers or counters.

Figure 1 shows the connections for simple ripple carry, in which the clock period must be longer than the CP to TC delay of the first stage, plus the cumulative CET to TC delays of the intermediate stages, plus the CET to CP setup time of the last stage. This total delay plus setup time sets the upper limit on clock frequency. For faster clock rates, the carry lookahead connections shown in Figure 2 are recommended. In this scheme the ripple delay through the intermediate stages commences with the same clock that causes the first stage to tick over from max to min to start its final cycle. Since this final cycle requires 16 clocks to complete, there is plenty of time for the ripple to progress through the intermediate stages. The critical timing that limits the clock period is the CP to TC delay of the first stage plus the CEP to CP setup time of the last stage. The TC output is subject to decoding spikes due to internal race conditions and is therefore not recommended for use as a clock or asynchronous reset for flip-flops, registers or counters.

### Logic Equations:

$$\text{Count Enable} = \text{CEP} \cdot \text{CET} \cdot \overline{PE}$$

$$\text{TC} = Q_0 \cdot Q_1 \cdot Q_2 \cdot Q_3 \cdot \text{CET}$$

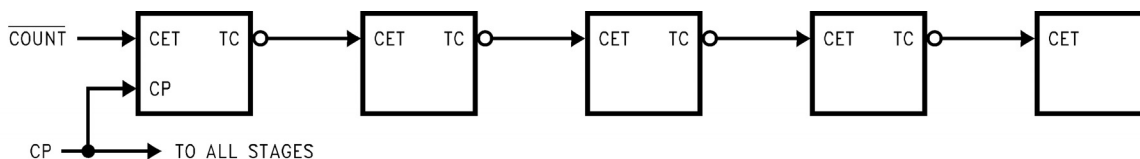


Figure 1. Multistage Counter with Ripple Carry

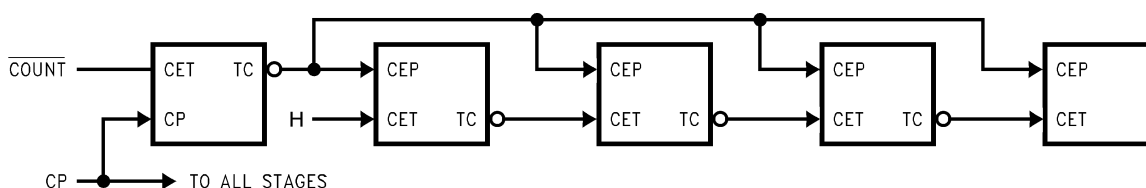


Figure 2. Multistage Counter with Lookahead Carry

Mode Select Table


| $\overline{\text{MR}}$ | $\overline{\text{PE}}$ | CET | CEP | Action on the Rising Clock Edge ( $\nearrow$ ) |
|------------------------|------------------------|-----|-----|--|
| L                      | X                      | X   | X   | Reset (Clear)                                  |
| H                      | L                      | X   | X   | Load ( $P_n \rightarrow Q_n$ )                 |
| H                      | H                      | H   | H   | Count (Increment)                              |
| H                      | H                      | L   | X   | No Change (Hold)                               |
| H                      | H                      | X   | L   | No Change (Hold)                               |

H = HIGH Voltage Level


L = LOW Voltage Level

X = Immaterial

State Diagram

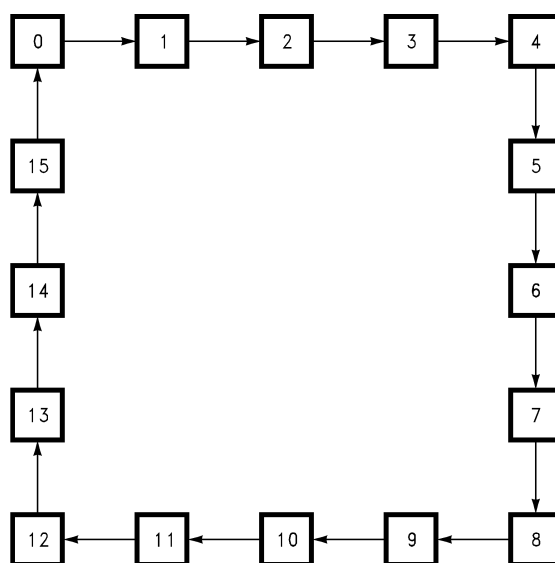

Block Diagram

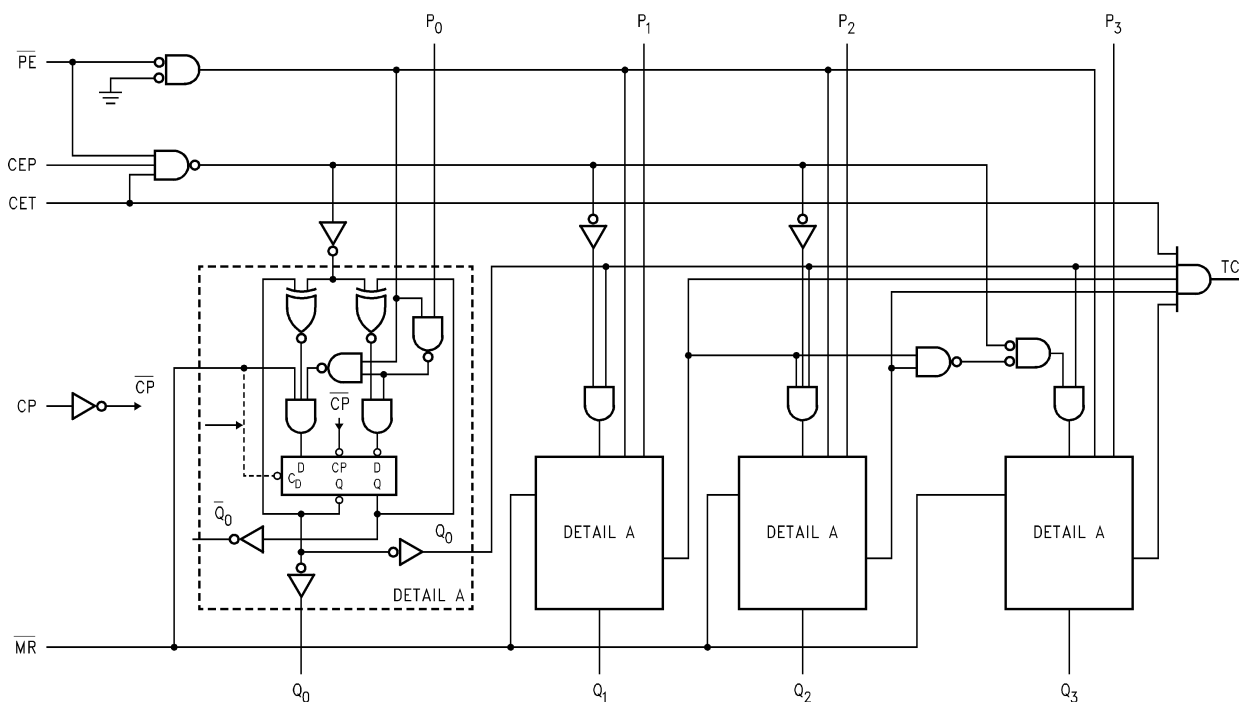

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol    | Parameter                                | Rating                   |
|-----------|--|--------------------------|
| $V_{CC}$  | Supply Voltage                           | −0.5V to +7.0V           |
| $V_{IN}$  | DC Input Voltage                         | −0.5V to +7.0V           |
| $V_{OUT}$ | DC Output Voltage                        | −0.5V to $V_{CC} + 0.5V$ |
| $I_{IK}$  | Input Diode Current                      | −20mA                    |
| $I_{OK}$  | Output Diode Current                     | ±20mA                    |
| $I_{OUT}$ | DC Output Current                        | ±25mA                    |
| $I_{CC}$  | DC $V_{CC}$ / GND Current                | ±50mA                    |
| $T_{STG}$ | Storage Temperature                      | −65°C to +150°C          |
| $T_L$     | Lead Temperature (Soldering, 10 seconds) | 260°C                    |

## Recommended Operating Conditions<sup>(1)</sup>

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol     | Parameter   | Rating                            |
|------------|---|-----------------------------------|
| $V_{CC}$   | Supply Voltage  | 2.0V to +5.5V                     |
| $V_{IN}$   | Input Voltage   | 0V to +5.5V                       |
| $V_{OUT}$  | Output Voltage  | 0V to $V_{CC}$                    |
| $T_{OPR}$  | Operating Temperature   | −40°C to +85°C                    |
| $t_r, t_f$ | Input Rise and Fall Time,<br>$V_{CC} = 3.3V \pm 0.3V$<br>$V_{CC} = 5.0V \pm 0.5V$ | 0ns/V ~ 100ns/V<br>0ns/V ~ 20ns/V |

### Note:

1. Unused inputs must be held HIGH or LOW. They may not float.

## DC Electrical Characteristics

| Symbol   | Parameter                 | $V_{CC}$ (V) | Conditions                       | $T_A = 25^\circ\text{C}$  |      |                     | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ |                     | Units         |
|----------|---------------------------|--------------|----------------------------------|---------------------------|------|---------------------|---|---------------------|---------------|
|          |                           |              |                                  | Min.                      | Typ. | Max.                | Min.  | Max.                |               |
| $V_{IH}$ | HIGH Level Input Voltage  | 2.0          |                                  | 1.50                      |      |                     | 1.50  |                     | V             |
|          |                           | 3.0–5.5      |                                  | $0.7 \times V_{CC}$       |      |                     | $0.7 \times V_{CC}$                             |                     |               |
| $V_{IL}$ | LOW Level Input Voltage   | 2.0          |                                  |                           |      | 0.50                |   | 0.50                | V             |
|          |                           | 3.0–5.5      |                                  |                           |      | $0.3 \times V_{CC}$ |   | $0.3 \times V_{CC}$ |               |
| $V_{OH}$ | HIGH Level Output Voltage | 2.0          | $V_{IN} = V_{IH}$<br>or $V_{IL}$ | $I_{OH} = -50\mu\text{A}$ | 1.9  | 2.0                 |   | 1.9                 | V             |
|          |                           | 3.0          |                                  |                           | 2.9  | 3.0                 |   | 2.9                 |               |
|          |                           | 4.5          |                                  |                           | 4.4  | 4.5                 |   | 4.4                 |               |
|          |                           | 3.0          |                                  | $I_{OH} = -4\text{mA}$    | 2.58 |                     |   | 2.48                |               |
|          |                           | 4.5          |                                  | $I_{OH} = -8\text{mA}$    | 3.94 |                     |   | 3.80                |               |
| $V_{OL}$ | LOW Level Output Voltage  | 2.0          | $V_{IN} = V_{IH}$<br>or $V_{IL}$ | $I_{OL} = 50\mu\text{A}$  |      | 0.0                 | 0.1   |                     | V             |
|          |                           | 3.0          |                                  |                           |      | 0.0                 | 0.1   |                     |               |
|          |                           | 4.5          |                                  |                           |      | 0.0                 | 0.1   |                     |               |
|          |                           | 3.0          |                                  | $I_{OL} = 4\text{mA}$     |      |                     | 0.36  | 0.44                |               |
|          |                           | 4.5          |                                  | $I_{OL} = 8\text{mA}$     |      |                     | 0.36  | 0.44                |               |
| $I_{IN}$ | Input Leakage Current     | 0–5.5        | $V_{IN} = 5.5\text{V or GND}$    |                           |      | $\pm 0.1$           |   | $\pm 1.0$           | $\mu\text{A}$ |
| $I_{CC}$ | Quiescent Supply Current  | 5.5          | $V_{IN} = V_{CC}$ or GND         |                           |      | 4.0                 |   | 40.0                | $\mu\text{A}$ |

## Noise Characteristics

| Symbol          | Parameter                                | $V_{CC}$ (V) | Conditions          | $T_A = 25^\circ\text{C}$ |        | Units |
|-----------------|--|--------------|---------------------|--------------------------|--------|-------|
|                 |  |              |                     | Typ.                     | Limits |       |
| $V_{OLP}^{(2)}$ | Quiet Output Maximum Dynamic $V_{OL}$    | 5.0          | $C_L = 50\text{pF}$ | 0.4                      | 0.8    | V     |
| $V_{OLV}^{(2)}$ | Quiet Output Minimum Dynamic $V_{OL}$    | 5.0          | $C_L = 50\text{pF}$ | –0.4                     | –0.8   | V     |
| $V_{IHD}^{(2)}$ | Minimum HIGH Level Dynamic Input Voltage | 5.0          | $C_L = 50\text{pF}$ |                          | 3.5    | V     |
| $V_{ILD}^{(2)}$ | Maximum LOW Level Dynamic Input Voltage  | 5.0          | $C_L = 50\text{pF}$ |                          | 1.5    | V     |

## Note:

2. Parameter guaranteed by design.

## AC Electrical Characteristics

| Symbol                              | Parameter                                   | V <sub>CC</sub> (V) | Conditions             | T <sub>A</sub> = 25°C |      |      | T <sub>A</sub> = -40° to +85°C |      | Units |
|-------------------------------------|---|---------------------|------------------------|-----------------------|------|------|--------------------------------|------|-------|
|                                     |   |                     |                        | Min.                  | Typ. | Max. | Min.                           | Max. |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay Time (CP-Q <sub>n</sub> ) | 3.3 ± 0.3           | C <sub>L</sub> = 15pF  |                       | 8.3  | 12.8 | 1.0                            | 15.0 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 10.8 | 16.3 | 1.0                            | 18.5 |       |
|                                     |   | 5.0 ± 0.5           | C <sub>L</sub> = 15pF  |                       | 4.9  | 8.1  | 1.0                            | 9.5  | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 6.4  | 10.1 | 1.0                            | 11.5 |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay Time (CP-TC, Count)       | 3.3 ± 0.3           | C <sub>L</sub> = 15pF  |                       | 8.7  | 13.6 | 1.0                            | 16.0 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 11.2 | 17.1 | 1.0                            | 19.5 |       |
|                                     |   | 5.0 ± 0.5           | C <sub>L</sub> = 15pF  |                       | 4.9  | 8.1  | 1.0                            | 9.5  | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 6.4  | 10.1 | 1.0                            | 11.5 |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay Time (CP-TC, Load)        | 3.3 ± 0.3           | C <sub>L</sub> = 15pF  |                       | 11.0 | 17.2 | 1.0                            | 20.0 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 13.5 | 20.7 | 1.0                            | 23.5 |       |
|                                     |   | 5.0 ± 0.5           | C <sub>L</sub> = 15pF  |                       | 6.2  | 10.3 | 1.0                            | 12.0 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 7.7  | 12.3 | 1.0                            | 14.0 |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay Time (CET-TC)             | 3.3 ± 0.3           | C <sub>L</sub> = 15pF  |                       | 7.5  | 12.3 | 1.0                            | 14.5 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 10.5 | 15.8 | 1.0                            | 18.0 |       |
|                                     |   | 5.0 ± 0.5           | C <sub>L</sub> = 15pF  |                       | 4.9  | 8.1  | 1.0                            | 9.5  | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 6.4  | 10.1 | 1.0                            | 11.5 |       |
| t <sub>PHL</sub>                    | Propagation Delay Time (MR-Q <sub>n</sub> ) | 3.3 ± 0.3           | C <sub>L</sub> = 15pF  |                       | 8.9  | 13.6 | 1.0                            | 16.0 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 11.2 | 17.1 | 1.0                            | 19.5 |       |
|                                     |   | 5.0 ± 0.5           | C <sub>L</sub> = 15pF  |                       | 5.5  | 9.0  | 1.0                            | 10.5 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 7.0  | 11.0 | 1.0                            | 12.5 |       |
| t <sub>PHL</sub>                    | Propagation Delay Time (MR-TC)              | 3.3 ± 0.3           | C <sub>L</sub> = 15pF  |                       | 8.4  | 13.2 | 1.0                            | 15.5 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 10.9 | 16.7 | 1.0                            | 19.0 |       |
|                                     |   | 5.0 ± 0.5           | C <sub>L</sub> = 15pF  |                       | 5.0  | 8.6  | 1.0                            | 10.0 | ns    |
|                                     |   |                     | C <sub>L</sub> = 50pF  |                       | 6.5  | 10.6 | 1.0                            | 12.0 |       |
| f <sub>MAX</sub>                    | Maximum Clock Frequency                     | 3.3 ± 0.3           | C <sub>L</sub> = 15pF  | 80                    | 130  |      | 70                             |      | MHz   |
|                                     |   |                     | C <sub>L</sub> = 50pF  | 55                    | 85   |      | 50                             |      |       |
|                                     |   | 5.0 ± 0.5           | C <sub>L</sub> = 15pF  | 135                   | 185  |      | 115                            |      | MHz   |
|                                     |   |                     | C <sub>L</sub> = 50pF  | 95                    | 125  |      | 85                             |      |       |
| C <sub>IN</sub>                     | Input Capacitance                           |                     | V <sub>CC</sub> = Open |                       | 4    | 10   |                                | 10   | pF    |
| C <sub>PD</sub>                     | Power Dissipation Capacitance               |                     | <sup>(3)</sup>         |                       | 23   |      |                                |      | pF    |

## Note:

3. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:

$$I_{CC}(\text{opr}) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$

When the outputs drive a capacitive load, total current consumption is the sum of C<sub>PD</sub>, and ΔI<sub>CC</sub> which is obtained from the following formula:

$$\Delta I_{CC} = F_{CP} \cdot V_{CC} \left( \frac{C_{Q0}}{2} + \frac{C_{Q1}}{4} + \frac{C_{Q2}}{8} + \frac{C_{Q3}}{16} + \frac{C_{TC}}{16} \right)$$

C<sub>Q0</sub>-C<sub>Q3</sub> and C<sub>TC</sub> are the capacitances at Q0-Q3 and TC, respectively. F<sub>CP</sub> is the input frequency of the CP.

**AC Operating Requirements**




| Symbol               | Parameter                                 | $V_{CC}$ (V) <sup>(4)</sup> | $T_A = 25^\circ\text{C}$ |                    | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ | Units |
|----------------------|---|-----------------------------|--------------------------|--------------------|---|-------|
|                      |   |                             | Typ.                     | Guaranteed Minimum |   |       |
| $t_S$                | Minimum Setup Time ( $P_n$ –CP)           | 3.3                         |                          | 5.5                | 6.5   | ns    |
|                      |   | 5.0                         |                          | 4.5                | 4.5   |       |
| $t_S$                | Minimum Setup Time ( $\overline{PE}$ –CP) | 3.3                         |                          | 8.0                | 9.5   | ns    |
|                      |   | 5.0                         |                          | 5.0                | 6.0   |       |
| $t_S$                | Minimum Setup Time (CEP or CET–CP)        | 3.3                         |                          | 7.5                | 9.0   | ns    |
|                      |   | 5.0                         |                          | 5.0                | 6.0   |       |
| $t_H$                | Minimum Hold Time ( $P_n$ –CP)            | 3.3                         |                          | 1.0                | 1.0   | ns    |
|                      |   | 5.0                         |                          | 1.0                | 1.0   |       |
| $t_H$                | Minimum Hold Time ( $\overline{PE}$ –CP)  | 3.3                         |                          | 1.0                | 1.0   | ns    |
|                      |   | 5.0                         |                          | 1.0                | 1.0   |       |
| $t_H$                | Minimum Hold Time (CEP or CET–CP)         | 3.3                         |                          | 1.0                | 1.0   | ns    |
|                      |   | 5.0                         |                          | 1.0                | 1.0   |       |
| $t_{W(L)}, t_{W(H)}$ | Minimum Pulse Width CP (Count)            | 3.3                         |                          | 5.0                | 5.0   | ns    |
|                      |   | 5.0                         |                          | 5.0                | 5.0   |       |
| $t_{W(L)}$           | Minimum Pulse Width ( $\overline{MR}$ )   | 3.3                         |                          | 5.0                | 5.0   | ns    |
|                      |   | 5.0                         |                          | 5.0                | 5.0   |       |
| $t_{REC}$            | Minimum Removal Time                      | 3.3                         |                          | 2.5                | 2.5   | ns    |
|                      |   | 5.0                         |                          | 1.5                | 1.5   |       |

**Note:**

4.  $V_{CC}$  is  $3.3 \pm 0.3\text{V}$  or  $5.0 \pm 0.5\text{V}$ .

## Physical Dimensions

Dimensions are in millimeters unless otherwise noted.

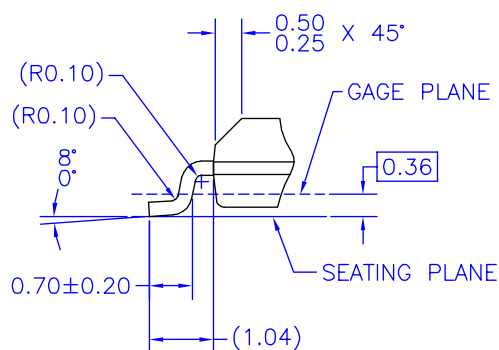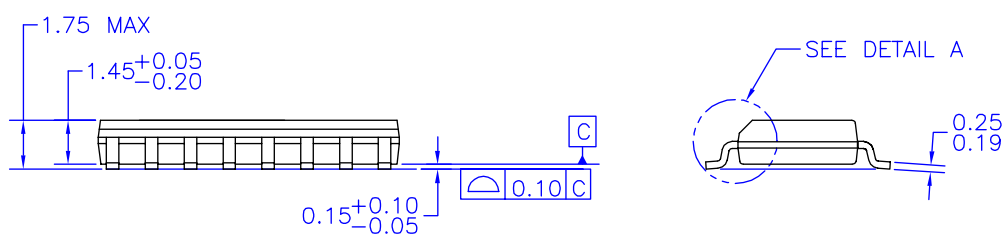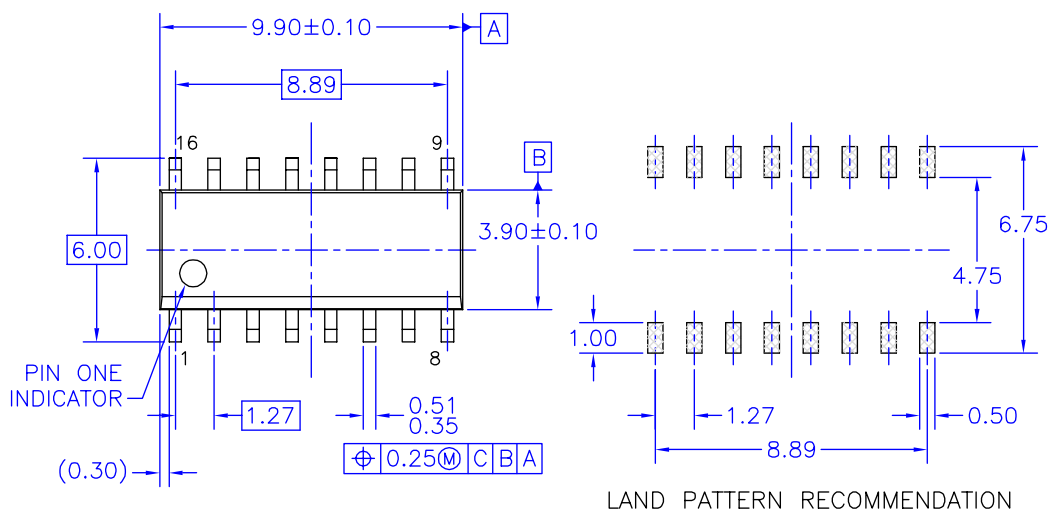

DETAIL A  
SCALE: 2:1

NOTES: UNLESS OTHERWISE SPECIFIED

- A) THIS PACKAGE CONFORMS TO JEDEC MS-012, VARIATION AC, ISSUE C, DATED MAY 1990.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS.
- D) STANDARD LEAD FINISH:  
200 MICROINCHES / 5.08 MICRONS MIN.  
LEAD/TIN (SOLDER) ON COPPER.


M16AREVK

**Figure 3. 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Package Number M16A**




### Physical Dimensions (Continued)



Dimensions are in millimeters unless otherwise noted.

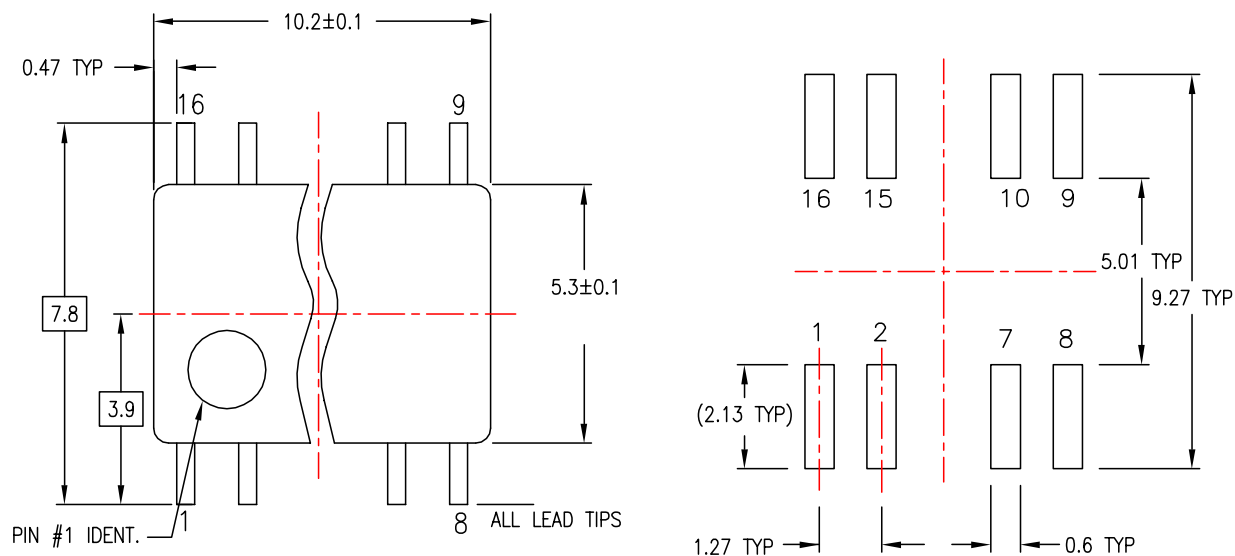

## LAND PATTERN RECOMMENDATION

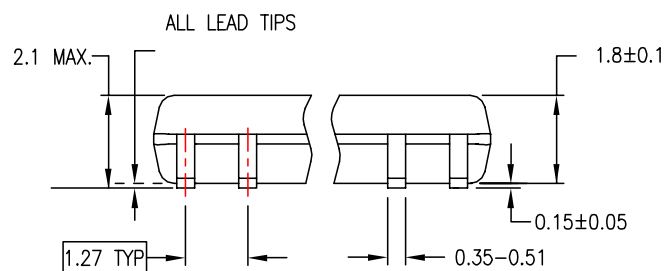

DIMENSIONS ARE IN MILLIMETERS

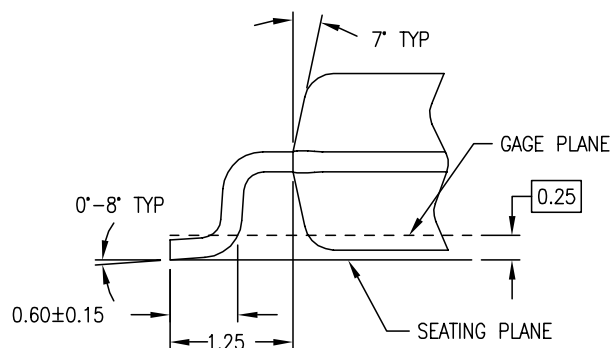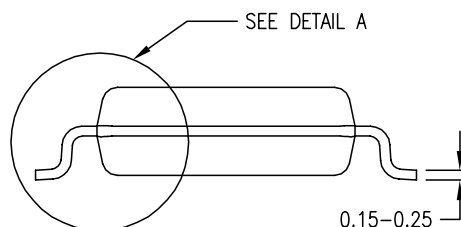

DETAIL A

NOTES:


- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

M16DREVC

**Figure 4. 16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M16D**

**Physical Dimensions** (Continued)

Dimensions are in millimeters unless otherwise noted.

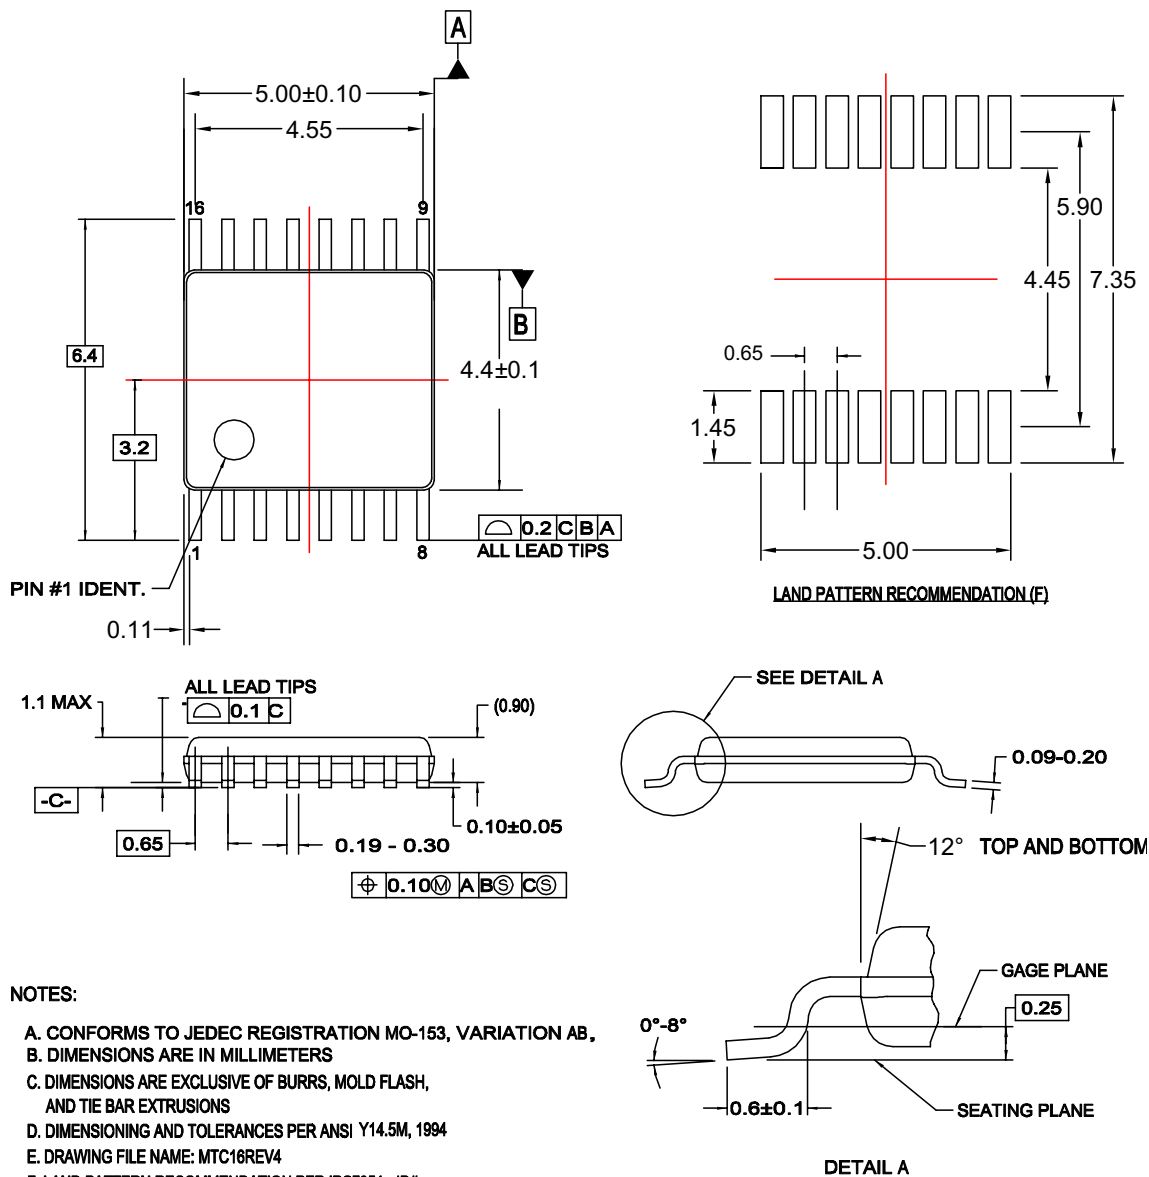


MTC16rev4

**Figure 5. 16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC16**

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|  |                                |   |                             |
|--|--------------------------------|---|-----------------------------|
| ACEx <sup>®</sup>                                | <i>i-Lo</i> <sup>™</sup>       | Power-SPM <sup>™</sup>  | TinyBoost <sup>™</sup>      |
| Across the board. Around the world. <sup>™</sup> | ImpliedDisconnect <sup>™</sup> | PowerTrench <sup>®</sup>  | TinyBuck <sup>™</sup>       |
| ActiveArray <sup>™</sup>                         | IntelliMAX <sup>™</sup>        | Programmable Active Droop <sup>™</sup>  | TinyLogic <sup>®</sup>      |
| Bottomless <sup>™</sup>                          | ISOPANAR <sup>™</sup>          | QFET <sup>®</sup>   | TINYOPTO <sup>™</sup>       |
| Build it Now <sup>™</sup>                        | MICROCOUPLER <sup>™</sup>      | QS <sup>™</sup>   | TinyPower <sup>™</sup>      |
| CoolFET <sup>™</sup>                             | MicroPak <sup>™</sup>          | QT Optoelectronics <sup>™</sup>   | TinyWire <sup>™</sup>       |
| CROSSVOLT <sup>™</sup>                           | MICROWIRE <sup>™</sup>         | Quiet Series <sup>™</sup>   | TruTranslation <sup>™</sup> |
| CTL <sup>™</sup>                                 | Motion-SPM <sup>™</sup>        | RapidConfigure <sup>™</sup>   | μSerDes <sup>™</sup>        |
| Current Transfer Logic <sup>™</sup>              | MSX <sup>™</sup>               | RapidConnect <sup>™</sup>   | UHC <sup>®</sup>            |
| DOVE <sup>™</sup>                                | MSXPro <sup>™</sup>            | ScalarPump <sup>™</sup>   | UniFET <sup>™</sup>         |
| E <sup>2</sup> CMOS <sup>™</sup>                 | OCX <sup>™</sup>               | SMART START <sup>™</sup>  | VCX <sup>™</sup>            |
| EcoSPARK <sup>®</sup>                            | OCXPro <sup>™</sup>            | SPM <sup>®</sup>  | Wire <sup>™</sup>           |
| EnSigna <sup>™</sup>                             | OPTOLOGIC <sup>®</sup>         | STEALTH <sup>™</sup>  |                             |
| FACT Quiet Series <sup>™</sup>                   | OPTOPLANAR <sup>®</sup>        | SuperFET <sup>™</sup>   |                             |
| FACT <sup>®</sup>                                | PACMAN <sup>™</sup>            | SuperSOT <sup>™</sup> -3  |                             |
| FAST <sup>®</sup>                                | PDP-SPM <sup>™</sup>           | SuperSOT <sup>™</sup> -6  |                             |
| FASTr <sup>™</sup>                               | POP <sup>™</sup>               | SuperSOT <sup>™</sup> -8  |                             |
| FPS <sup>™</sup>                                 | Power220 <sup>®</sup>          | SyncFET <sup>™</sup>  |                             |
| FRFET <sup>®</sup>                               | Power247 <sup>®</sup>          | TCM <sup>™</sup>  |                             |
| GlobalOptoisolator <sup>™</sup>                  | PowerEdge <sup>™</sup>         | The Power Franchise <sup>®</sup>  |                             |
| GTO <sup>™</sup>                                 | PowerSaver <sup>™</sup>        |  |                             |
| HiSeC <sup>™</sup>                               |                                |   |                             |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition   |
|--------------------------|------------------------|--|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.   |
| Preliminary              | First Production       | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.                                      |

Rev. I26

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor:

[74VHC161N](#) [74VHC161SJ](#)