1. Remove BL-3 from smart phone(un-pair)
2. Reset BL-3(Press button for ten seconds)
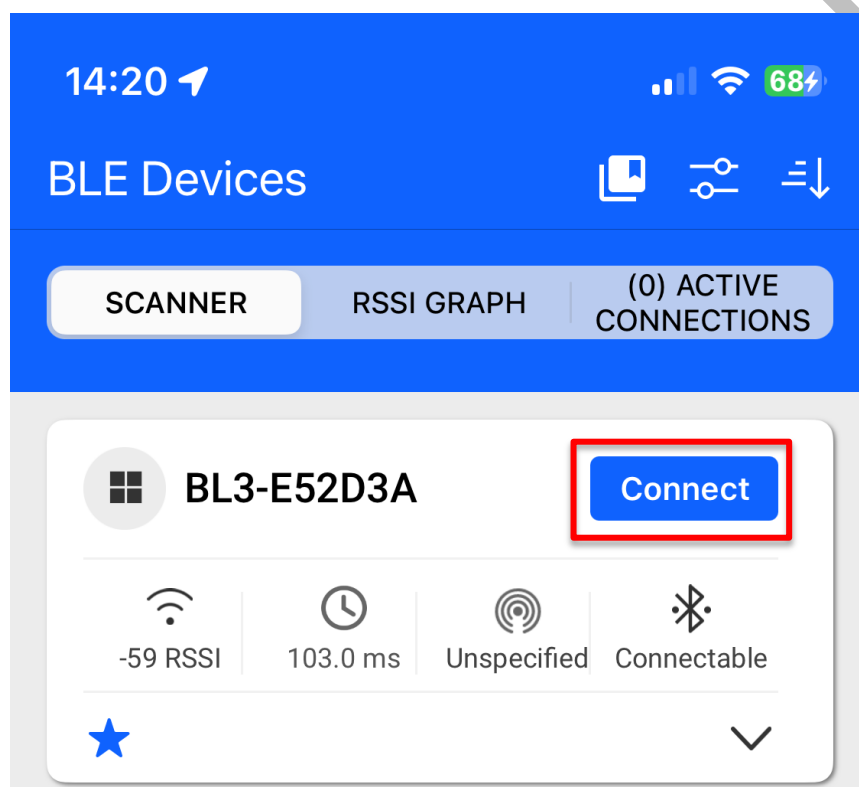3. Search and install "EFR Connect" in smart phone
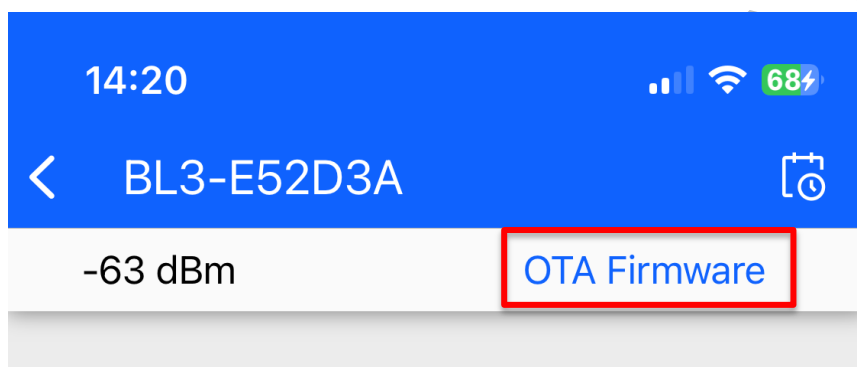
EFR Connect BLE Mobile App

工具程式

打開

4. Copy OTA file into smart phone
5. Power on BL-3 and open "EFR Connect". APP will scan device automatically.
6. Select "BL3-XXXXXX" and click "Connect "to connect with BL-3

14:20

BLE Devices

SCANNER | RSSI GRAPH | (0) ACTIVE CONNECTIONS

BL3-E52D3A   Connect

-59 RSSI | 103.0 ms | Unspecified | Connectable

7. Do not pair with smart phone(Cancel)

More Info ⌄

Unknown Service   Rename

CCAF68A3-DD38-4C61-BED2-9B14027605EA

Mo ⌄

藍牙配對要求
「BL3-E52D3A」想要與你的iPhone
配對。

Un   ame

92F

| 取消 | 配對 |

8. Click OTA Firmware

14:20   ᵃᶤᶤ 🛜 68⚡

<   BL3-E52D3A   📅

-63 dBm   OTA Firmware

9. Click CHOOSE FILE

OTA Device Firmware Update

This function may be used to perform Over the Air firmware update to the connected device.

Type: ● Partial   ○ Full

Mode: ● Reliability   ○ Speed

Application: **CHOOSE FILE**

10. Select OTA file and Click OTA UPDATE

OTA Device Firmware Update

This function may be used to perform Over the Air firmware update to the connected device.

Type: ◉ Partial   ◯ Full

Mode: ◉ Reliability   ◯ Speed

Application:...dme_decrease.gbl ⊗

Cancel   **Upload**

11. OTA progress

OTA Device Firmware Update

APP ...Inbox/findme_decrease.gbl
1 OF 1 187,792 BYTES

8%
22.8 Kbps
0:04

Done

12. OTA Finish, click Done

OTA Device Firmware Update

AVG. SPEED	TIME	BYTES SENT
23.5 Kbps	01:04	187,792

✓
Update
Complete

Done

13. After Clicking Done. BL-3 will reset and send advertising. Use the same APP connect to BL-3 and check version(Device Information → Firmware Revision String → BL-3-00.00.00.09