CS162
Operating Systems and Systems Programming
Lecture 18

File Systems

April 4th, 2016

Prof. Anthony D. Joseph

http://cs162.eecs.Berkeley.edu

Quick Aside: Big Projects



- What is a big project?
  - Time/work estimation is hard
  - Programmers are eternal optimists (it will only take two days)!
    - » This is why we bug you about starting the project early
    - » Had a grad student who used to say he just needed "10 minutes" to fix something. Two hours later…
- Can a project be efficiently partitioned?
  - Partitionable task decreases in time as you add people
  - But, if you require communication:
    - » Time reaches a minimum bound
    - » With complex interactions, time increases!
  - Mythical person-month problem:
    - » You estimate how long a project will take
    - » Starts to fall behind, so you add more people
    - » Project takes even more time!

Techniques for Partitioning Tasks

- Functional
  - Person A implements threads, Person B implements semaphores, Person C implements locks…
  - Problem: Lots of communication across APIs
    - » If B changes the API, A may need to make changes
    - » Story: Large airline company spent $200 million on a new scheduling and booking system. Two teams "working together." After two years, went to merge software. Failed! Interfaces had changed (documented, but no one noticed). Result: would cost another $200 million to fix.
- Task
  - Person A designs, Person B writes code, Person C tests
  - May be difficult to find right balance, but can focus on each person's strengths (Theory vs systems hacker)
  - Since Debugging is hard, Microsoft has *two* testers for *each* programmer
- Most CS162 project teams are functional, but people have had success with task-based divisions

Communication



- More people mean more communication
  - Changes have to be propagated to more people
  - Think about person writing code for most fundamental component of system: everyone depends on them!
  - *You should be meeting in person at least twice/week!*
- Miscommunication is common
  - "Index starts at 0? I thought you said 1!"
- Who makes decisions?
  - Individual decisions are fast but trouble
  - Group decisions take time
  - Centralized decisions require a big picture view (someone who can be the "system architect")
- Often designating someone as system architect can be a good thing
  - Better not be clueless
  - Better have good people skills
  - Better let other people do work

Coordination

- More people ⇒ no one can make all meetings!
  - They miss decisions and associated discussion
  - Example from earlier class: one person missed meetings and did something group had rejected
- People have different work styles
  - Some people work in the morning, some at night
  - How do you decide when to meet or work together?
- What about project slippage?
  - It will happen, guaranteed!
  - Example: phase 4 of one project, everyone busy but not talking. One person way behind. No one knew until very end – too late!
- Hard to add people to existing group
  - Members have already figured out how to work together

Recall: Device Drivers

- Device Driver: Device-specific code in the kernel that interacts directly with the device hardware
  - Supports a standard, internal interface
  - Same kernel I/O system can interact easily with different device drivers
  - Special device-specific configuration supported with the **`ioctl()`** system call
- Device Drivers typically divided into two pieces:
  - Top half: accessed in call path from system calls
    - » implements a set of standard, cross-device calls like **`open()`**, **`close()`**, **`read()`**, **`write()`**, **`ioctl()`**, **`strategy()`**
    - » This is the kernel's interface to the device driver
    - » Top half will *start* I/O to device, may put thread to sleep until finished
  - Bottom half: run as interrupt routine
    - » Gets input or transfers next block of output
    - » May wake sleeping threads if I/O now complete

Kernel vs User-level I/O

- Both are popular and practical for different reasons:
- Kernel-level drivers for critical devices that must keep running (e.g., display drivers)
  - Programming is a major effort, correct operation of the rest of the kernel depends on correct driver operation
- User-level drivers for devices that are non-threatening (e.g., USB devices in Linux: **`libusb`**)
  - Provide higher-level primitives to the programmer, avoid every driver doing low-level I/O register tweaking
  - The multitude of USB devices can be supported by Less-Than-Wizard programmers
  - New drivers don't have to be compiled for each version of the OS, and loaded into the kernel

Kernel vs User-level Programming Styles

- Kernel-level drivers
  - Have a much more limited set of resources available:
    - » Only a fraction of **`libc`** routines typically available
    - » Memory allocation (e.g., Linux **`kmalloc`**) much more limited in capacity and required to be physically contiguous
    - » Should avoid blocking calls
    - » Can use asynchrony with other kernel functions but tricky with user code
- User-level drivers
  - Similar to other application programs but:
    - » Will be called often – should do its work fast, or postpone it – or do it in the background
    - » Can use threads, blocking operations (usually much simpler) or non-blocking or asynchronous

Recall: I/O Performance

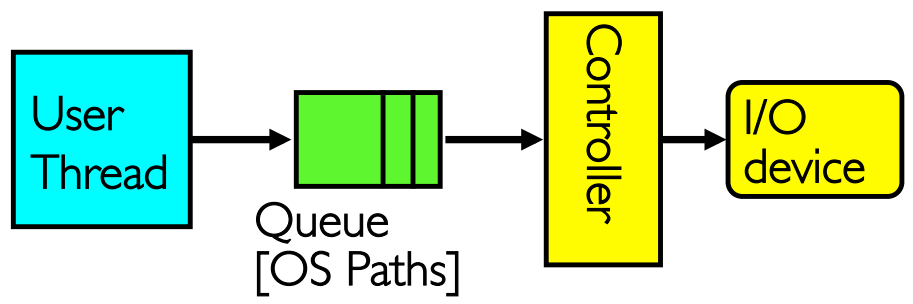

Response Time = Queue + I/O device service time



- Performance of I/O subsystem
  - Metrics: Response Time, Throughput
  - Effective BW per op = transfer size / response time
    - » EffectiveBW(n) = n / (S + n/B) = B / (1 + SB/n)
  - Contributing factors to latency:
    - » Software paths (can be loosely modeled by a queue)
    - » Hardware controller
    - » I/O device service time
- Queuing behavior:
  - Can lead to big increases in latency as utilization increases
  - Solutions?

Performance: Multiple Outstanding Requests



- Suppose each read takes 10 ms to service
- If a process works for 100 ms after each read, what is the utilization of the disk?
  - U = 10 ms / 110ms = 9%
- What it there are two such processes?
  - U = (10 ms + 10 ms) / 120ms ≈17%
- What if each of those processes have two such threads?

Recall: How do we Hide I/O Latency?

- Blocking Interface: "Wait"
  - When request data (e.g., read() system call), put process to sleep until data is ready
  - When write data (e.g., write() system call), put process to sleep until device is ready for data
- Non-blocking Interface: "Don't Wait"
  - Returns quickly from read or write request with count of bytes successfully transferred to kernel
  - Read may return nothing, write may write nothing
- Asynchronous Interface: "Tell Me Later"
  - When requesting data, take pointer to user's buffer, return immediately; later kernel fills buffer and notifies user
  - When sending data, take pointer to user's buffer, return immediately; later kernel takes data and notifies user

Administrivia

- HW4 – Releases on Monday 4/11 (Due 4/25)
- Project 2 code due next Friday
- Midterm II: Coming up in 2.5 weeks! (4/20)
  - 6-7:30PM (aa-eh 10 Evans, ej-oa 155 Dwinelle)
  - Covers lectures #13 to 21
  - 1 page of hand-written notes, both sides

BREAK

Recall: Building a File System

- File System: Layer of OS that transforms block interface of disks (or other block devices) into Files, Directories, etc.
- File System Components
  - Disk Management: collecting disk blocks into files
  - Naming: Interface to find files by name, not by blocks
  - Protection: Layers to keep data secure
  - Reliability/Durability: Keeping of files durable despite crashes, media failures, attacks, etc.
- User vs. System View of a File
  - User's view:
    - » Durable Data Structures
  - System's view (system call interface):
    - » Collection of Bytes (UNIX)
    - » Doesn't matter to system what kind of data structures you want to store on disk!
  - System's view (inside OS):
    - » Collection of blocks (a block is a logical transfer unit, while a sector is the physical transfer unit)
    - » Block size ≥ sector size; in UNIX, block size is 4KB

Recall: Translating from User to System View

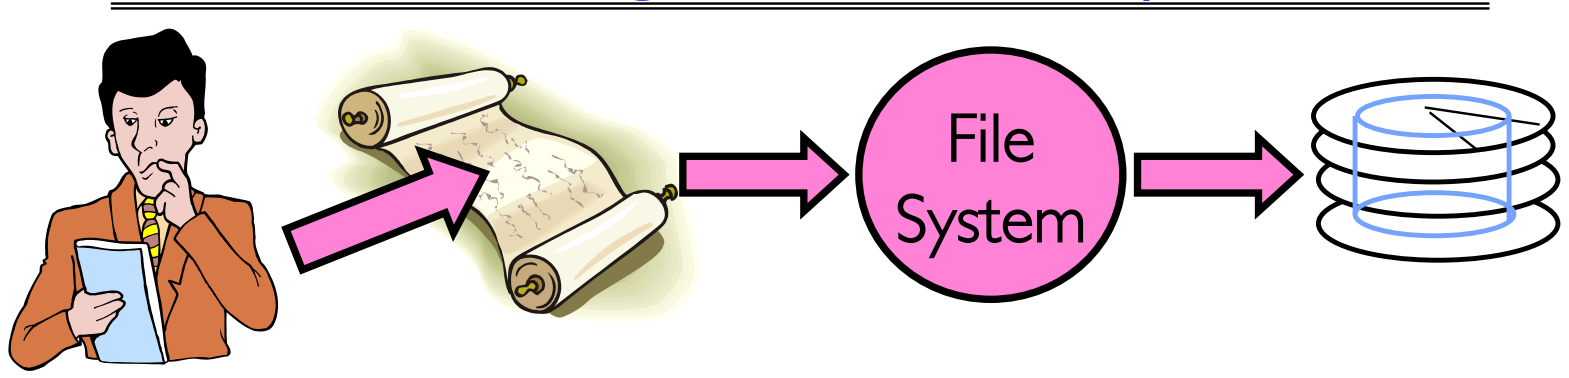

- What happens if user says: give me bytes 2—12?
  - Fetch block corresponding to those bytes
  - Return just the correct portion of the block
- What about: write bytes 2—12?
  - Fetch block
  - Modify portion
  - Write out Block
- Everything inside File System is in whole size blocks
  - For example, `getc()`, `putc()` ⇒ buffers something like 4096 bytes, even if interface is one byte at a time
- From now on, file is a collection of blocks

So You Are Going to Design a File System …

- What factors are critical to the design choices?
- Durable data store => it's all on disk
- (Hard) Disks Performance !!!
  - Maximize sequential access, minimize seeks
- Open before Read/Write
  - Can perform protection checks and look up where the actual file resource are, in advance
- Size is determined as they are used !!!
  - Can write (or read zeros) to expand the file
  - Start small and grow, need to make room
- Organized into directories
  - What data structure (on disk) for that?
- Need to allocate / free blocks
  - Such that access remains efficient

Recall: Disk Management Policies

- Basic entities on a disk:
  - File: user-visible group of blocks arranged sequentially in logical space
  - Directory: user-visible index mapping names to files (next lecture)
- Access disk as linear array of sectors. Two Options:
  - Identify sectors as vectors [cylinder, surface, sector], sort in cylinder-major order, not used anymore
  - Logical Block Addressing (LBA): Every sector has integer address from zero up to max number of sectors
  - Controller translates from address ⇒ physical position
    - » First case: OS/BIOS must deal with bad sectors
    - » Second case: hardware shields OS from structure of disk
- Need way to track free disk blocks
  - Link free blocks together ⇒ too slow today
  - Use bitmap to represent free space on disk
- Need way to structure files: File Header
  - Track which blocks belong at which offsets within the logical file structure
  - Optimize placement of files' disk blocks to match access and usage patterns

Components of a File System

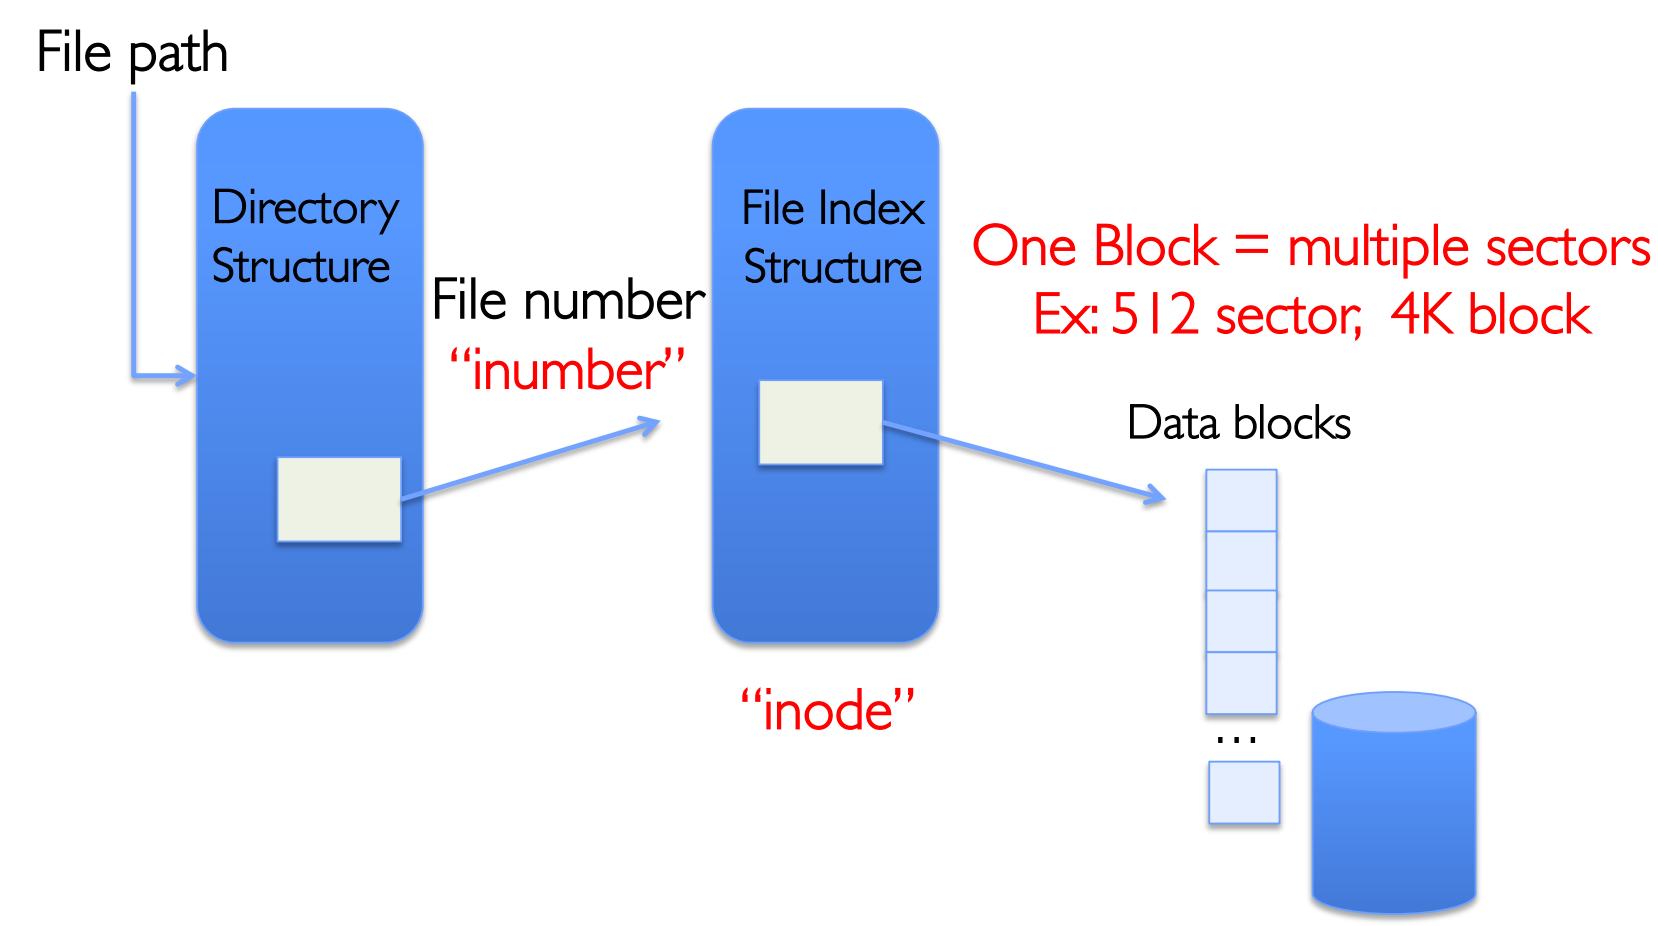

Components of a file system

file name offset —directory→ *file number offset* —index structure→ *Storage block*

- Open performs *Name Resolution*
  - Translates pathname into a "file number"
    - » Used as an "index" to locate the blocks
  - Creates a file descriptor in PCB within kernel
  - Returns a "handle" (another integer) to user process
- Read, Write, Seek, and Sync operate on handle
  - Mapped to descriptor and to blocks

Directories

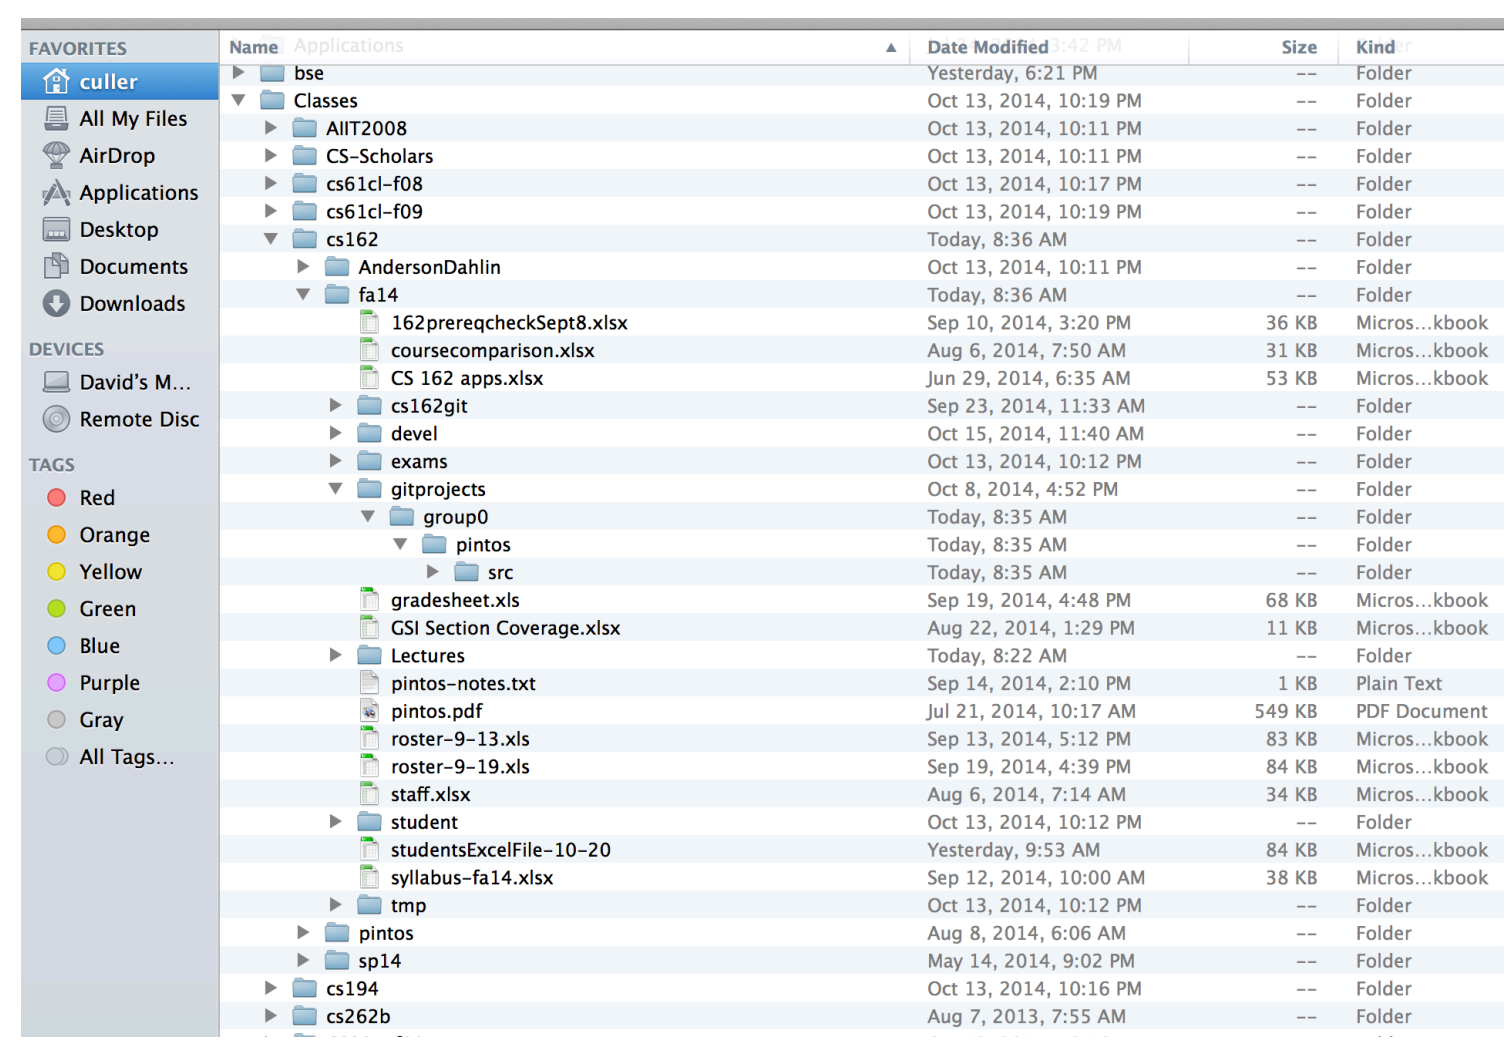

Directory

- Basically a hierarchical structure
- Each directory entry is a collection of
  - Files
  - Directories
    - » A link to another entries
- Each has a name and attributes
  - Files have data
- Links (hard links) make it a DAG, not just a tree
  - Softlinks (aliases) are another name for an entry

I/O & Storage Layers

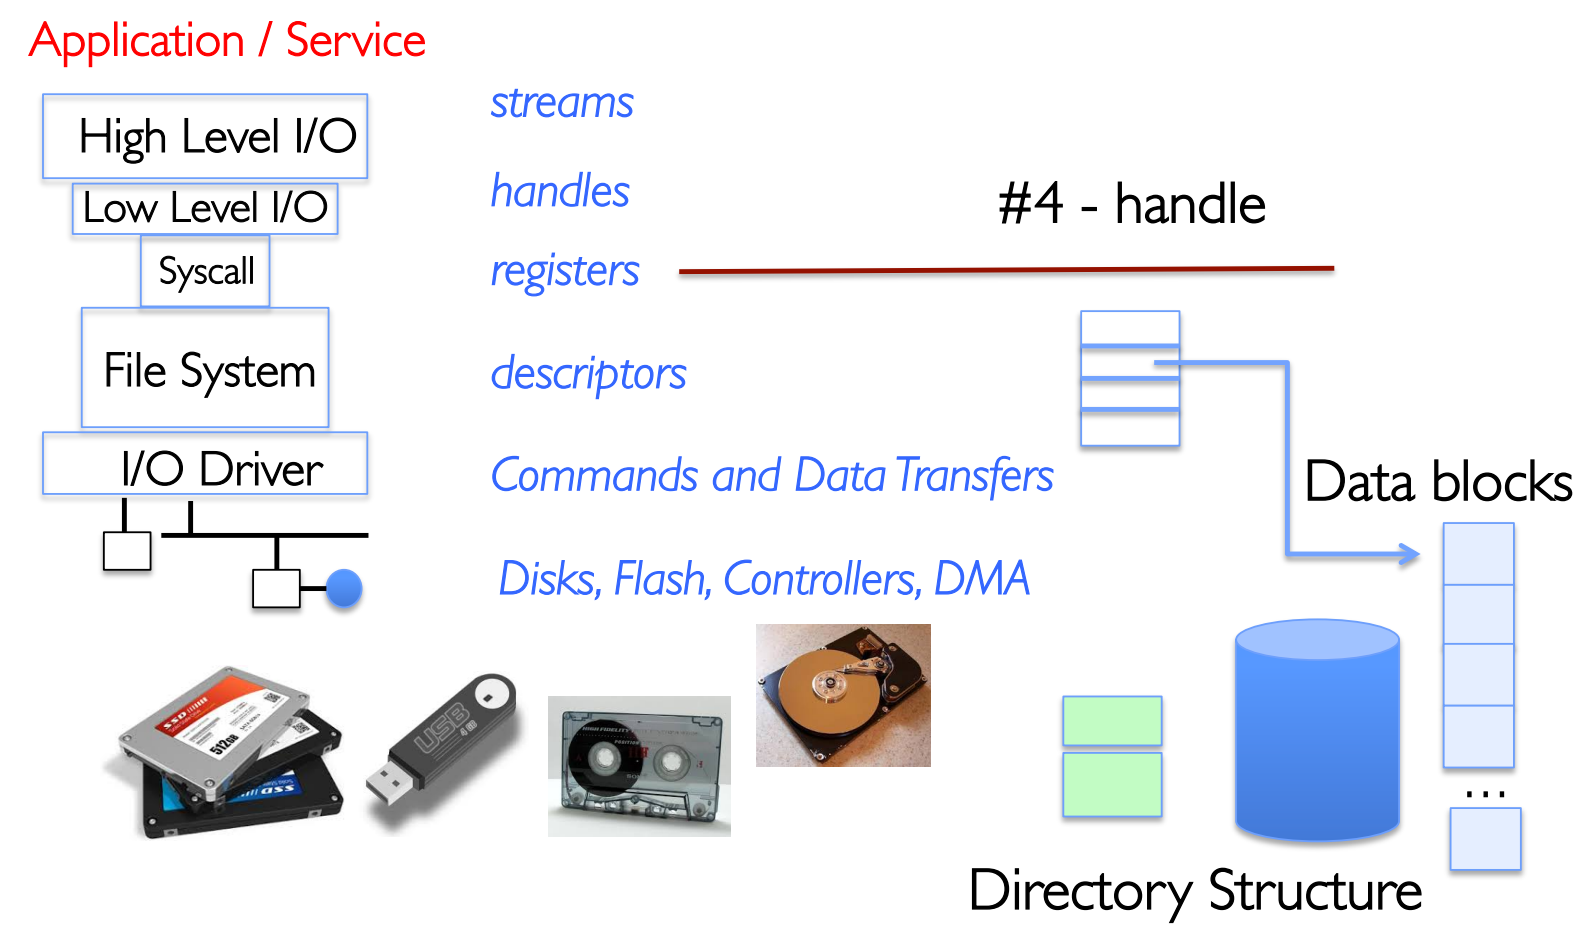

File

- Named permanent storage
- Contains
  - Data
    - » Blocks on disk somewhere
  - Metadata (Attributes)
    - » Owner, size, last opened, …
    - » Access rights
      - R, W, X
      - Owner, Group, Other (in Unix systems)
      - Access control list in Windows system

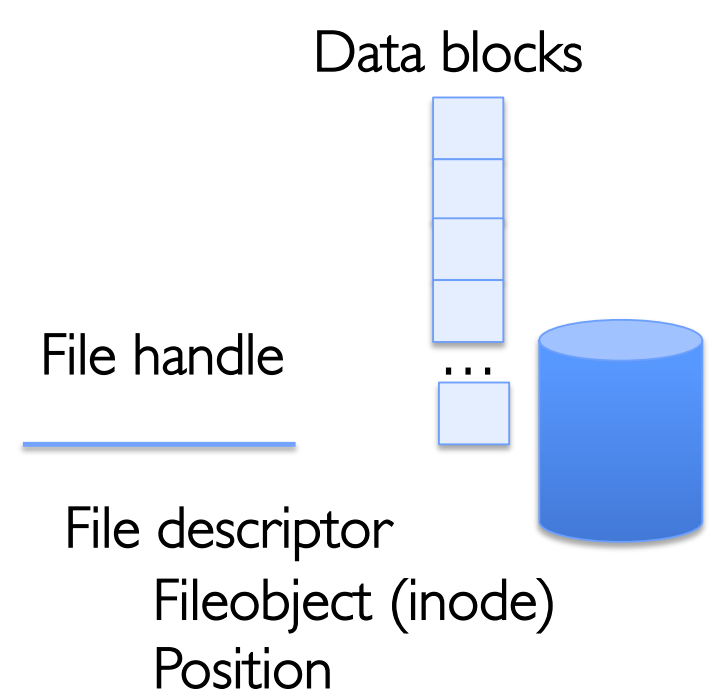

In-Memory File System Structures

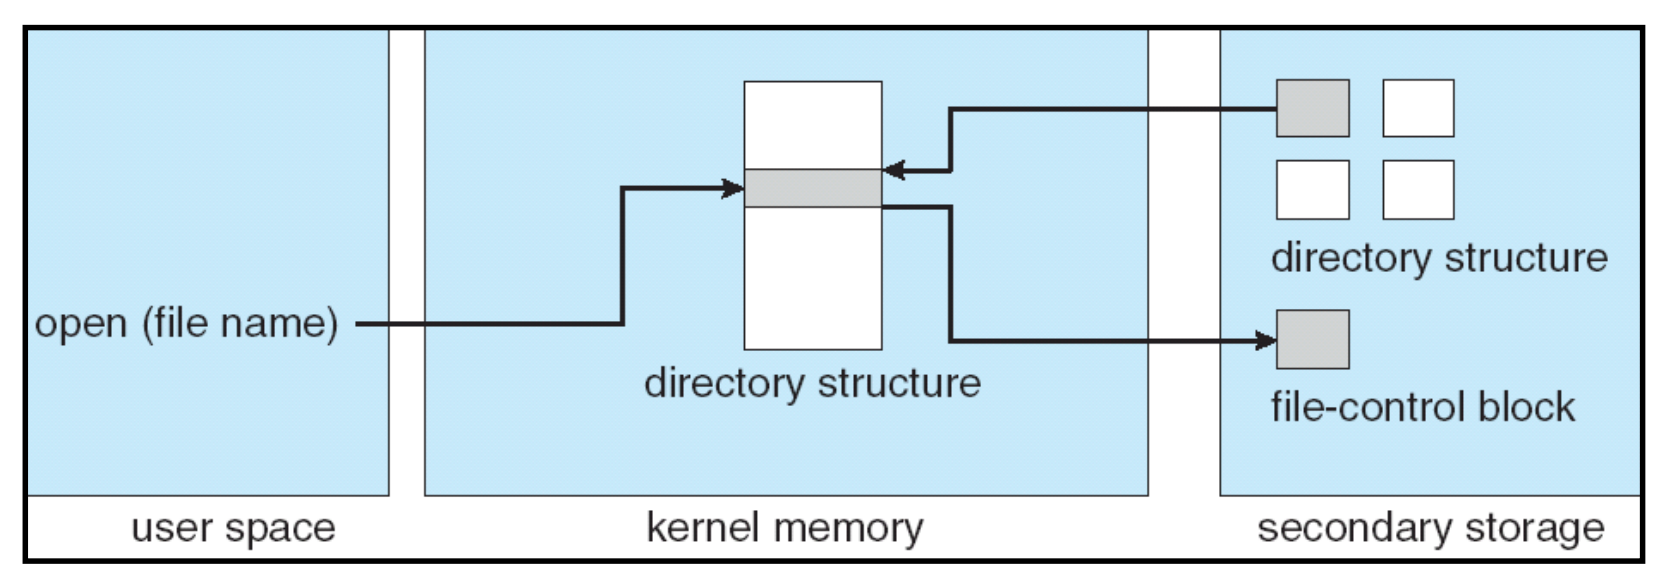

- Open system call:
  - Resolves file name, finds file control block (inode)
  - Makes entries in per-process and system-wide tables
  - Returns index (called "file handle") in open-file table

In-Memory File System Structures

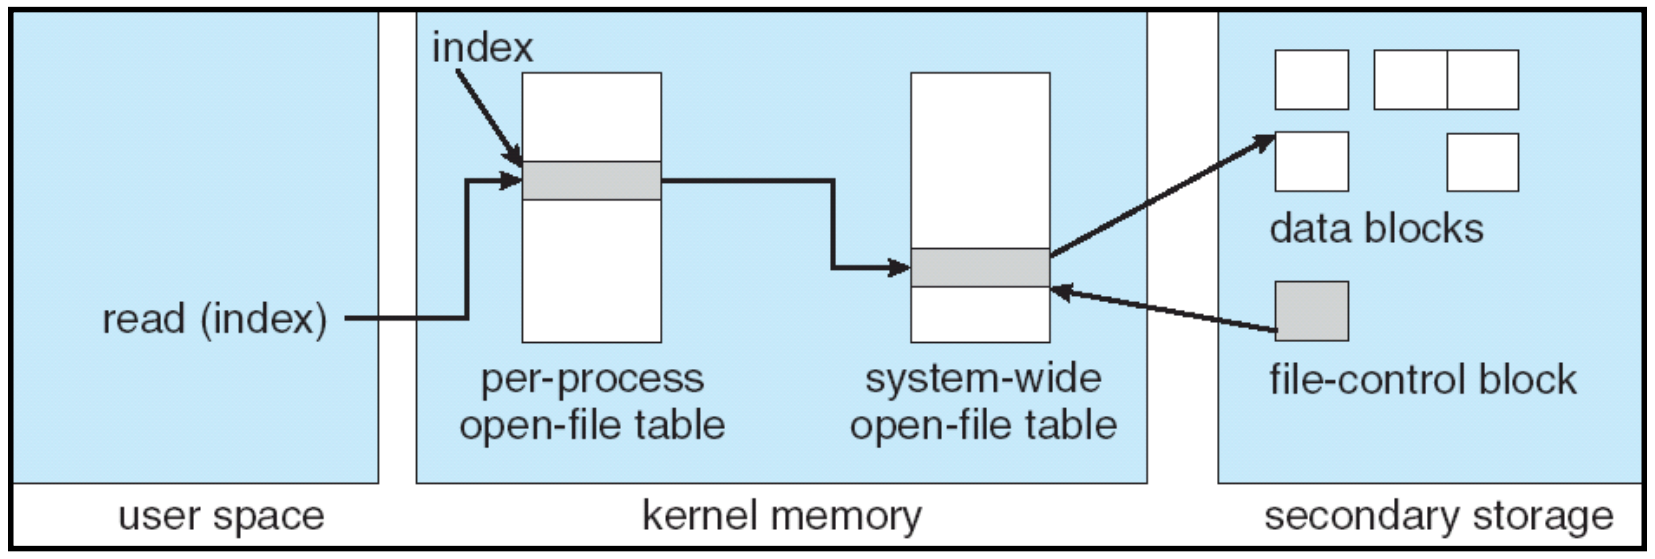

- Read/write system calls:
  - Use file handle to locate inode
  - Perform appropriate reads or writes

BREAK

Our first filesystem: FAT (File Allocation Table)

- The most commonly used filesystem in the world!
- Assume (for now) we have a way to translate a path to a "file number"
  - i.e., a directory structure
- Disk Storage is a collection of Blocks
  - Just hold file data
- Example: file_read 31, < 2, x >
  - Index into FAT with file number
  - Follow linked list to block
  - Read the block from disk into memory

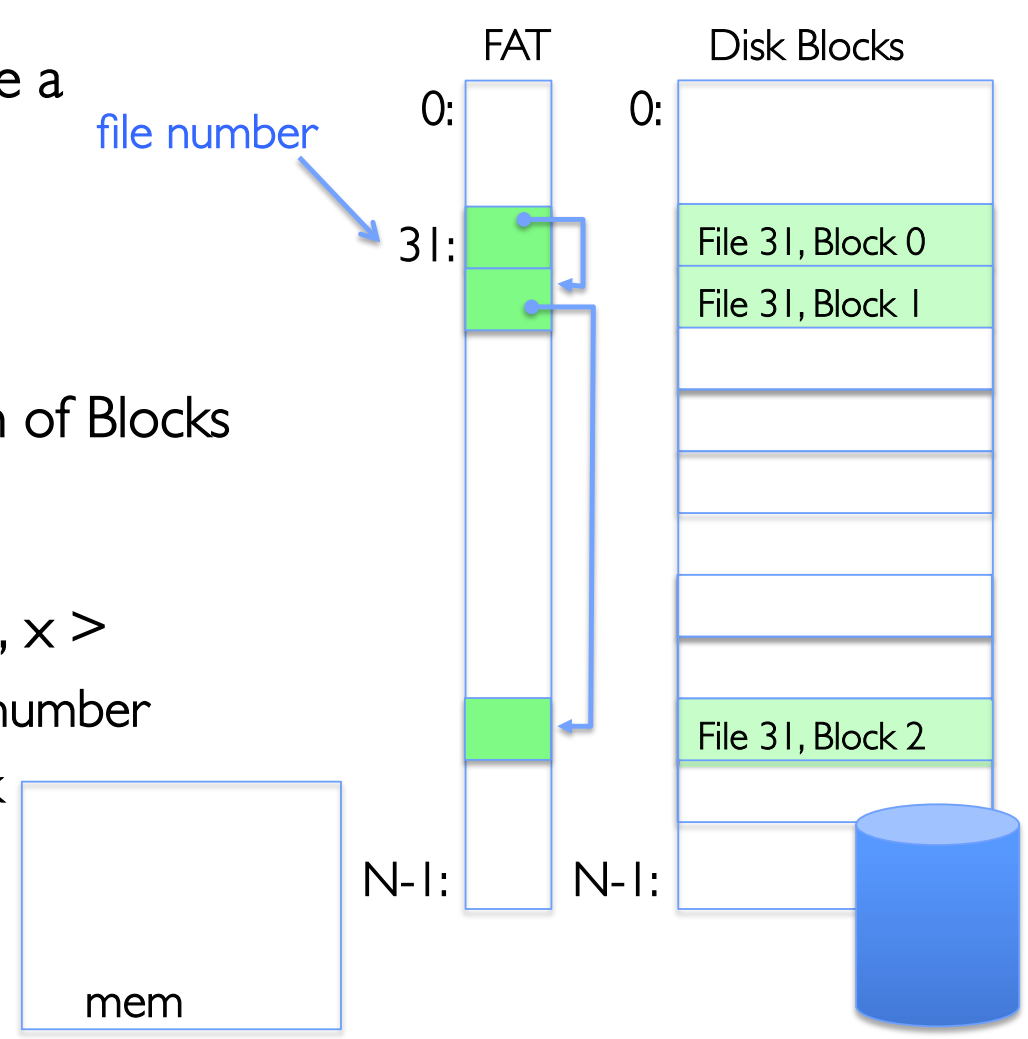

FAT Properties

- File is collection of disk blocks
- FAT is linked list 1-1 with blocks
- File Number is index of root of block list for the file
- File offset (o = B:x)
- Follow list to get block #
- Unused blocks ⇔ FAT free list

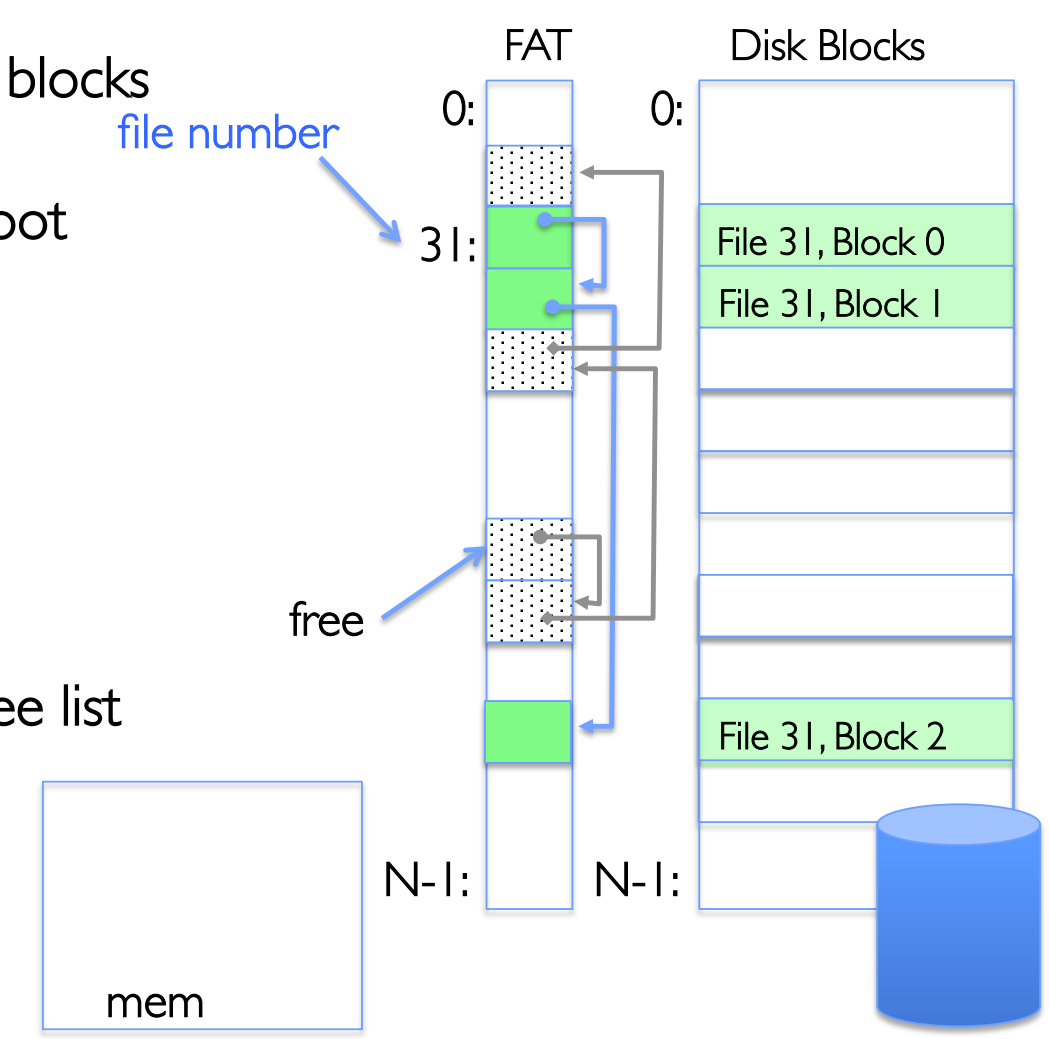

FAT Properties

- File is collection of disk blocks
- FAT is linked list 1-1 with blocks
- File Number is index of root of block list for the file
- File offset (o = B:x)
- Follow list to get block #
- Unused blocks ⇔ FAT free list
- Ex: file_write(51, <3, y>)
  - Grab blocks from free list
  - Linking them into file

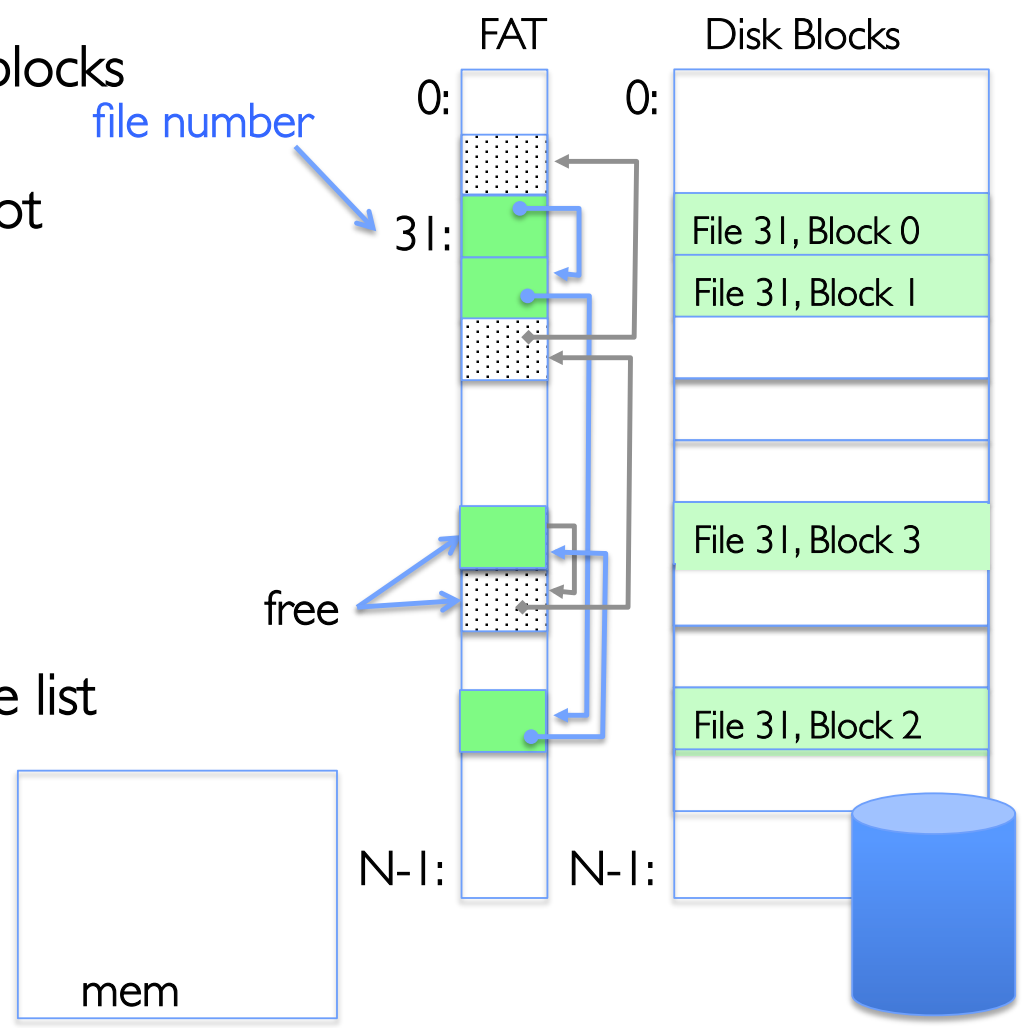

FAT Properties

- File is collection of disk blocks
- FAT is linked list 1-1 with blocks
- File Number is index of root of block list for the file
- Grow file by allocating free blocks and linking them in
- Ex: Create file, write, write

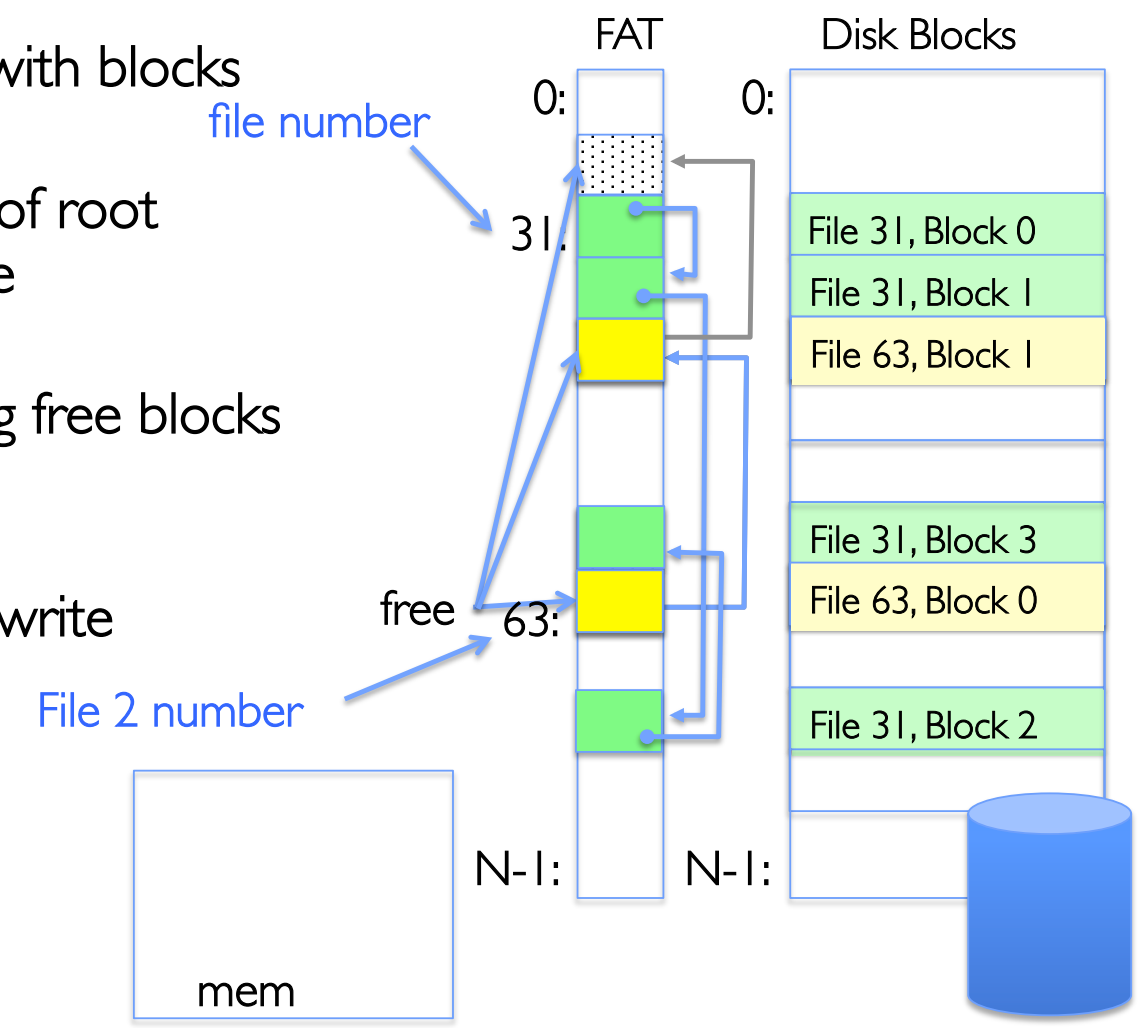

FAT Assessment

- *FAT32 (32 instead of 12 bits) used in Windows, USB drives, SD cards, …*
- Where is FAT stored?
  - On Disk, restore on boot, copy in memory
- What happens when you format a disk?
  - Zero the blocks, link up the FAT free-list
- Simple

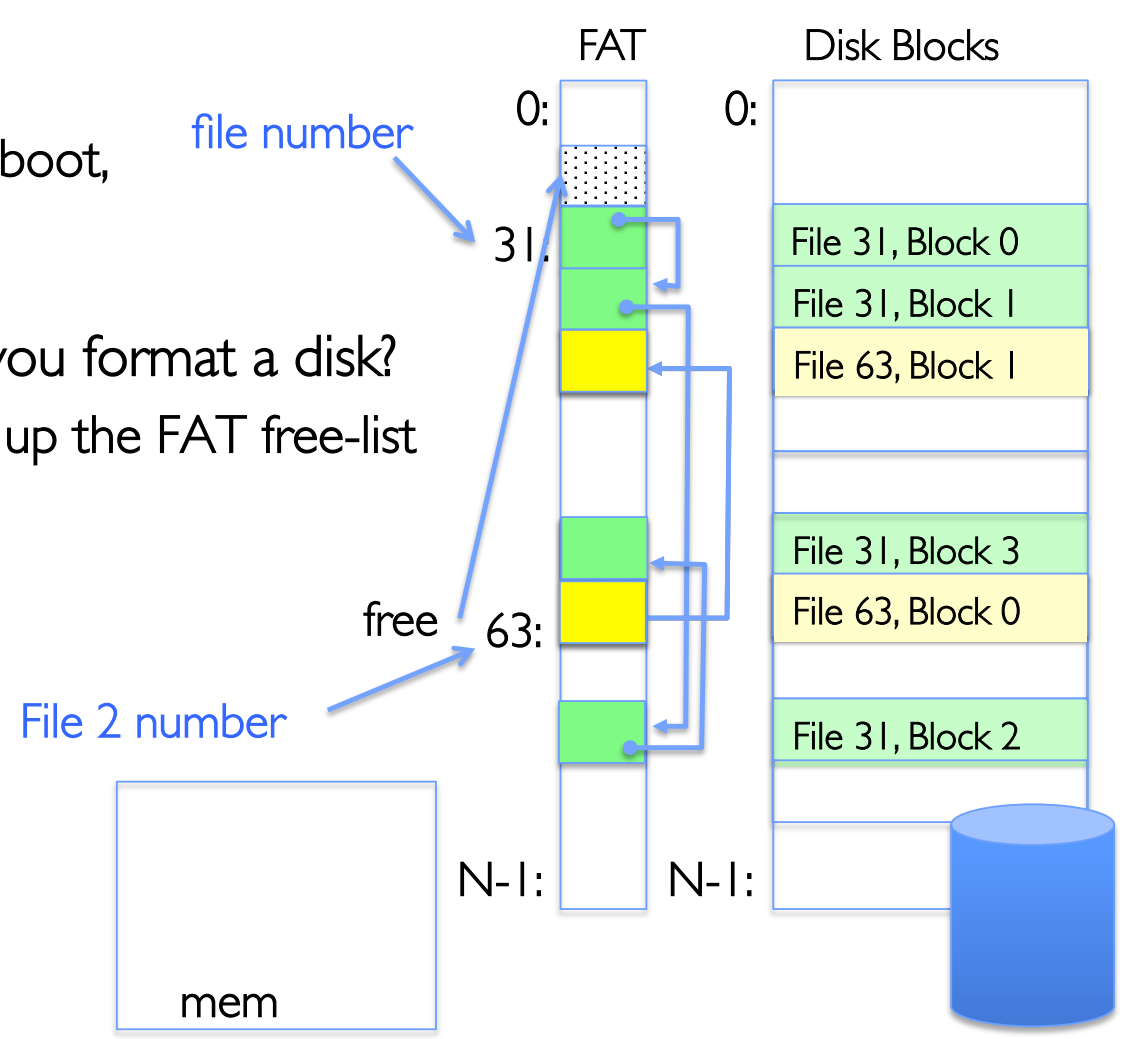

FAT Assessment

- Time to find block (large files) ??
- Block layout for file ???
- Sequential Access ???
- Random Access ???
- Fragmentation ???
- Small files ???
- Big files ???

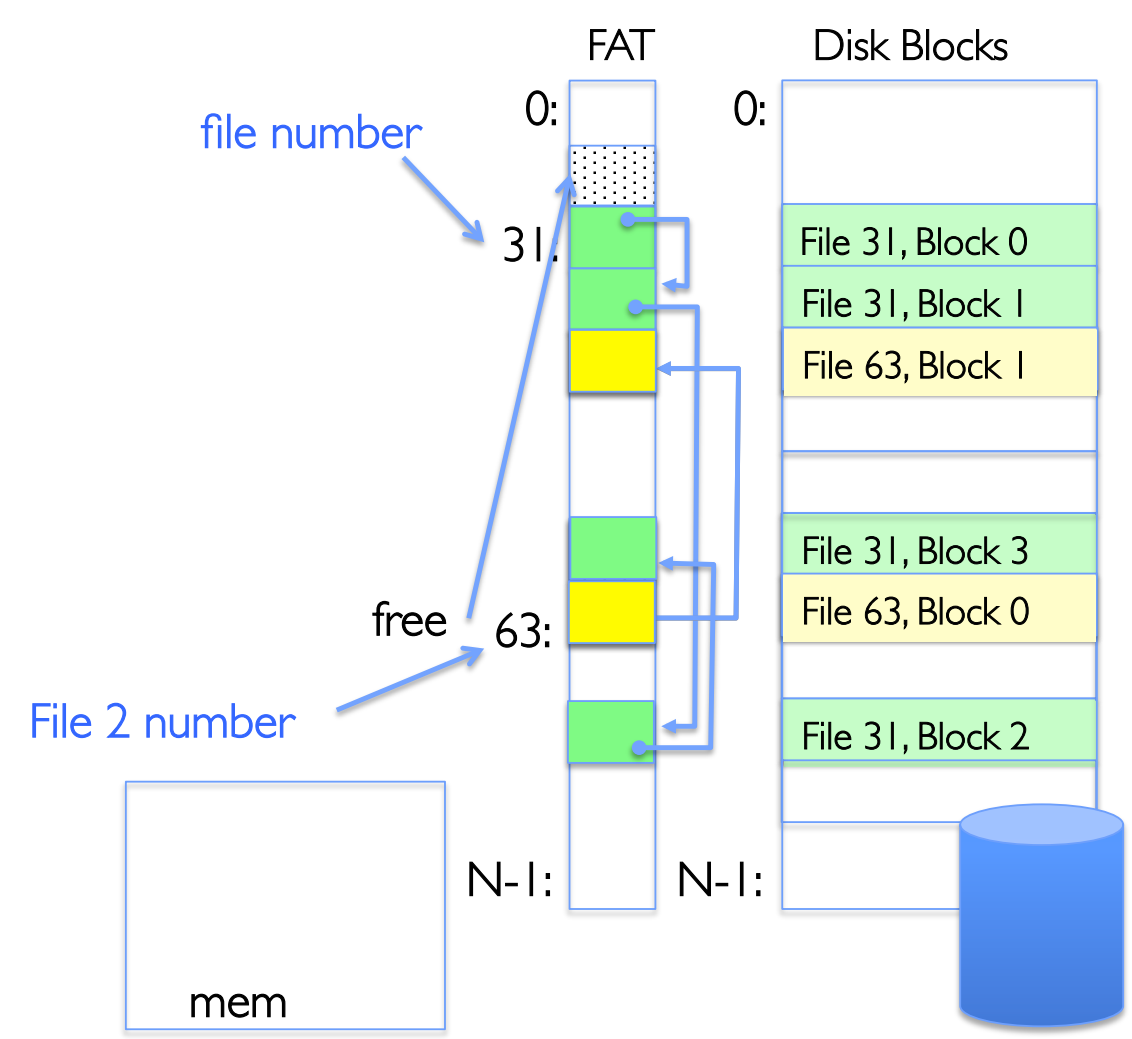

What about the Directory?



- Essentially a file containing
  <file_name: file_number> mappings
- Free space for new entries
- In FAT: attributes kept in directory (!!!)
- Each directory a linked list of entries
- Where do you find root directory ("/")?

Directory Structure (cont'd)

- How many disk accesses to resolve "/my/book/count"?
  - Read in file header for root (fixed spot on disk)
  - Read in first data block for root
    - » Table of file name/index pairs. Search linearly – ok since directories typically very small
  - Read in file header for "my"
  - Read in first data block for "my"; search for "book"
  - Read in file header for "book"
  - Read in first data block for "book"; search for "count"
  - Read in file header for "count"
- Current working directory: Per-address-space pointer to a directory (inode) used for resolving file names
  - Allows user to specify relative filename instead of absolute path (say CWD="/my/book" can resolve "count")

Many Huge FAT Security Holes!

- FAT has no access rights
- FAT has no header in the file blocks
- Just gives an index into the FAT
  - (file number = block number)

Characteristics of Files

- Most files are small

A Five-Year Study of File-System Metadata

NITIN AGRAWAL
University of Wisconsin, Madison
and
WILLIAM J. BOLOSKY, JOHN R. DOUCEUR, and JACOB R. LORCH
Microsoft Research

- Most of the space is occupied by the rare big ones

A Five-Year Study of File-System Metadata • 9:9

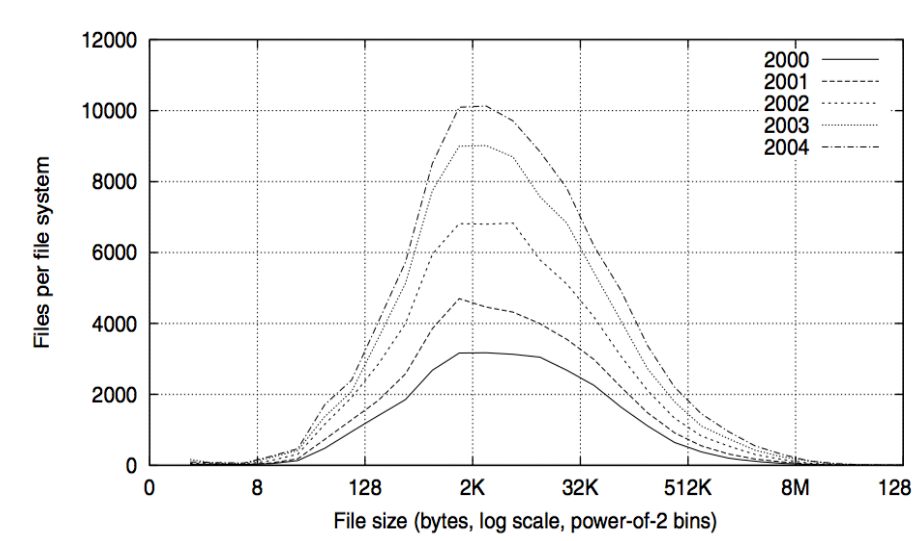

Fig. 2. Histograms of files by size.

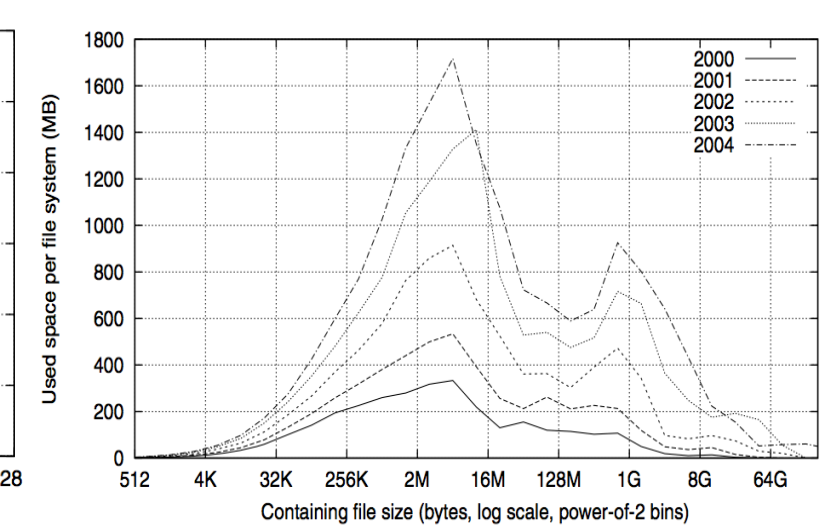

Fig. 4. Histograms of bytes by containing file size.

So What About a "Real" File System?

- Meet the inode:

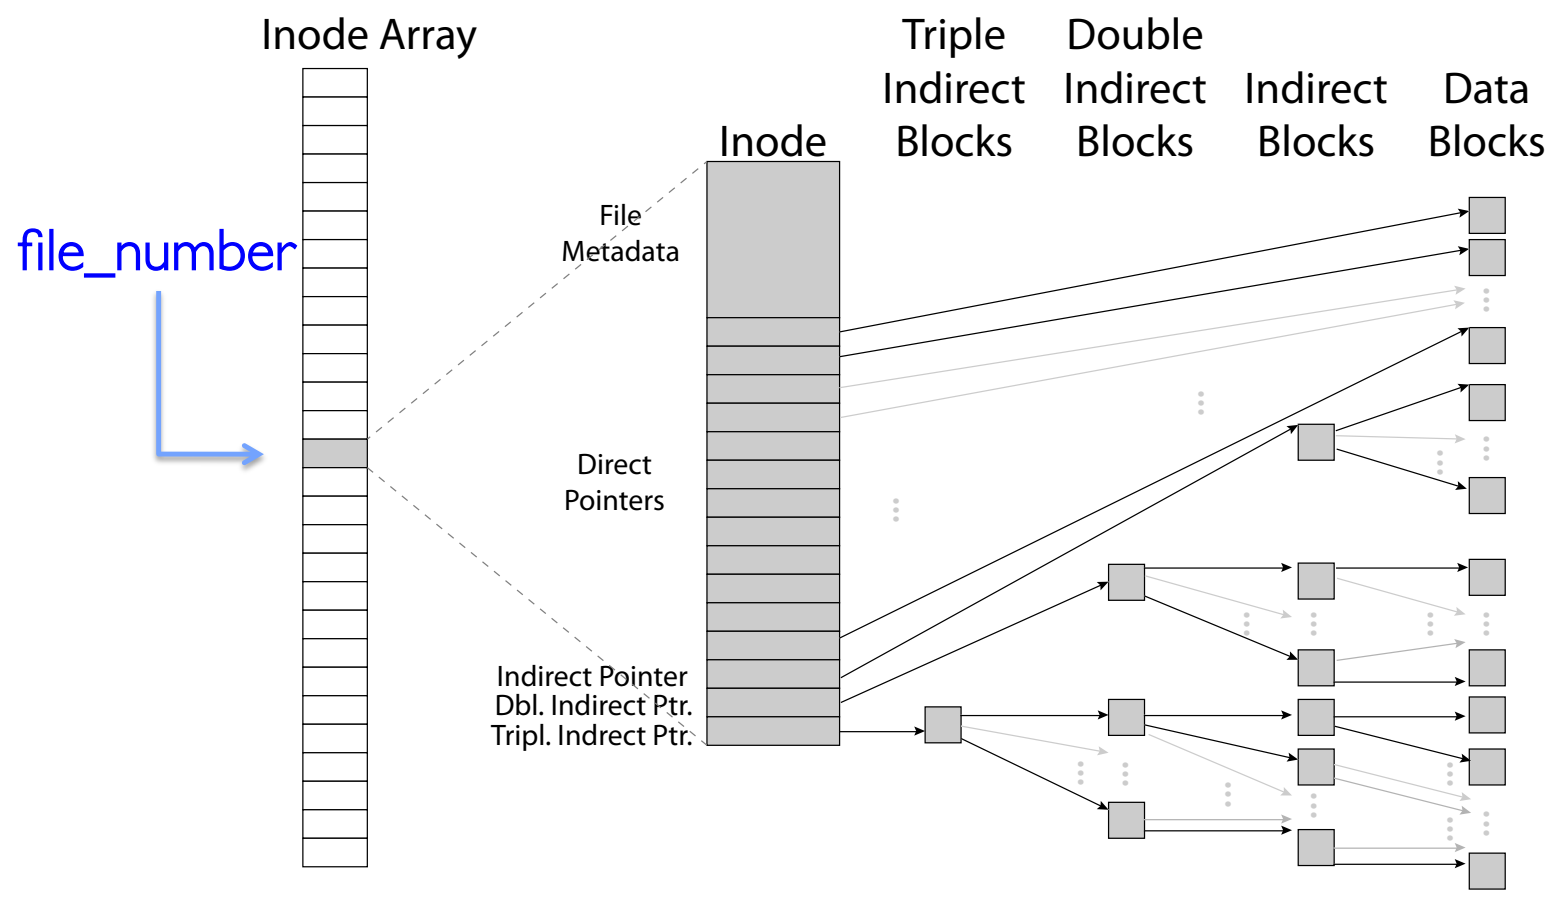

Summary

- File System:
  - Transforms blocks into Files and Directories
  - Optimize for access and usage patterns
  - Maximize sequential access, allow efficient random access
- File (and directory) defined by header, called "inode"
- File Allocation Table (FAT) Scheme
  - Linked-list approach
  - Very widely used: Cameras, USB drives, SD cards
  - Simple to implement, but poor performance

I/O & Storage Layers

Operations, Entities and Interface

Recall: C Low level I/O

- Operations on File Descriptors – as OS object representing the state of a file
  - User has a "handle" on the descriptor

```
#include <fcntl.h>
#include <unistd.h>
#include <sys/types.h>

int open (const char *filename, int flags [, mode_t mode])
int creat (const char *filename, mode_t mode)
int close (int filedes)
```

Bit vector of:
- Access modes (Rd, Wr, …)
- Open Flags (Create, …)
- Operating modes (Appends, …)

Bit vector of Permission Bits:
- User|Group|Other X R|W|X

http://www.gnu.org/software/libc/manual/html_node/Opening-and-Closing-Files.html

Recall: C Low Level Operations

```
ssize_t read (int filedes, void *buffer, size_t maxsize)
 - returns bytes read, 0 => EOF, -1 => error
ssize_t write (int filedes, const void *buffer, size_t size)
 - returns bytes written

off_t lseek (int filedes, off_t offset, int whence)

int fsync (int fildes) – wait for i/o to finish
void sync (void) – wait for ALL to finish
```

- When write returns, data is on its way to disk and can be read, but it may not actually be permanent!