



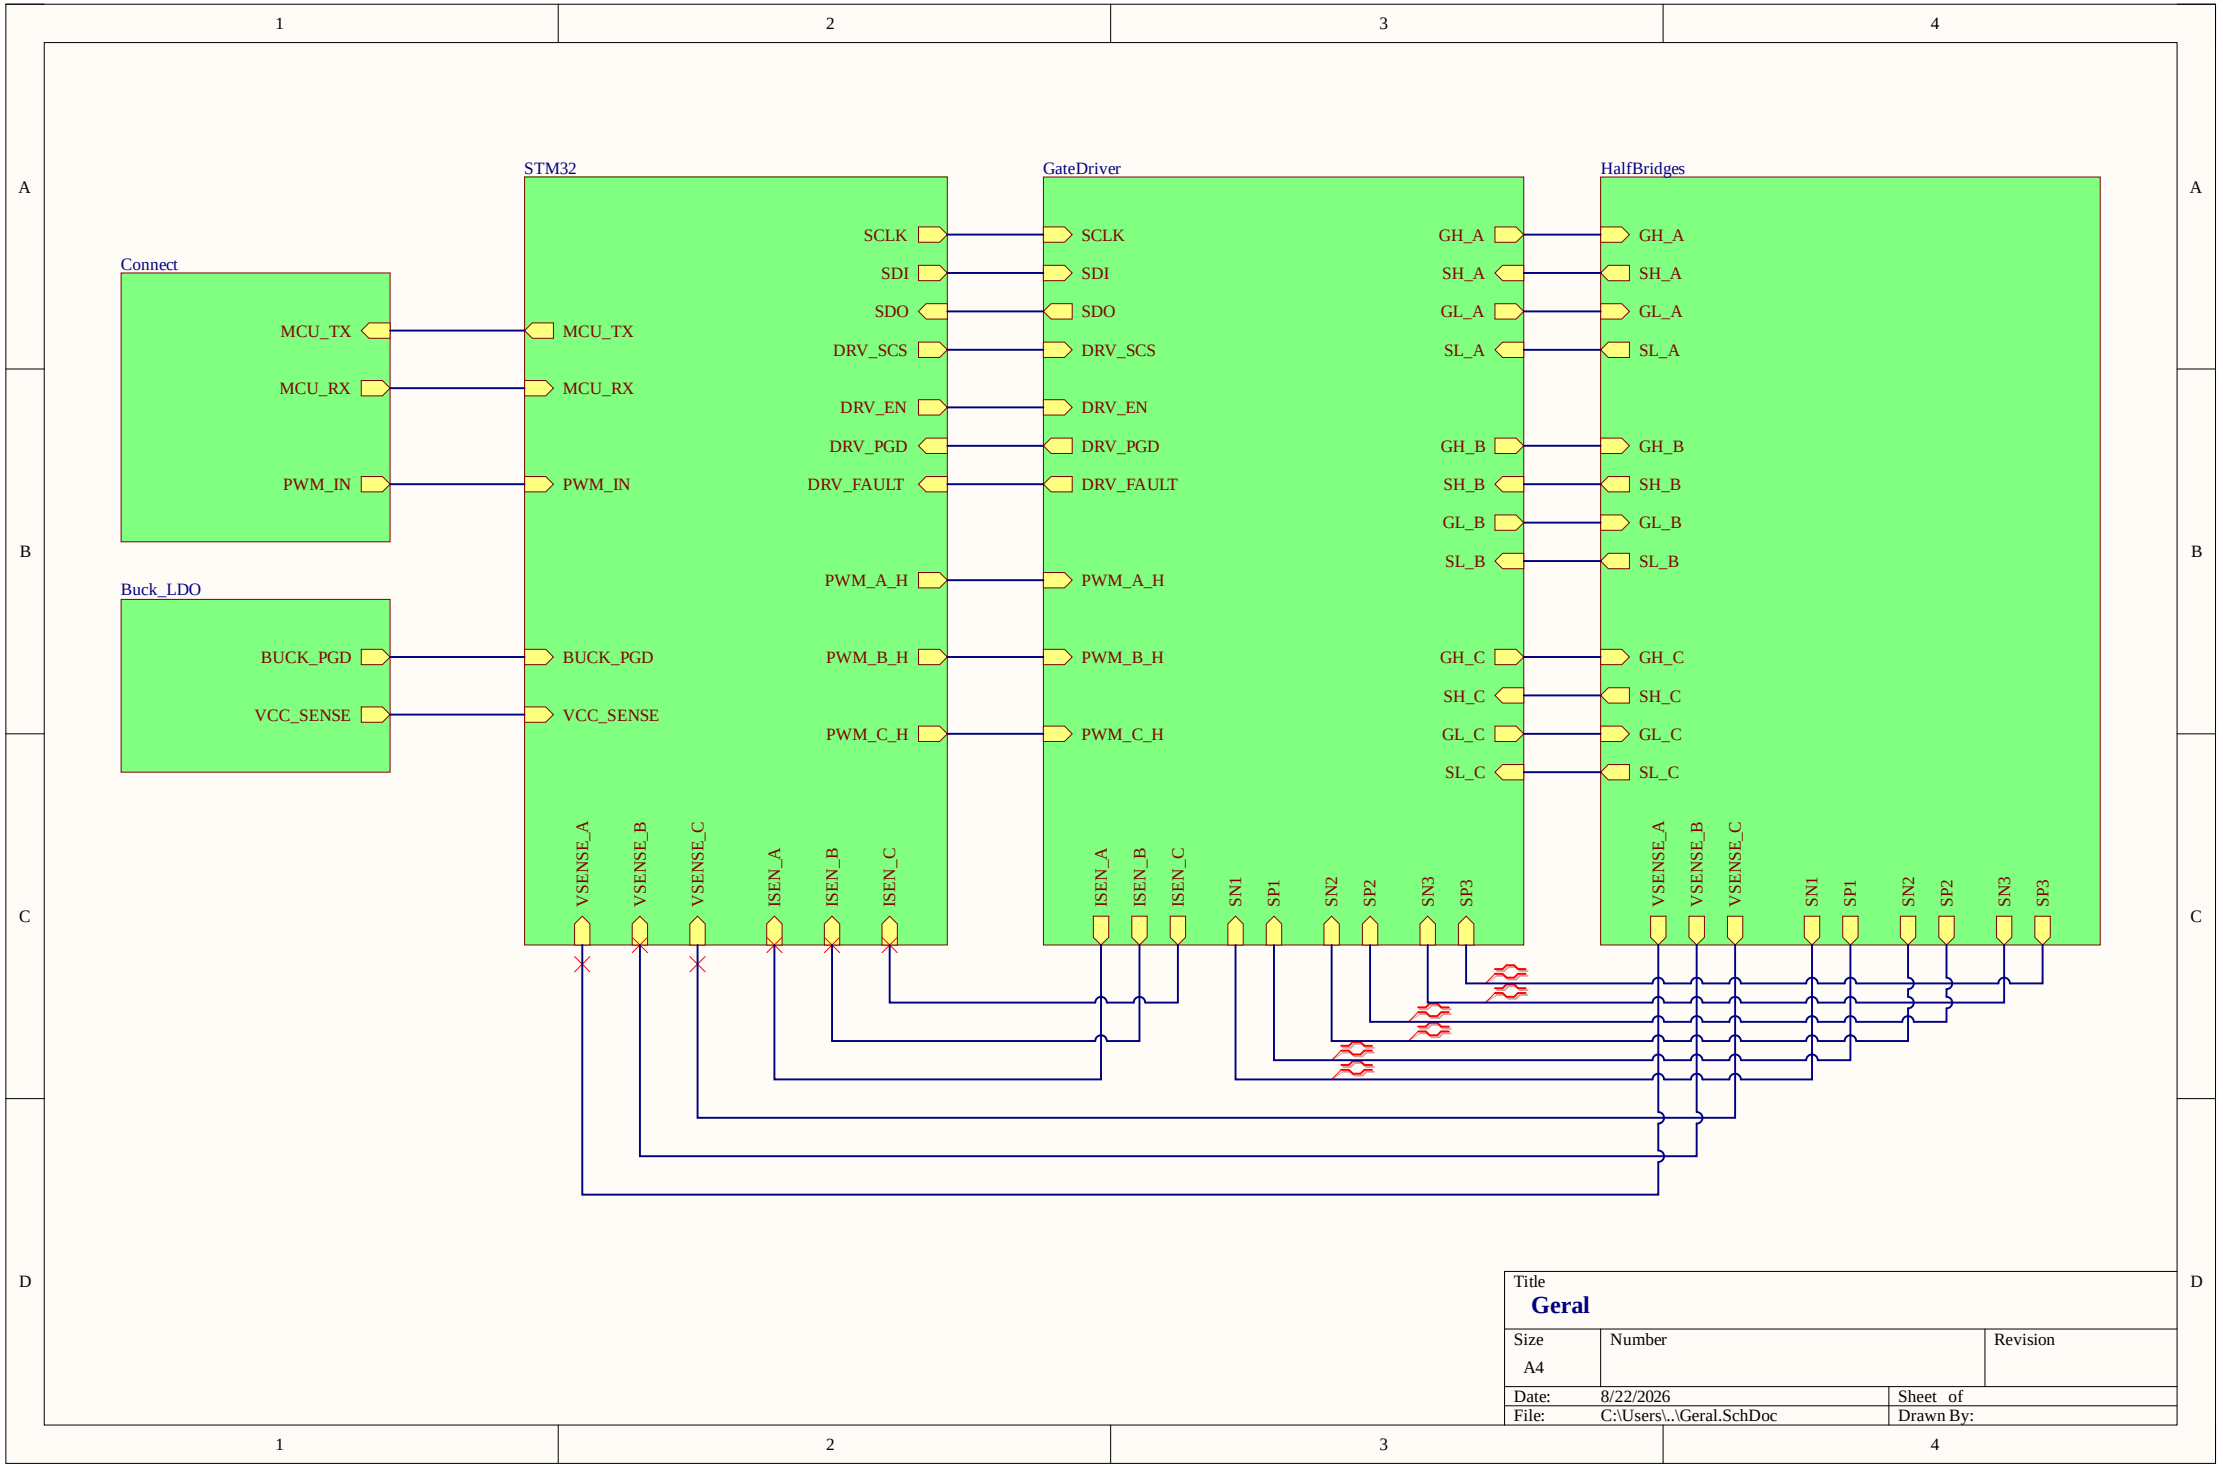


Title		
Geral		
Size	Number	Revision
A4		
Date:	8/22/2026	Sheet of
File:	C:\Users\...\Geral.SchDoc	Drawn By:



2S-6S to 5V

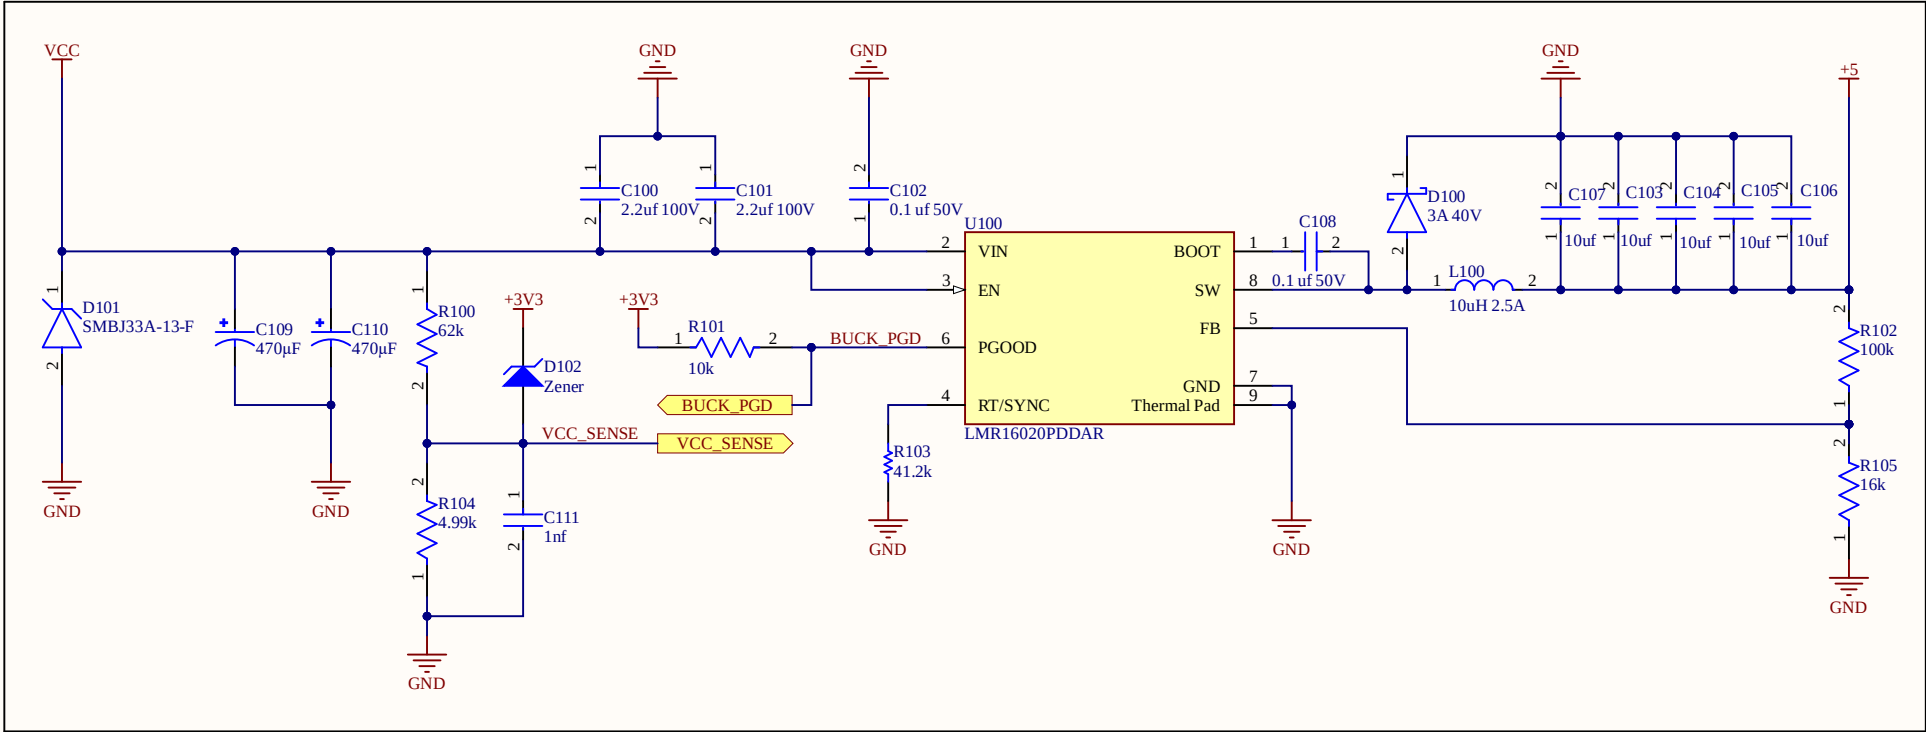


5V to 3V3

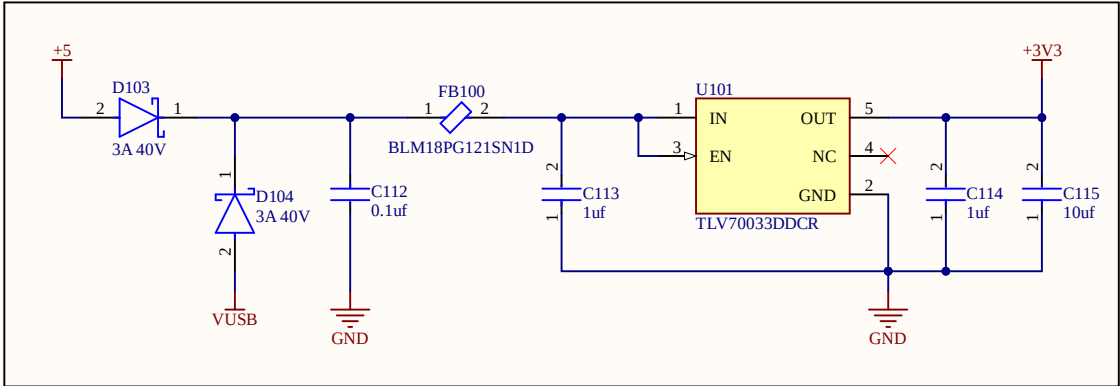

Title		
Buck Converter + LDO		
Size	Number	Revision
A4		
Date:	8/22/2026	Sheet of
File:	C:\Users\...\Buck_LDO.SchDoc	Drawn By:

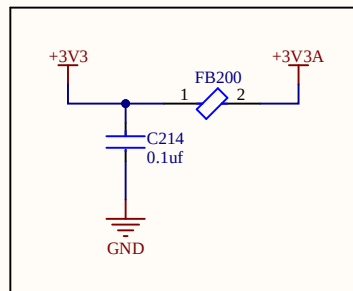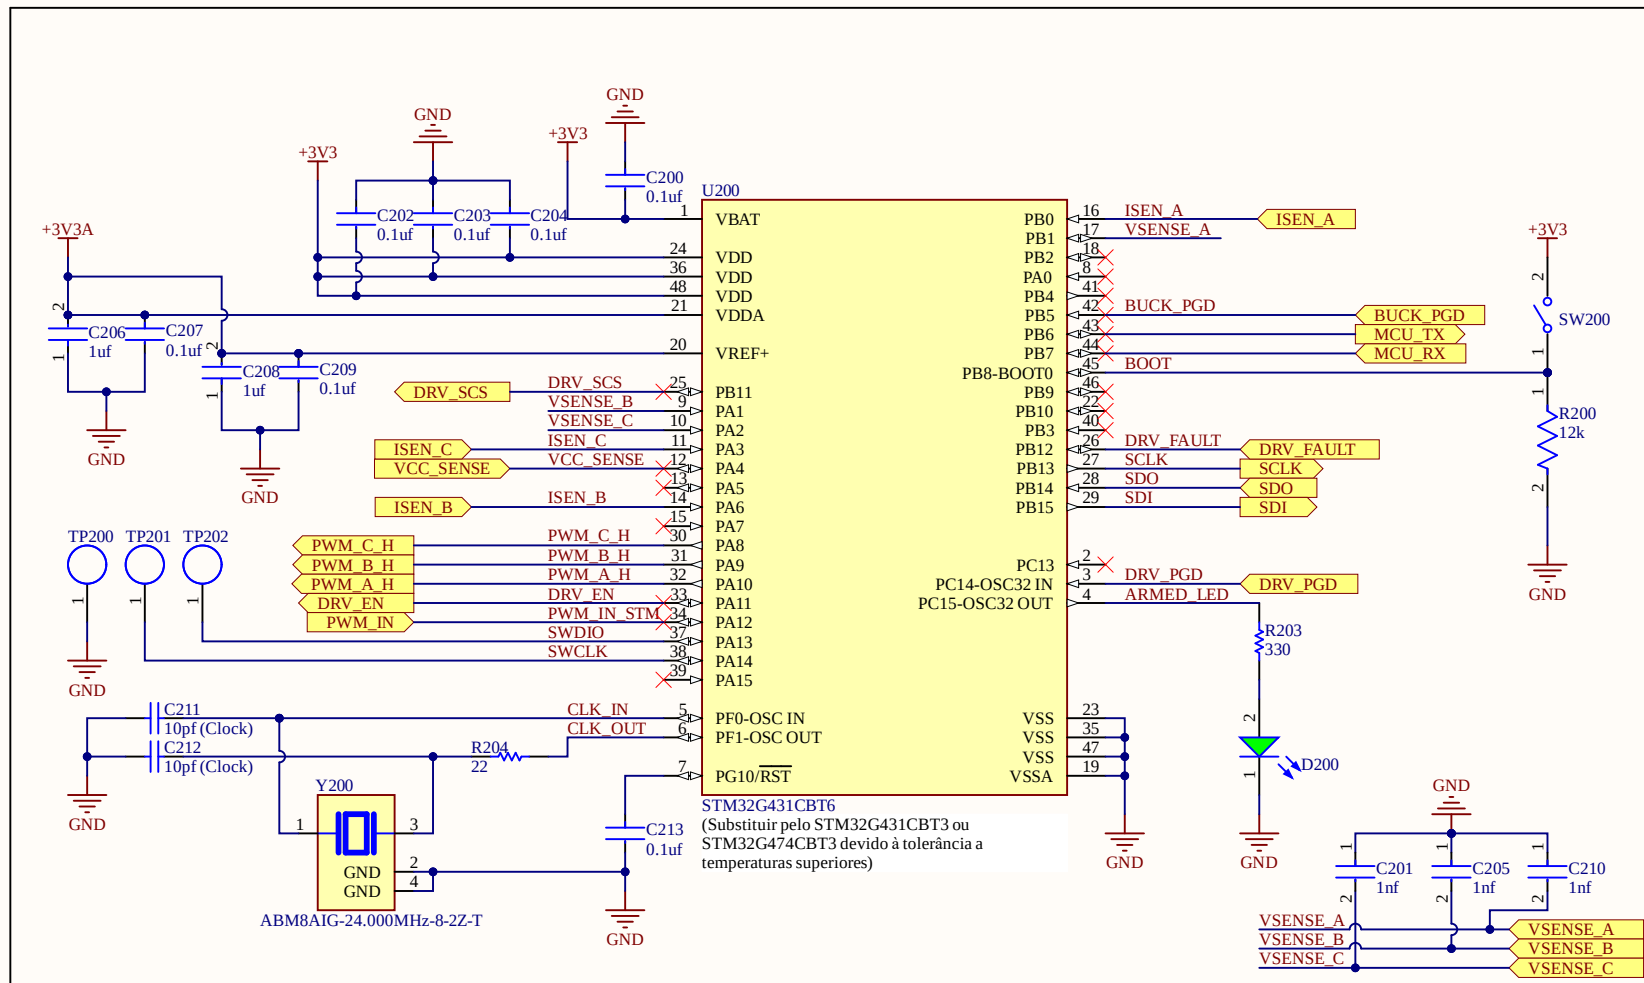


Title STM32G431		
Size A4	Number	Revision
Date: 8/22/2026	Sheet of	
File: C:\Users\...\STM32.SchDoc	Drawn By:	

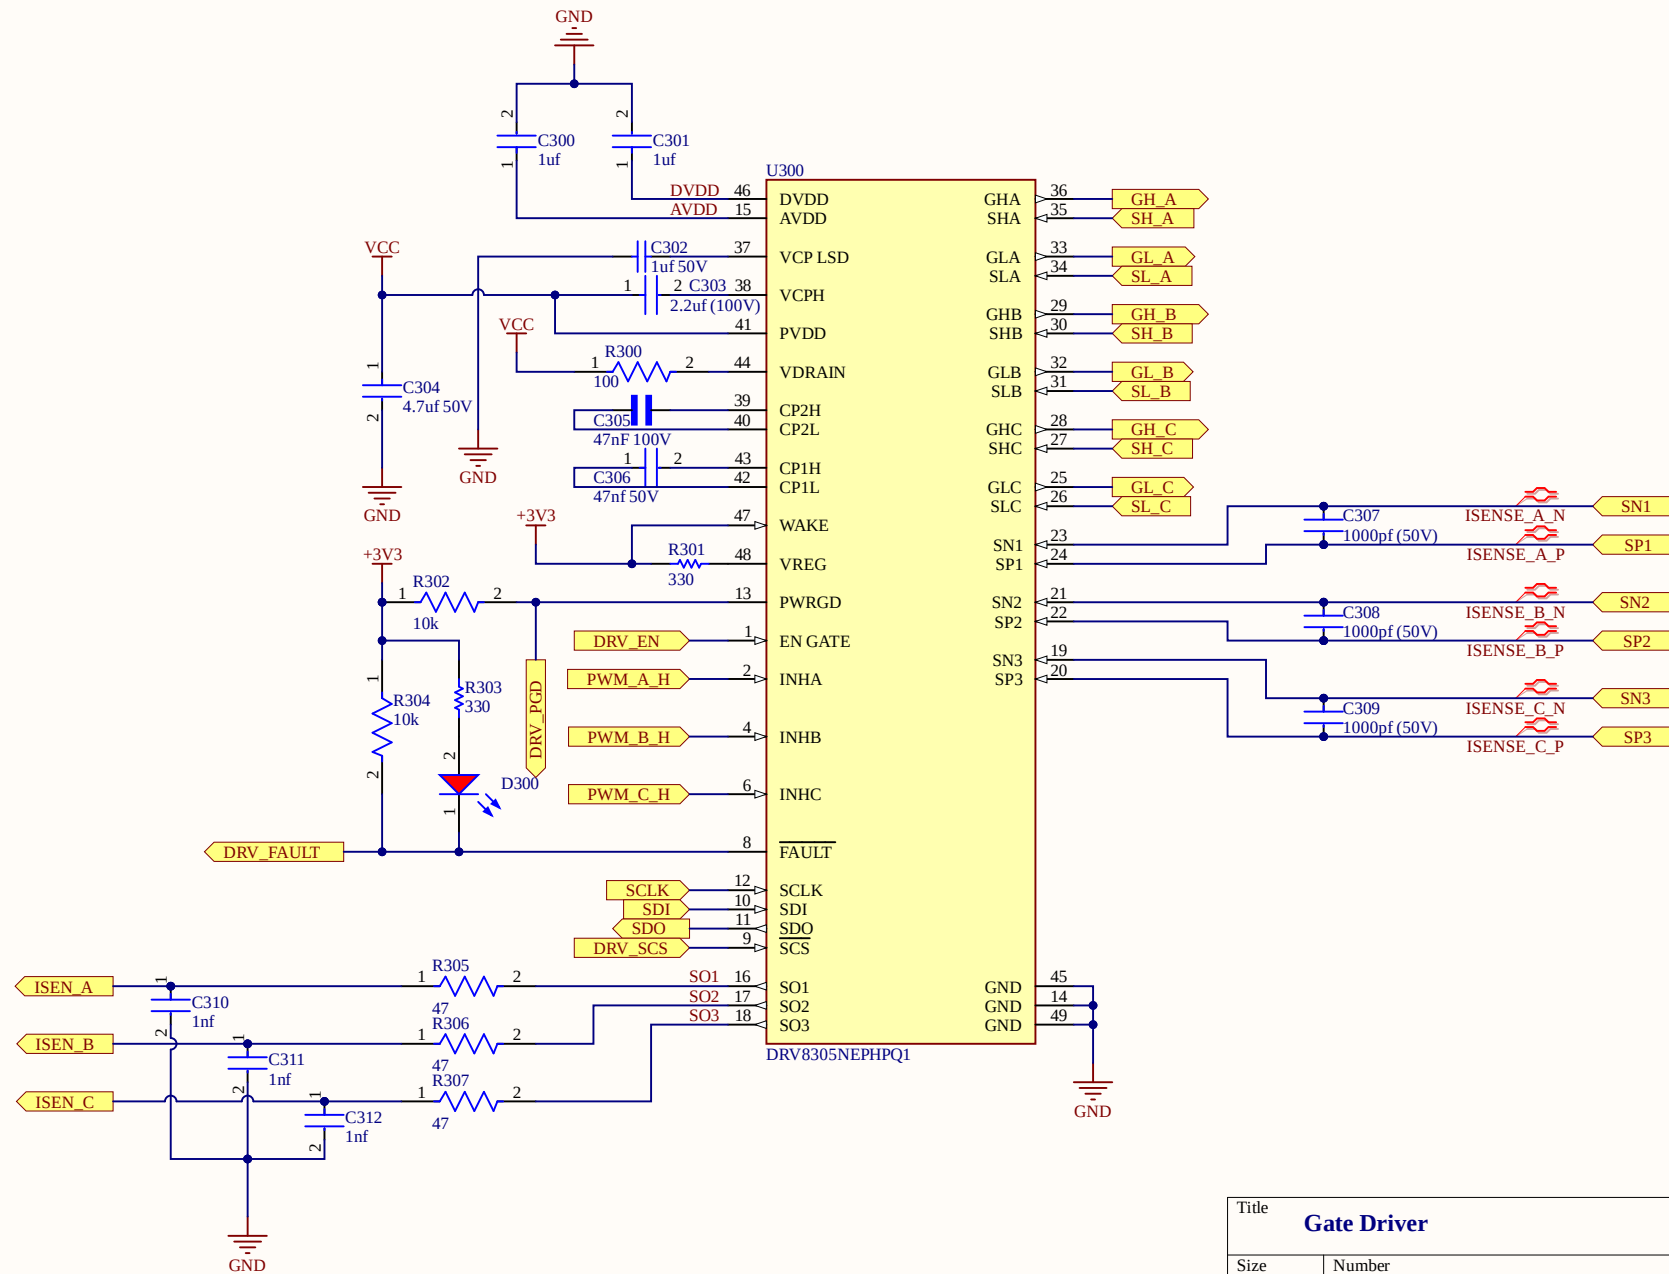


Title		
Gate Driver		
Size	Number	Revision
A4		
Date:	8/22/2026	Sheet of
File:	C:\Users\...\GateDriver.SchDoc	Drawn By:



Phase A

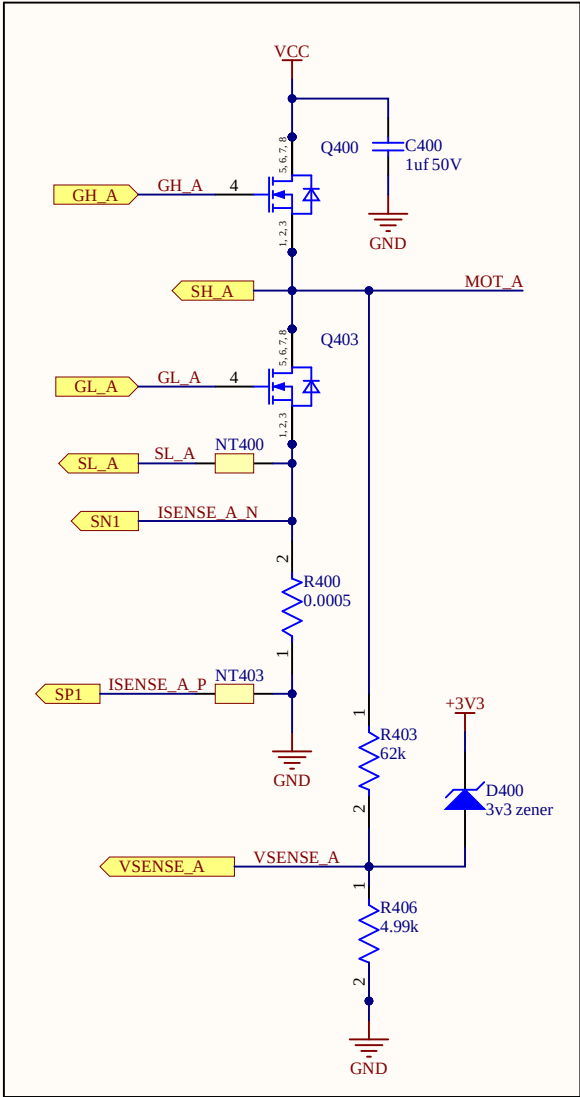




Phase B

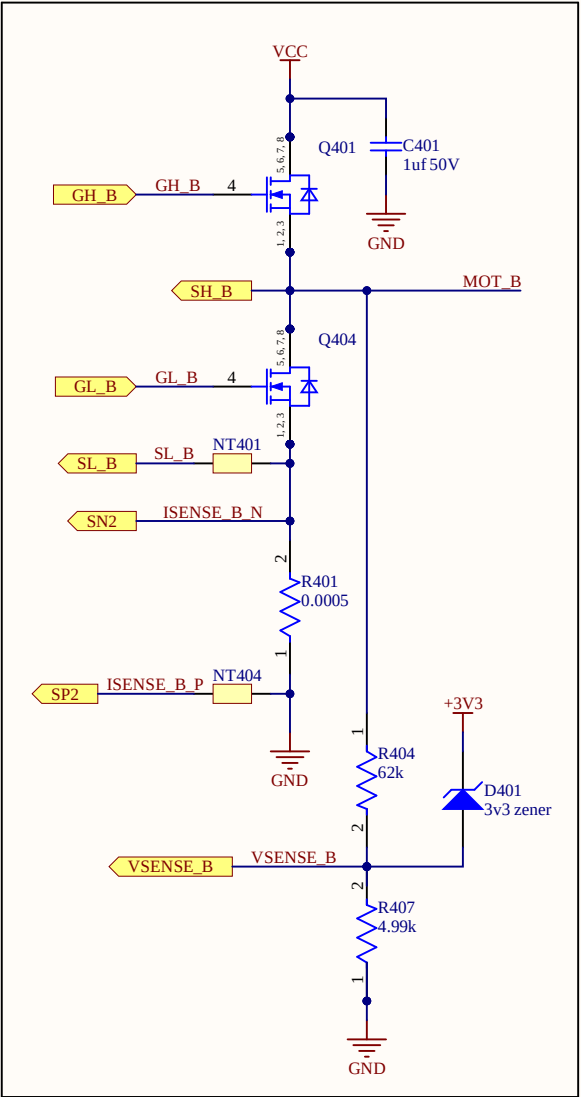


Phase C

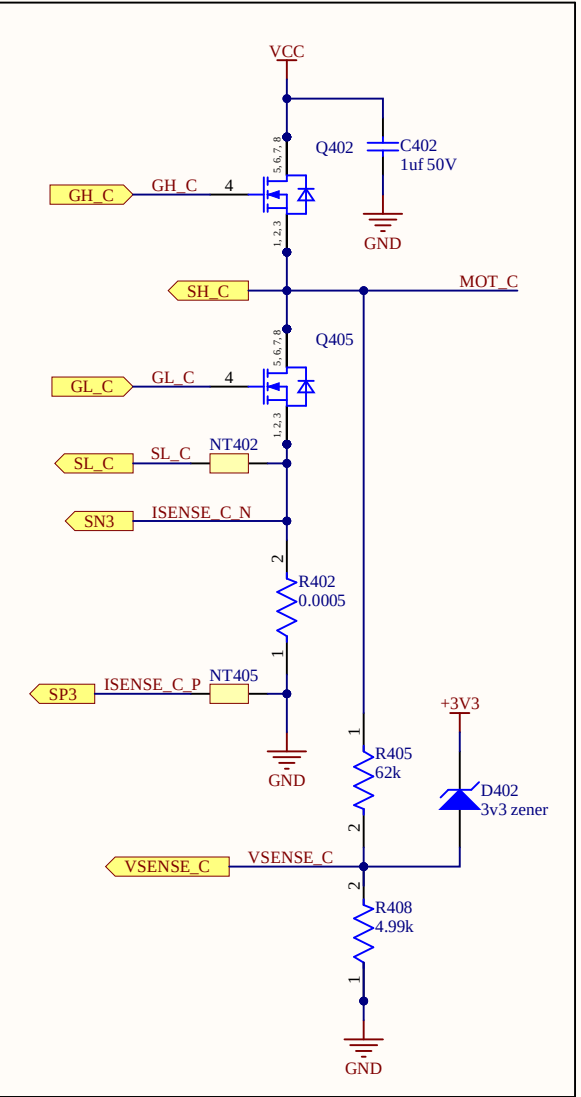

Title		
Half-Bridges e Back-EMF Sense + Conector Output		
Size	Number	Revision
A4		
Date:	8/22/2026	Sheet of
File:	C:\Users\...\HalfBridges.SchDoc	Drawn By:

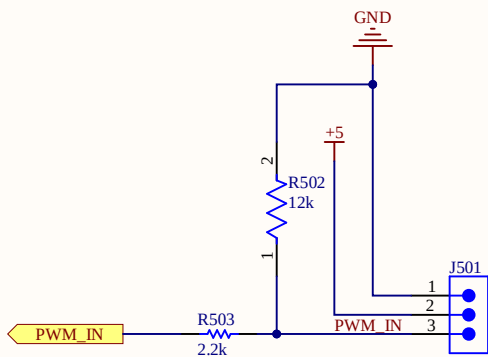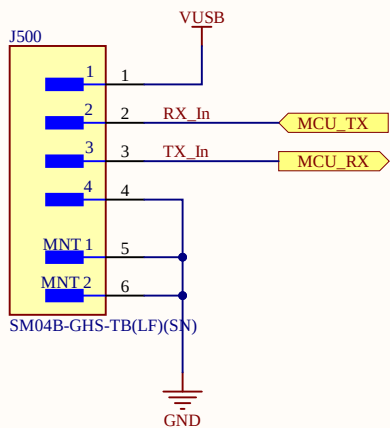

Title		
Conectores Input (UART + Bateria + SR)		
Size	Number	Revision
A4		
Date:	8/22/2026	Sheet of
File:	C:\Users\...\Connect.SchDoc	Drawn By:

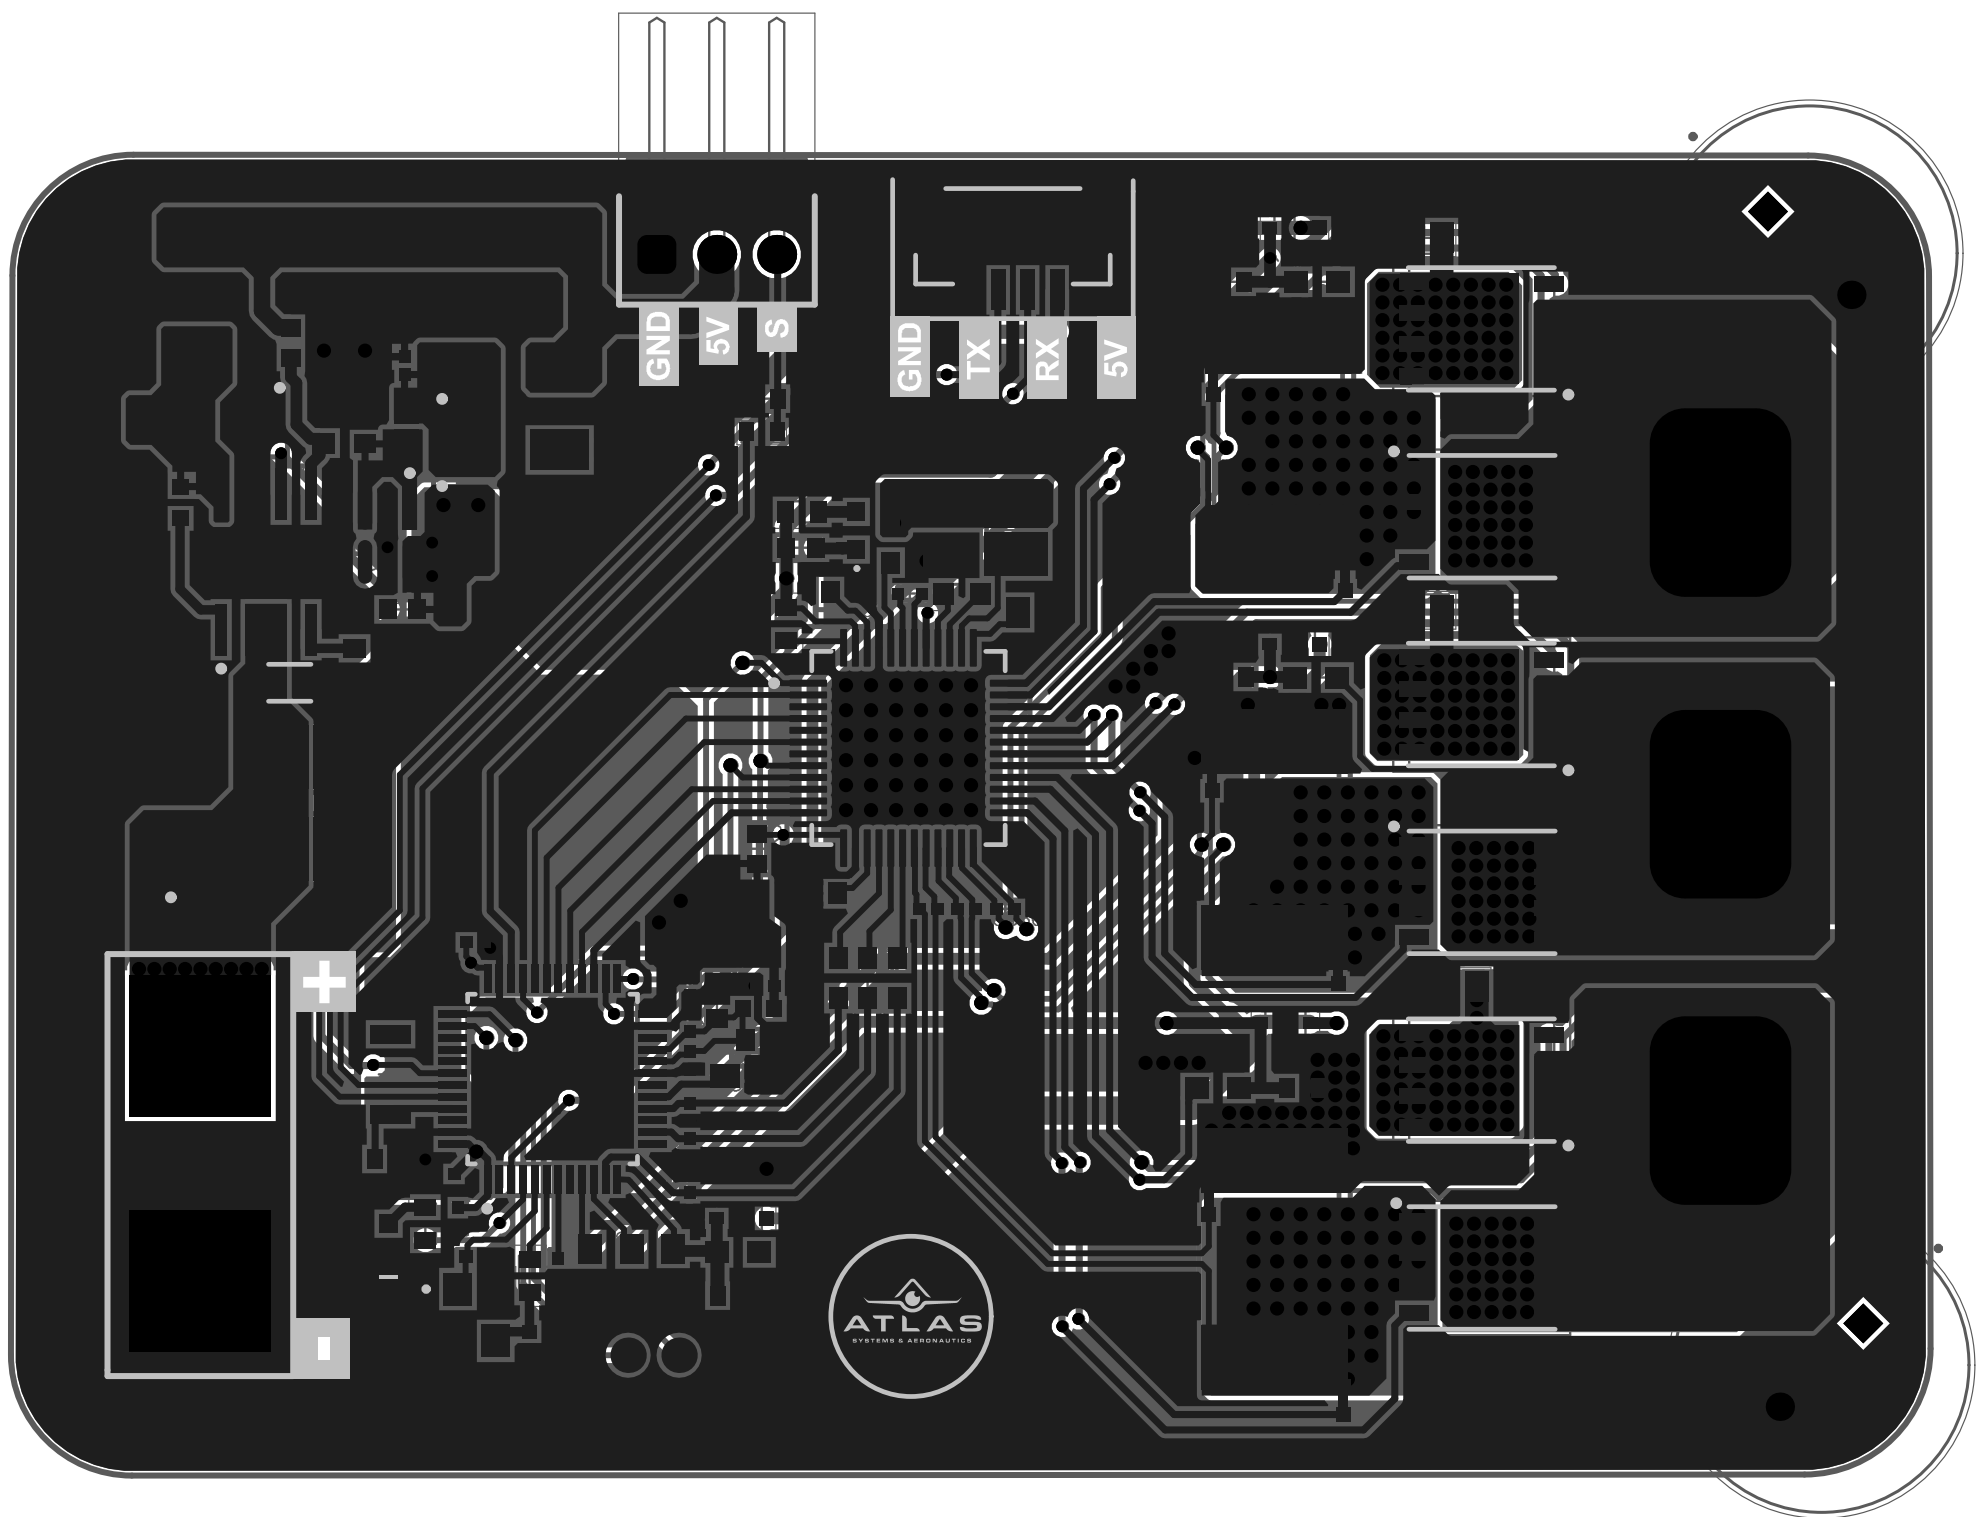

Line#	Designator	Name	Description	Quantity
	C100, C101, C303	2.2uf 100V, 2.2uf (100V)	CAP CER 2.2UF 100V X7R1210	3
	C102, C108	0.1 uf 50V	Cap Ceramic 0.1uF 50V X7R20% Pad SMD 0603 Soft Termination +125°C Automotive T/R	2
	C103, C104, C105, C106, C107, C115	10uf	CAP CER 10UF 16V X7R1206	6
	C109, C110	EEUFC1H471	Condensateur, alu lytique, 470 µF, Tolérance 20 %, Vol-Rtg 50 VCC, Radial, 12,5 x 25, Bulk	2
	C111, C201, C205, C210	1nf	CAP CER 1000PF 50V C0G/NPO 0603	4
	C112, C200, C202, C203, C204, C207, C209, C213, C214	0.1uf	Cap Ceramic 100nF 25V X7R±10% SMD 0402 +125°C Paper T/R	9
	C113, C114, C206, C208, C300, C301	1uf	CC0603 1 uF X7R10.00% 16 V	6
	C211, C212	10pf (Clock)		2
	C302, C400, C401, C402	1uf 50V		4
	C304	4.7uf 50V	Chip Multilayer Ceramic Capacitors for General Purpose, 1206, 4.7uF, X7R, 15%, 10%, 50V	1
	C305	CL10B473KC8WPN	0.047 µF ±10% 100V Ceramic Capacitor X7R0603 (1608 Metric)	1
	C306	47nf 50V	CAP CER 0.047UF 50V X7R0402	1
	C307, C308, C309	1000pf (50V)	Cap Ceramic 1nF 50V X7R±10% SMD 0402 +125°C Paper T/R	3
	C310, C311, C312	1nf	Cap Ceramic 1nF 50V C0G±5% SMD 0402 +125°C Paper T/R	3
	D100, D103, D104	3A40V	DIODE SCHOTTKY 40V 3A SMA	3
	D101	SMBJ3A-13-F	TVS DIODE 33V 53.3V SMB	1
	D102, D400, D401, D402	Zener, 3v3 zener	Surface Mount Zener Diode, 3.3 V, -65 to 150 degC, 2-Pin SOD323, RoHS, Tape and Reel	4
	D200	150060GS75000	430mcd Colorless transparence 520nm Emerald 140° LED0603 Light Emitting Diodes (LED) ROHS	1
	D300		LED RED DIFFUSED 0603 SMD	1
	FB100	BLM18PG121SN1D	Chip Ferrite Bead, 0603, 120Ω @100MHz, 0.05Ω, 25%, 2A	1
	FB200	BLM18AG601SN1D	Chip Ferrite Bead, 0603, 600Ω @100MHz, 0.38Ω, 25%, 500mA	1
	J500	SM04B-GHS-TB(LF)(SN)	CONN HEADER SMD R/A4POS 1.25MM	1
	J501	61300311021	THT Angled Pin Header WR-PHD, Pitch 2.54 mm, Single Row, 3 pins	1
	L100	10uH 2.5A	FIXED IND 10UH 2.5A 158 MOHM SMD	1
	Q400, Q401, Q402, Q403, Q404, Q405	BSC014N06NS	OptiMOS Power - MOSFET, 60 V	6
	R100, R403, R404, R405	62k	RES SMD 62KΩ 0.1% 1/16W 0603	4
	R101, R302, R304	10k	CRGCQ 0603 10K 5%	3
	R102	100k	CRGCQ 0603 100K 5%	1
	R103	41.2k		1
	R104, R406, R407, R408	4.99k	Anti-Sulfurated Chip Resistors Automotive Grade 4.99kΩ 1% 100ppm/°C 0603	4
	R105	16k	RES SMD 100 OHM 1% 1/8W 0603	1
	R200, R502	12k	RES 12KΩ 1.00% 0.1W 0603	2
	R203, R301, R303	330	Chip Resistor, 330 Ohm, +/- 1%, 0.1 W, -55 to 155 degC, 0603 (1608 Metric), RoHS, Tape and Reel	3
	R204	22	Chip Resistor, 22 Ohm, +/- 1%, 0.1 W, -55 to 155 degC, 0603 (1608 Metric), RoHS, Tape and Reel	1
	R300	100		1
	R305, R306, R307	47		3
	R400, R401, R402	0.0005	METAL SHUNT RESISTOR 3921 5% 175	3
	R503	2.2k	Thick Film Resistor, 2.2 KΩm, 100 mW, 50 V, +/- 1%, -55 to 155 degC, 2-Pin SMD (0603), RoHS, Tape and Reel	1
	SW200		SWITCH TACTILE SPST-NO 0.05A 12V	1
	U100	LMR16020PDDAR	IC REG BUCK ADJUSTABLE 2A 8SOPWR	1
	U101	TLV70033DDCR	IC REG LINEAR 3.3V 200MA SOT23-5	1
	U200	STM32G431CBT6	STM32G431CBT3 - MAINSTREAM ARM CORTEX-M4+ MCU 17	1
	U300	DRV8305NEPHQ1	IC MTR DRV MULTI 4.4-45V 48HTQFP	1
	Y200	ABM8AIG-24.000MHz-8-2Z-T	Crystal 24MHz ±20ppm (Tol) ±50ppm (Stability) 8pF FUND 50Ohm Automotive 4-Pin Ultra Mini-CSMD T/R	1