

1 Decision on Changing Input Batch

Usage

For traceability reasons, every time an input batch is changed, a new merged batch/output batch is to be produced for material listed by serial numbers.


The function "decision on changing the input batch" is used every time when input batches are changed and it has to be ensured that the reported serial numbers deriving from different input batches are not mixed up in one output batch.

Example:

Two input batches from different lots are used for one material. Input batches are changed, once the first lot of the input batch has been consumed. The material/input batch of the first lot is logged off and the material of the second lot is logged on as input batch. There must be at least two different merged batches/output batches, as the serial numbers of two different input lots or input batches are assembled.

The "decision on changing the input batch" function and the relevant posting procedure for input batch changes make sure the right connections are generated between input and output batches and the user is forced to "pay attention" and to post all serial numbers before logging an input batch off.

Example:

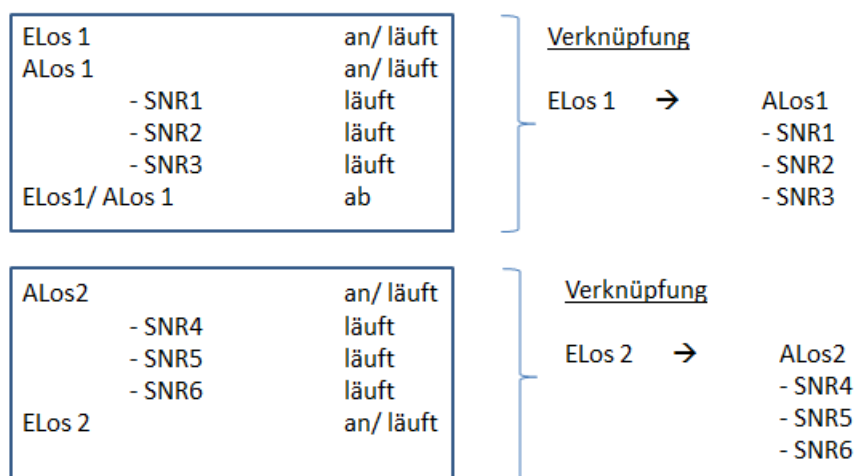

Prerequisite/configuration

The warning message can be enabled and/or disabled. The configuration is described [here](#).

Results/inspections

The user is forced to make a decision when changing input batches:

- Log input batch off --> No
- Log input batch off --> Yes

The input batch is logged off by the system if the user decides to log off the input batch.

The dialog is executed and the input batch to be logged off is posted accordingly:

- Change the batch status (processed, free, blocked)
- Material movement (consumption --> goods issue (261))
- Connections between the output batch (merged batches and subordinate batches) and the input batch are completed in batch tracing. The system has already established a connection between the input batch to be logged off and the currently running output batch when the output batch was generated.

If this connection is not required, an option of the material type "output batch connection = J/N" makes sure the connection is deleted.

- The batch history is updated.

The user makes an entry (staff badge number) for the logged off input batch and the logged in input batch in the batch history. Consequently, one can trace back who decided to log on a new input batch and to ignore the serial numbers mounted with the old input batch. These serial numbers are only posted with the new input batch, although they have not been produced by it.



This function can be applied in the "merge serial numbers" dialog and to "change output batches". The text has to be adjusted specific to the project.