

KLEIN TOOLS®

POCKET LASER LEVEL

NIVEL LÁSER DE BOLSILLO

NIVEAU LASER DE POCHE

3-AXIS
ADJUSTABLE
BODY


CUERPO QUE
SE PUEDE
AJUSTAR
EN 3 EJES

BOÎTIER
RÉGLABLE
SUR TROIS
AXES

93PTL



2x AAA
INCLUDED
INCLUIDAS
COMPRISES



IP54




CE

UK
CA

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


0924AE-B1

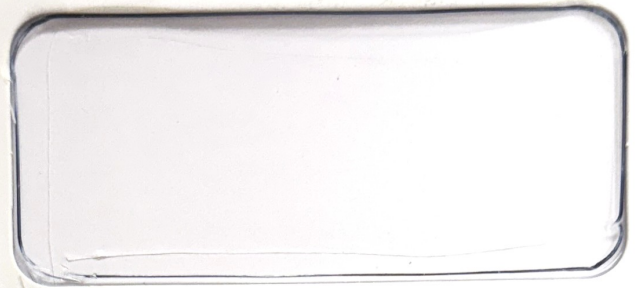

- Bright red laser line and adjustable body combine to project lines at any angle
- Fine-adjust knobs let you adjust the laser line without moving the body
- Powerful magnets, hang holes, 1/4-20 tripod mount, and built-in kickstand give flexible mounting options
- 3-axis bubble vials illuminate for easy viewing in all lighting conditions

- Línea láser en color rojo brillante y cuerpo ajustable que se combinan para proyectar líneas a cualquier ángulo
- Perillas de ajuste de precisión que le permiten ajustar la línea láser sin mover el cuerpo del nivel
- Imanes potentes, orificios para colgar, soporte para trípode de 1/4-20 y pie de apoyo incorporado que ofrecen opciones de montaje flexibles
- Ampollas de burbuja en 3 ejes que iluminan para una fácil visualización en todas las condiciones de iluminación
- Ligne laser rouge vif et boîtier réglable permettant de projeter des lignes à n'importe quel angle
- Boutons de réglage précis permettant d'ajuster la ligne laser sans bouger le boîtier
- Aimants puissants, trous de suspension, support pour trépied 1/4-20 et béquille intégrée offrant des options de montage flexibles
- Fioles à bulle lumineuses sur trois axes pour faciliter la lecture dans toutes les conditions d'éclairage

WARNING: Cancer and reproductive harm - See www.P65Warnings.ca.gov for more information.



Warranty / Garantía / Garantie:
www.kleintools.com/warranty

CE / UKCA AUTHORISED REPRESENTATIVE - Represented by ARC:
Authorised Rep Compliance Ltd., Authorised Rep Compliance Ltd.,
Ground Floor, 71 Lower Baggot Street, Arc House, Thurham,
Dublin, D02 P593, Ireland Lancaster, LA2 0DT, UK
Importado por: KLEIN TOOLS DE MEXICO, S. DE R.L. DE C.V.
Calle: Avenida Kalos, No. 801-1 Col. Kalos Guadalupe C.P. 67205
Municipio: Guadalupe Estado: Nuevo Leon RFC: KTM710310645
Contenido: 1 pieza

KLEIN TOOLS, INC
Mansfield, TX USA
© 2023

f o v i d
www.kleintools.com

PATENT PENDING
PATENTE PENDIENTE
BREVET EN INSTANCE

Made in China
Hecho en China
Fabriqué en Chine



0 92644 93009 6

1380820 Rev. 09/23 B



93PTL

FIG. A

POCKET LASER LEVEL – INSTRUCTIONS
NIVEL LÁSER DE BOLSILLO – INSTRUCCIONES
NIVEAU LASER DE POCHE – INSTRUCTIONS



Purchased at Lowes Bryan TX
\$30 price, Feb 2025
Brightness acceptable, wish it was brighter

This manual edited by D Malawey
▶ Included product brochure,
▶ Omit french & spanish pages,
▶ Rearrange first page for reading



BASED ON: 1390725 Rev 06/23 B

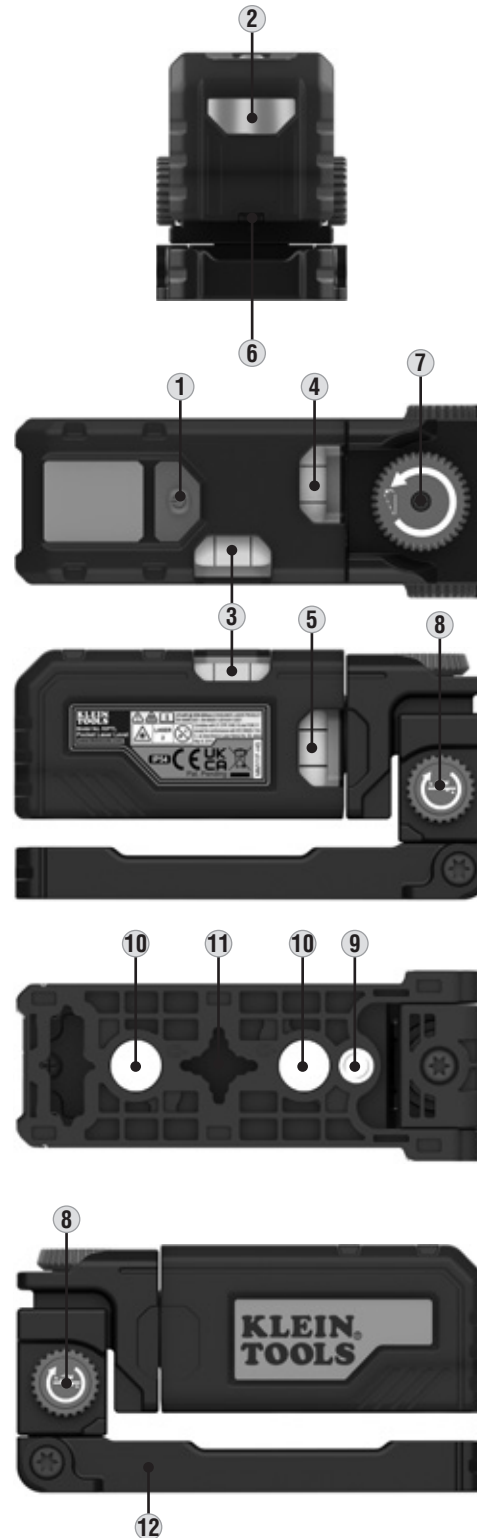


FIG. B



FEATURE DETAILS (FIG. A)

- | | |
|-----------------------------|---------------------------|
| 1. On/Off Button | 7. Elevation Control Knob |
| 2. Laser Aperture | 8. Tilt Control Knob |
| 3. X Plane Bubble Vial | 9. 1/4-20 Tripod Mount |
| 4. Y Plane Bubble Vial | 10. Magnets |
| 5. Z Plane Bubble Vial | 11. Hang Hole |
| 6. Battery Compartment Door | 12. Kickstand |

The 93PTL is a laser level that can adjust in 3 axis by both adjusting the housing, and by a built-in fine adjust system. Alongside the 3 axis orthogonal illuminated bubble vials, the 93PTL can deliver level lines, plumb lines, and lines at custom angles.

GENERAL SPECIFICATIONS

- **Operating Temp:** 14°F to 122°F (-10°C to 50°C)
- **Relative Humidity:** 85%
- **Storage Temp:** -5°F to 140°F (-20°C to 60°C)
- **Laser Type:** Class 2 (630 to 640nm, <1mW)
- **Line Accuracy:** Horizontal, Vertical: $\pm .37"$ per 32' (9.5 mm per 10 m)
- **Battery Type:** 2× AAA, 1.5V
- **Dimensions:** 4.28" × 1.75" × 2.27" (10.8 cm × 4.4 cm × 5.7 cm)
- **Weight:** 0.41 lbs (187 g) without batteries
- **Standards:** CE, UKCA, EN 50689:2021, IEC 60825-1:2014
- **Complies with:** 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019
- **Ingress Protection:** IP54 Dust & Water Resistant

Specifications subject to change.

⚠ WARNINGS

To ensure safe operation and service of the instrument, follow these instructions. Failure to observe these warnings can result in serious personal injury, fire, or electrical shock. Retain these instructions for future reference.

⚠ WARNING: LASER RADIATION. DO NOT STARE INTO BEAM. Class 2 Laser.

- Exposing eyes to laser radiation can result in severe and permanent eye injuries. **NEVER** look directly into the laser beam emitted by this instrument.
- Do not use the instrument if it appears to be damaged.
- Do not modify the instrument in any way, as to do so could result in emission of hazardous laser radiation than could result in severe eye injuries.
- Do not use optical equipment such as lenses, prisms, optical scopes, etc. to transmit, retransmit, or view the laser beam as this could result in severe eye injuries.
- This product should not be used by untrained operators or operators who have not read and fully understood the instructions.
- This product should not be used in any location that could result in somebody looking at or having their eyes inadvertently irradiated by the laser beam as this could result in severe eye injuries.
- The instrument should be powered off following use to minimize the risks of inadvertently exposure to hazardous laser radiation that could result in severe eye injuries.
- Do not remove warning labels from this instrument as this could result in serious personal injury and increases the risk of exposure to hazardous laser irradiation.
- The instrument should be securely located in a tidy work environment prior to operation as unexpected drops or movement of the instrument may result in damage to the instrument and increases the risk of inadvertent exposure to laser radiation that could result in severe eye injuries.
- This instrument is IP54 dust & water resistant. Following any contact with water, thoroughly dry the instrument with a dry, lint-free cloth.
- There are no user serviceable parts in this instrument

**Warning label
on side of
93PTL**



FEATURE DETAILS (FIG. A)

- | | |
|-----------------------------|---------------------------|
| 1. On/Off Button | 7. Elevation Control Knob |
| 2. Laser Aperture | 8. Tilt Control Knob |
| 3. X Plane Bubble Vial | 9. 1/4-20 Tripod Mount |
| 4. Y Plane Bubble Vial | 10. Magnets |
| 5. Z Plane Bubble Vial | 11. Hang Hole |
| 6. Battery Compartment Door | 12. Kickstand |

SYMBOLS ON PRODUCT

- | | |
|---|---|
|  Warning or Caution |  Strong Magnetic Field |
|  Read instructions |  Hazardous laser radiation |
|  Laser Class 2 |  DO NOT stare into beam or view directly with optical instruments |
|  Conformité Européenne: Conforms with European Economic Area directives |  UKCA: UK Conformity Assessment |
|  WEEE: Electronics disposal | |

OPERATING INSTRUCTIONS

To turn the laser & illuminated bubble vials, press the on/off button. **①**

Adjusting the laser line:

- The laser line can be adjusted by moving the 93PTL up and down, side-to-side, and by rotating the housing relative to the kickstand. **⑫**
- The laser line position can be further adjusted by turning each of the fine adjust knobs. The elevation knob **⑦** will adjust the height of the laser line, and tilt control knobs **⑧** will adjust the angle of the laser line relative to the X plane. **(FIG. B)**
- To cast a level line, ensure that both top X **③**, Y **④** vials of the 93PTL indicate level. For plumb lines, ensure that the side Z **⑤** vial is levelled.

NOTE: The fine adjust knobs have a limited range of adjustment. Do not use the fine adjust knobs beyond their adjustment range. Instead rotate the housing relative to the kickstand to bring the vials close to a level position (with the bubble close to be centered to vial).

MAINTENANCE

Battery replacement:

- Low Battery Indicator: When the batteries drop low enough, the laser line will blink 3 times every 30 seconds until the unit shuts off. When the device starts blinking, the user is advised to change the batteries.
- Open battery door **⑥**
- Remove & recycle spent AAA batteries
- Install new batteries (be mindful of correct polarity)
- Close door and screw shut

CLEANING

Be sure laser level is turned off and wipe with a clean, dry lint-free cloth.
Do not use abrasive cleaners or solvents.

STORAGE

Remove the batteries when the instrument is not in use for a prolonged period of time. Do not expose to high temperatures or humidity. After a period of storage in extreme conditions exceeding the limits mentioned in the General Specifications section, allow the laser level to return to normal operating conditions before using.

FCC AND IC COMPLIANCE

See this product's page at www.kleintools.com for FCC compliance information. Canada ICES-003 (B) / NMB-003 (B)

WARRANTY

www.kleintools.com/warranty

DISPOSAL / RECYCLE



Do not place equipment and its accessories in the trash. Items must be properly disposed of in accordance with local regulations. Please see www.epa.gov/recycle for additional information.

CUSTOMER SERVICE

KLEIN TOOLS, INC.
450 Bond Street Lincolnshire, IL 60069 1-800-553-4676
customerservice@kleintools.com www.kleintools.com

A FULL RANGE OF **LASER LEVELS**

High-Performance Alignment
and Layout Tools



LASER LEVELS

The Klein Tools Compact Laser Levels are high-performance laser leveling and alignment tools for professionals. The compact size allows users to easily transport while keeping the accuracy and reliable pendulum self-leveling system with clear, bright green or red laser level lines. Equipped with an integrated magnetic mount that rotates 360° and tripod mounting threads, Klein's compact laser levels continue to enable a multitude of alignment and layout applications.



3 easy-to-read bright green
360° laser planes

Battery Indicator

On/off Buttons X, Y,
and Z Plane Buttons

Pendulum Lock/Unlock
Slider Switch

Integrated
magnetic 360°
mounting bracket

93CPLG

1/4-20 survey tripod
mounting thread





MINI CROSS-LINE LASER LEVEL

93MCLS & 93MCLG

The Mini Cross-Line Laser Level has a compact and lightweight design that is easy to use and store in tight places. The Mini Cross-Line Laser Level provides a reliable pendulum self-leveling system with red and green laser level lines. Equipped with a magnetic mounting bracket and overmold design that is IP54 rated and protects from water and dust. Klein's Cross-Line Laser Level enables a multitude of alignment and layout applications. The single switch is a breeze to set up and take down, and lets users rapidly level and align on smaller indoor jobsites.

35'
RANGE

93MCLS



50'
RANGE

93MCLG



GREEN PLANAR LASER LEVEL

93CPLG

The Compact Green Planar Laser Level is a full-featured laser leveling and alignment tool for professionals with a compact and lightweight design. Clear, bright green 360° lines in the X-, Y- and Z-planes project from this level up to 100' with an auto out-of-level detection ensuring accuracy. The Compact Green Planar Laser Level is equipped with an integrated magnetic mount and 1/4-20 tripod mounting threads enabling a multitude of alignment and layout applications.

100'
RANGE

93CPLG



RED POCKET LASER LEVEL

93PTL

The Red Pocket Laser Level is a high-performance laser leveling and alignment tool for DIY'ers and professionals alike. The powerful red laser line is easy to see and use in all lighting conditions. The adjustable body and 3 axis lighted bubble vials allow a user to project laser lines that are level and at any angle the user needs. The fine adjust knobs enable more accurate laser placement than other laser line generators. Klein's Pocket Laser Level enables a multitude of alignment and layout applications because of convenient size, 3 lit vials, 3 orthogonal axis of rotation, and multiple attachment options built within the unit.

30'
RANGE

93PTL





*Tripod (69345)
sold separately.



	93PTL	93MCLS	93MCLG	93CPLG	93LCLS	93LCLGR	93PLL
UPC 0-92644+	93009-6	93010-2	93011-9	93013-3	93002-7	93004-1	69278-9
DESCRIPTION	Red Pocket Laser Level	Red Mini Cross-Line	Green Mini Cross-Line	Compact Green Planer Level	Cross Line with Plumb	Cross Line with Plumb	360° Planar Level
BEAM COLOR	●	●	●	●	●	●	●
RANGE	30'	35'	50'	100'	150'	165'	200'
RECHARGEABLE	X	X	X	✓	X	✓	✓
PLUMB LEVELING (DOORS, STUDS)	X	✓	✓	✓	✓	✓	✓
TILING	✓	✓	✓	✓	✓	✓	✓
WALL BOX/ELECTICAL BOX	✓	✓	✓	✓	✓	✓	✓
DROP CEILINGS	X	X	X	✓	✓	✓	✓

⚠ Visit www.kleintools.com for warnings and instructions.

For Professionals
SINCE 1857™



See our complete line of **Levels and Measuring Tools**
www.kleintools.com



© 2023 Klein Tools, Inc.
Lincolnshire, IL 60069
78325 Rev. 09/23 A