



# TYCO ADHESIVES

## INDUSTRIAL TAPES

### Tyco Adhesives® 500AV

Matte-finish Polyethylene-Coated Cloth  
AV Cord Tape


#### APPLICATIONS

- Used to protect and anchor wiring in the photography, film, convention, and music industries.
- Moisture and dust-proof sealing of equipment cases and film canisters.
- Designed to withstand exterior weather applications for up to 8 hours.

#### FEATURES & BENEFITS

- Excellent initial tack & adhesion power at low & high temperatures.
- Adheres well to smooth or rough surfaces.
- Excellent tear & unwind properties.
- UV stabilizer additive to the adhesive provides superior outdoor performance for up to 8 hours.
- Clean removal adhesive.

#### CONSTRUCTION

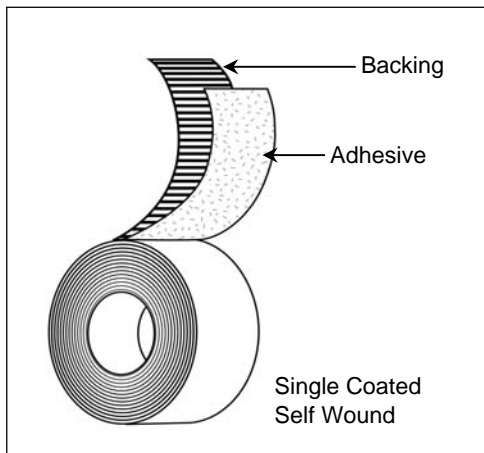

#### PRODUCT DESCRIPTION

##### Single-Coated Construction

##### Backing:

- LDPE Coated Cloth

##### Adhesive:

- Natural Rubber

##### Colors:

- Black

#### TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	12 mils	0.310 mm	ASTM D 1000
Adhesion to Steel	31.7 oz./in.	35.5 g/mm	PSTC-1
Tensile Strength	30 lb./in.	0.54 kg/mm	ASTM D 1000
Elongation (%)	11.5 %		
Unwind Force	32.45 oz./in.	36.4 g/mm	PSTC-1
Maximum Performance Temperature	200 F		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.

**Tyco**  
**Adhesives**

#### CORPORATE HEADQUARTERS

25 FORGE PARKWAY  
FRANKLIN, MA 02038  
1-800-343-7875  
Fax: 1-800-328-4822

[www.tycoadhesives.com](http://www.tycoadhesives.com)

A tyco INTERNATIONAL LTD. COMPANY