


# **Inter VLAN Routing:MultiLayer Switch**

IVR (Inter-VLAN Routing) on a Layer 3 switch allows communication between different VLANs without needing an external router. Here's how you can configure IVR on a Cisco Layer 3 switch:

## **Steps to Configure IVR on a Layer 3 Switch**

- Create VLANs**
- Create SVIs (Switch Virtual Interfaces)**
- Assign Switch Ports to VLANs**
- Enable IP Routing**
- Test Connectivity**

# Inter Vlan Routing: MultiLayer Switch

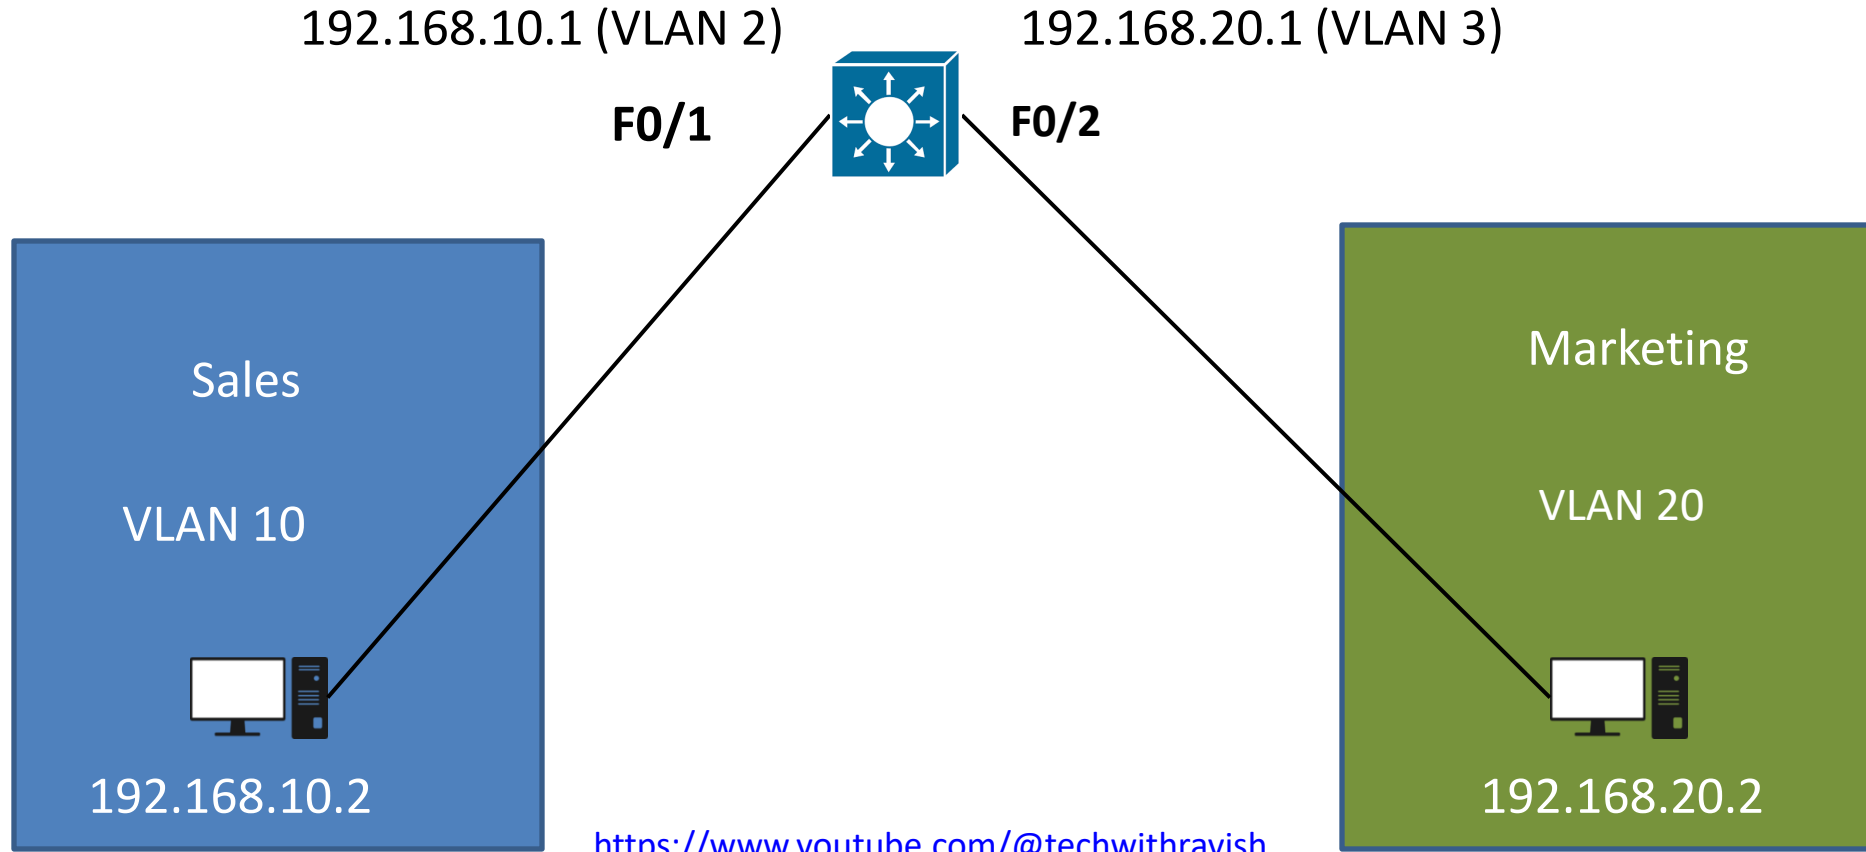

# IVR Configuration: Multilayer Switch

## **STEP 1: Create VLAN 10 and 20 Give Name**

```
Switch> enable
```

```
Switch# configure terminal
```

```
Switch(config)# vlan 10
```

```
Switch(config-vlan)# name Sales
```

```
Switch(config-vlan)# exit
```

```
Switch(config)# vlan 20
```

```
Switch(config-vlan)# name Marketing
```

```
Switch(config-vlan)# exit
```

# IVR Configuration: Multilayer Switch

## Step 2: Provide IP to VLAN

```
Switch>Enable
```

```
Switch#Configure terminal
```

```
Switch(config)#int vlan 10
```

```
Switch(config-if)#ip address 192.168.10.1 255.255.255.0
```

```
Switch(config-if)#exit
```

```
Switch(config)#int vlan 20
```

```
Switch(config-if)#ip address 192.168.20.1 255.255.255.0
```

```
Switch(config-if)#exit
```

# Configuring VLAN on L3 Switch Interfaces

```
Switch> enable
```

```
Switch# configure terminal
```

```
Switch(config)# interface f0/1
```

```
Switch(config-if)#Switchport Mode Access
```

```
Switch(config-if)#Switchport Access VLAN 10
```

```
Switch(config-if)#Exit
```

```
Switch(config)# interface f0/2
```

```
Switch(config-if)#Switchport Mode Access
```

```
Switch(config-if)#Switchport Access VLAN 20
```

```
Switch(config-if)#)# exit
```

# IVR Configuration: Multilayer Switch

## **Configure Routing**

```
Switch> enable
```

```
Switch# configure terminal
```

```
Switch(config)# ip routing
```

```
Switch(config)# exit
```