Robotic System Design Project 2: Phase 1

1 Project Work

In Project 2 Phase 1, you need to implement the 3D-2D pose estimation algorithm learned in the lecture to estimate the camera's poses with images. This is an individual project, which means you must complete it by yourself.

1.1 Project Assignments

Three assignments are required for this project including:

- 1. Calculating the camera's pose corresponding to every image.
- 2. Publishing camera pose information in the form of navmsgs/Odometry.
- 3. Plotting these poses with rqt _rviz.
- 4. Comparing your result with the reference.

Note: If You are Non-Engineering Background, you can used OpenCV functions; If Not, You are NOT allowed to use any OpenCV functions in your implementation.

1.2 Project Details

You will be provided with a ROS package named tagdetector, where a serial of points and their positions will be calculated with images. You need to implement this project based on the point and position array. You can follow the below procedures to prepare for your coding.

- 1. put aruco-1.2.4 and tagdetector in your workspace (catkinws/src/)
- 2. install aruco (following aruco-1.2.4/README)
- 3. Setup your ROS environment and compile the tagdetector package.
- 4. Find bagtag.launch in tag_detector/launch, and images.bag in tagdetector/bag.
- 5. Use bagtag.launch and images.bag to run this package (roslaunch bagtag.launch).
- 6. Read the comments in tagdetector/src/tagdetectornode.cpp carefully.
- 7. Add your code into tag_detector/src/tagdetectornode.cpp.
- 8. Note that the pose you calculated is $(\mathbf{t}_{cw}, \mathbf{R}_{cw})$, which represents the pose of world frame respecting to the camera frame.

2 Submission

When you complete the tasks you could submit your code and documents to canvas before **Nov. 8th, 2021 23:59:00**. The title of your submission should be "YOUR-NAMEYOUR-STUDENT-ID". Your submission should contain:

- 1. A maximum 2-page document including:
 - (a) Figures plotted by rviz.
 - (b) Statistics about your result. (For example, RMS error between the poses you calculate with the reference ones)
 - (c) Descriptions about your implementation.
 - (d) Any other things we should be aware of.
- 2. Files tagdetectornode.cpp, as well as any other c++ files you need to run your code.

3 Basic use of RVIZ

- 1. open one terminal, input:roscore; open another termianl, input: rosrun rviz rviz.
- 2. click add button, add your topic.
- 3. change the frame to "world".
- 4. change the color of your odometry and reference odometry.

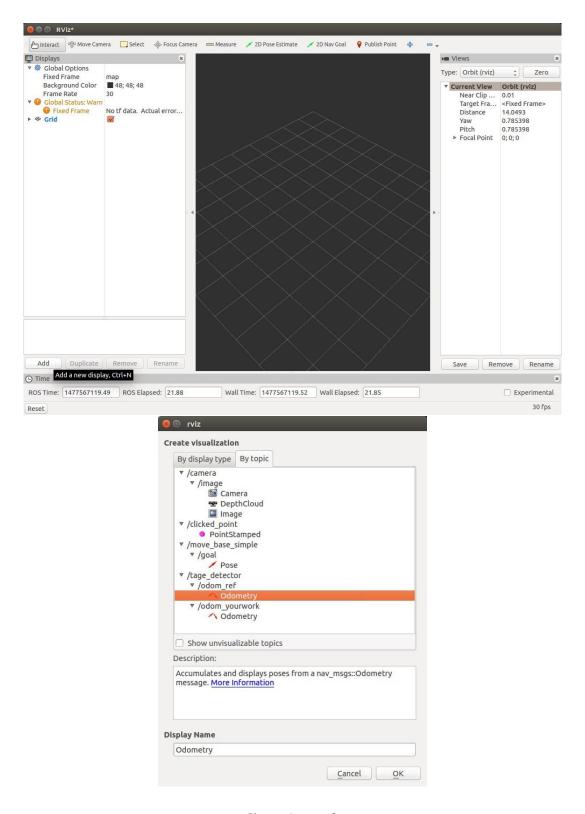


Figure 1: step 2

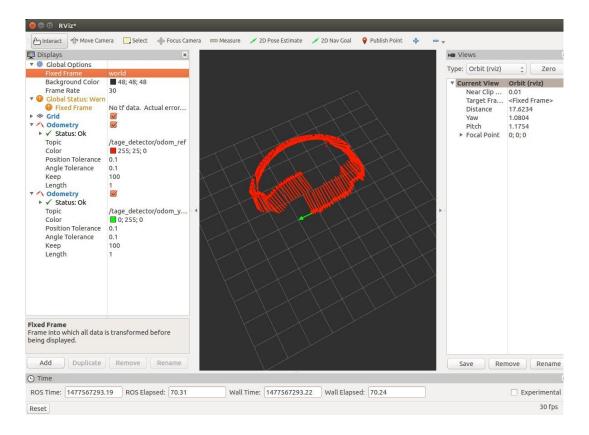


Figure 2: step 3