

AY 2021/2022



POLITECNICO DI MILANO

DD: Design Document

Ottavia Belotti Alessio Braccini Riccardo Izzo

Professor
Elisabetta DI NITTO

Version 1.0
December 14, 2021

Contents

1	Introduction	1
1.1	Purpose	1
1.2	Scope	1
1.3	Definitions, acronyms, abbreviations	1
1.4	Revision history	2
1.5	Reference documents	2
1.6	Document structure	2
2	Architectural Design	4
2.1	Overview	4
2.2	Component view	7
2.3	Deployment view	12
2.4	Runtime view	14
2.5	Component interfaces	29
2.6	Selected architectural styles and patterns	30
2.7	Other design decisions	31
2.7.1	Servers availability and response time	31
2.7.2	Farmers ranking	31
2.7.3	Farmers location	32
2.7.4	Agronomist daily plan	32
3	User Interface Design	35
4	Requirements Traceability	39
5	Implementation, Integration and Test Plan	44
6	Effort Spent	45
7	References	45

1 Introduction

1.1 Purpose

The purpose of this document is to provide a full technical description of the system described in the RASD document. In this design document we discuss about both hardware and software architectures in terms of interaction among the components that represent the system. Moreover, there are mentions about the implementation, testing and integration process. This document will include technical language so it is primarily addressed to programmers, but stakeholders are also invited to read it in order to understand the characteristics of the project.

1.2 Scope

The scope of this design document lays in the definition of the system behavior, in both general and critical cases, and in the design of the system architecture by describing the logical allocation of the components and the interaction between them. This document also extends in part to the implementation and testing plan, where one possible course of action is explained, user interface design of user applications and requirements traceability relating to the RASD.

1.3 Definitions, acronyms, abbreviations

Acronyms

- **DREAM:** *Data-driven predictive farming*
- **RASD:** Requirement Analysis and Specification Document
- **DD:** Design Document
- **API:** Application Programming Interface
- **DBMS:** Database Management System
- **UML:** Unified Modeling Language
- **GPS:** Global Positioning System

- **IT:** Information Technology
- **GUI:** Graphic User Interface
- **UI:** User Interface

1.4 Revision history

1.5 Reference documents

- Specification document: "Assignment RDD AY 2021-2022"
- Requirements Analysis Specification Document (RASD)
- UML documentation: <https://www.uml-diagrams.org/>
- ArchiMate documentation: <https://pubs.opengroup.org/architecture/archimate3-doc/>
- Slides of the lectures

1.6 Document structure

- **Section 1** gives a brief description of the design document, it describes the purpose and the scope of it including all the definitions, acronyms and abbreviations used.
- **Section 2** delves deeply into the system architecture by providing a detailed description of the components, the interfaces and all the technical choices made for the development of the application. It also includes detailed sequence, component and ArchiMate diagrams that describe the system in depth .
- **Section 3** contains a complete description of the user interface (UI), it includes all the client-side mockups with some graphs useful to understand the correct execution flow.
- **Section 4** links the RASD to the DD, it maps the goals and the requirements described in the RASD to the actual functionalities presented in this DD.

- **Section 5** presents a description of the implementation, testing and integration phases of the system components that are going to be carried out during the technical development of the application.

2 Architectural Design

2.1 Overview

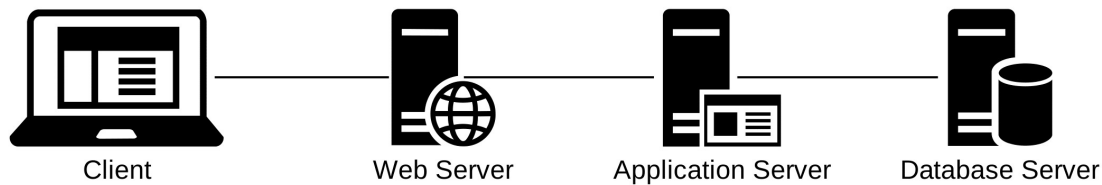


Figure 1: Four-Tier Architecture Scheme

The system is a distributed application that follows the common client-server paradigm. The architecture of the application is structured in three logic layers:

- **Presentation Layer (P)**: it manages the presentation logic and handles the user actions. It is characterized by a GUI (Graphic User Interface) that allows the user to interact with the application in a simple and effective way.
- **Logic or Application Layer (A)**: it manages all the functionalities that has to be provided to the users, it is also responsible of data exchange between the client and the data sources.
- **Data Layer (D)**: it manages the access to data sources, it gets data from the database and moves it through the other layers. It is essential to guarantee a high level of abstraction from the database in order to provide an easy to use model.

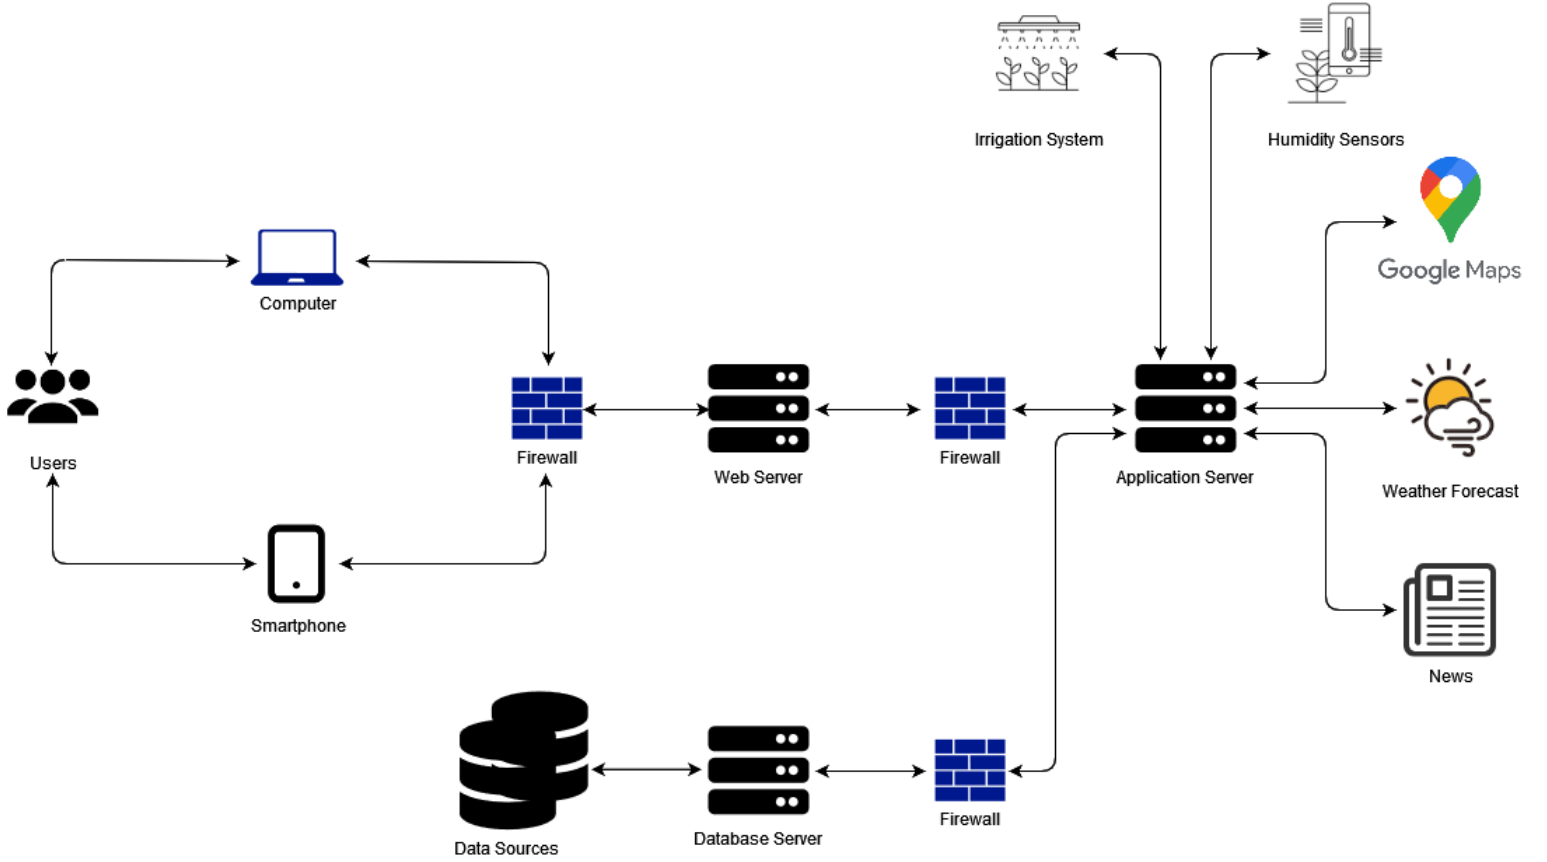


Figure 2: High Level Architecture

The system, as shown in *Figure (1)*, is based on a four-tier architecture (Client, Web Server, Application Server and Database Server), this ensures more flexibility and high scalability. The tiers are separated by firewalls in order to guarantee a higher level of security to the whole system. A thin client is used to prevent heavy computation load client side, in this way all the heavy operations are executed at server side. The client's devices can be a personal computer, a mobile device or any kind of IT device able to connect to the Web Server through a web browser. In fact, the four-tiers architecture has been specifically chosen to allow the widest variety of commercial devices

to access the application, without the need of developing an OS-specific one for each of them. The Web Server manages the HTTP requests by the users and forwards them to the Application Server. The Application Server communicates with the Database Server and transform data following its business logic. It also manages all the external APIs including: Google Maps API, the news, the weather forecast, the water irrigation system and the humidity sensors. This allows to retrieve data like weather information directly from it in order to show them to the user. To enable the geolocalization, the Application Server uses the API provided by Google Maps. The Database Server manages all the internal data sources and communicates directly with the Application Server. All the components will be described in depth in the following sections.

2.2 Component view

General Component View

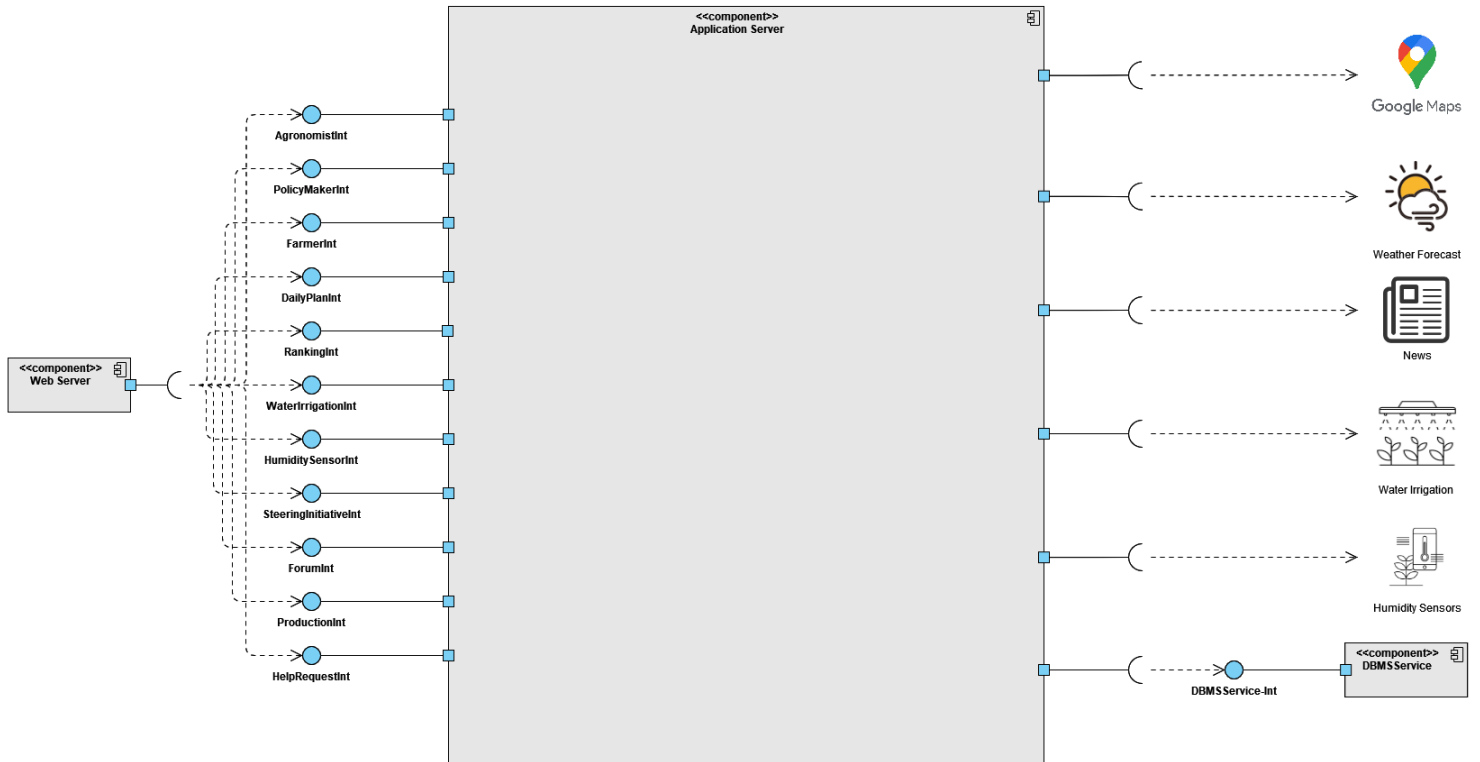


Figure 3: General Component Diagram

This image gives a high level representation of the components of the system. On the left are shown the provided interfaces between the Web Server and the Application Server that in this scheme is represented as a "black box"; a complete description of it is provided in the next section. All the interfaces basically represent the main functionalities requested by the client application. On the right there are the requested interfaces. Among these, one is responsible of the geolocalization and is provided by the Google

Maps API, the others manage the remaining external services such as the weather forecast, the news, the water irrigation system and the humidity sensors. Finally, the DBMS interface manages the DBMS service and it's responsible of the communication between the Application Server and the Database Server.

Application Server Component View

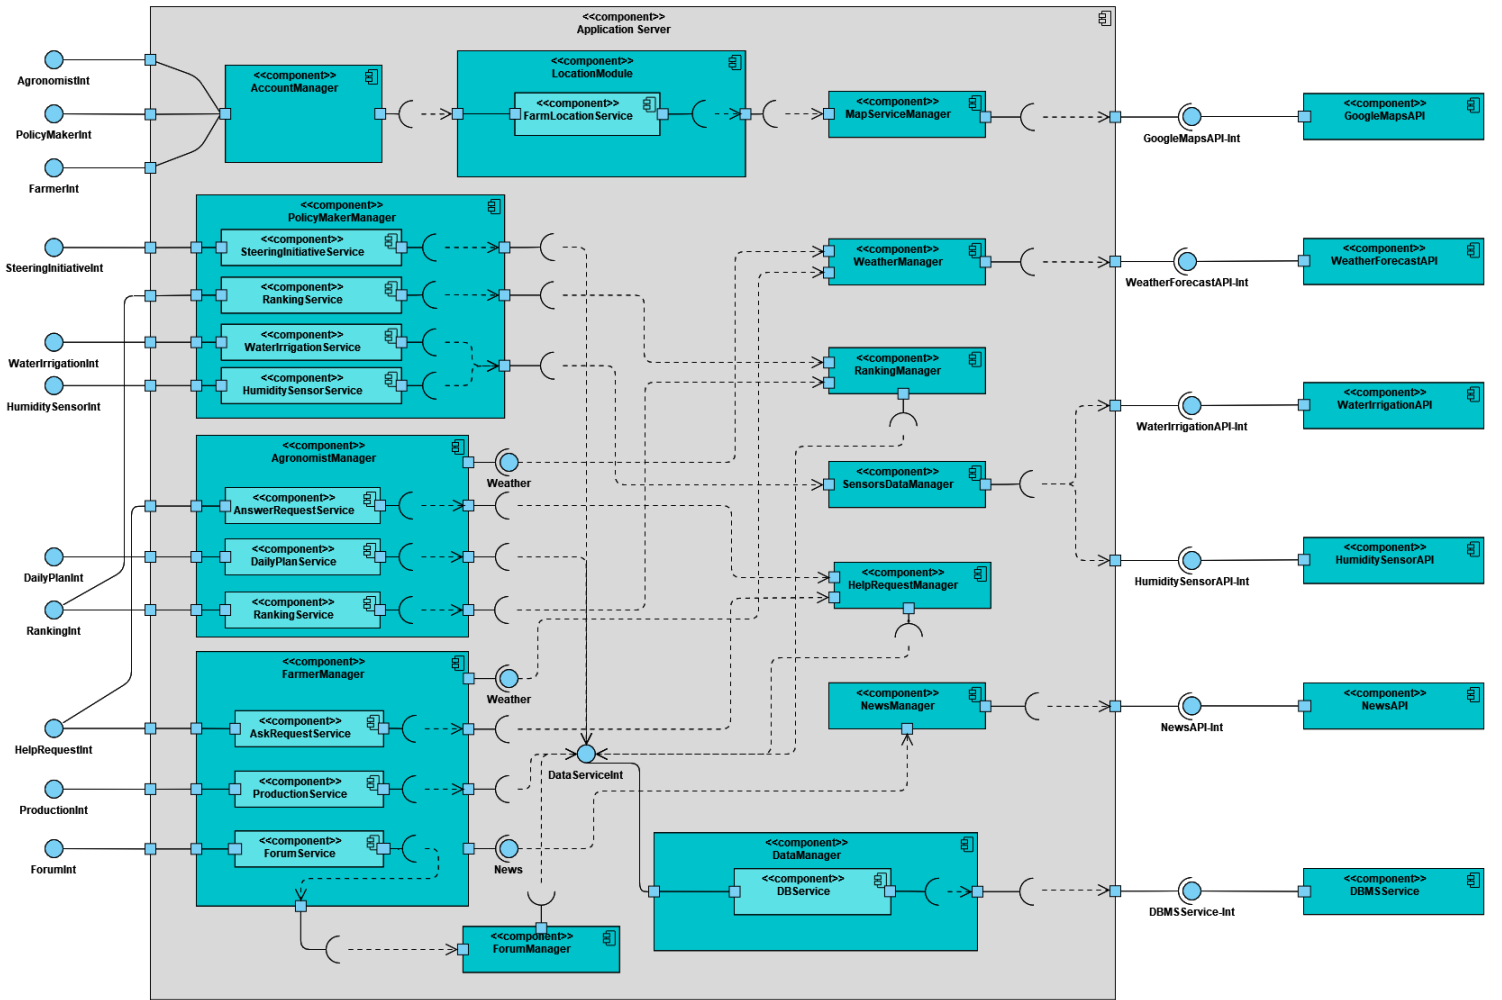


Figure 4: Application Server Component Diagram

The following component diagram gives a detailed view of the Application Server, it shows the internal structure and the interaction between the components. External elements in the diagram are represented in a simplified way.

- **AccountManager:** this component handles all the basic requests made by the client. This includes the authentication process that is composed by the log in, the log out and the sign up services. It also includes the edit profile routine invoked by an user editing the personal account. Once a user is logged in, all the specific functionalities are provided by the component that manages this type of user. Finally it communicates with the *LocationModule* that provides the geolocalization service.
- **LocationModule:** this module provides the interface that allows the geolocalization of the farm based on the GPS and on the address provided by the farmer. In order to provide this service, it communicates with the *MapServiceManager*.
- **MapServiceManager:** this component communicates directly with the external API provided by Google Maps, it provides information regarding the region and allows the user to visualize the map of a specific location. Mainly it adapts the data received by the API in a comprehensible way for the other components, it also manages the API requests.
- **PolicyMakerManager:** it manages the policy maker services, these include: steering initiatives, ranking, water irrigation system and humidity sensors. The steering initiative service and the ranking service are mapped through an interface to the internal database, on the other side the water irrigation service and the humidity sensor service are considered external services and are managed by the *SensorsDataManager*.
- **AgronomistManager:** it manages the agronomist services, these include: answer help requests, daily plan and ranking. It includes the weather external interface, it communicates with the weather component in order to provide the weather forecast service to the agronomist.

The daily plan service and the ranking service are linked to the internal database, instead the answer request service communicates directly with the *HelpRequestManager* component.

- **FarmerManager:** it manages the farmer services, these include: ask a help request, production and forum. It includes two external interfaces: the first one communicates with the *WeatherManager* component in order to provide the weather forecast service to the farmer, the other one communicates with the *NewsManager* component. In this case, only the production service is linked directly to the internal database, instead the ask request service is linked to the *HelpRequestManager* component, while the forum service exposes an interface to connect to the *ForumManager* component.
- **ForumManager:** this component manages the forum section, in particular it is responsible of the management of all the topics with the related messages between farmers.
- **DataManager:** it provides access to the external interface of the database, it manages queries and interacts with the DBMS. It includes one component that expose an interface that allow other internal components to communicate with the database. This component is connected to the *DBMSService* external component, this establishes the connection between the Application Server and the Database Server.
- **HelpRequestManager:** it manages the help requests between farmers and agronomists. It communicates with the *FarmerManager* component for the help requests to ask, on the other way it communicates with the *AgronomistManager* component for the ones to answer. Finally it provides an interface that communicate with the internal database in order to store the requests.
- **RankingManager:** it manages the ranking system for both the policy maker and the agronomist. It is responsible for calculating the final score used to compare the farmers in the ranking. More details on how to calculate it can be found in *Section (2.7)*.
- **NewsManager:** this component manages the service related to the news, it provides updated suggestions about crops and fertilizers for the

farmers. To do this it interacts with the external component *NewsService*.

- **WeatherManager:** this component manages the service related to the weather forecast. It interacts with the external component *WeatherForecastService* in order to get the weather data.
- **SensorsDataManager:** this component handles two external APIs, the first one provided by the water irrigation system and the other one provided by the humidity sensors. Both services are used by the *PolicyMakerManager*.

2.3 Deployment view

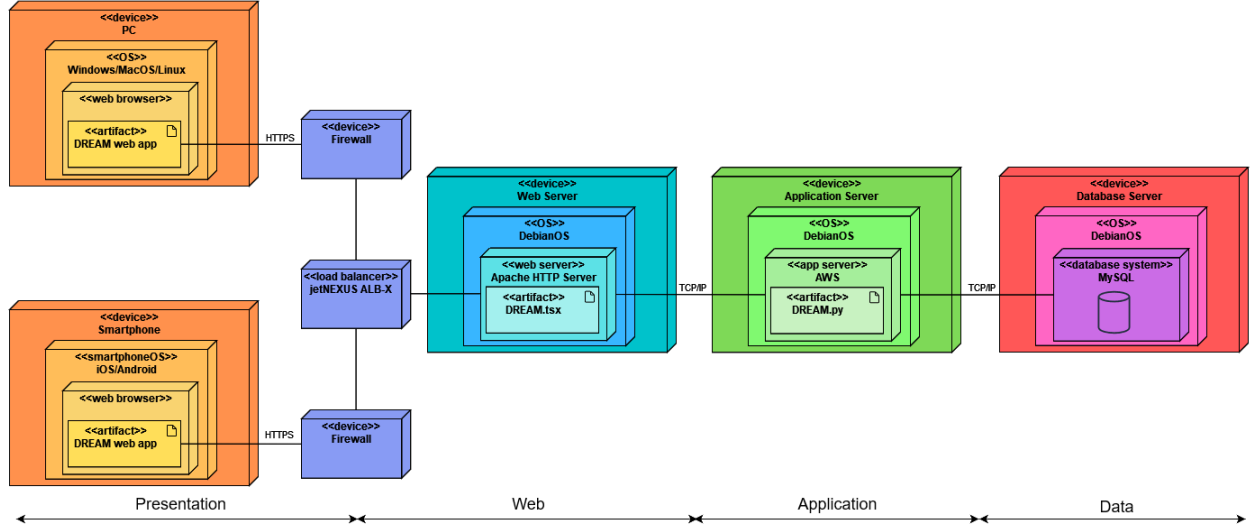


Figure 5: Deployment Diagram

The deployment diagram in *Figure (5)* shows the most important components necessary for the correct behaviour of the system. The devices shown in the diagram are:

- **PC/Smartphone:** they are the client machines, can be used by all the type of users. It allows the user to connect to the Web Server through a web browser as long as the HTTPS protocol is used.
- **Firewall:** first level of security, it guarantees safety access to the internal network of the system.
- **Load balancer:** the main goal is to prevent the overload of a server, this device distributes the incoming requests equally across multiple servers. This increase availability and reliability of the application. The one selected is the *jetNEXUS ALB-X*.

- **Web Server:** it manages the HTTPS requests from the clients and route them to the *Application Server* for processing. On the other way it is responsible of the incoming requests from the application server, they are managed by serving an HTML file to the client in addition to CSS and JS sheets. The result page is built with a client-side scripting. Finally web servers are duplicated to ensure high scalability and to guarantee good performance in case of a single point of failure.
- **Application Server:** it runs the core functionalities of the system, here there is the application logic. It also manages all the external APIs such as the Google Maps API and the weather forecast API. Just like the *Web Server*, for the same reasons, it is duplicated. The *Application Server* and the *Database Server* are connected through an internal LAN, there are no firewalls between them in order to increase the average connection speed. Finally, it establishes the connection with the data tier through the DBMS interface.
- **Database Server:** it represents the data tier, it receives the requests from the *Application Server* and manages them. MySQL has been selected as the main database infrastructure, this allow to manage easily and in a secure way all the data sources.

2.4 Runtime view

Here are represented the runtime view of some relevant use cases of the system through some sequence diagrams. In the diagrams, the part regarding the user is omitted because it has been considered superfluous to the understanding of the interaction. In later diagrams some parts, like the login phase or the come back to home page, were omitted for the above motivations.

Sign Up

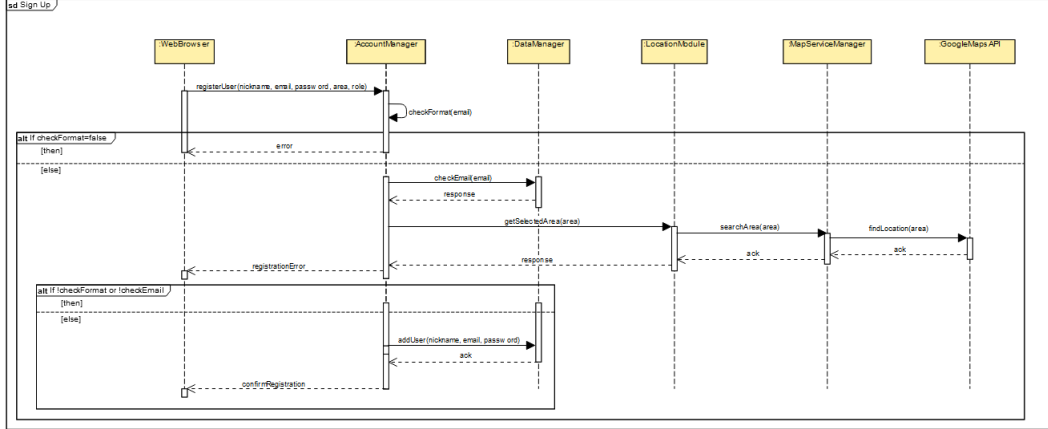


Figure 6: Sign Up

Sign up is pretty standard: user registers himself/herself by inserting first name, last name, email, password, job role and area. If the user is a farmer, he/she chooses also the crop type the farm deals with. The *LocationModule* and the *MapServiceManager* are used in this phase in order to ease the users in the selection of their location using the GPS. However users can also select manually their location without the use of GPS.

At the end of the process, if every check results succesfull, the user is registered into the database by the *DataManager* component.

Log In

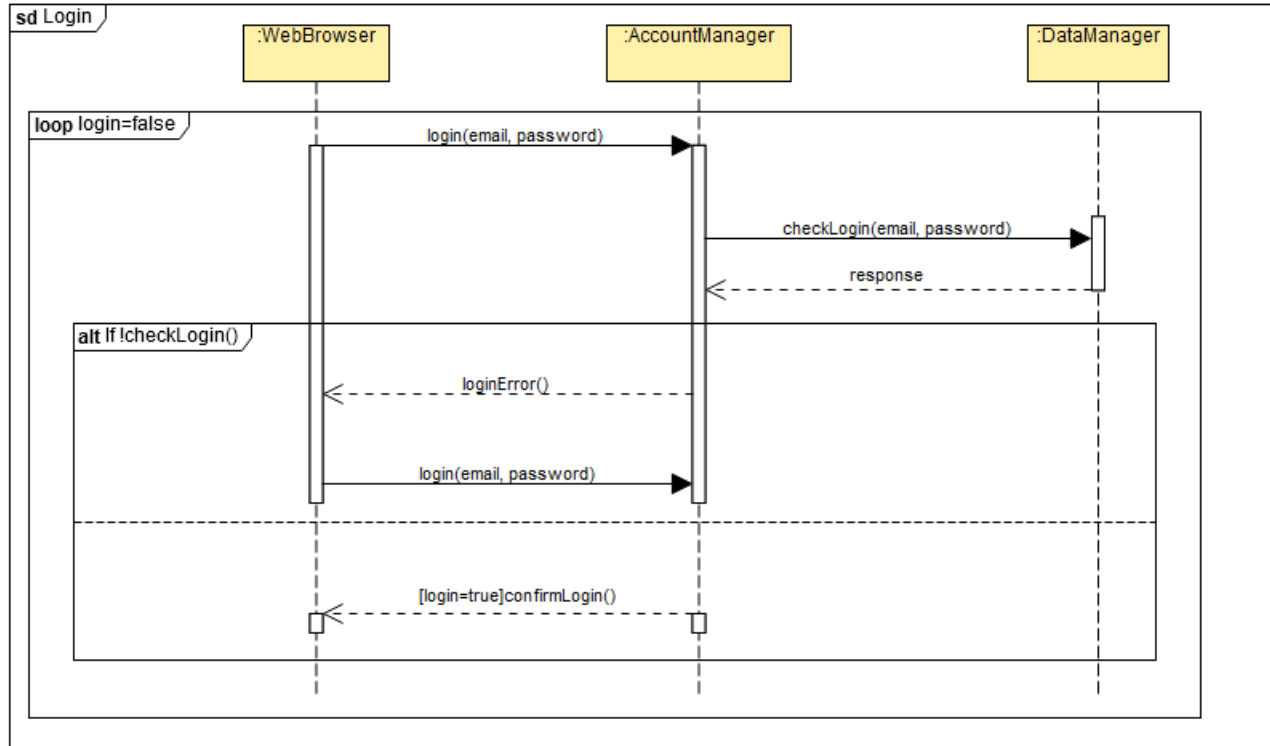


Figure 7: Log In

The Log In phase simply consists in the user action of inserting their email (primary and unique key of the database) and password in the login fields, then the system checks if the pair corresponds to an entry in the database. In case of success, the user can log in the system and use its functionalities available for that particular type of account chosen during the Sign Up phase.

View Steering Initiative Reports

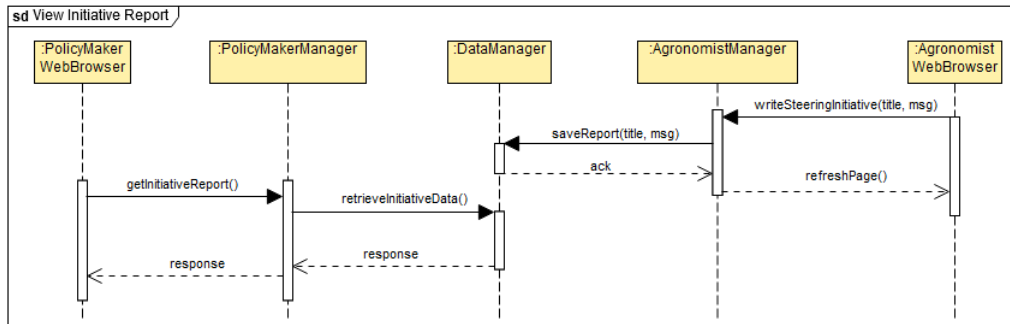


Figure 8: View Initiative Report

This sequence diagram represents the interactions between components that occur when displaying the steering initiatives (previously stored in the database) to a policy maker user.

Check Soil Humidity Data

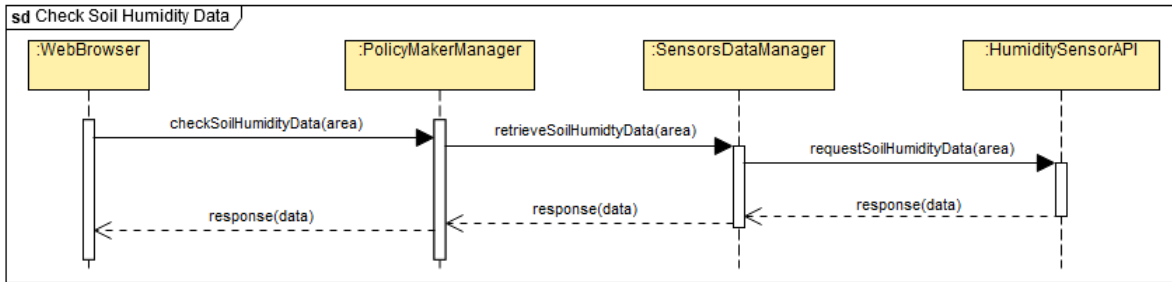


Figure 9: Check Soil Humidity Data

This sequence diagram represents the interactions between components that occur when displaying the sensors data regarding soil humidity to a policy maker user. The business logic running on the Application Server retrieves these data from an external source, furthermore it handles them just temporarily since they are not modified by our system and they're fetched on user demand. The user can also specify the area of the region by using the parameter 'area', so it's simpler to check a specific area instead of the whole region.

Check Water Irrigation Data

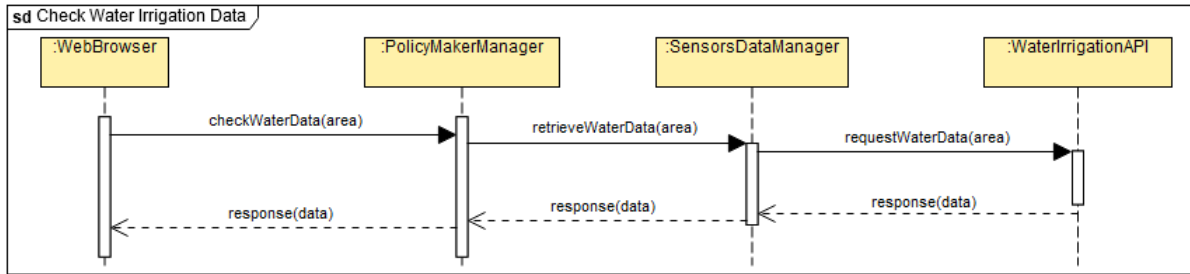


Figure 10: Check Water Irrigation Data

This sequence diagram represents the interactions between components that occur when displaying the sensors data regarding the water irrigation to a policy maker user. The function is the same of the above mentioned case.

View Farmers Ranking

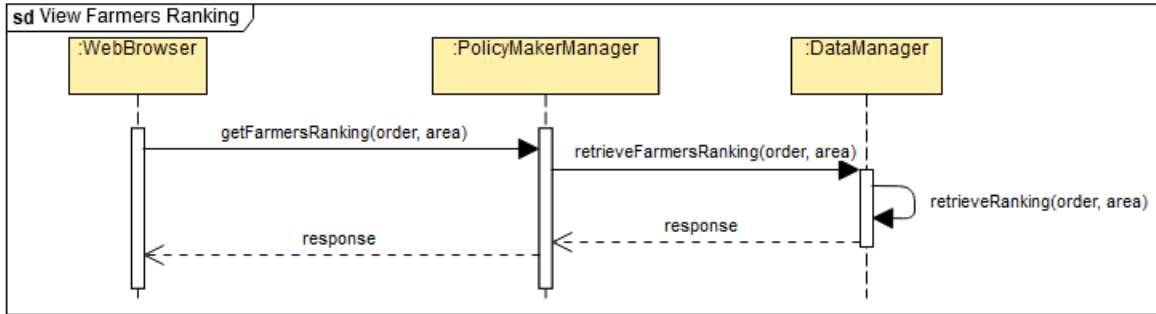


Figure 11: View Farmers Ranking

This sequence diagram represents the interactions between components that occur when displaying the farmers ranking to policy maker and agronomist users. It will be explained better later in the document. The function includes an area parameter to specify which area the user wants the ranking. In order to achieve code reusability, this function is invoked by either policy makers or agronomists. When a policy maker wants to see the ranking the parameter **area** will be set to **all** in order to obtain the ranking comprehensive of all Telangana's farmer registered in the app. Instead, when an agronomist wants to use this functionality, **area** will be automatically taken to his/her respective responsibility area. By doing this, the function becomes more modular.

View Specific Farmers Informations



Figure 12: View Specific Farmer Informations

This sequence diagram represents the interactions between components caused by a search for a specific farmer information summary.

Profile Edit

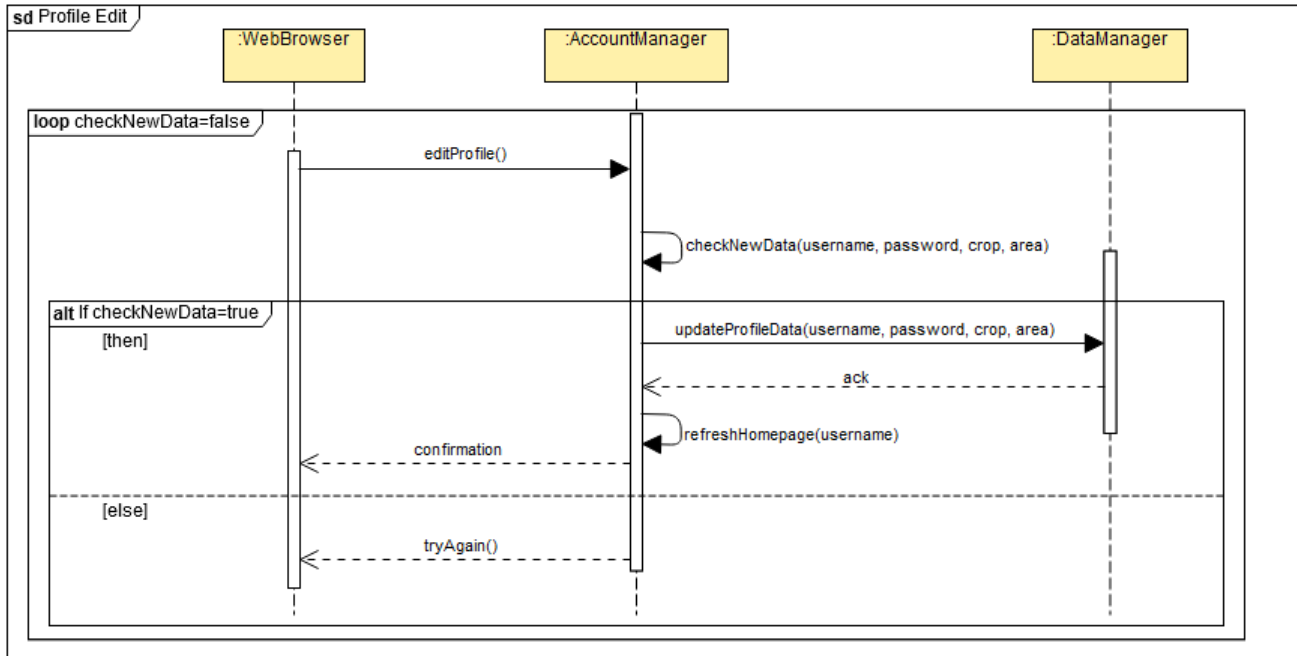


Figure 13: Profile Edit

This sequence diagram represents the interactions between components that occur when users make changes in the profile settings: edit username, password, area or crop type (if they're farmer users).

Insert Production Data

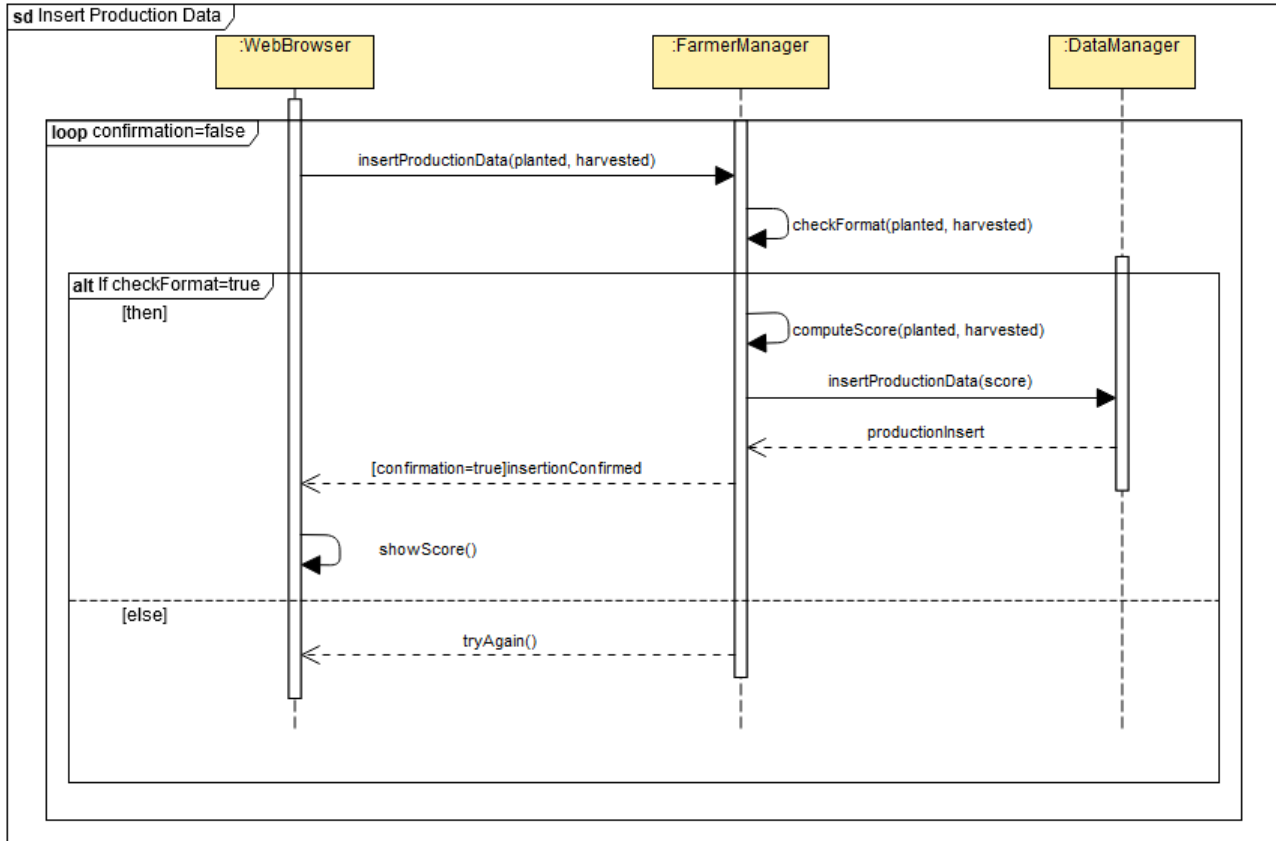


Figure 14: Insert Production Data

This sequence diagram represents the interactions between components caused by an insertion of production data from a farmer user. Each new production entry causes the score associated to the farmer to be calculated again and updated. So the score shall be an attribute of each farmer profile. Since a farmer's rank is directly proportionated to the his/her score, the recomputation can lead to a shifting in the general ranking too.

Check News

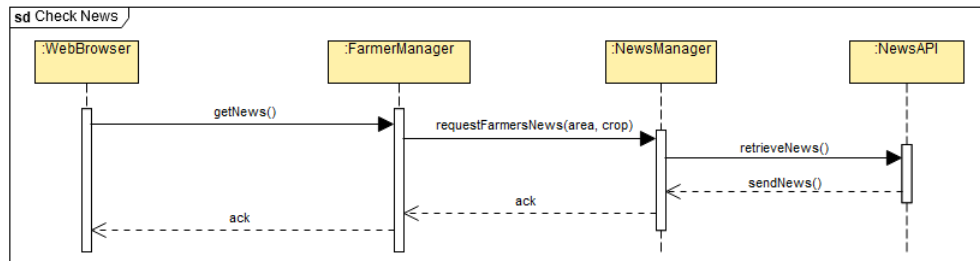


Figure 15: Check News

This sequence diagram represents the interactions between components that occur when displaying the news regarding farmers' interests to them, such as news concerning the same area or crop type of the farmer. The *NewsManager* uses the *NewsAPI* component in order to get always up-to-date news.

Forum

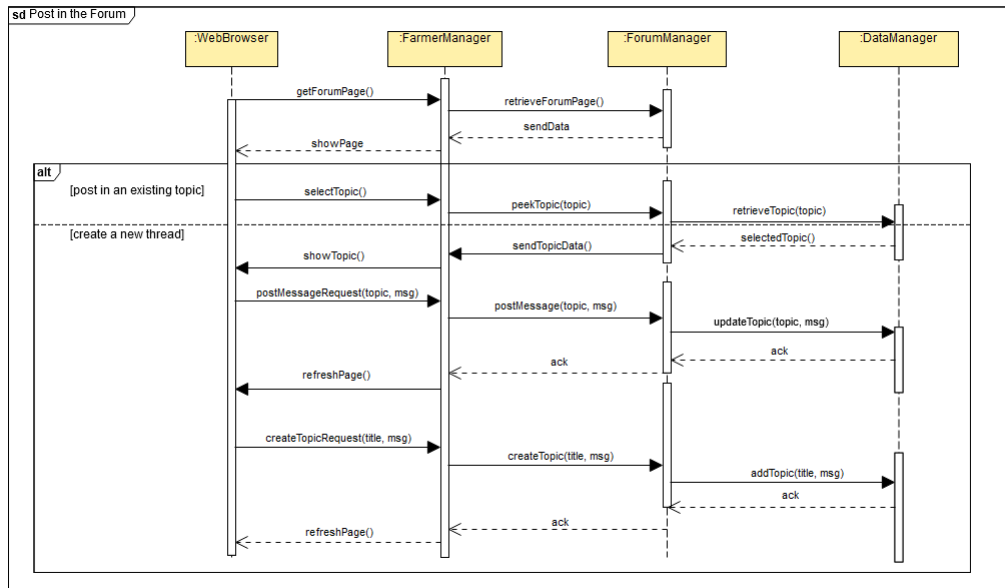


Figure 16: Forum

This sequence diagram represents the interactions between the components of the forum. It is split into two part: the one that allows the user to make a post in an already existing topic and the one that allows the user to create a new topic.

Check Weather Forecast

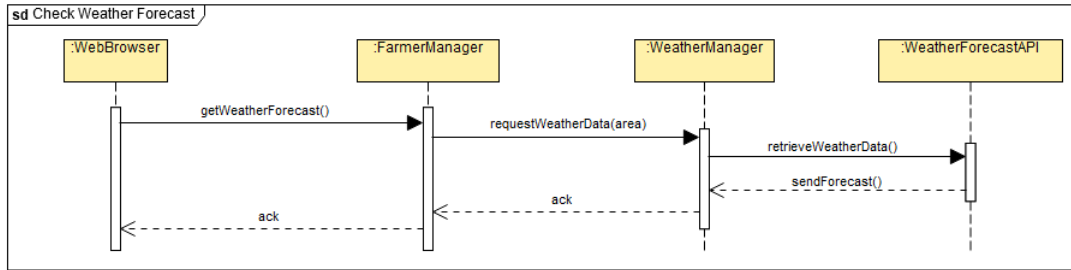


Figure 17: Check Weather Forecast

This sequence diagram represents the interactions between components that occur when displaying the weather forecast to the users. The weather report is tailored to the user area. The *WeatherManager* component uses the *WeatherForecastAPI* component in order to get always up-to-date forecast.

Help Request

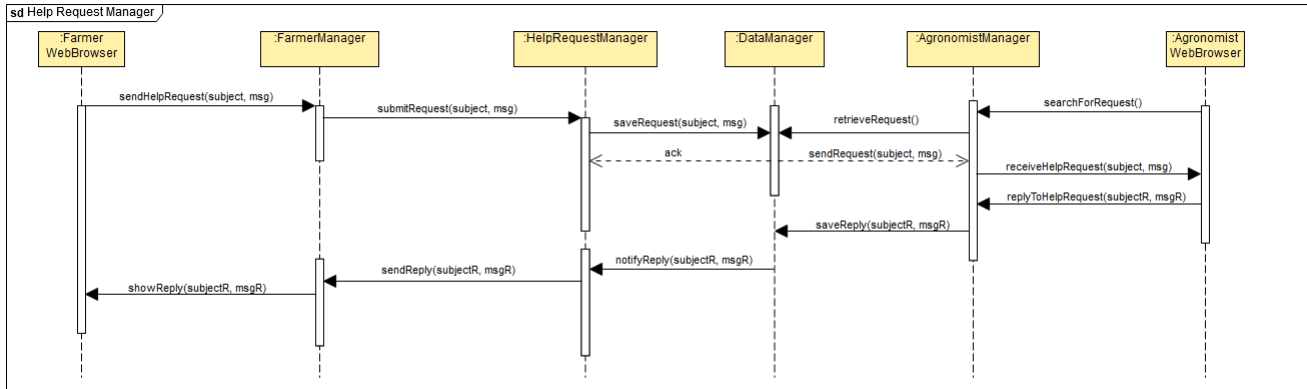


Figure 18: Help Request

This sequence diagram represents the interactions between the components needed to manage the help requests that the farmers send to the agronomists. When a farmer sends an help request the system saves it in the database. When the agronomist is online an automatic script checks if there are some unread messages in the database and sends them to the agronomist. The agronomist replies to the request and saves it into the database. When the farmer is online another automatic script checks if there are some unread replies in the database and displays them to the farmer. Since the exchange is necessarily asynchronous because of the fact that the receiver of the message might be offline in the moment of the delivery, the messages have to be stored on the database and the unread ones have to be fetched each time the user is back online.

Daily Plan Management

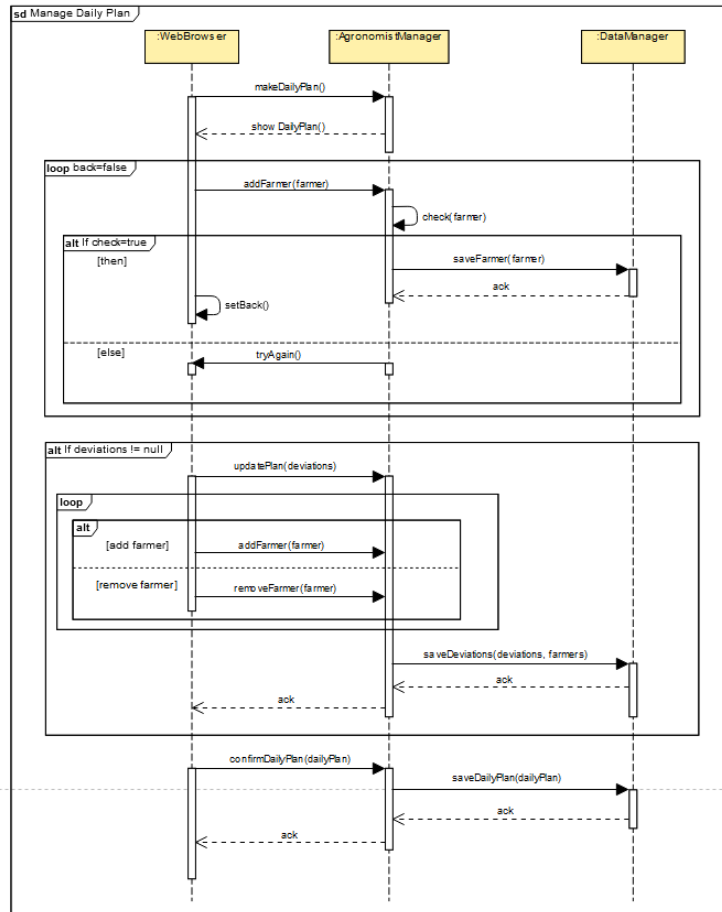


Figure 19: Daily Plan

This sequence diagram represents the interactions between components in managing the daily plan. In the diagram, there are both the creation and the updating of the daily plan.

2.5 Component interfaces

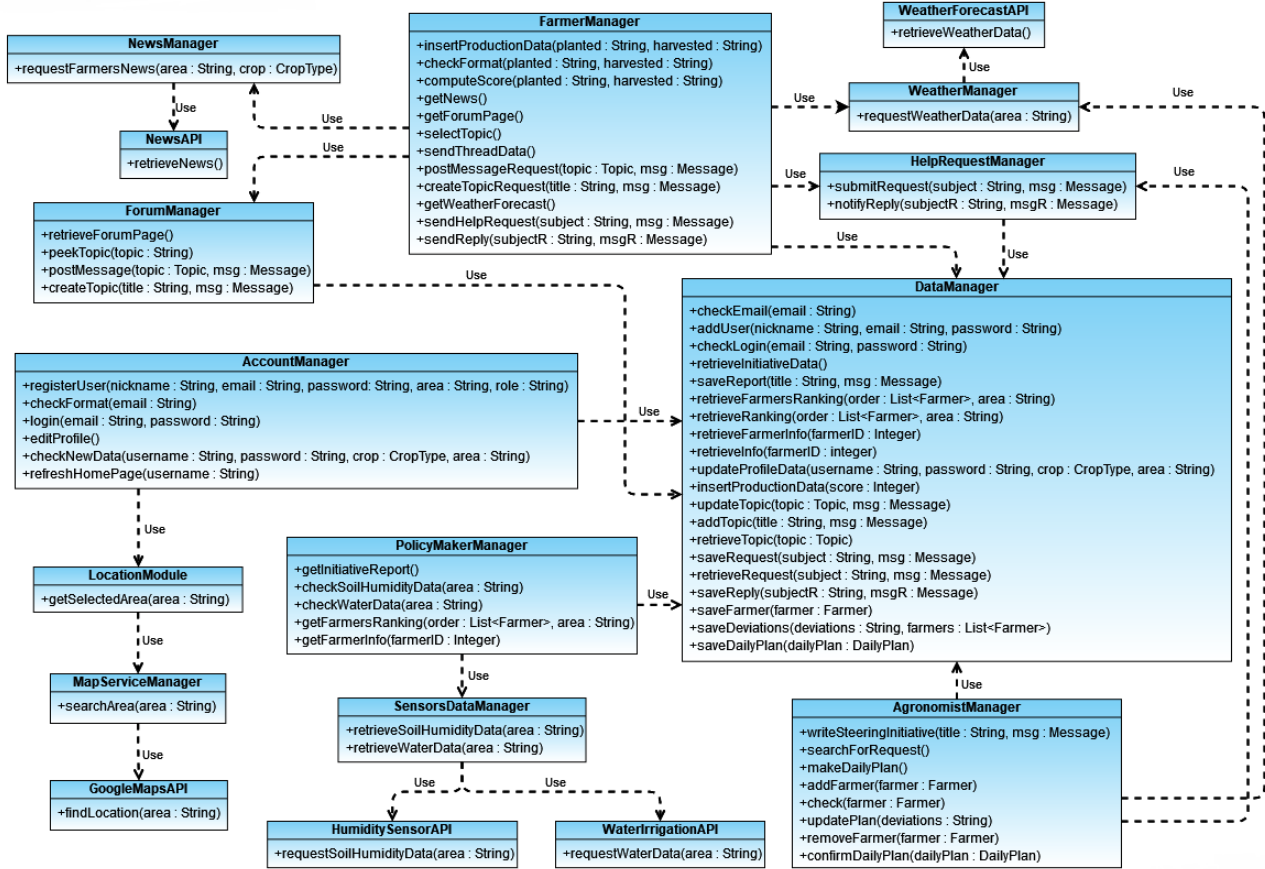


Figure 20: Component Interfaces Diagram

This diagram above describes in detail the interfaces and the corresponding methods offered by each component, it also shows the interaction between them. The diagram refers to the component diagrams in *Figure (3)* and *Figure (4)*. Please note that the methods described in *Figure (20)* don't represent exactly the final version that will be used during the implementation, they just provide a logical representation.

2.6 Selected architectural styles and patterns

- **Four tier architecture**

This kind of architecture divides the system in four different modules: client, presentation, applications and data tier. As described in the previous sections, the architecture is based on this architectural style.

- **Thin client**

The thin client approach increases performance and security since that every piece of data are not stored locally but in a centralized server.

- **Scalability**

A four tiers application guarantee that the scaling approach architecture is adopted only for the most critical components. The result obtained maximize the performances but also minimize the costs.

- **Model View Controller**

Model View Controller [1] (MVC) is a software design pattern used for developing user interfaces that divides the program logic into three interconnected elements. This separate internal information representations from the ways they're presented to and accepted from the user. These three components are:

- Model: the central component of the pattern. It is the application's dynamic data structure, independent of the user interface. It directly manages the data, logic and rules of the application.
- View: The view defines how the app's data should be displayed.
- Controller: it contains logic that updates the model and/or view in response to input from the users of the app.

2.7 Other design decisions

2.7.1 Servers availability and response time

In order to guarantee the availability of 99.998% promised in the RASD, replicas of the web servers and the application servers are needed, this prevents the system to crash in case of a point failure. The response time described in the RASD is 0.5 seconds, the load balancer will allow to reach this goal by distributing the incoming requests from users among the replicas. The database server is replicated as well for the same reasons. So that, in case of failure the system can continue to work, thanks to the distributed nature of the system.

Furthermore, in case of failure of the whole system, the status can be restored thanks to backups. So a backup routine has to be planned. Periodically, in an automated way, the system shall performs a backup of the system and replaces the older copy with it.

2.7.2 Farmers ranking

How to compute the score on which the farmer ranking will be based is a complex choice to make. In fact, the ranking system has been thought as an aid for policy makers and agronomists to understand how the farmers are performing. However, there are multiple factors that play a role in a farmer's performance, some of them not even immediately recognisable. Plus DREAM should highlight the climate resilience aspects, which is not a trivial task.

For the first version of the app, the following formula is proposed in order to achieve a fair and scientific way to compute the score associated to each farmer.

$$score = \frac{harvested\ qty}{sown\ qty} \cdot \left(1 + \frac{hostile\ weather\ days}{365}\right) \quad (1)$$

The formula can be broken down into two factors, η and δ :

$$\eta = \frac{harvested\ qty}{sown\ qty} \quad (2)$$

$$\delta = 1 + \frac{hostile\ weather\ days}{365} \quad (3)$$

η is the main term that represents the productivity of a farmer, that is how efficient he/she has been given the quantity of sown seeds (in kilograms) and the return in harvested crop (in kilograms).

Whereas δ weighs up the harshness of the climate conditions endured by the farmer in the last year. The variable *hostile weather days* is a counter of the days in which the climate has not been very lenient in the farm's region and could have ruined the plantation. Days are considered "hostile weather days" in case the amount of rain fallen during that day has been greater than 115.60 mm/hour (so in condition of very heavy rainfall or worse), particularly expected during monsoon seasons; as well as strong heat waves and prolonged periods of drought. Also specific crop disease that might have afflicted the region for a certain time during the year may be considered as challenging days to take in consideration. However, at the time of this document, just rainfalls data are available for the DREAM app, so only heavy rain days will be taken into account in computing the δ parameter.

The role of δ is to favor farmers that have been particularly hitten by climatic problems but still have managed to produce, since this demonstrate that they've been able to carry out usefull practices that helped them staying productive despite the natural adversities.

The data used to calculate the score is all the one collected in the 12 months prior the computation. The score is worked out at the end of each week, and the ranking is directly proportional to it. If farmers obtain the same score, they are going to be ranked in the same position as well.

2.7.3 Farmers location

In order to locate a farm the user has two options:

- Address: farm can be located through the address inserted by the user at the beginning. The address is verified by the *LocationModule*.
- GPS coordinates: if the address hasn't been inserted by the user or, if the *LocationModule* don't find the address, the user can msnuslly specify the coordinates with the help of the map service.

2.7.4 Agronomist daily plan

Everyday the agronomist has to fills out the daily plan. This can be manually updated and confirmed until the end of the day, otherwise the system

automatically confirms the plan at 23:59 of the same day.

3 User Interface Design

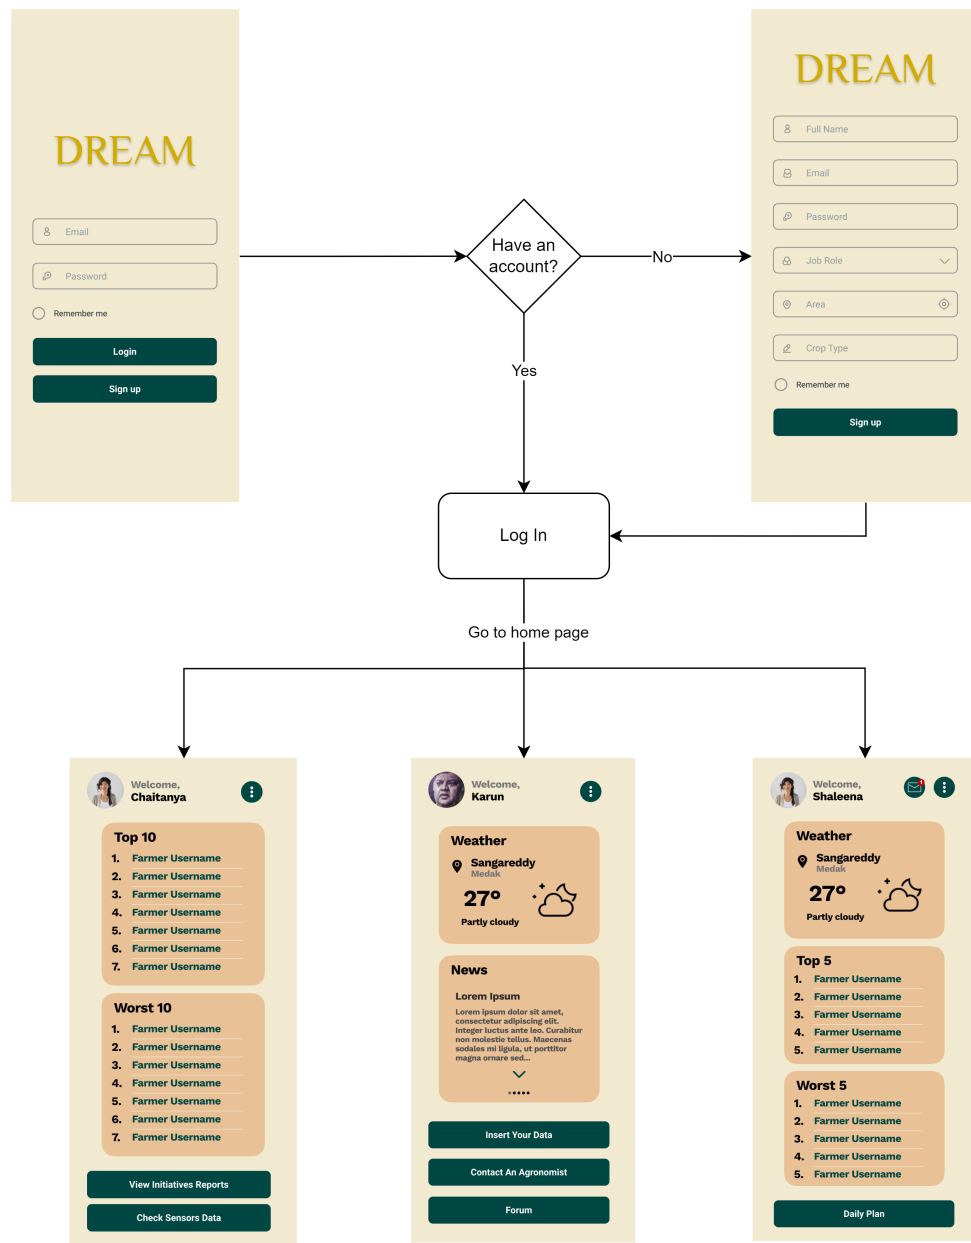


Figure 21: Sign Up and Log In

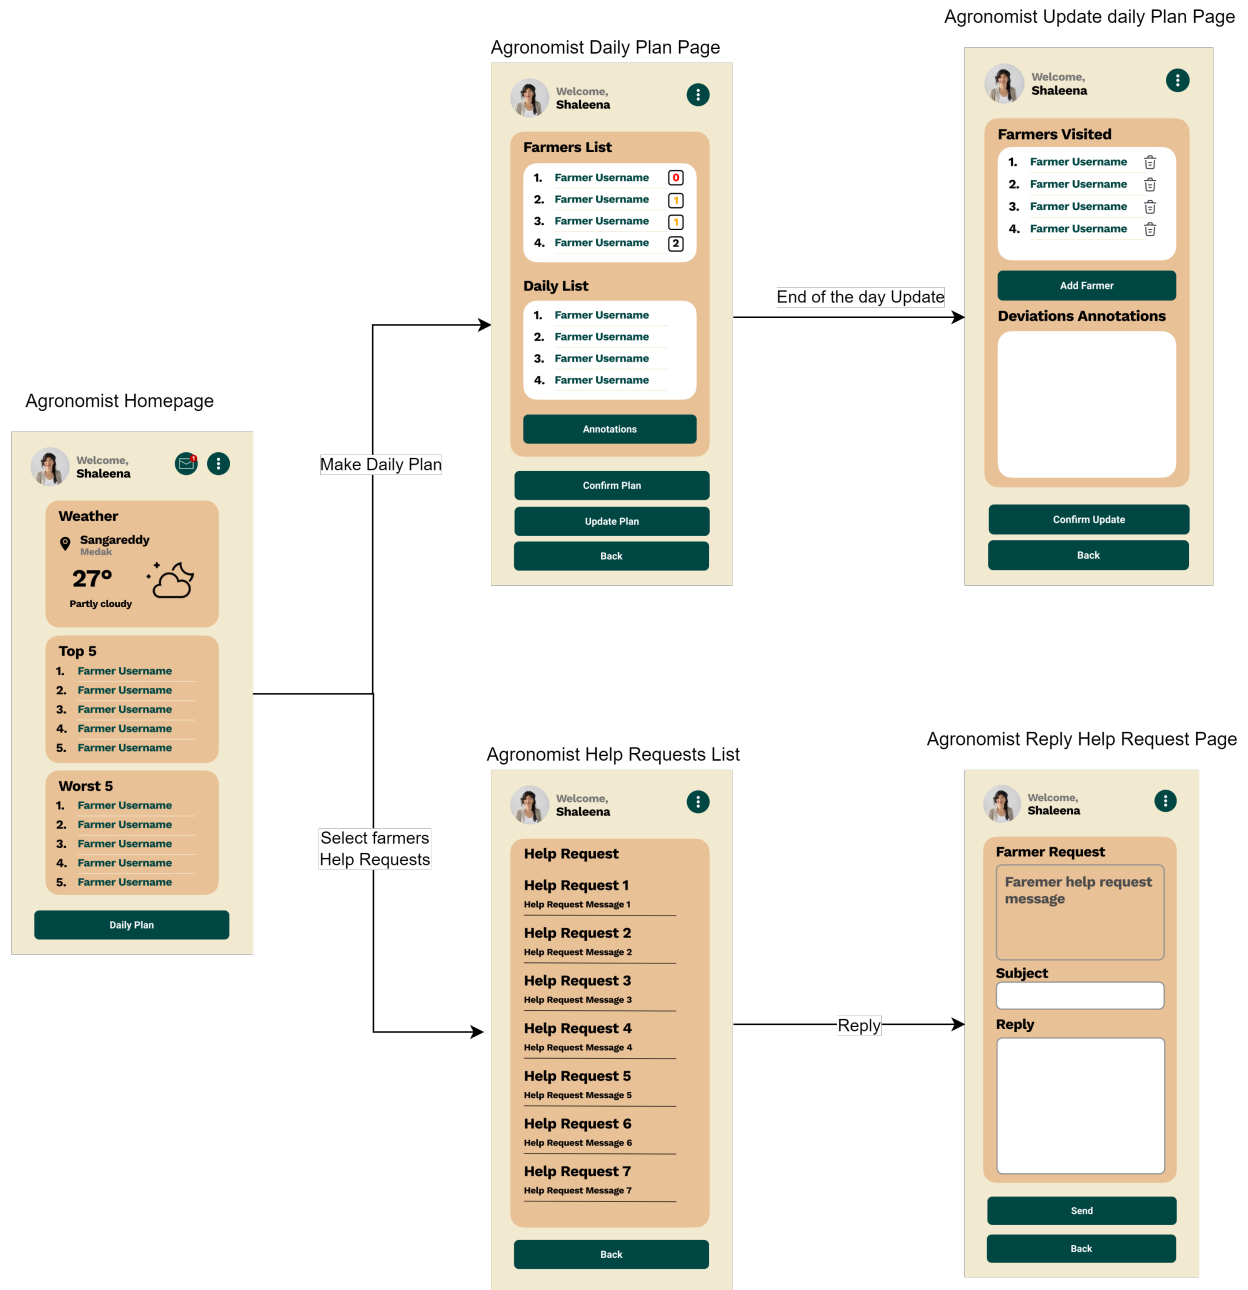


Figure 22: Agronomists Interactions

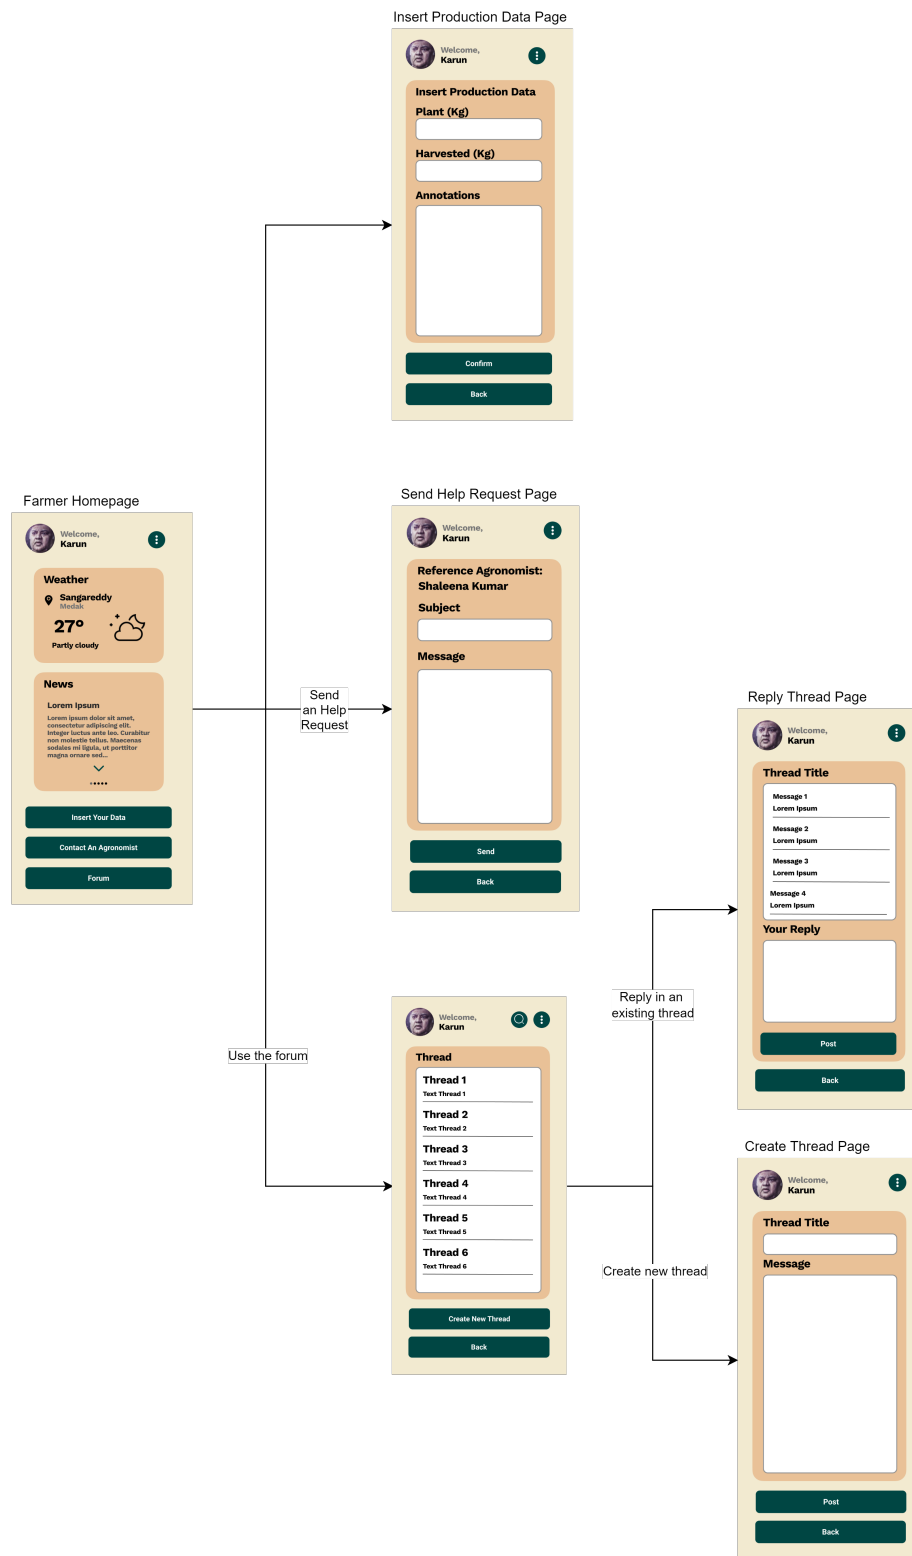


Figure 23: Farmers Interactions

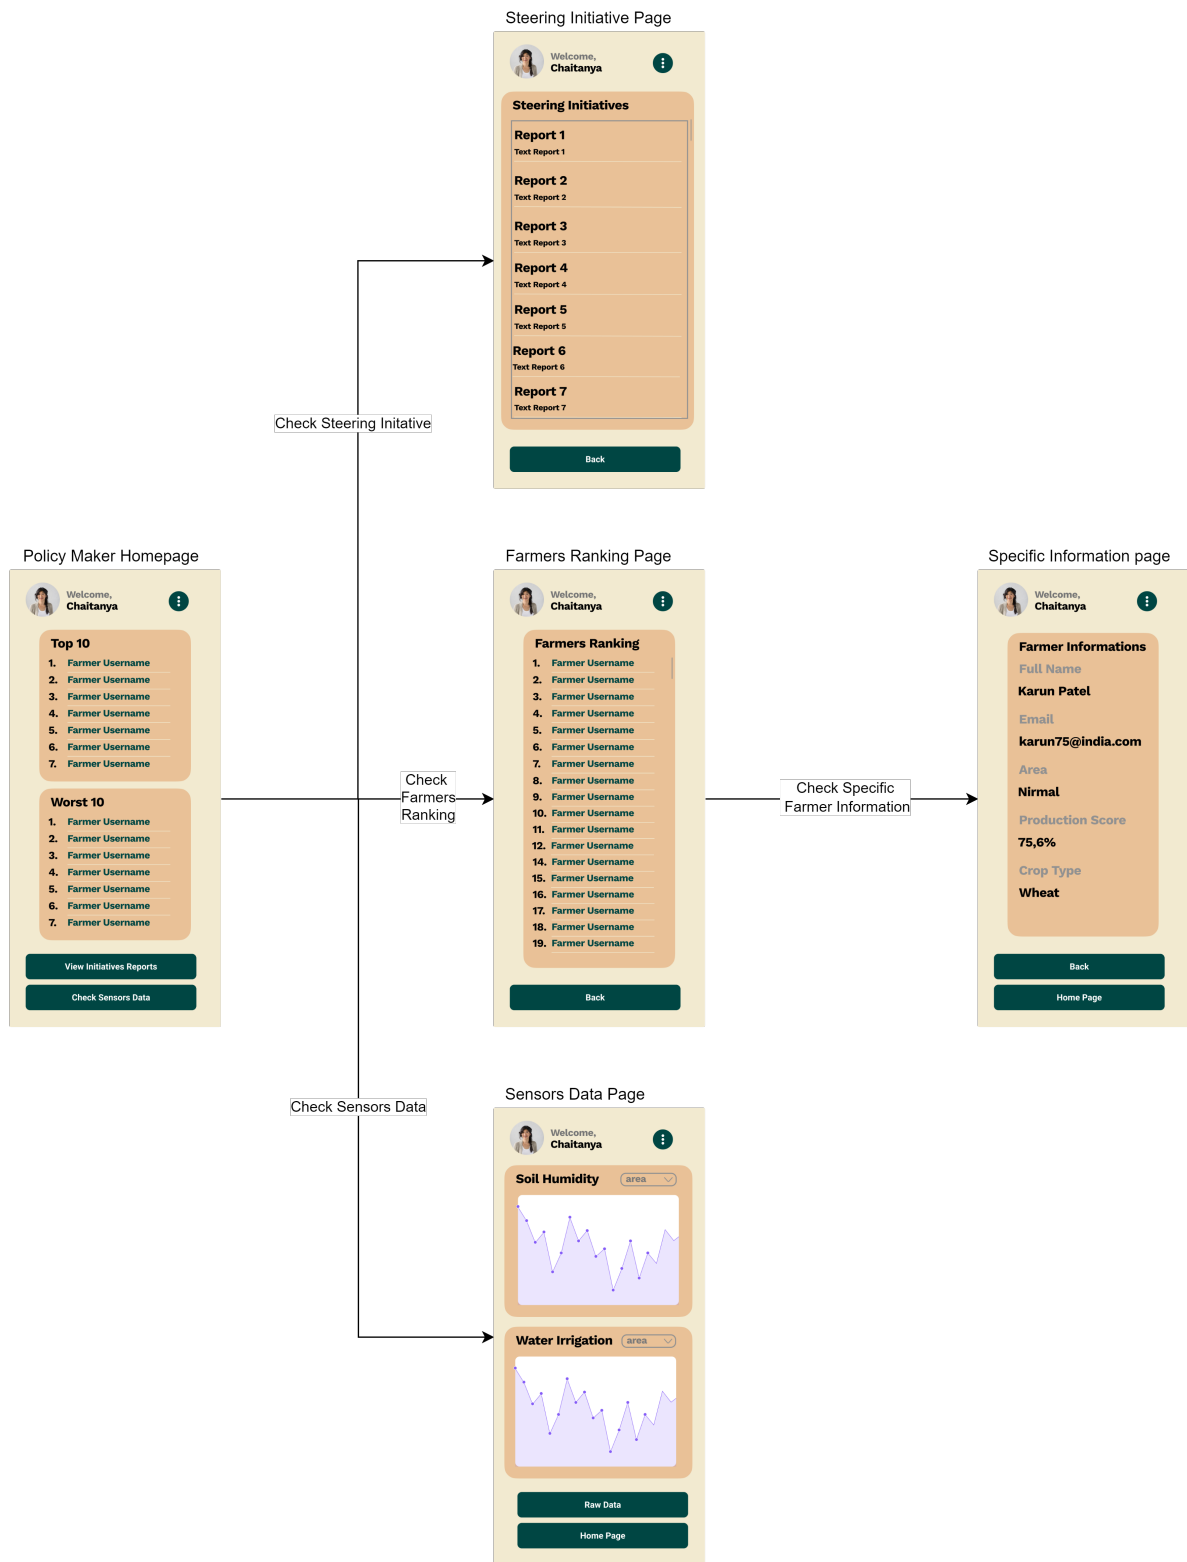


Figure 24: Policy Maker Interactions

4 Requirements Traceability

Requirements	Components
<p>R1) The system must allow only registered and logged-in users to use the app</p> <p>R2) The system shall allow users to be identified by an email of their choosing</p> <p>R3) The system must suggest to the users the area in which they are during the registration phase, if the IT device is equipped with GPS technology. In any case, the final decision will be up to the registering user</p>	<ul style="list-style-type: none">• AccountManager• LocationModule• MapServiceManager
<p>R4) The system must inform the user to try later if they are experimenting connectivity issues</p>	<ul style="list-style-type: none">• AccountManager

<p>R5) The system must allow Policy Makers to see up-to-date statistic data about water irrigation systems and soil humidity sensors</p> <p>R6) The system must allow Policy Makers to retrieve all agronomists' steering initiative reports uploaded to the database</p> <p>R7) The system must give Policy Makers up-to-date ranking of the best and worst performing farmers</p>	<ul style="list-style-type: none"> • PolicyMakerManager <ul style="list-style-type: none"> – WaterIrrigationService – HumiditySensorService – SteeringInitiativeService – RankingService • DataManager • SensorsDataManager • RankingManager
<p>R8) The system must use a fair and scientific score to rank the Farmers in order to represent the real situation</p>	<ul style="list-style-type: none"> • RankingManager
<p>R9) The system must let Farmers insert their production information every day</p>	<ul style="list-style-type: none"> • FarmerManager <ul style="list-style-type: none"> – ProductionService • DataManager

<p>R10) The system must provide the contact of the agronomist appointed to the area of the farmer requesting professional help</p>	<ul style="list-style-type: none"> • FarmerManager <ul style="list-style-type: none"> – AskRequestService • AgronomistManager • DataManager • HelpRequestManager
<p>R11) The system must allow every user registered as Farmer to access the forum, to create new discussions and to post replies to already existing ones</p>	<ul style="list-style-type: none"> • FarmerManager <ul style="list-style-type: none"> – ForumService • ForumManager • DataManager
<p>R12) The system must notify agronomists of unresolved requests of help from Farmers</p>	<ul style="list-style-type: none"> • AgronomistManager <ul style="list-style-type: none"> – AnswerRequestService • HelpRequestManager

<p>R13) The system must allow the agronomists to add a new schedule for the day each day</p> <p>R14) The system must suggest to the agronomists which farms to visit while planning the daily plan based upon the last visit day following a FIFO policy</p> <p>R15) The system must suggest to the agronomists only the farms among the ones in their competence area</p> <p>R16) The system must allow the Agronomists to update their schedule during the day and to confirm the execution before the end of the day</p> <p>R17) The system must register the already uploaded schedule as definitive if the user doesn't confirm the daily plan for day x before 23:59 of the day x</p>	<ul style="list-style-type: none"> • AgronomistManager <ul style="list-style-type: none"> – DailyPlanService
<p>R18) The system must give Agronomists up-to-date ranking of the best and worst performing farmers in their responsibility area</p>	<ul style="list-style-type: none"> • RankingManager • AgronomistManager <ul style="list-style-type: none"> – RankingService

R19) The system must show weather forecasts relevant to the area concerning the Farmer or the agronomist	<ul style="list-style-type: none"> • WeatherManager • FarmerManager • AgronomistManager
R20) The system must present news concerning crop only if relevant to the Farmer's own crop type	<ul style="list-style-type: none"> • FarmerManager • NewsManager

Here, we present a summary of the table above for a more immediate visualization.

AccountManager:	AcM
LocationModule:	LM
MapServiceManager:	MSM
PolicyMakerManager:	PMM
AgronomistManager:	AgM
FarmerManager:	FaM
ForumManager:	FoM
DataManager:	DM
HelpRequestManager:	HRM
RankingManager	RM
NewsManager:	NM
WeatherManager:	WM
SensorsDataManager:	SDM

Table 2: Components' legend

	AcM	LM	MSM	PMM	AgM	FaM	FoM	DM	HRM	RM	NM	WM	SDM
R1	x	x	x										
R2	x	x	x										
R3	x	x	x										
R4	x												
R5				x				x					x
R6				x				x					x
R7				x				x					x
R8								x					
R9						x		x					
R10					x	x		x	x				
R11						x	x	x					
R12					x				x				
R13					x								
R14					x								
R15					x								
R16					x								
R17					x								
R18					x					x			
R19					x	x						x	
R20						x					x		

Table 3: Component and requirement mapping

5 Implementation, Integration and Test Plan

6 Effort Spent

Student	Time for S.1	S.2	S.3	S.4	S.5
Ottavia Belotti	1h	2h	2h	2h	?
Alessio Braccini	2h	8h	8h	?	?
Riccardo Izzo	2h	11h	1h	?	?

7 References

References

- [1] MDN Web Docs Glossary: Definitions of Web-related terms -> MVC
<https://developer.mozilla.org/en-US/docs/Glossary/MVC>