


altis teknoloji

pursuing perfection with you

Avery Dennison AD-163u8 UHF RFID Inlay

Slender 60 × 4 mm Gen2 UHF RFID inlay with NXP UCODE 8 featuring Self Adjust technology. Achieves up to 7 m read distance on high-dielectric materials including glass, plastics and near-liquid. Ideal for beauty & personal care and pharmaceutical tagging.

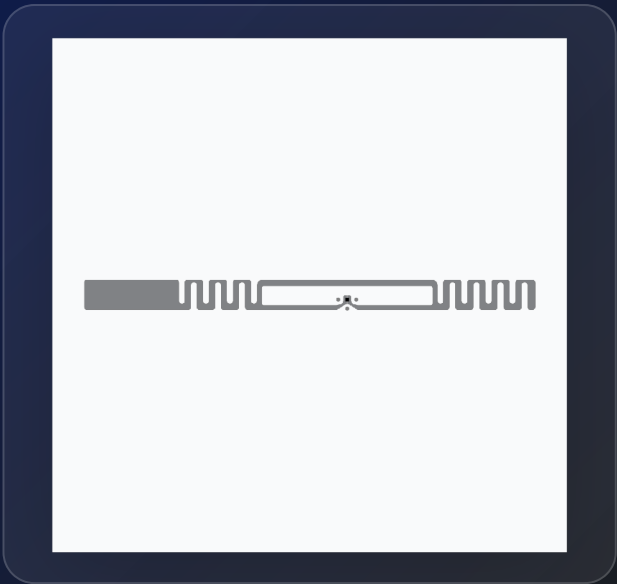

RFID SPECIFICATION

Chip	NXP UCODE 8
Standard	ISO/IEC 18000-63 Type C
Frequency Band	UHF 860–960 MHz
EPC Memory	128-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
Certificate	ARC (RFID Lab, Auburn University)
RoHS	EU Directive 2011/65/EU and 2015/863 Compliant

PHYSICAL SPECIFICATION

Antenna Dimensions	60 × 4 mm / 2.36 × 0.16 in
Dry Inlay (RF601236)	PET substrate — 20,000 pcs/reel — pitch 15.88 mm
Wet Inlay (RF601235)	64 × 6 mm die-cut — PET substrate — 20,000 pcs/reel
Label / Sticker (RF100479)	64 × 6 mm — White BOPP face sheet — 7,008 pcs/reel
Web Width	70.4 mm / 3 in
Core Size	76 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- NXP UCODE 8 with Self Adjust feature for challenging environments
- 128-bit EPC memory and 48-bit unique serialized TID number
- Up to 7 m read distance on glass, plastics and near-liquid
- Slender 60 × 4 mm antenna – ideal for small retail items
- Available in dry inlay, wet inlay and label / sticker formats
- ARC accredited quality by RFID Lab at Auburn University
- RoHS compliant – EU Directive 2011/65/EU and 2015/863

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay