

Satellite Orbit Control

HW3

Almog Dobrescu

ID 214254252

December 19, 2024

Contents

1	Given	2
1.1	Desired	2
1.2	Limitations	2
2	The CW equations	2
2.1	x-y	2
2.2	z	2
2.3	x-y-z	3
3	case A	4
4	case B	7

List of Figures

1	3D figure of the orbit trajectory	5
2	2D figure of the position over time	5
3	Thrust acceleration components and total thrust acceleration over time . . .	6
4	Total Δv over time	6

1 Given

$$\begin{aligned} T_1 &= 100 [\text{min}] = 6 \cdot 10^3 [\text{sec}] & T_2 &= T_1 = 6 \cdot 10^3 [\text{sec}] \\ e_1 &= 0 & e_2 &= 0 \\ a_1 &= \sqrt[3]{\frac{\mu T_1^2}{4\pi^2}} = 7.1366 \cdot 10^3 [\text{km}] & a_2 &= a_1 = 7.1366 \cdot 10^3 [\text{km}] \\ \alpha &= \Delta i = 0.01^\circ \end{aligned}$$

In CW frame with origin at Satellite #1 and at $t = 0$:

$$\begin{pmatrix} x_2(0) = 0 \\ y_2(0) = -1 \\ z_2(0) = 1 \end{pmatrix} [\text{km}] \quad \begin{pmatrix} \dot{x}_2(0) = 0 \\ \dot{y}_2(0) = 0 \\ \dot{z}_2(0) = -0.74267 \cdot n \end{pmatrix} \begin{bmatrix} \text{km} \\ \text{sec} \end{bmatrix}$$

1.1 Desired

$$\begin{pmatrix} x_2(t_f) = 0 \\ y_2(t_f) = 0 \\ z_2(t_f) = 0 \end{pmatrix} \quad \begin{pmatrix} \dot{x}_2(t_f) = 0 \\ \dot{y}_2(t_f) = 0 \\ \dot{z}_2(t_f) = 0 \end{pmatrix}$$

1.2 Limitations

The engine can't create thrust in the x direction and:

$$a_{\max} = 8 \cdot 10^{-6} \begin{bmatrix} \text{km} \\ \text{sec}^2 \end{bmatrix}$$

2 The CW equations

$$\begin{cases} \ddot{x} - 2n\dot{y} - 3n^2x = f_x \\ \ddot{y} + 2n\dot{x} = f_y \\ \ddot{z} + n^2z = f_z \end{cases} \quad (1)$$

2.1 x-y

$$\vec{x} = \begin{pmatrix} x \\ \dot{x} \\ y \\ \dot{y} \end{pmatrix} \quad (2)$$

$$\dot{\vec{x}} = F\vec{x} + G\vec{f} \quad (3)$$

Where:

$$F = \begin{pmatrix} 0 & 1 & 0 & 0 \\ 3n^2 & 0 & 0 & 2n \\ 0 & 0 & 0 & 1 \\ 0 & -2n & 0 & 0 \end{pmatrix} \quad G = \begin{pmatrix} 0 & 0 \\ 1 & 0 \\ 0 & 0 \\ 0 & 1 \end{pmatrix} \quad \vec{f} = \begin{pmatrix} f_x \\ f_y \end{pmatrix} \quad (4)$$

2.2 z

$$\vec{x} = \begin{pmatrix} z \\ \dot{z} \end{pmatrix} \quad (5)$$

$$\dot{\vec{x}} = F\vec{x} + Gf \quad (6)$$

Where:

$$F = \begin{pmatrix} 0 & 1 \\ -n^2 & 0 \end{pmatrix} \quad G = \begin{pmatrix} 0 \\ 1 \end{pmatrix} \quad f = (f_z) \quad (7)$$

2.3 x-y-z

The equations of motion in state space form are therefor:

$$\vec{x} = \begin{pmatrix} x \\ \dot{x} \\ y \\ \dot{y} \\ z \\ \dot{z} \end{pmatrix} \quad (8)$$

$$\dot{\vec{x}} = F\vec{x} + G\vec{f} \quad (9)$$

Where:

$$F = \begin{pmatrix} 0 & 1 & 0 & 0 & 0 & 0 \\ 3n^2 & 0 & 0 & 2n & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & -2n & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & -n^2 & 0 \end{pmatrix} \quad G = \begin{pmatrix} 0 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 1 \end{pmatrix} \quad f = \begin{pmatrix} f_x \\ f_y \\ f_z \end{pmatrix} \quad (10)$$

3 case A

The desired maneuver time is 2000 [sec]. The desired approach trajectory is a straight line with constant velocity from the initial point to the origin.

From geometric considerations, the required velocity on the straight line is:

$$\dot{\vec{x}}_{req} = \begin{pmatrix} \frac{x_f - x_0}{t_f} \\ \frac{y_f - y_0}{t_f} \\ \frac{z_f - z_0}{t_f} \end{pmatrix} = \begin{pmatrix} 0 \\ 5 \\ -5 \end{pmatrix} \cdot 10^{-4} \left[\frac{\text{km}}{\text{sec}^2} \right] \quad (11)$$

Which mean that the initial pulse:

$$\Delta v_1 = \dot{\vec{x}}_{req} - \dot{\vec{x}}_0 = \begin{pmatrix} 0 \\ 0.5 \\ 0.2777 \end{pmatrix} \cdot 10^{-3} \left[\frac{\text{km}}{\text{sec}^2} \right] \quad (12)$$

and the final pulse:

$$\Delta v_f = \dot{\vec{x}}_f - \dot{\vec{x}}_{req} = \begin{pmatrix} 0 \\ -5 \\ 5 \end{pmatrix} \cdot 10^{-4} \left[\frac{\text{km}}{\text{sec}^2} \right] \quad (13)$$

Since the velocity is constant:

$$\begin{pmatrix} \ddot{x} \\ \ddot{y} \\ \ddot{z} \end{pmatrix} = \vec{0}$$

By substituting the constraints in the CW equations we get:

$$\begin{cases} 0 - 2n\dot{y} = f_x \\ 0 = f_y \\ 0 + n^2 z = f_z \end{cases} \quad (14)$$

$$\vec{a} = \vec{f} = \begin{pmatrix} -2n \cdot 0.5 \cdot 10^{-3} \\ 0 \\ n^2 z \end{pmatrix} \quad (15)$$

Check that the maximum acceleration hasn't been reached:

$$|\vec{a}| = \sqrt{(2n \cdot 0.5 \cdot 10^{-3})^2 + (n^2 z)^2} < \sqrt{(2n \cdot 0.5 \cdot 10^{-3})^2 + (n^2 \cdot 1)^2} \quad (16)$$

$$|\vec{a}| < 1.5163 \cdot 10^{-6} < 8 \cdot 10^{-6} \quad \checkmark$$

By solving this system numerically, we obtain the approach trajectory.

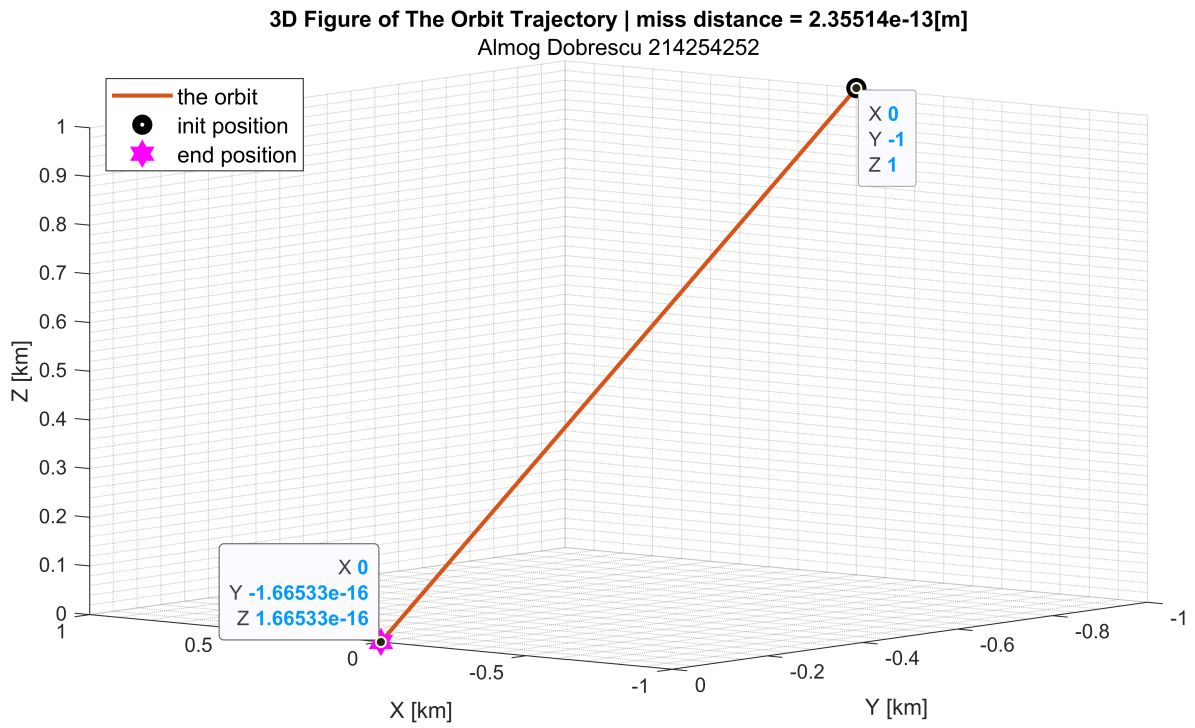


Figure 1: 3D figure of the orbit trajectory

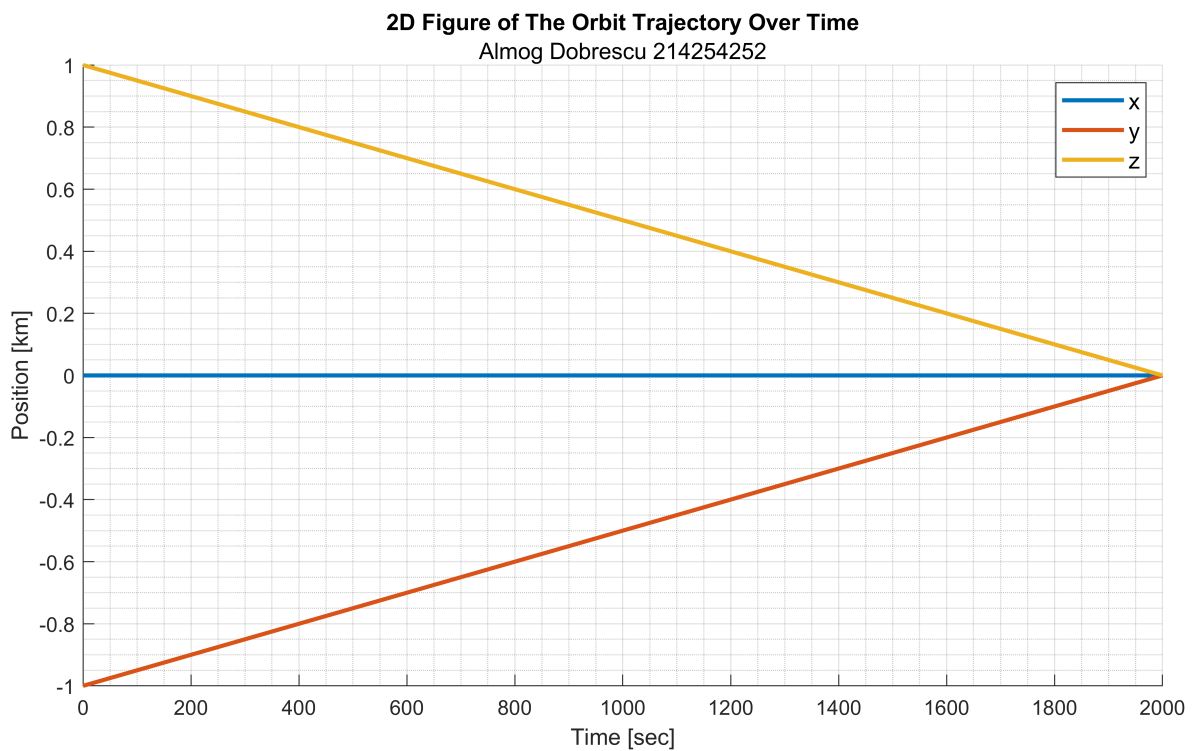


Figure 2: 2D figure of the position over time

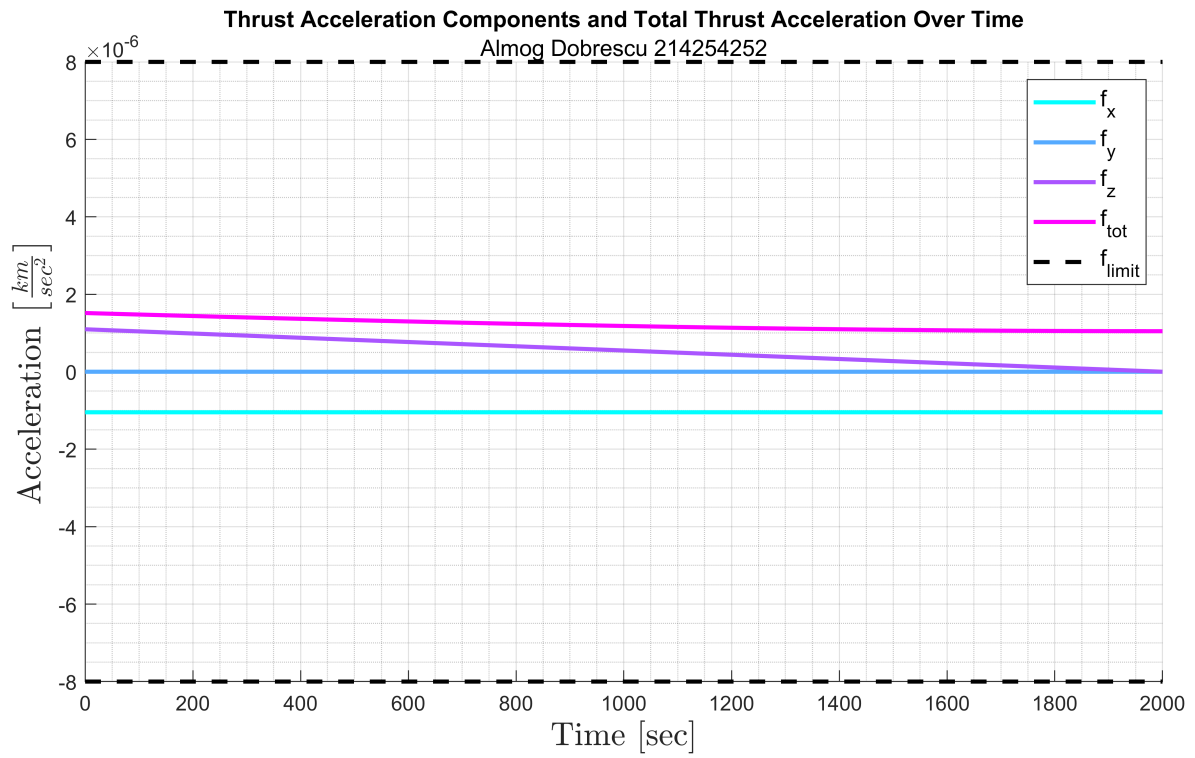
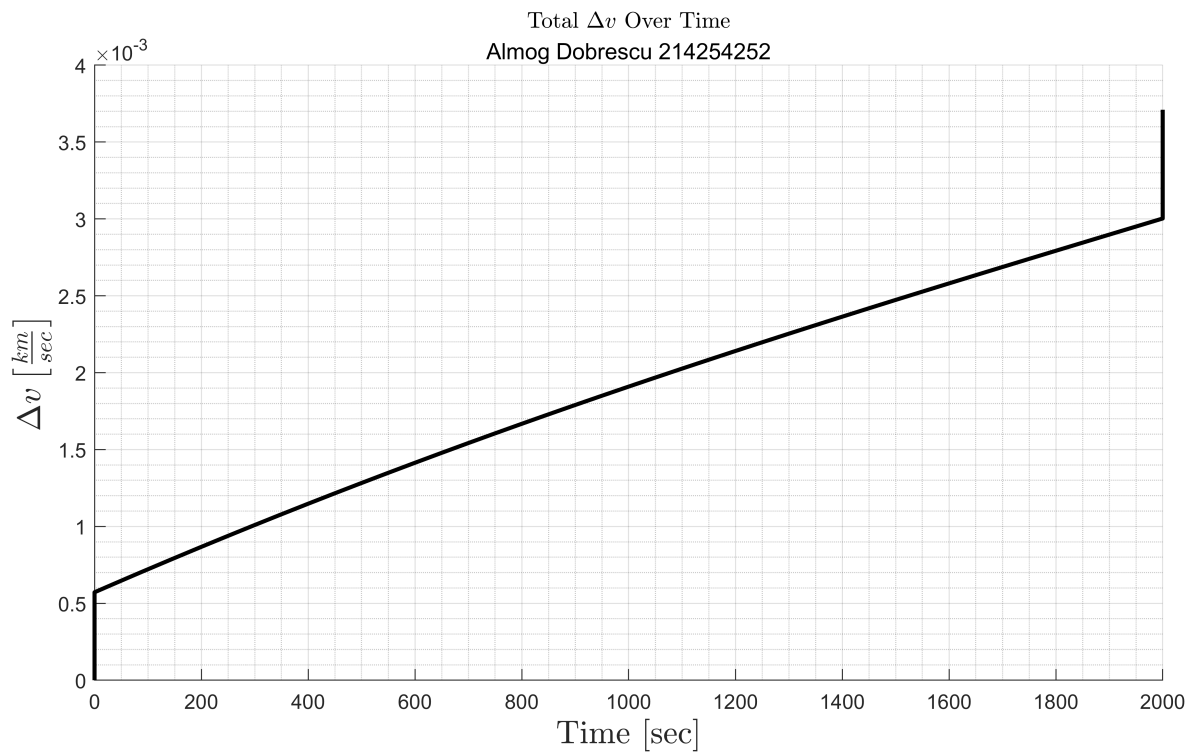


Figure 3: Thrust acceleration components and total thrust acceleration over time

Figure 4: Total Δv over time

4 case B