
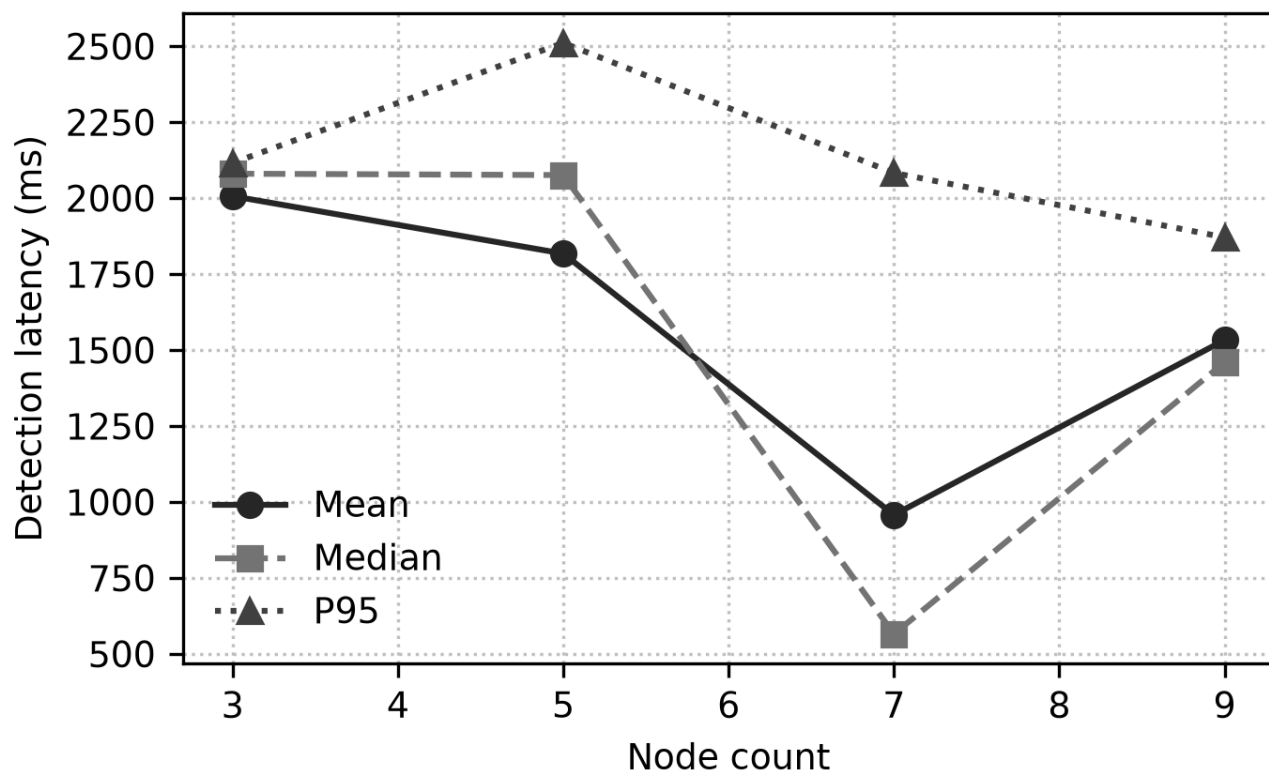



Signed-binding protocol results

Run date: 2026-08-27
Chaincode: arptracker v1.0, seq 1 — Channel: mychannel — Network: Fabric test-network, 2 orgs
Topology: 3 / 5 / 7 / 9 real LAN containers — Trials: 30 per node count, 10 per other stage
E2E spoof detection: PASS — Ledger protection: 100% — Baseline rejection: 10/10

Latency (n=30 per node count)


Nodes	n	Mean	Median	P95	Min	Max	Trials <1000ms	Trials ≥1000ms
3	30	2006.5 ms	2080.5 ms	2109.0 ms	556.0 ms	2209.0 ms	1	29
5	30	1817.5 ms	2076.0 ms	2095.0 ms	381.0 ms	2641.0 ms	2	28
7	30	957.4 ms	565.5 ms	2079.0 ms	208.0 ms	2130.0 ms	19	11
9	30	1532.9 ms	1459.5 ms	1859.0 ms	894.0 ms	2468.0 ms	3	27

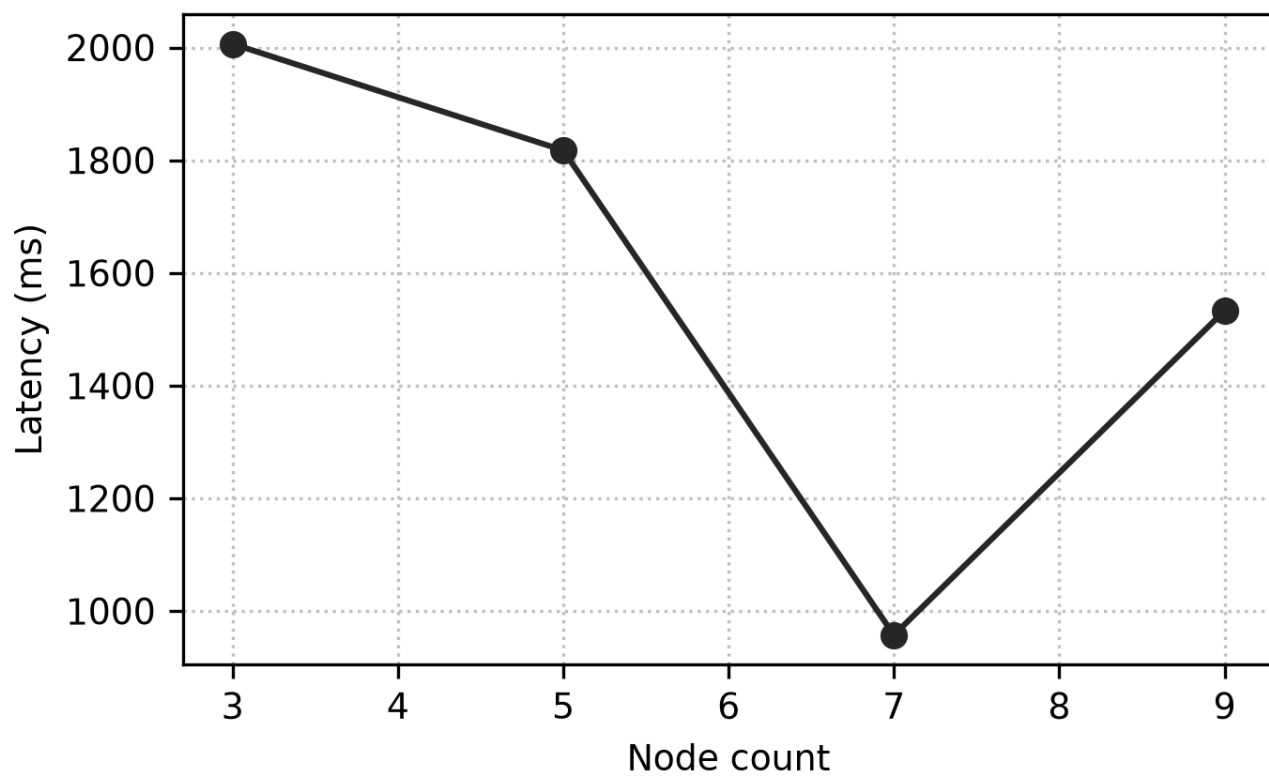

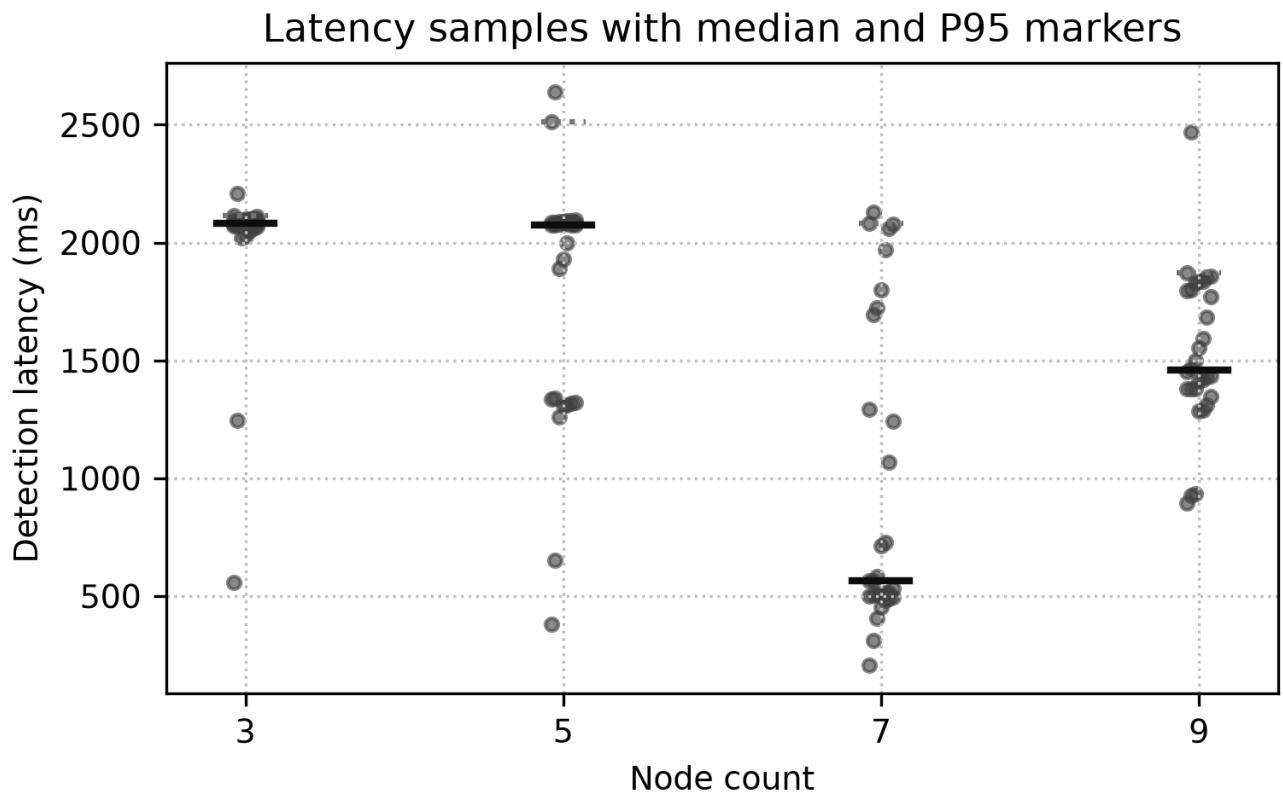


Throughput (n=10 per rate)

Rate/s	Mean	Median	P95	Min	Max
1	1880 ms	2062 ms	2085 ms	377 ms	2088 ms
11	1987 ms	2062 ms	2082 ms	1246 ms	2087 ms
21	2185 ms	2154 ms	2477 ms	1257 ms	2717 ms
31	2262 ms	2104 ms	2496 ms	2062 ms	2735 ms
41	1825 ms	2078 ms	2095 ms	396 ms	2098 ms
51	2202 ms	2079 ms	2462 ms	2066 ms	2563 ms
61	2048 ms	2078 ms	2081 ms	1776 ms	2097 ms
71	2130 ms	2074 ms	2302 ms	2062 ms	2424 ms
81	1993 ms	2072 ms	2090 ms	1252 ms	2097 ms
91	2046 ms	2066 ms	2088 ms	1830 ms	2098 ms

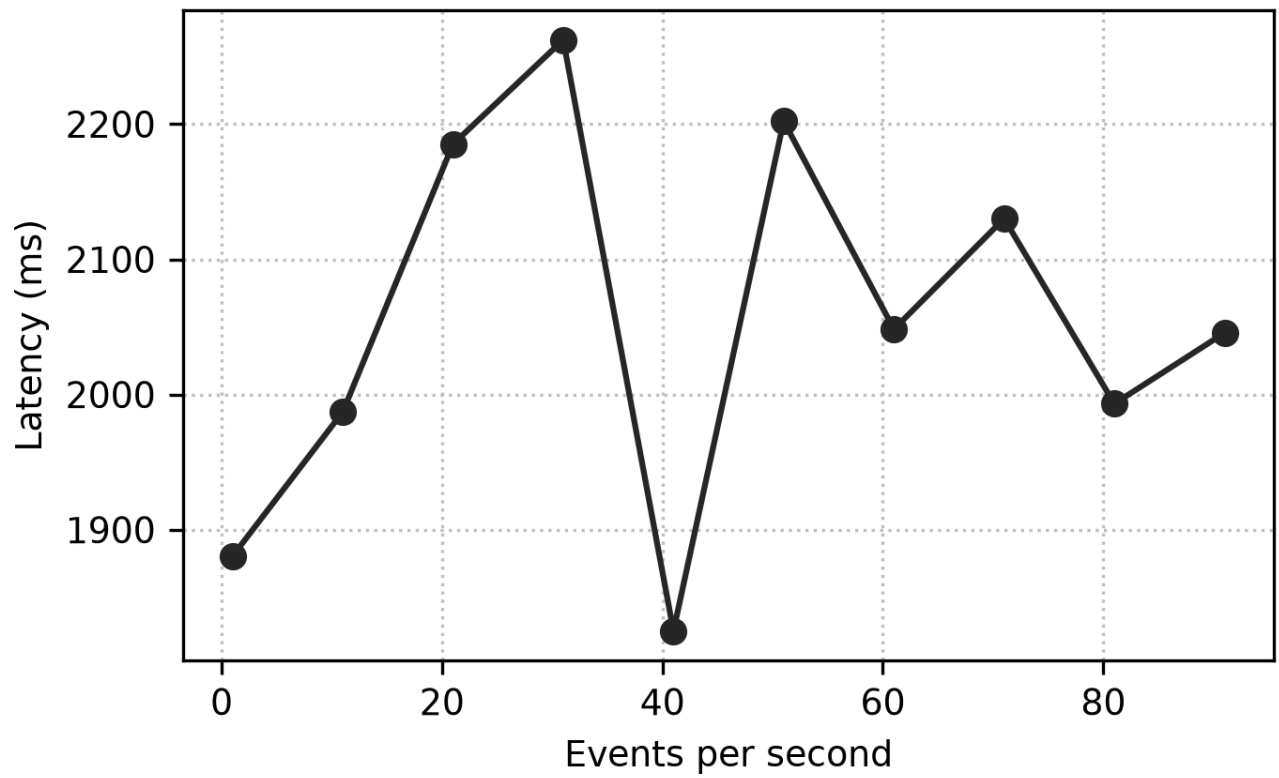

Cold-start (n=10 per size)

Size label	Actual entries	n	Mean install	Median	Min	Max
10	239	10	488.6 ms	488.2 ms	486.4 ms	493.5 ms
50	279	10	568.0 ms	567.8 ms	567.1 ms	569.5 ms
100	329	10	669.9 ms	669.7 ms	668.8 ms	671.8 ms
250	479	10	975.0 ms	974.8 ms	971.8 ms	978.7 ms

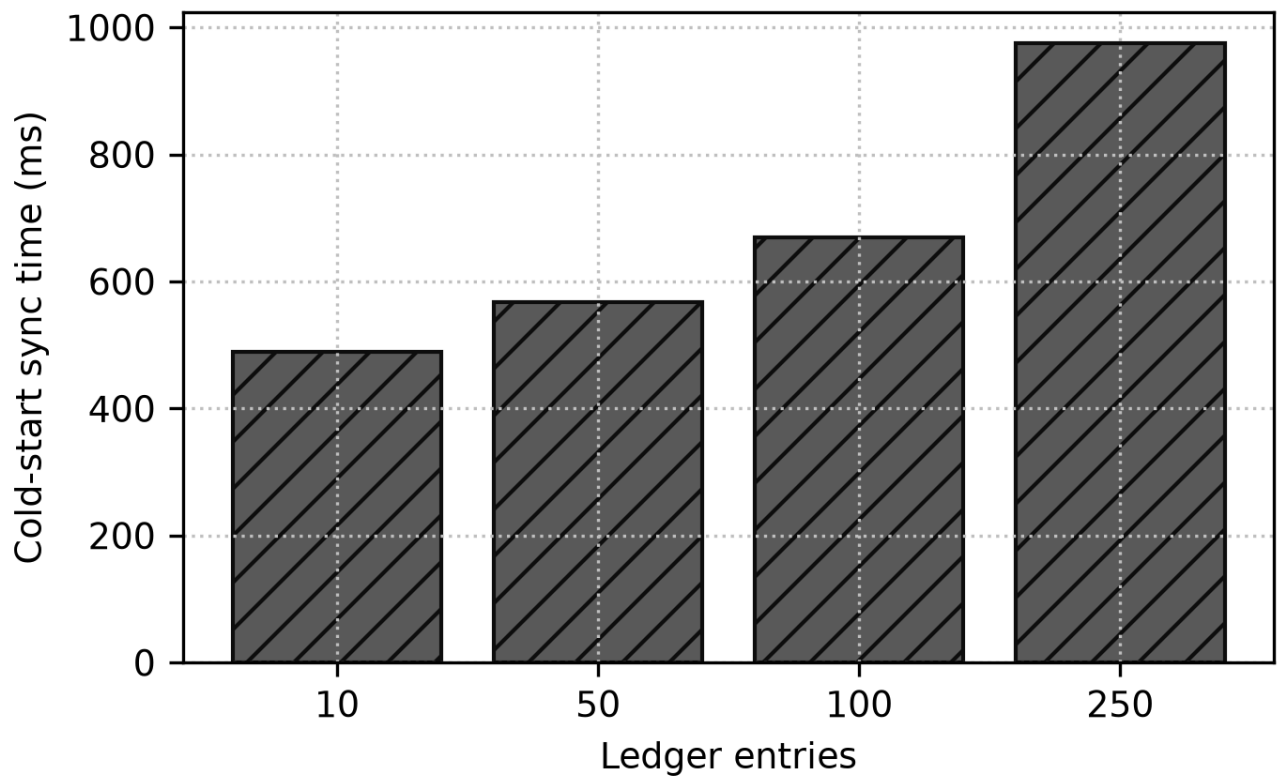

Baseline & protection (n=10)

Mean detection	Median	P95	Rejected
1954 ms	2072 ms	2093 ms	10 / 10

