


DIMENSIONS · MM

Foot-mounted (B3) dimensions

Key sizes for replacing a motor or making a base. Where two values are given, the first is for 2-pole motors and the second for 4-, 6-, 8- and 10-pole. Full drawings for every mounting type are available on request.

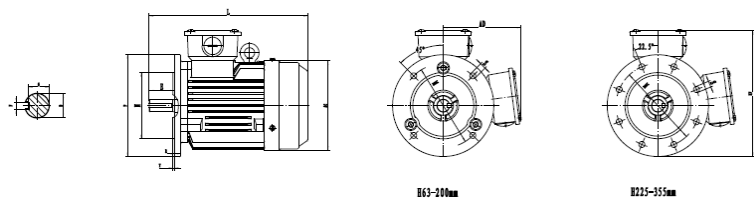

Frame	Shaft height H	Foot holes A × B	Shaft Ø D	Shaft length E	Bolt hole K	Overall length L
63M	63	100 × 80	11	23	7	230
71M	71	112 × 90	14	30	7	255
80M	80	125 × 100	19	40	10	295
90S	90	140 × 100	24	50	10	345
90L	90	140 × 125	24	50	10	385
100L	100	160 × 140	28	60	12	390
112M	112	190 × 140	28	60	12	425–455
132S	132	216 × 140	38	80	12	475
132M	132	216 × 178	38	80	12	510
160M	160	254 × 210	42	110	15	610
160L	160	254 × 254	42	110	15	655
180M	180	279 × 241	48	110	15	680
180L	180	279 × 279	48	110	15	715
200L	200	318 × 305	55	110	19	770
225S	225	356 × 286	60	140	19	795
225M	225	356 × 311	55 / 60	110 / 140	19	800 / 825
250M	250	406 × 349	60 / 65	140	24	890
280S	280	457 × 368	65 / 75	140	24	975
280M	280	457 × 419	65 / 75	140	24	1 025
315S	315	508 × 406	65 / 80	140 / 170	28	1 180 / 1 210
315M	315	508 × 457	65 / 80	140 / 170	28	1 215 / 1 245
315L	315	508 × 508	65 / 80	140 / 170	28	1 290 / 1 320
355M	355	610 × 560	75 / 95	140 / 170	28	1 390 / 1 420
355L	355	610 × 630	75 / 95	140 / 170	28	1 500 / 1 530

MOUNTING OPTIONS BY FRAME SIZE

Frame	B3 foot	B5 flange	B35 foot + flange	V1 vertical	B14 small flange	B34 foot + small flange
63–112	✓	✓	✓	✓	✓	✓
132–160	✓	✓	✓	✓	✓	–
180–280	✓	✓	✓	✓	–	–
315–355	✓	–	✓	✓	–	–