



2026

撒肥车



金龙

PRODUCT CATALOG

Tillage & farm implements

Spreaders, trailers, tillage, mowers, planters, etc. direct from the factory to your farm.

WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code from an Andrivo farmer. It's shown to you before you order, not folded into a price you can't verify.

25%

fee with a referral code (30% without)

0

distributors in between

SADC

we deliver across Southern Africa

How every quote works

1

Factory direct

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2

Inspected before it ships

Each order is checked against the factory spec sheet before it leaves the plant.

3

Shipping & customs handled

Freight, duties, clearing and transport to your gate are all managed by us.

4

Parts & aftersales

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

EXAMPLE: A DISC HARROW ORDER

Factory price	R36 000
Freight, duties & customs	R7 000
Transport: port to farm	R2 000
Andrivo fee (25% with a code)	R11 250
You pay	R56 250

CONTENTS

What's in this catalog

Specifications are typical for each model; your Andrivo quote confirms the exact configuration, size and price for your farm.

Spreading & transport 04

Fertiliser spreader carts (2–14 m³)	04
Liquid fertiliser spreaders	04
Grain transport vehicle	05

Tillage & land preparation 06

Land leveller	06
Stone picker	06
Farm trailer	06
Disc harrow	07
Power harrow	07
Rotary tiller	07
Chisel plough	08
Cultivator	08
Trencher	08
Horizontal reversing plough	08
Disc plough	09
Furrow plough	09
Heavy disc harrow	09

Mowers & cutters 10

Folding-wing rotary cutter	10
Double-disc mower	10
Multi-disc mower	10
Sickle bar mower	11
9GX semi-circular lawn mower	11
LCTM light lawn mower	11
9GX large lawn mower	11
Flail mowers	12–13

Planting & harvesting 14

Potato harvester	14
Corn sheller	14
Vegetable planter	14
Wheat planter	14
Potato planter	15
Finger-wheel rake	15
Reel sprinkler irrigation machine	15
Plough & rotary tiller combination	15

Wear parts 16

Loosening shovels, plough tips & rake blades	16
Disc blades: sizes & weights	17

Fertilizer spreader cart



Horizontal screw conveyor/double disc fertilizer spreader									
NO.	Item	Unit	2 cubes	3 cubes	5 cubes	8 cubes	10 cubes	12 cubes	14 cubes
1	Hopper volume	m³	2	3	5	8	10	12	14
2	Bearing weight	t	3	4	6	10	12	14	17
3	Supporting power	hp	≥50	≥50	≥60	≥80	≥100	≥120	≥120
4	Machine size (L×W×H)	mm	4100×1800×1700	4400×1970×1700	4400×2130×1970	5500×2300×2350	5900×2300×2400	6350×2560×2590	6350×2560×2790
5	Spread width	m	8-10	8-10	8-10	8-10	8-10	8-10	8-10
6	Machine weight	kg	1190	1230	1570	2250	2750	2850	2980
7	Tyre type	/	10.0/75-15.3	11.5/80-15.3	14-17.5	16/70-20	16/70-24	500/60-22.5	500/60-22.5

Customizable double vertical screw conveyors, horizontal screw conveyors, double disc spreading devices and self-propelled three-wheel fertilizer spreaders are available.



Liquid fertilizer spreader							
NO.	Item	Unit	6 cubes	8 cubes	10 cubes	12cubes	15 cubes
1	Hopper volume	m³	6	8	10	12	15
2	Supporting power	hp	≥70	≥80	≥100	≥100	≥150
3	Machine size (L×W×H)	mm	6100×2000×2700	7000×2300×2700	7340×2540×2700	7300×2600×2900	7600×2700×3350
4	Fertilization rate	n/min	≥1m³	≥1m³	≥1m³	≥1m³	≥1m³
5	Spraying amplitude	m	10-15	10-15	10-15	10-15	10-15
6	Machine weight	kg	2100	2550	3210	4100	5020
7	Tyre type	/	400/55-22.5	16/70-24	500/60-22.5	600/55-26.5	500/60-22.5

Customizable

Grain transport vehicle



Grain transport vehicle							
NO.	Item	Unit	3 cubes	6 cubes	9cubes	12cubes	20cubes
1	Hopper volume	m ³	3	6	9	12	20
2	Bearing weight	t	4	7	11	14	24
3	Supporting power	hp	≥40	≥60	≥90	≥100	≥200
4	Machine size (L×W×H)	mm	4050×1600×2000	4580×2060×2500	5170×2400×2900	6140×2560×2860	7400×2960×3400
5	Machine weight	kg	1100	1390	1900	2500	5210
6	Tyre type	/	11.5/80-15.3	14-17.5	400/60-22.5	600/50-22.5	500/60-22.5 (Double Bridges)
Customizable							




Folding arm grain transporter				
NO.	Item	Unit	28 cubes	7 cubes
1	Hopper volume	m ³	28	7
2	Supporting power	hp	≥240	≥70
3	Machine size (L×W×H)	mm	8360×2950×3500	5580×2550×3000
4	Carriage size (L×W×H)	m	5950×2900×2300	2720×2220×1700
5	Machine weight	kg	6620	2290
6	Tyre type	/	600/50-22.5 (Double Bridges)	16/70-20
Customizable				

Land leveler



Stone picker

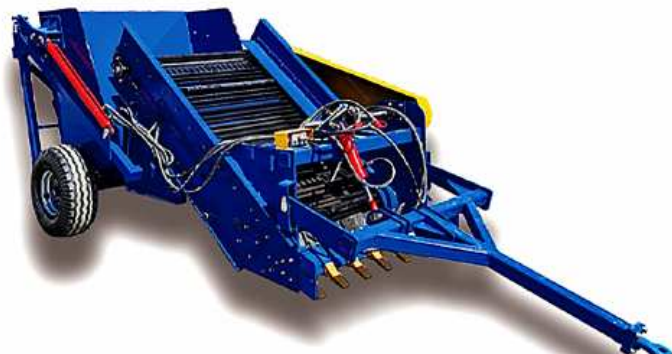

Land leveler						
NO.	Item	Unit	12PW-250	12PW-300	12PW-30S	12PW-300S
1	Working width	m	2.5	3	1.5-2.3	2-3
2	Machine size (L×W×H)	mm	3400*2530*2850	3400*3000*2850	3200*(1520-2320)*1750	3200*(2040-3040)*1750
3	Supporting power	hp	100-150	120-180	80-140	100-180
4	Machine weight	kg	1090	1180	1090	1180
5	Horizontal error	cm	±2	±2	±2	±2
6	Tyre type	/	10.0/75-15.3	10.0/75-15.3	26*12.00-12ss	26*12.00-12ss

Stone picker				
NO.	Item	Unit	1.2m	1.5m
1	Trenching depth	cm	20-35	20-35
2	Machine size (L×W×H)	mm	4700*2660*1700	4800*2300*1800
3	Body size(L×W×H)	mm	1430*700*1200	1730*700*1200
4	Supporting power	hp	100	140
5	Machine weight	kg	1410	1590
6	Tyre type	/	10.0/80-12	10.0/80-12

Farm trailer



Farm trailer							
NO.	Item	Unit	3t	4t	5t	6t	7t
1	Machine weight	kg	660	1450	2060	2050	1640
2	Dumping method	/	Hydraulic rear-tipping dumping	Hydraulic left and right dumping	Hydraulic rear-tipping dumping	Hydraulic left and right dumping	No
3	Braking mode	/	Air brake	Air brake	Air brake	No	Air brake
4	Machine size	mm	3800×1520×1700	5320×1710×1900	5870×2180×2350	6250×2170×2070	6400×2210×2610
5	Carriage size	mm	2500×1520×540	3800×1710×455	4100×2100×(550+550)	4500×2150×550	4800×2210×550
6	Wheelbase	m	0.9	1.45	1.6	1.5	1.6
7	Traction length	m	2.15	1.37	1.66	1.53	1.8
8	Tyre type	/	11.5/80-15.3	7.50-16 (Dual-axle four-wheel)	11.5/80-15.3	9.00-16 (Dual-axle four-wheel)	9.00-16
9	Supporting power	hp	30-50	30-50	50-100	60-100	≥70

Customizable

Disc harrow




Suspended							
NO.	Item	Unit	2m	2.5m	3.5 m	4 m	5.5m
1	Machine weight	kg	1250	1450	1740	1990	2735
2	Machine size (L*W*H)	mm	2530*2000*1540	2530*2500*1540	2530*3500*1540	2530*4000*1540	2530*5500*1540
3	Main beam dimension	cm	10*10	10*10	10*10	10*10	10*10
4	Disc diameter	cm	62	62	62	62	62
5	Crusher roll diameter	cm	35	35	35	35	35
6	Number of discs	pcs	14	16	24	28	38
7	Working width	m	2	2.5	3.5	4	5.5
8	Supporting power	hp	90-120	100-140	≥160	≥180	≥200



3-Point/pull type							
NO.	Item	Unit	4 meters	5 meters	6 meters	7 meters	7.5 meters
1	Machine weight	kg	4480	5600	6720	7840	8400
2	Machine size (L×W ×H)	mm	7300×4550×1900	7300×5550×1900	7300×6550×1900	7300×7550×1900	7300×8050×1900
3	Disc diameter	cm	62	62	62	62	62
4	Crusher roll diameter	cm	40	40	40	40	40
5	Number of discs	pcs	32	40	48	56	60
6	Working width	m	4	5	6	7	7.5
7	Supporting power	hp	180-220	200-240	220-260	260-300	≥300
8	Type type	/	16/70-20	16/70-20	16/70-20	16/70-20	16/70-20

Power harrow

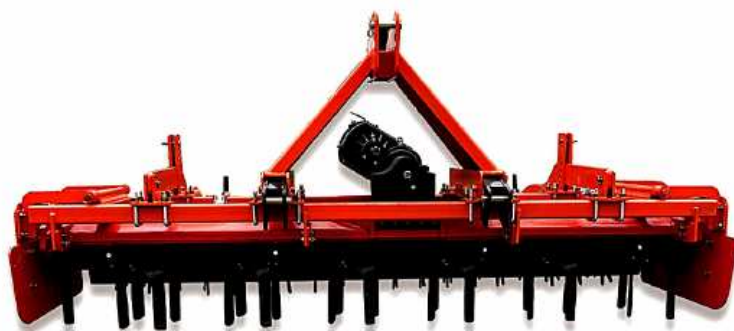

Power harrow					
NO.	Item	Unit	3 meters	3.5 meters	4 meters
1	Working width	m	3	3.5	4
2	Machine weight	kg	1700	1940	2180
3	Supporting power	hp	≥180	≥200	≥240
4	Machine size (L×W ×H)	mm	1490×1140×1400	1520×1640×1420	1600×4390×1420
5	Rake tooth depth	cm	32	33	33
6	Hydraulic roll diameter	cm	32	32	32

Rotary tiller



Rotary tiller									
NO.	Item	Unit	SGTN-80D	SGTN-100D	SGTN-120D	SGTN-125D	SGTN-140D	SGTN-150D	SGTN-160D
1	Supporting power	hp	18-20	18-22	20-25	20-25	25-30	25-30	30-40
2	Tilling width	cm	70	90	110	115	130	140	150
3	Tilling depth	cm	8-16	8-16	8-16	8-16	8-16	8-16	8-16
4	Number of blades	pcs	16	16	24	24	24	24	24
5	Blade type	/	SGTN-L						
6	Machine weight	kg	190	195	200	205	210	215	240

Chisel plough



Chisel plough								
NO.	Item	Unit	3ZT-1.0	3ZT-1.4	3ZT-1.8	3ZT-2.2	3ZT-2.6	3ZT-3.0
1	Working width	mm	1000	1400	1800	2200	2600	3000
2	Number of plough tips	pcs	5	7	9	11	13	15
3	Working depth	mm	100-200					
4	Machine weight	kg	260	300	350	420	490	580
5	Supporting power	hp	25	30-40	40-50	50-70	70-90	80-100
6	Hook mode	/	Three-point suspension					

Cultivator




Cultivator			
NO.	Item	Unit	3.5 meters
1	Machine weight	kg	1670
2	Machine size (L×W×H)	mm	3900×3870×1470
3	Working width	m	3.45
4	The number of deep loosening shovels/rakes	pcs	11 deep loosening shovels with 32 notches and 4 discs
5	Ploughing depth	cm	35-45
6	Supporting power	hp	≥200

Trencher



Trencher			
NO.	Item	Unit	1KS-35
1	Structural form	/	Double disc
2	Overall size	mm	1450*900*1200
3	Machine weight	kg	320
4	Cutter number	pcs	2
5	Number of blades	pcs	30
6	Trenching depth	cm	45
7	Width of trench bottom	cm	25
8	Supporting power	hp	60-150

Horizontal reversing plough

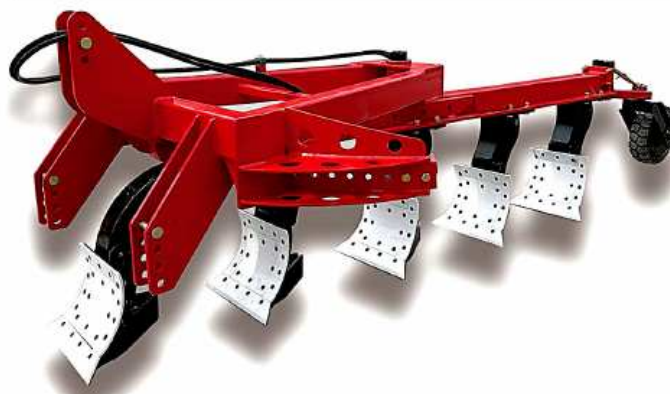

Horizontal reversing plough			
NO.	Item	Unit	5 plows
1	Working width	mm	2400
2	Machine size (L×W×H)	mm	4700×2100×1400
3	Main beam dimension	mm	150×150
4	Supporting power	hp	200
5	Plow depth	cm	12-30
6	Machine weight	kg	1060

Disc plough



Disc plow					
NO.	Item	Unit	1LY (T) -325	1LY (T) -425	1LY (T) -525
1	Tilling width	m	0.75	1.00	1.25
2	Tilling depth	mm	250-300	250-300	250-300
3	Number of discs	pcs	3	4	5
4	Disc diameter	mm	660		
5	Machine weight	kg	420	480	580
6	Supporting power	hp	55-70	80-90	100-120

Furrow plough



Furrow plough						
NO.	Item	Unit	1L-235	1L-335	1L-435	1L-535
1	Single plow body tillage	mm	350			
2	Maximum tillage	mm	700	1050	1400	1750
3	Tilling depth	cm	200-350			
4	Matching horse power	hp	40-50	55-80	60-80	90-120
5	weight	kg	195	320	410	550
6	Hitch form	/	Three-point suspension			

Disc harrow



Disc harrow											
NO.	Item	Unit	1BZ-1.8	1BZ-2.0	1BZ-2.2	1BZ-2.5	1BZ-3.0	1BZ-3.4	1BZ-3.8	1BZ-4.2	1BZ-5.3
1	Plowing width	mm	1800	2000	2200	2500	3000	3400	3800	4200	5300
2	Cultivate deeply	mm	200-250								
3	Diameter of the rake blade	mm	660mm/26inch								
4	Thickness of the rake blade	mm	5								6
5	The number of rake blades	pcs	16	18	20	24	28p	32	36	40	48
6	Whole machine weight	kg	1150	1250	1350	1500	1600	1800	2100	2300	3750
7	Supporting power	hp	60-70	70-80	80-90	90-100	100-110	110-120	130-140	150-160	160-180

Folding wing rotary cutter



Folding wing rotary cutter					
NO.	Item	Unit	3.5m	4.5m	6m
1	Machine weight	kg	1650	1850	2440
2	Mowing width	m	3.5	4.5	6
3	Overall machine size (L×W×H)	mm	4800*4000*600mm	4900*4900*650	4800*6500*900
4	Folded wing size(L×W×H)	mm	4800*1600*1500mm	4900*2400*2000	4800*2750*3000
5	Supporting power	hp	100-150	100-150	≥180
6	Tyre type	/	165/70R13	165/70R13	165/70R13

Double-disc lawn mower



Multi-disc lawn mower



Double-disc lawn mower					
NO.	Item	Unit	1.25	1.35	1.65
1	Supporting power	hp	20-40	30-50	45-60
2	swath	m	1.25	1.35	1.65
3	Drum speed	r/min	1620	1620	1620
4	Overall size	mm	2300*800*1050	2400*850*1050	3090*900*1100
5	Machine weight	kg	330	350	448

Multi-disc lawn mower							
NO.	Item	Unit	4-disc	5-disc	6-disc	7-disc	8-disc
1	Working width	m	1.7	2.1	2.45	2.8	3.05
2	Number of discs	pcs	4	5	6	7	8
3	Machine size (L×W×H)	mm	2940×1300×1300	3430×1300×1300	3920×1480×1300	4410×1300×1300	4900×1300×1300
4	Supporting power	hp	40-50	40-90	40-90	60-100	80-120
5	Machine weight	kg	450	485	527	545	650

Andrivo · Tillage & implement range

10 andrivo.sales@outlook.com · +27 79 519 8131

Sickle bar mower




Sickle bar mower						
NO.	Item	Unit	9G-1.4	9G-1.6	9G-1.8	9G-2.1
1	Working width	m	1.4	1.6	1.8	2.1
2	Cutting height	cm	5-6	5-6	5-6	5-6
3	Machine weight	kg	140	160	180	200
4	Supporting power	hp	15	18	20	25-45
5	Hook mode	f	Three-point suspension			

9GX- Semi-circular lawn mower



9GX- Semi-circular lawn mower						
NO.	Item	Unit	9GX-1.2	9GX-1.5	9GX-1.8	9GX-2.1
1	Cutting width	m	1.2	1.5	1.8	2.1
2	Stubble height	cm	4-11			
3	Input speed	r/min	540			
4	Whole machine weigh	kg	265	310	410	470
5	Supporting power	hp	18-35	30-55	55-90	70-120

LCTM- Light Lawn mower

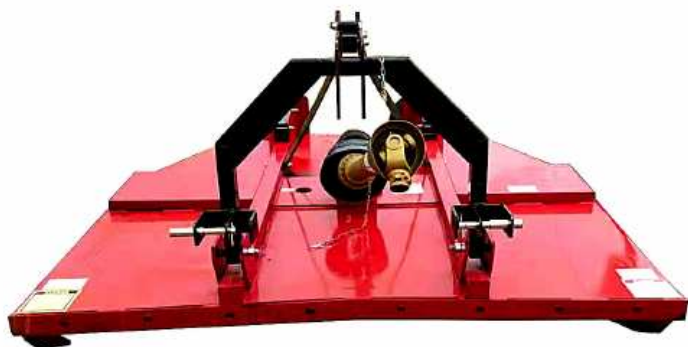

LCTM- Light Lawn mower						
NO.	Item	Unit	LCTM100	LCTM120	LCTM150	LCTM180
1	Cutting width	m	1.0	1.2	1.5	1.8
2	Stubble height	cm	4-11			
3	Input speed	r/min	540			
4	Whole machine weight	kg	170	185	210	315
5	Supporting power	hp	12-30	18-35	25-50	40-80

9GX- Large lawn mower



9GX- Large lawn mower						
NO.	Item	Unit	9GX-2.4	9GX-2.8	9GX-3.0	9GX-3.5
1	Cutting width	m	2.4	2.8	3.0	3.5
2	Stubble height	cm	4-11			
3	Input speed	r/min	540			
4	Whole machine weight	kg	700	730	780	1030
5	Supporting power	hp	70-100	80-120	90-130	100-200

Flail mower



NO.	Item	Unit	AGL120	AGL140	AGL160	AGL180
1	Working width	mm	1150	1350	1550	1750
2	Rated speed	rpm	540	540	540	540
3	Hammer blade	n	18	22	24	28
4	Y-blade	n	36	44	48	56
5	Spindle speed	rpm	2160	2160	2160	2160
6	Supporting power	hp	35-60	40-70	45-80	60-90
7	Machine weight	kg	303	318	336	355
8	Package size	mm	1350*800*750	1550*800*750	1750*800*750	1950*800*750



NO.	Item	Unit	AGF160	AGF180	AG200	AGF220
1	Working width	mm	1550	1750	1950	2150
2	Rated speed	rpm	540	540	540	540
3	Hammer blade	n	22	26	28	32
4	Y-blade	n	44	52	56	64
5	Spindle speed	rpm	2160	2160	2160	2160
6	Supporting power	hp	60-100	70-110	85-120	95-130
7	Machine weight	kg	571	605	632	665
8	Package size	mm	2100*900*750	2300*900*750	2500*900*750	2700*900*750



NO.	Item	Unit	EF120	EF140	EF160	EF180	EF200
1	Working width	mm	1150	1350	1550	1750	1950
2	Rated speed	rpm	540	540	540	540	540
3	Hammer blade	n	18	22	24	28	34
4	Y-blade	n	36	44	48	56	68
5	Spindle speed	rpm	2160	2160	2160	2160	2160
6	Supporting power	hp	30-60	35-70	40-80	55-90	70-100
7	Machine weight	kg	249	257	270	281	295
8	Package size	mm	1350*800*750	1550*800*750	1750*800*750	1950*800*750	2150*800*750



NO.	Item	Unit	EFCT140	EFCT160	EFCT180	EFCT200	EFCT220
1	Working width	mm	1350	1550	1750	1950	2150
2	Rated speed	rpm	540	540	540	540	540
3	Hammer blade	n	22	24	28	34	38
4	Y-blade	n	44	48	56	68	76
5	Spindle speed	rpm	2160	2160	2160	2160	2160
6	Supporting power	hp	35-70	40-80	55-90	70-100	80-100
7	Machine weight	kg	265	278	289	305	319
8	Package size	mm	1550*800*750	1750*800*750	1950*800*750	2150*800*750	2350*800*750




NO.	Item	Unit	EFCT140	EFCT160
1	Working width	mm	1350	1550
2	Rated speed	rpm	540	540
3	Hammer blade	n	22	24
4	Y-blade	n	44	48
5	Spindle speed	rpm	2160	2160
6	Supporting power	hp	35-70	40-80
7	Machine weight	kg	280	293
8	Package size	mm	1550*800*750	1750*800*750



NO.	Item	Unit	EFCH140	EFCH160	EFCH180	EFCH200	EFCH220
1	Working width	mm	1350	1550	1750	1950	2150
2	Rated speed	rpm	540	540	540	540	540
3	Hammer blade	n	22	24	28	34	38
4	Y-blade	n	44	48	56	68	76
5	Spindle speed	rpm	2160	2160	2160	2160	2160
6	Supporting power	hp	40-70	45-80	60-90	75-100	85-100
7	Machine weight	kg	312	330	351	369	390
8	Package size	mm	1550*800*750	1750*800*750	1950*800*750	2150*800*750	2350*800*750

Potato harvester

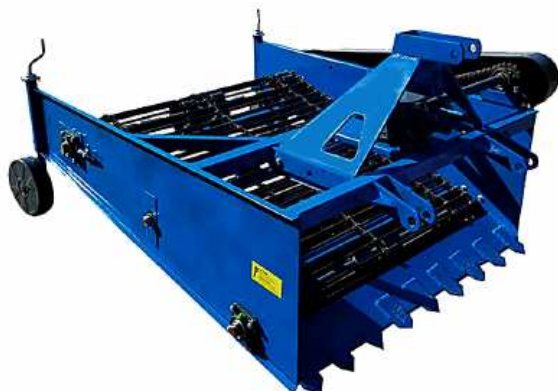

Potato harvester								
NO.	Item	Unit	4U-1	4U-1A	4UZ-1	4U-2	4U-2B	4U-3
1	Line spacing	cm	55-80	50-60	55-80	55-80	55-80	55-80
2	weight	kg	180	100	160	700	800	1200
3	Supporting power	hp	22-35	8-15	22-35	50-80	50-80	70-120
4	Working depth	cm	25	20	25	25	25	25
5	Overall size	mm	1800*1000*980	900*700*700	1200*1000*750	2300*2200*1000	2800*2200*1000	3300*3900*3100

The corn sheller



Corn thresher						
NO.	Item	Unit	Trailer type	STYM-850	Motor type	PTO
1	Overall size	mm	1800*1100*1200	1270*720*1000	1300*1000*1100	1300*850*1000
2	Machine weight	kg	345	115	190	150
3	Supporting power	hp	15-20	12-18	8-10	18-40
4	Work efficiency	t/h	6-8	4-5	4-5	4-5
5	Threshing rate	%	99	99	99	99

Vegetable planter



Vegetable planter			
NO.	Item	Unit	2BS-15
1	Overall size	mm	2100*1280*800
2	Machine weight	kg	266
3	Work efficiency	mm	5-10
4	Supporting power	hp	20-50
5	Seeding row spacing	mm	110-120 (customizable)
6	Seed spacing	mm	5-150 (adjustable)

A wheat planter



A wheat planter								
NO.	Item	Unit	2BFX-9	2BFX-12	2BFX-14	2BFX-16	2BFX-18	2BFX-24
1	Supporting power	hp	15-18	15-30	18-30	50	60-80	70-100
2	Net weight	kg	220	285	310	650	680	1080
3	Sowing range	mm	1350	1800	2100	2400	2700	3600
4	Seeding rows	row	9	12	14	16	18	24
5	Basic spacing	mm	150	150	150	150	150	150
6	Sowing depth	mm	40-80					

Potato planter



Potato planter				
NO.	Item	Unit	2CM2 (Double ridge)	2CM-1 (Single ridge)
1	Machine weight	kg	200	180
2	Row spacing	cm	50-80	/
3	Spacing in rows	cm	18-35	18-35
4	Operational efficiency	km/h	0.4-0.6	/
5	Seed box volume	m ³	0.24*2	0.24*1
6	Fu box volume	m ³	0.08*1	0.08*1
7	Supporting power	hp	20-35	20-35

Finger-wheel rake



Finger-wheel rake				
NO.	Item	Unit	912-3.0	912-4.0
1	Working width	mm	3000	4000
2	Weight	kg	260	380
3	Supporting power	hp	20	30
4	Number of plates	pcs	4	6
5	Strip width	mm	800-1500	
6	Tool width in transport condition	mm	3200	
7	Height of equipment in transport condition	mm	2300	3000
8	Unit operating speed	km/h	5-15	10-15

Reel sprinkler irrigation machine



Reel sprinkler irrigation machine				
NO.	Item	Unit	180	300
1	Machine weight	kg	430	1690
2	Machine size (L*W*H)	mm	3400*1580*1500	5400*2340*2600
3	PE pipe diameter	mm	50	75
4	PE pipe chief	m	180	300
5	Drive mode	/	Water turbine	Water turbine
6	Tyre type	/	145/70R12	10.0/80-12
7	Spraying radius	m	30-50	40-80

Plough and rotary tiller all in one machine





Plough and rotary tiller all in one machine					
NO.	Item	Unit	225	327	440
1	Machine weight	kg	300	450	650
2	Machine size (L*W*H)	mm	1500*1200*1170	2250*1300*1280	2600*1630*1470
3	Number of plow blades	mm	2	3	4
4	Ditching depth	cm	25-35	25-35	40
5	Working width	mm	650	950-1000	1300
6	Main beam size	mm	100*80*5	100*80*5	100*100*8
7	Supporting power	hp	≥50	≥80	≥100

Loosening shovels, plow tips and rake blades

Product characteristics

We select spring steel with manganese steel and boron steel properties as raw materials. Depending on the material, after undergoing different heat treatment processes, the idealized hardness value is achieved. Hardness of manganese steel material: 45-48HRC; The hardness of boron steel material is 45-48HRC. We will select different materials according to your requirements. The achievable diameter range is 12"-40" (300-1010mm), and the achievable thickness is 3-12mm. The shapes are notched, disc-shaped, flat, corrugated, etc. If you need a new type, we can produce it according to your drawings or samples.

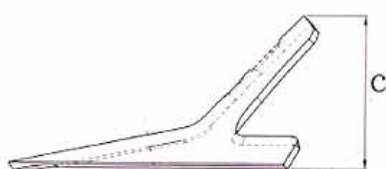

Loosening shovel			
Length (mm)	Width (mm)	Height (mm)	Thickness (mm)
A	B	C	/
310	280	50	4
300	230	110	5
250	210	110	6
260	240	160	5
180	220	100	5
500	400	160	6
200	155	80	4
550	420	160	6
185	230	120	5
185	150	100	5
Plow tip			
L mm/in	L1 mm/in	Hole size	Thickness mm
170/6.7	30/1.2	Following your's	5
255/10.0	40/1.6		8
290/11.4	50/2.0		10
400/15.7	60/2.4		12
430/16.9			15
			20
What's your size?	What's your size?		What's your size?



Diameter		thickness	Disc weight		Gap weight		Flat plate & corrugated weight	
1inch	mm	mm	kg	LBS	kg	LBS	kg	LBS
12	305	3.5	/	/	/	/	1.9	4.2
14	356	3.5	/	/	/	/	2.6	5.7
16	406	3.5	3.7	8.1	3.3	7.3	3.4	7.5
18	460	3.5	4.7	10.4	4.3	9.5	4.5	9.9
18	460	4	5.4	11.9	4.8	10.6	5.1	11.2
20	508	4	6.8	15.0	5.9	13.0	6.3	13.9
22	560	4	8.4	18.5	7.1	15.6	7.7	17.0
22	560	5	10.3	22.7	8.8	19.4	9.5	20.9
24	610	4	9.7	21.4	8.2	18.1	9.1	20.0
24	610	5	12.0	26.4	10.4	22.9	11.3	24.9
26	660	5	14.2	31.3	12.1	26.6	/	/
26	660	6	17.0	37.4	16.5	36.3	/	/
28	710	6	20.0	44.1	19.0	41.8	/	/
28	710	7	23.5	51.8	22.0	48.5	/	/
28	710	8	26.8	59.0	21.1	52.9	/	/
30	760	7	26.8	59.0	24.5	54.0	/	/
30	760	8	30.6	64.4	27.6	60.8	/	/
30	760	10	38.0	83.7	34.2	75.3	/	/
32	810	10	43.5	95.8	38.7	85.2	/	/
32	810	12	52.0	114.5	46.8	103	/	/
36	910	12	66.7	147	60.0	132	/	/
38	960	12	74.0	163	66.8	147	/	/
40	1010	12	83.0	183	76.5	168	/	/
44	1120	12	102.0	225	95.0	211	/	/
46	1170	12	110.0	242	100.0	220	/	/