

THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF ANELLO PHOTONICS INC, ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANELLO PHOTONICS INC, IS PROHIBITED

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	Initial Release	10/22/25	
	2	Changed Color Code for CAN Wires	12/4/2025	
	3	nReset Wire Added	2/20/2026	
A2	4	Corrected Pin 1 Location	10/22/2026	

NOTES, UNLESS OTHERWISE SPECIFIED:
1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M-1994.
2. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.100.
3. THIS IS A CAD GENERATED PART. FOR DIMENSIONAL OR ANY INFORMATION NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL.
4. DIMENSIONS ARE IN INCHES.

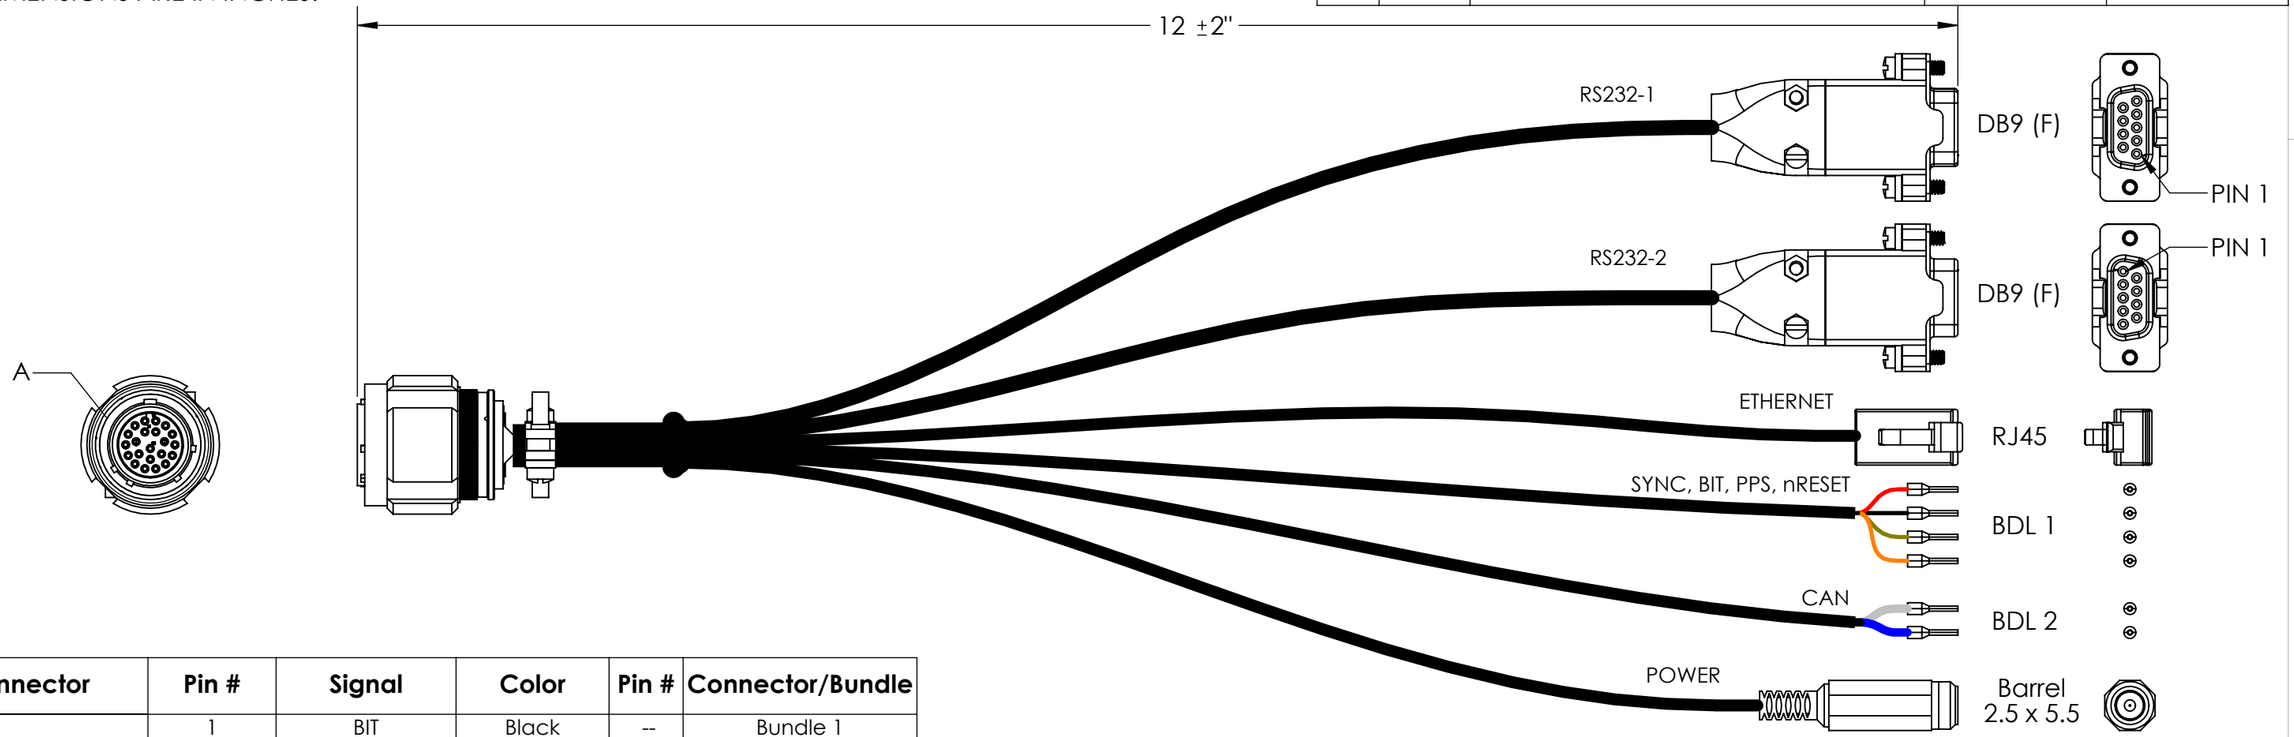

Connector	Pin #	Signal	Color	Pin #	Connector/Bundle
Conn, 22pin, Circular MIL-DTL-38999 Series III 38999/26WC35SN	1	BIT	Black	--	Bundle 1
	2	GND	Black	5	DB9 F
	3	RS232-1_Rx	Red	3	
	4	RS232-1_Tx	Brown	2	
	5	CAN_P	White	--	Bundle 2
	6	CAN_N	Blue	--	
	7	PPS1	Red	--	Bundle 1
	8	nRESET	Orange	--	Bundle 1
	11	RS232-2_Tx	Brown	2	DB9 F
	12	RS232-2_Rx	Red	3	
	13	GND	Black	5	
	14	SYNC	Brown	--	Bundle 1
	15	ETH-RD_N	Green	6	RJ45
	16	ETH_RD-P	White/Green	3	
	17	POW_GND	Black	2	Power
	18	POW_VIN	Red	1	
	20	ETH_TD_P	White/Orange	1	RJ45
	21	ETH_TD_N	Orange	2	
	9,10,19, 22	--	--	NC	--

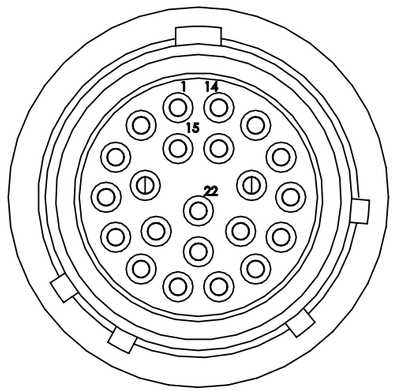

4 DETAIL A
SCALE 3 : 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	SOLIDWORKS GENERATED DRAWING DO NOT MANUALLY UPDATE	ANELLO
TOLERANCES ARE: DECIMAL .X ± .1 .XX ± .01 .XXX ± .005 ANGLES ±.5° INTERPRET PER ASME Y15.5-2009	APPROVALS: DWN T. Kridl — DATE 10/22/25	TITLE: Specification Control Drawing Assy, Cable, Maritime Breakout
MATERIAL SEE NOTES	CHKD	
FINISH SEE NOTES	DRAWING PROJECTION	SIZE B — DWG. NO. 25002301-22 — REV 4
DO NOT SCALE DRAWING		SCALE: 1:4 — SHEET 1 OF 1