


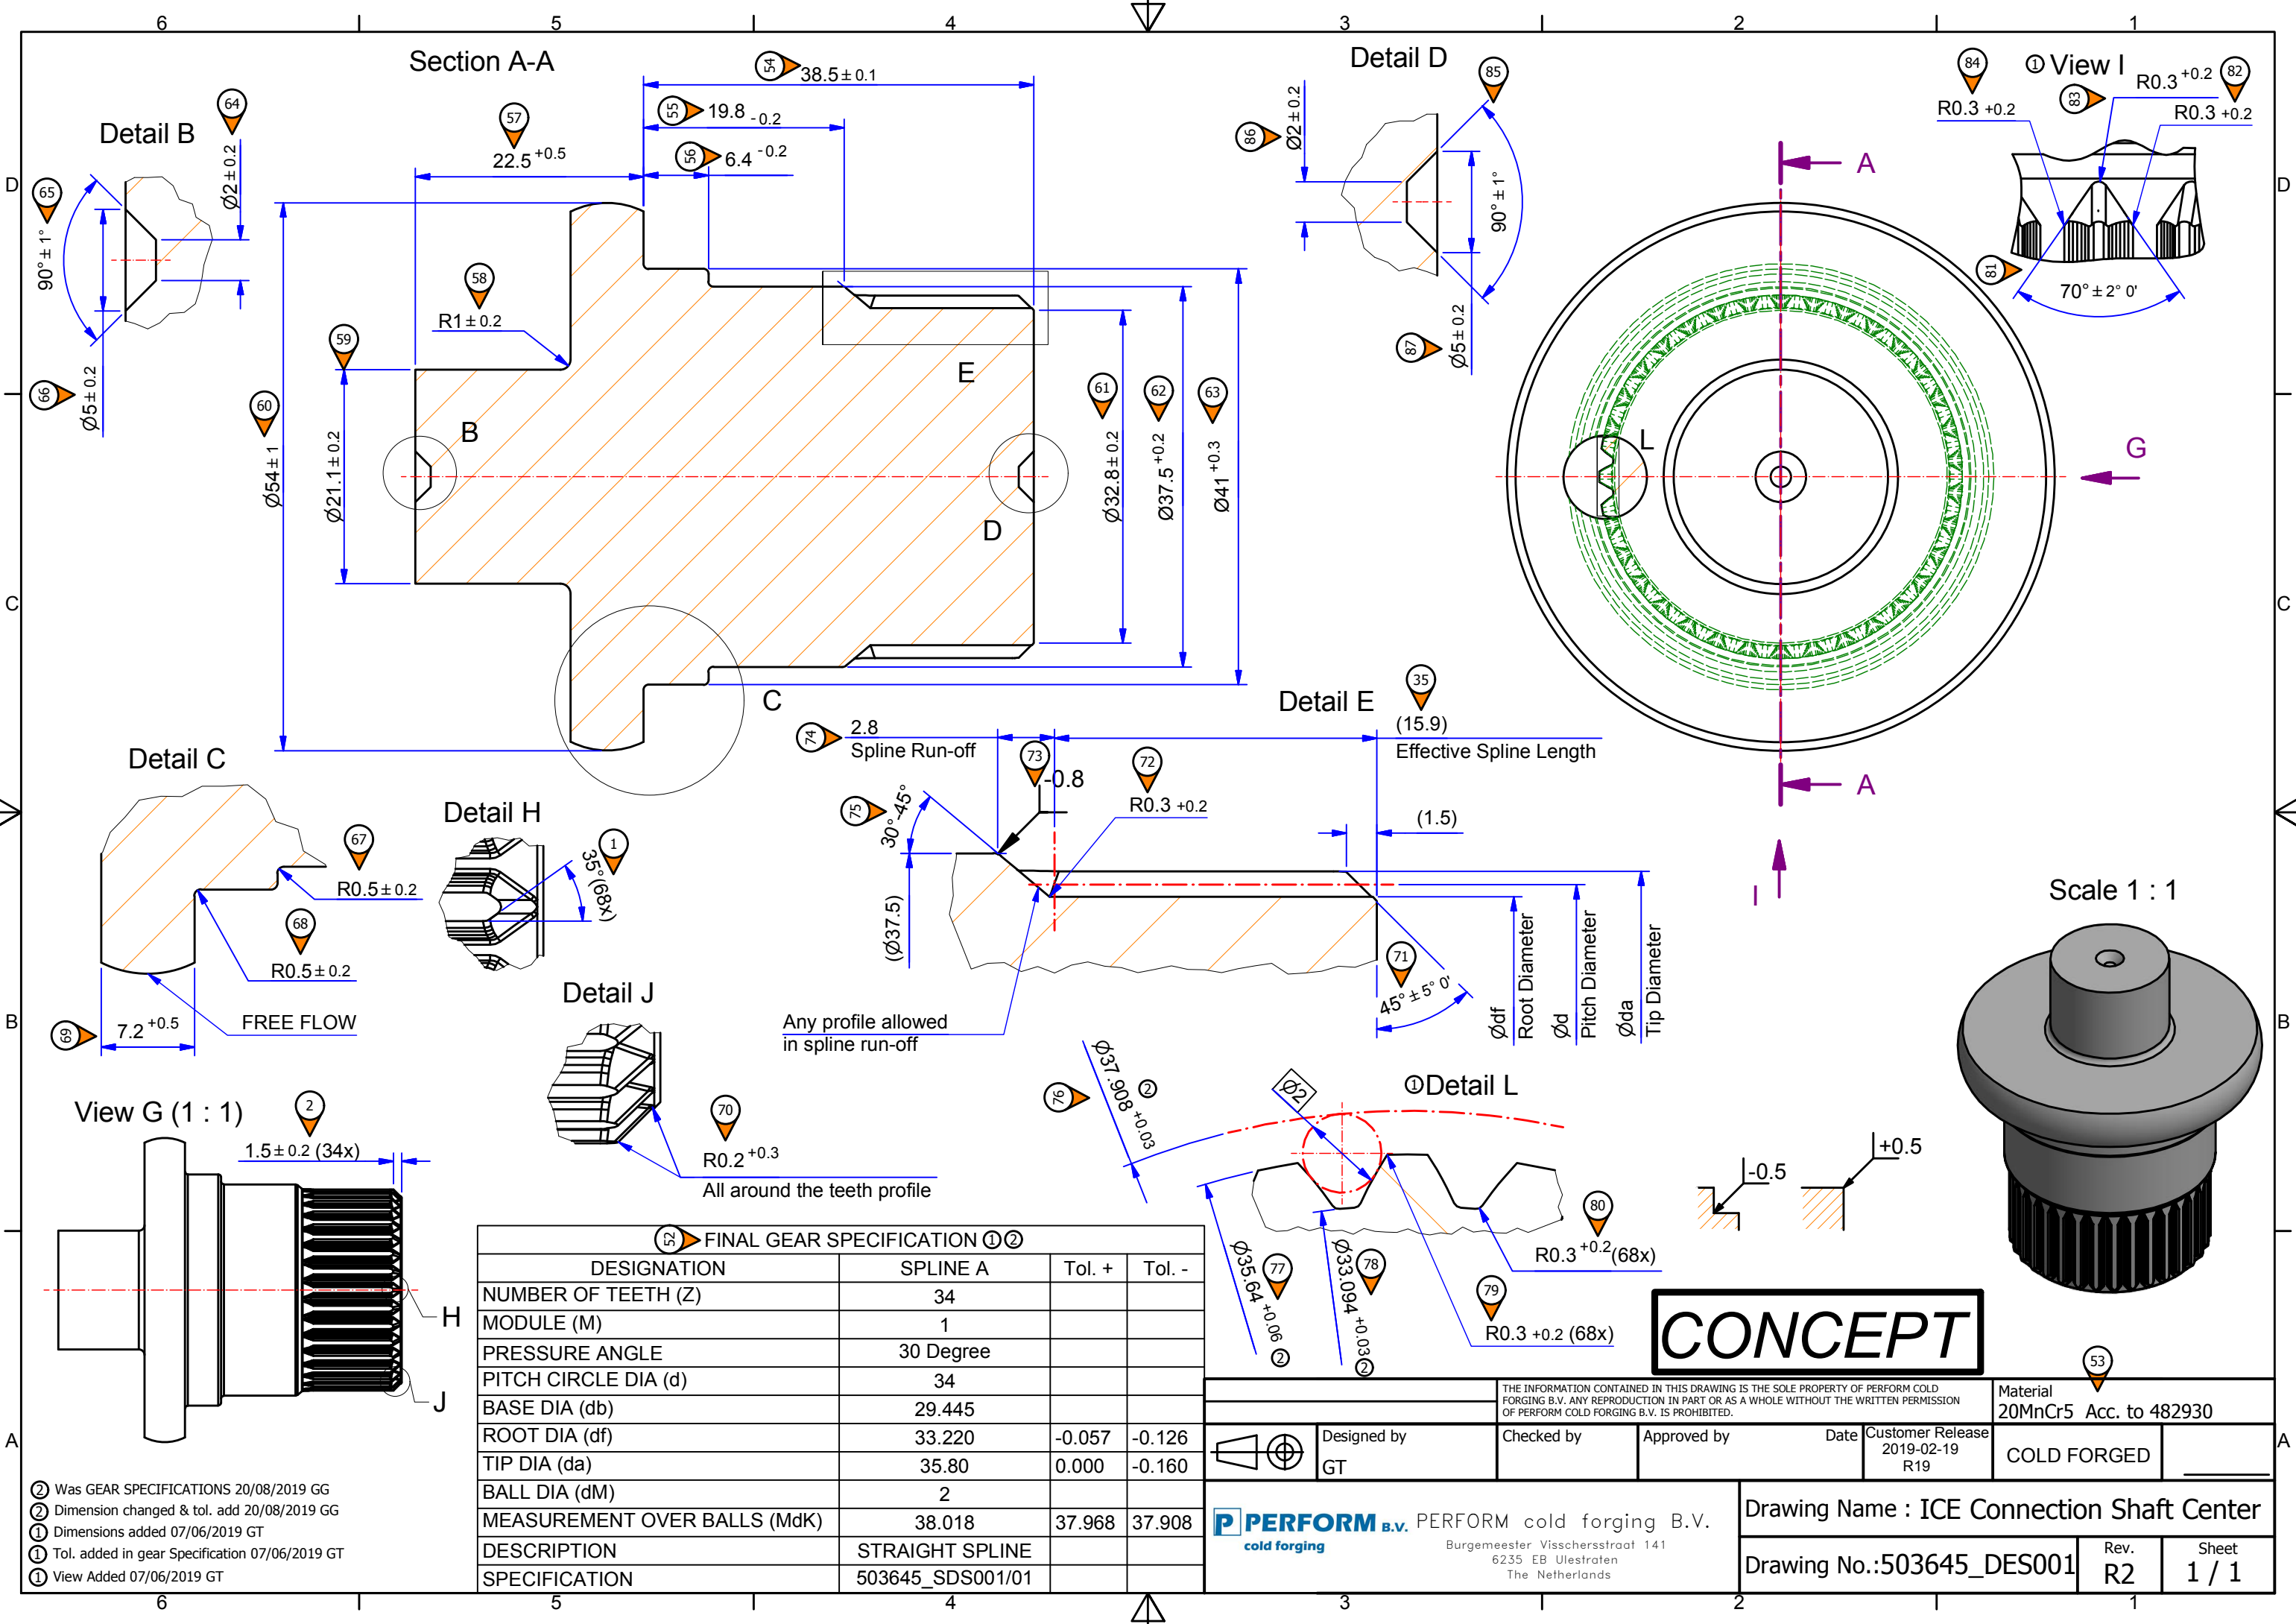

FINAL GEAR SPECIFICATION ①②			
DESIGNATION	SPLINE A	Tol. +	Tol. -
NUMBER OF TEETH (Z)	34		
MODULE (M)	1		
PRESSURE ANGLE	30 Degree		
PITCH CIRCLE DIA (d)	34		
BASE DIA (db)	29.445		
ROOT DIA (df)	33.220	-0.057	-0.126
TIP DIA (da)	35.80	0.000	-0.160
BALL DIA (dM)	2		
MEASUREMENT OVER BALLS (MdK)	38.018	37.968	37.908
DESCRIPTION	STRAIGHT SPLINE		
SPECIFICATION	503645_SDS001/01		

②

Was GEAR SPECIFICATIONS 20/08/2019 GG

②

Dimension changed & tol. add 20/08/2019 GG

①

Dimensions added 07/06/2019 GT

①

Tol. added in gear Specification 07/06/2019 GT

①

View Added 07/06/2019 GT

PERFORM B.V.

cold forging

PERFORM cold forging B.V.

Burgemeester Visschersstraat 141

6235 EB Uilestraten

The Netherlands

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PERFORM COLD FORGING B.V. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PERFORM COLD FORGING B.V. IS PROHIBITED.

Material

20MnCr5 Acc. to 482930

COLD FORGED

Drawing Name : ICE Connection Shaft Center

Drawing No.:503645_DES001

Rev.

R2

Sheet

1 / 1

CONCEPT