

F

E





D

C

B

A

0

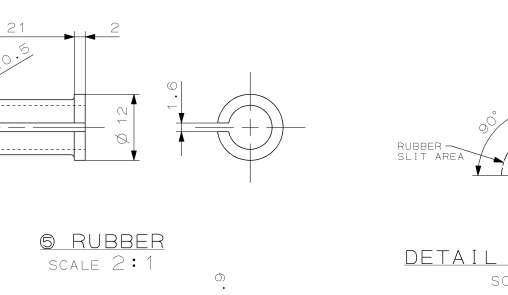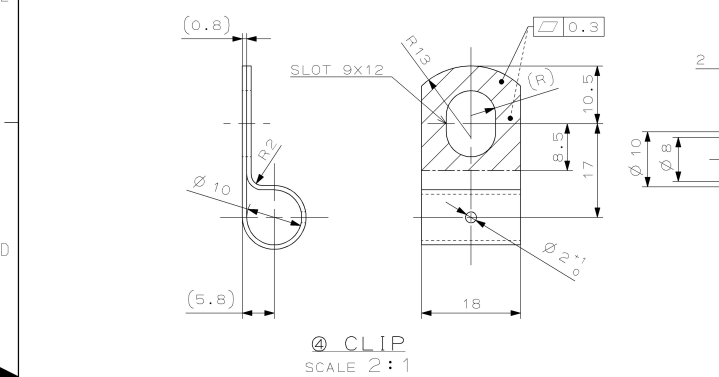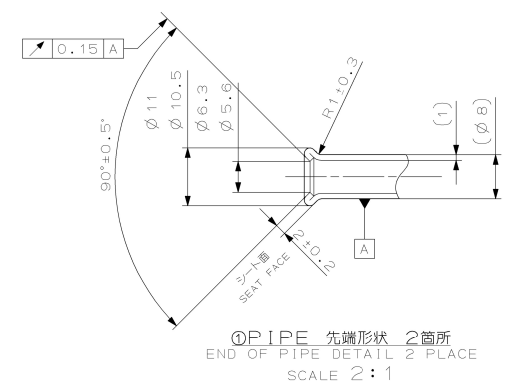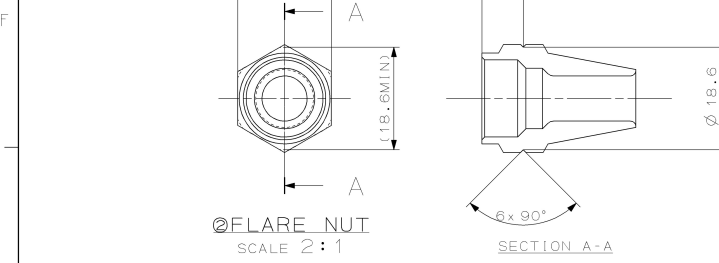


- 注記
- 指示無き曲げRは全て2軸を含む平面内におけるPIPE中心でR15とする
 - PIPE両側はフレアナット挿入後ダブルフレアのこと
 - フレアナット及びダブルフレアの詳細形状はISC-G00-500Yによる
 - 有塵なバリ及びシャープエッジ等無きこと
 - こみ、ほり等の付着無きよう納入のこと
(内部にダスト及び切粉等の異物無きこと)
 - 部品への使用制限及び報告義務のある物質はISC-A00-008Yによる
 - 固有値解析結果(参考値)
固有値(Hz) 647.8

- NOTES
- UNSPECIFIED BENDING RADIUS OF PIPE IS R15 ON A CENTER LINE.
 - BOTH SIDES OF PIPE END SHALL BE DOUBLE FLARED AFTER INSERTED FLARE NUT.
 - DETAILED SHAPE OF THE FLARE NUT AND DOUBLE FLARED SHALL BE AS SPECIFIED IN "ISO-000-500Y".
 - MUST BE FREE FROM BURRS AND SHARP EDGES.
 - SHALL BE DELIVERED AVOIDING DUST.
(MUST BE NO DUST AND TIP FLASH IN PIPE INNER)
 - THE RESTRICTED AND REPORTABLE SUBSTANCES FOR PARTS SHALL BE AS SPECIFIED IN ISC-A00-008Y.
 - ANALYSIS RESULT OF RESONANCE FREQUENCY.(REFERENCE FREQUENCY(Hz) 647.8

Guaranteed Mechanical Properties
保証機械的性質

*下記材質を使用する際は以下特性を満足すること。
*When using the material listed below, the following properties must be satisfied.


Material 材質	Yield Strength (MPa) 降伏強さ	Tensile Strength (MPa) 引張強さ
SS304 Min 最小	285	520

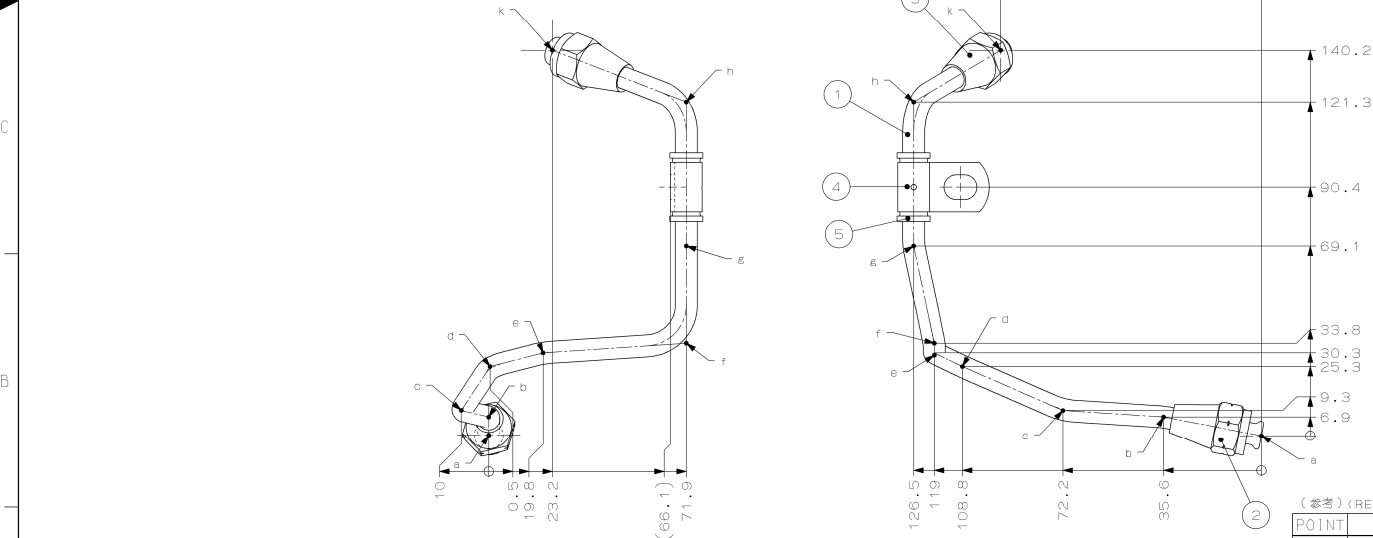

5	RUBBER	-	1	FC606 or EQUIV.	ISC-C91-001Y
4	CLIP	-	1	JSC440W (ISC-C21-001Y) or SS304 (ASTM 4200)	t=0.8, FIN:MFZn8S ISC-B11-004Y
3	FLARE NUT	-	1	SWRCH10C (JIS G 3507-1) or SUM22 (JIS G 4804) or SS304 (ASTM 4200)	(M14X1.5)
2	FLARE NUT	-	1	SUS304 (ISC-A390Y) or SS304 (ASTM 4200)	M14X1.5
1	PIPE	-	1	SUS304/SEAMLESS PIPE (ISC-A390Y) or SS304 (ASTM 4200)	OD Ø8, t=1.0
NO	P. NAME	P. NO	QTY	MATL.	DESCP.

(参考) (REFERENCE)

POINT	X	Y	Z
a	0.0	0.0	0.0
b	0.0	35.6	6.9
c	10.0	72.2	9.3
d	-0.5	108.8	25.3
e	-19.8	119.0	30.3
f	-71.9	119.0	33.8
g	-71.9	126.5	69.1
h	-71.9	126.5	121.3
k	-23.2	94.9	140.2



ORIGINAL PART INFORMATION

ORIG P.NO:7552614230

MAJOR ITEMS CHANGED

SHAPE & DIM MATL

FIN PERFORMANCE

PRODUCTIVITY

THIRD ANGLE PROJECTION

SCALE 1:1

FIRST USE RZ4

PROT (PROD) SERVICE

FIN NOT FIN

MATL SHOW

GENERAL TOLERANCE MACHINED

GENERAL TOLERANCE UNMACHINED

SURFACE ROU

PNC

DWG DATE 04-27-'26

MASS (kg)

CONT DES 0.1

PROD

ISUZU

ISUZU MOTORS LIMITED

PT商品企画部、総務部、品質保証部、LD総務部、SG

APPROVED

CHECK

DWG TR

NAME PIPE ASM;EXH PRESS SENSOR

GM NO

DWG NO 7475870300