SRA DEVELOPMENT BOARD – 2022

MICROCONTROLLER

ESP32

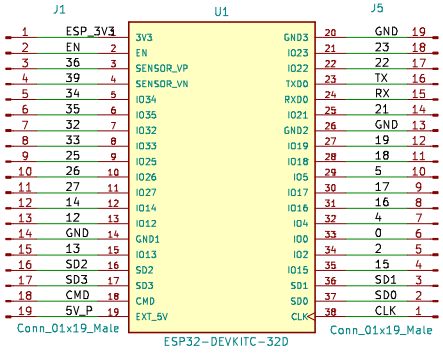

Note: IO0 – Boot Pin **EN – Reset Pin**

POWER CIRCUITRY

12V–GND Terminal



12V–DC Power Jack



LM2576: Buck Regulator

Converts 12V Input to 5V Output



1N5399 <=> SS24 (2A rated Schottky diode) **1N5822 <=> SS34 (3A rated Schottky diode)**

AMS1117: Linear Regulator

Converts 5V Input to 3.3V Output



MOTOR PORTS

Output Terminal Blocks



STANDARD VOLTAGE PORTS

5V, 3.3V & GND



DPDT SWITCHES

Motor Normal–Parallel Mode



12V Input–>Motor Supply



12V_U: Raw Input 12V
12V_P: 12V with protection circuit

1N5822 <=> SS34 (3A Schottky diode) **RUEF160 PTC Resetable Fuse I_trip = 3.2A; I_hold = 1.6A**

5V Regulated–>MCU Supply



5V: Raw Regulated 5V
5V_P: 5V with protection circuit

1N581* (1N5819/1N5419) <=>
SS15 (Vf=0.7V)
SS12 (Vf=0.5V)
(1A Schottky rectifier) **RXEF050 PTC Resetable Fuse I_trip = 1A; I_hold = 0.5A**

PUSH BUTTONS

Motor Forward–Backward



TESTPOINTS

Motor Output Pins



LED ARRAY

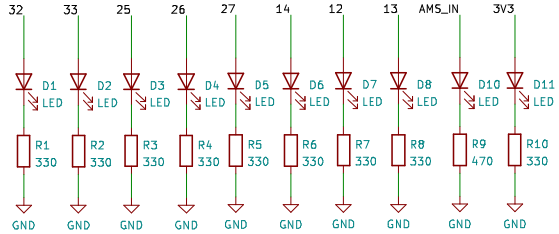

SENSOR PORTS (JST CONN.)

LSA



MPU

MOTOR DRIVER

TB6612FNG

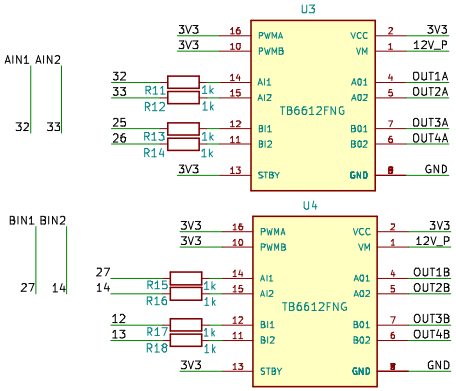

SERVO PORTS

3–Pin 5V Servos

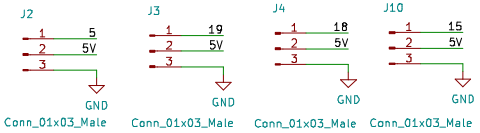

DRILLS

Mounting Holes

OLED PORT



GPIO 21 – SCL
GPIO 22 – SDA
GPIO 23 – INT

Sheet: /
File: sra_dev_board_2022.kicad_sch

Title:

Size: User	Date:	Rev:
KiCad E.D.A. kicad 6.0.1-79c1e3a40b~116~ubuntu20.04.1		Id: 1/1