



NAME – **ANMOL**
REG. NO. - **19BCE0891**



DIGITAL ASSIGNMENT – 5

NETWORK TOPOLOGY

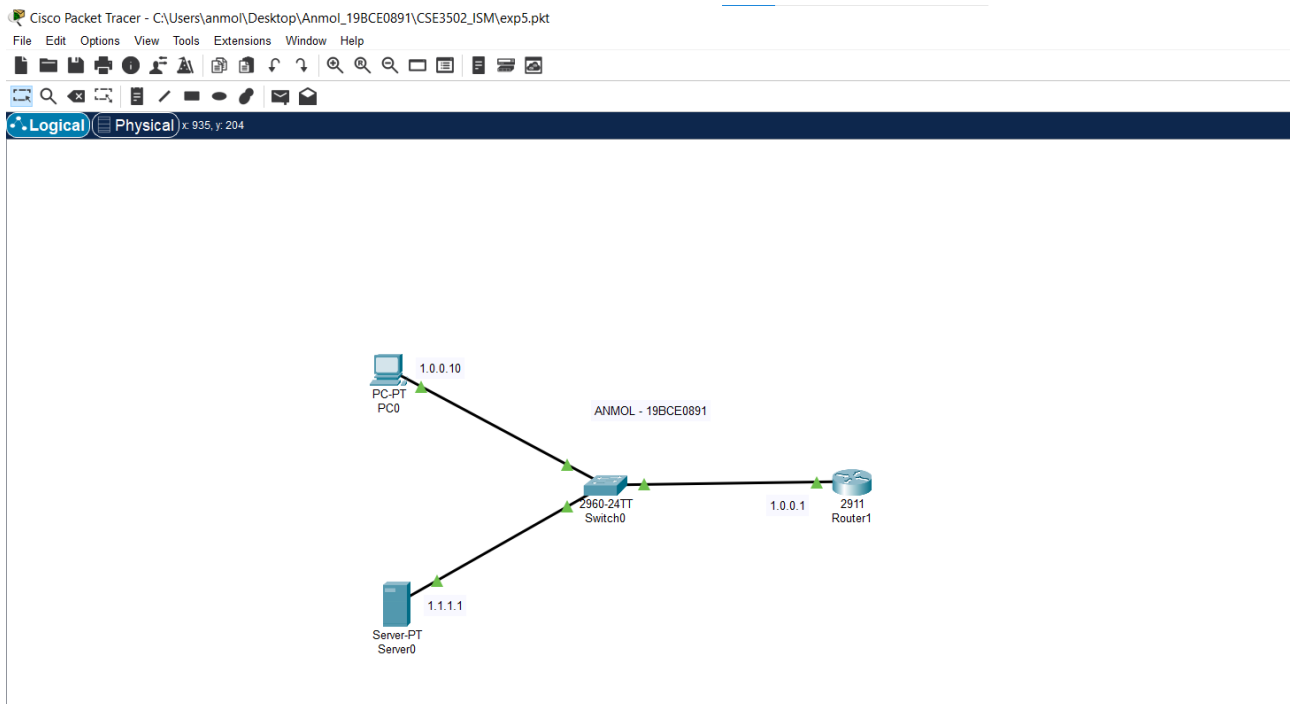

PC CONFIGURATION

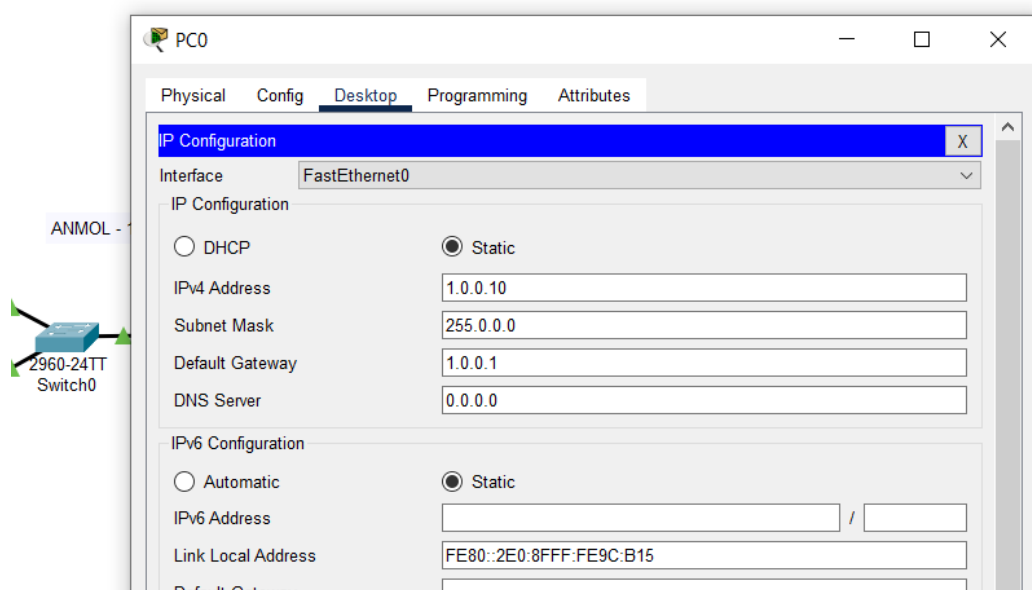

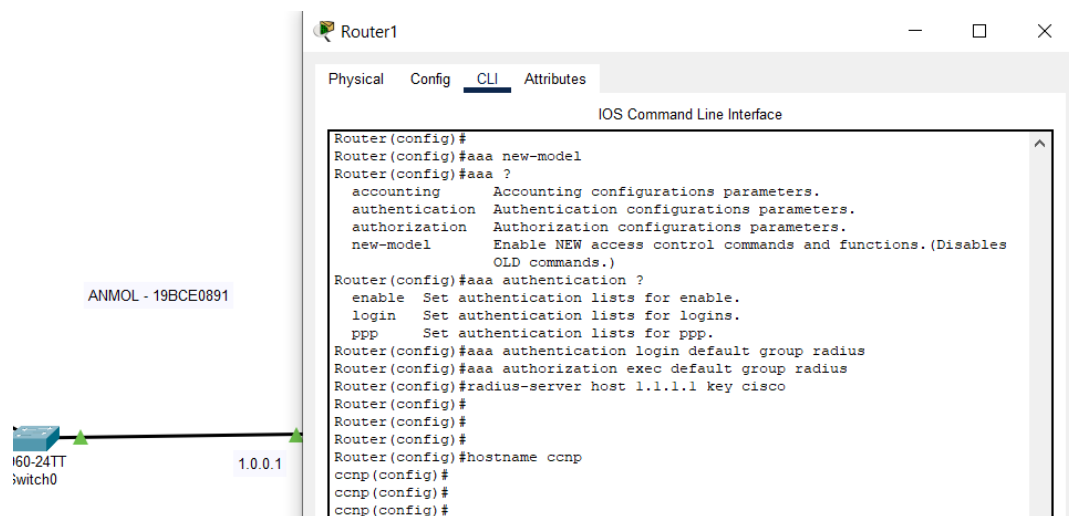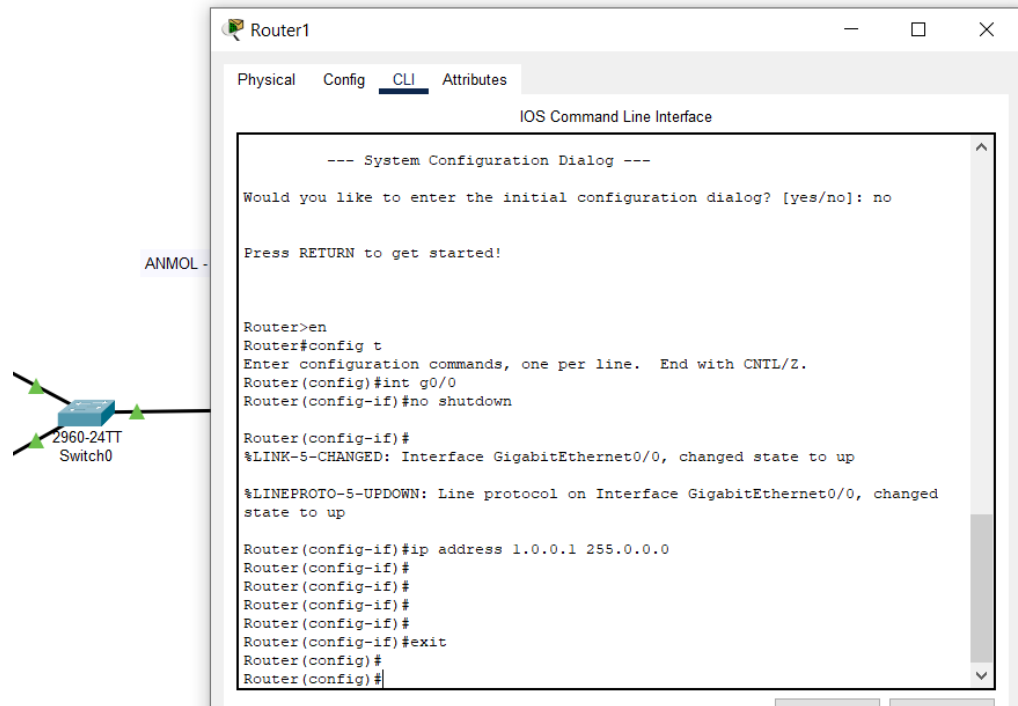ROUTER CONFIGURATION**COMMANDS :**

```

Router>en
Router#config t
Router(config)#int g0/0
Router(config-if)#no shutdown

```


```

Router(config-if)#ip address 1.0.0.1 255.0.0.0
Router(config-if)#exit
Router(config)#
Router(config)#aaa new-model

```

```
Router(config)#aaa authentication login default group radius
Router(config)#aaa authorization exec default group radius
Router(config)#radius-server host 1.1.1.1 key cisco
Router(config)#hostname ccnp
```

SERVER CONFIGURATION

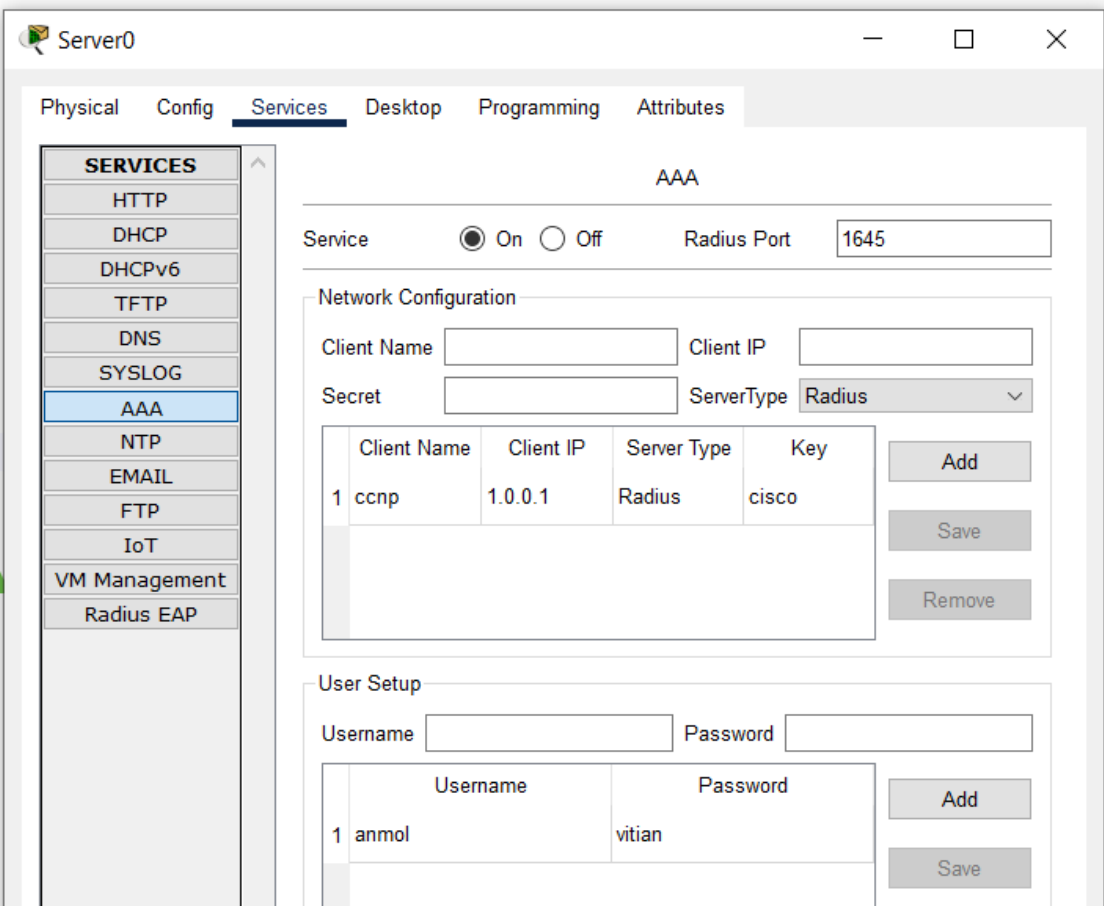

ANMOL - 2960-24TT Switch0

Server0

Physical Config **Services** Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA**
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP

AAA

Service ☒ On ☐ Off Radius Port

Network Configuration

Client Name Client IP


Secret ServerType **Radius**

	Client Name	Client IP	Server Type	Key	
1	ccnp	1.0.0.1	Radius	cisco	<input type="button" value="Add"/> <input type="button" value="Save"/> <input type="button" value="Remove"/>

User Setup

Username Password

	Username	Password	
1	anmol	vitian	<input type="button" value="Add"/> <input type="button" value="Save"/>

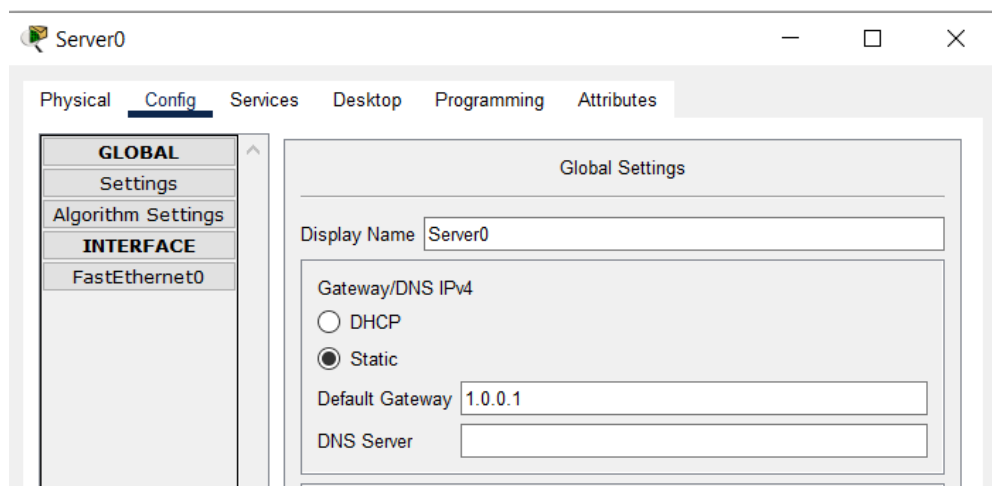

Server0

Physical **Config** Services Desktop Programming Attributes

GLOBAL

- Settings
- Algorithm Settings
- INTERFACE**
- FastEthernet0

Global Settings

Display Name

Gateway/DNS IPv4

☐ DHCP

☒ Static

Default Gateway

DNS Server

OUTPUT :

