


- Notes:
- 1. All dimensions in mm, unless noted
 - 2. Tolerances are +/- 0.5mm, unless noted
 - 3. General Application: Heater for 3D Printer Bed
 - 4. Material to be Heated: MIC6 Aluminum
 - 5. Supply Voltage: 110V and 220V AC mixed voltage heater
 - 6. Ideal Wattage: 300W
 - 7. Start Temperature: 30C
 - 8. Operation Temperature: 80C to 150C
 - 9. Heater Dimensions: See below
 - 10. Integrated Components: Standard Keenovo Thermistor - Center of Heater
 - 11. Mounting Method: High Temperature RTV (DOW CORNING 736)
 - 12. Insulation: Silicone 3mm or equivalent bonded to heater



ANNEX

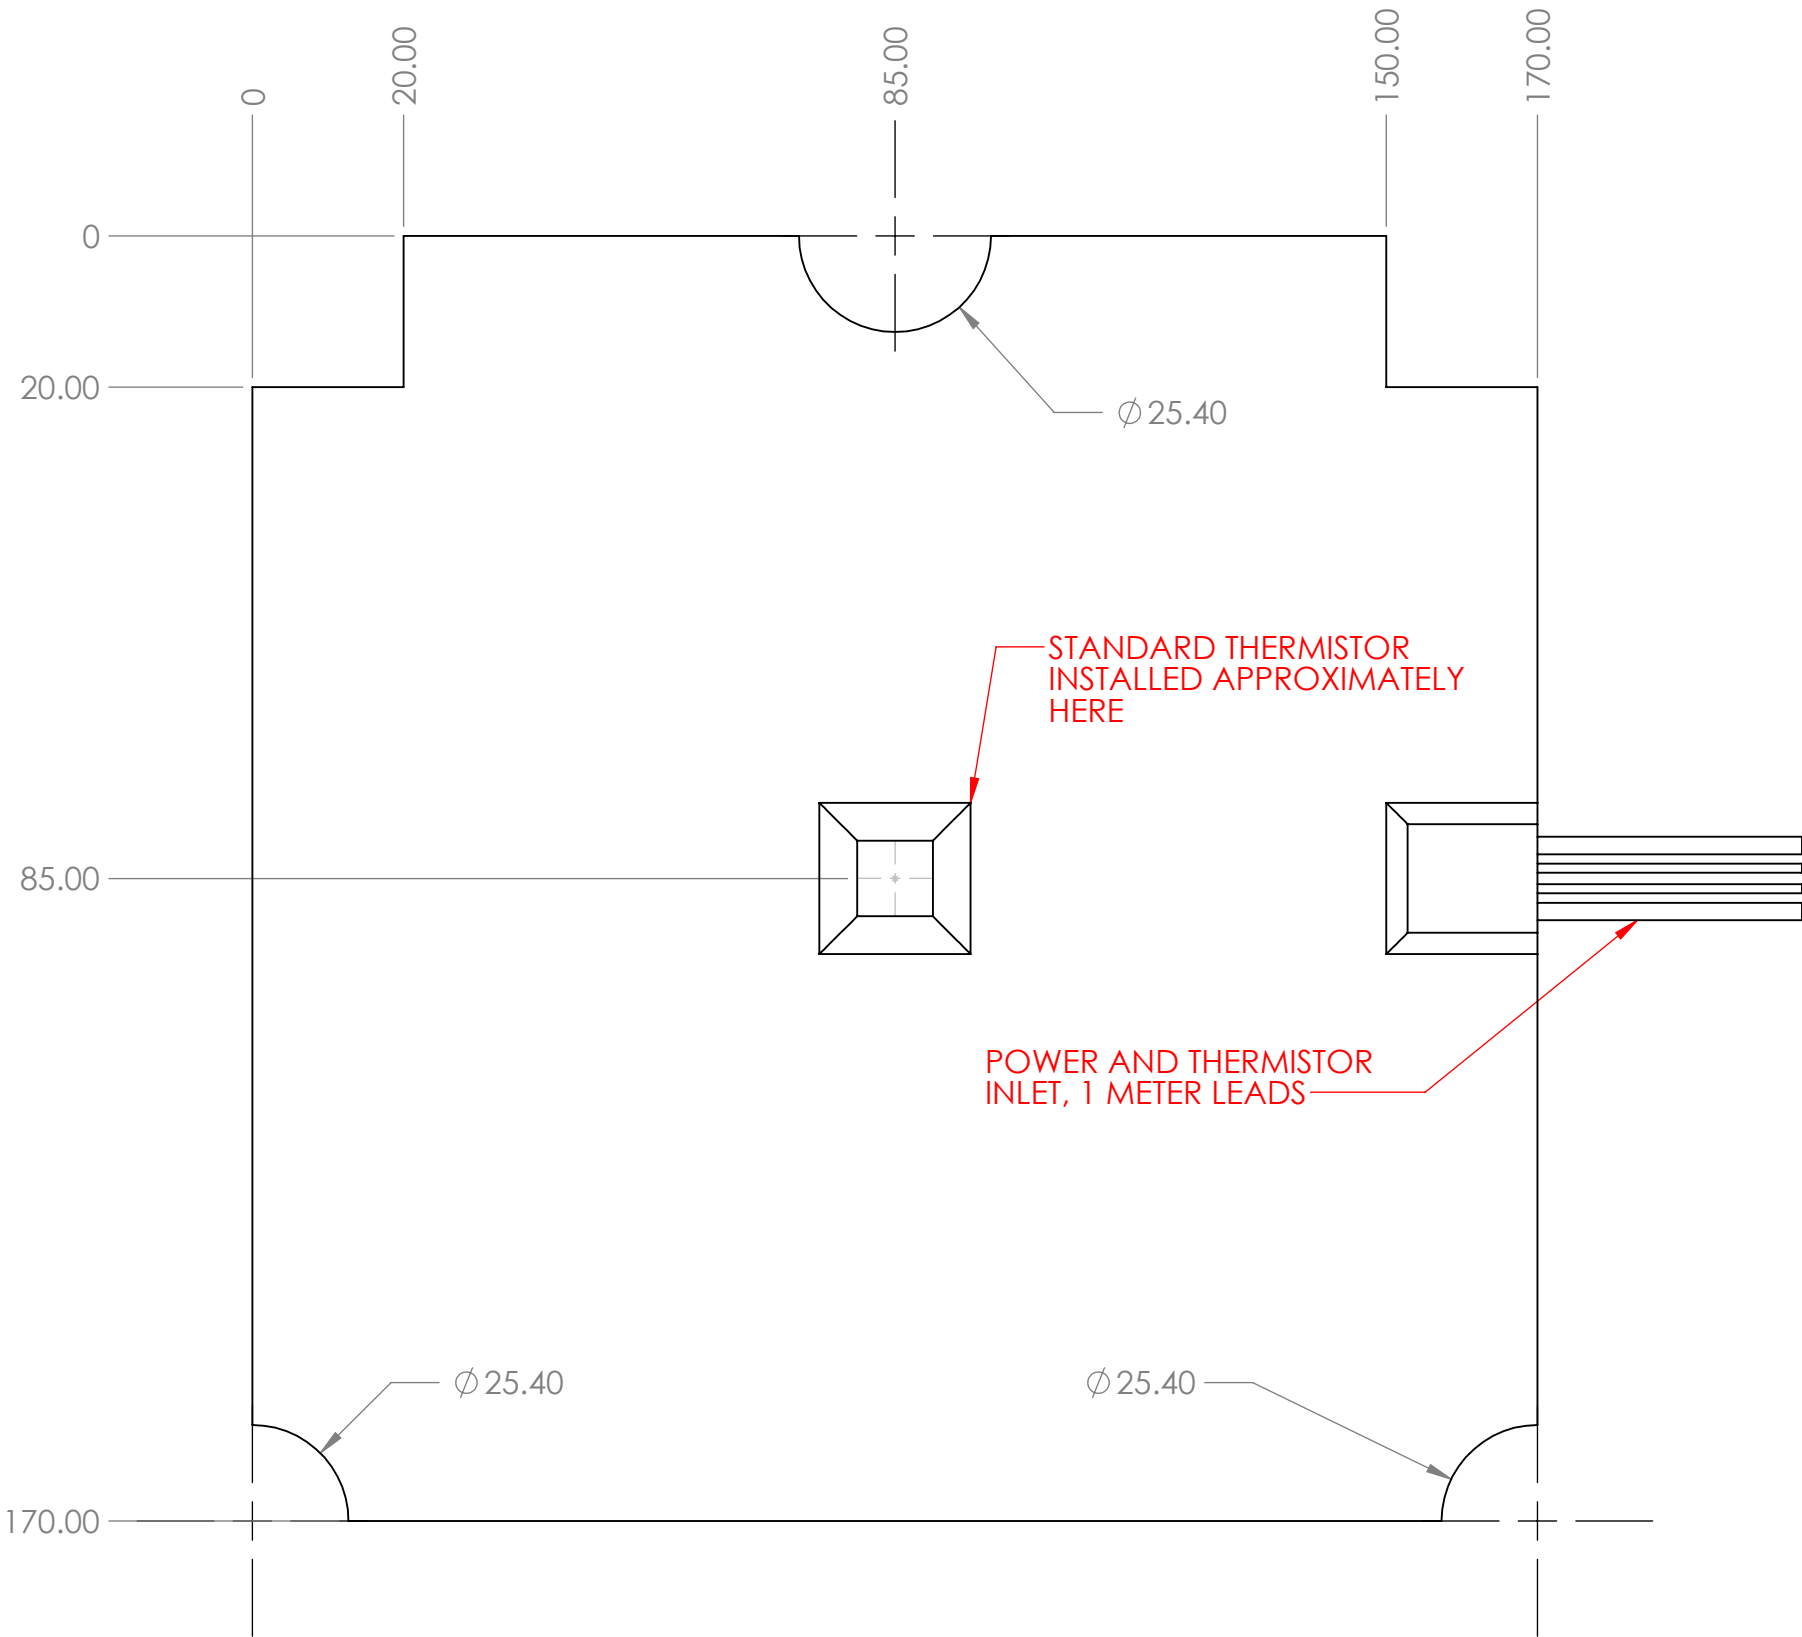

ANNEX Engineering - 180mm Silicone Heater

Scale: 1:1

Author: Trails - Annex Engineering Rev:3 Date: 01-13-2022