McMASTER-CARR®

Black-Oxide Alloy Steel Socket Head Screw

M3 x 0.5 mm Thread Size, 15 mm Long



Delivers Tuesday


$9.50 per pack of 50
91290A572

Thread	
Size	M3
Spacing	Coarse
Pitch	0.5 mm
Type	Metric
Fit	Metric Class 5g6g
Direction	Right Hand
Socket Head Profile	Standard
Fastener Head Type	Socket
Drive Style	Hex
Length	15 mm
Head	
Diameter	5.5 mm
Height	3 mm
Threading	Fully Threaded
Tensile Strength	170,000 psi
Fastener Strength Grade/Class	Class 12.9
Drive Size	2.5 mm
Hardness	Rockwell C41
Material	Black-Oxide Alloy Steel
Performance	High Strength
Specifications Met	DIN 912, ISO 4762
System of Measurement	Metric
Tip Type	Flat
Country of Origin	Taiwan
DFARS Compliance	Not Specialty Metals Compliant
Export Control Classification Number (ECCN)	EAR99
REACH Compliance	REACH (EC 1907/2006) (02/04/2026, 253 SVHC) Compliant
RoHS Compliance	RoHS 3 (2015/863/EU) Compliant
Schedule B Number	731815.9000
U.S.–Mexico–Canada Agreement (USMCA) Qualifying	No

Made of alloy steel, these screws are the standard for high-strength fastening. Use them in high-load applications such as dies, presses, and heavy equipment. The deep, six-point socket keeps the hex key from slipping out and damaging the drive.

Length is measured from under the head.

Black-Oxide Alloy Steel—Typically chosen for their appearance, these screws have a dark, matte coating to create a finished look. They offer minimal corrosion resistance, so they're best for dry environments.

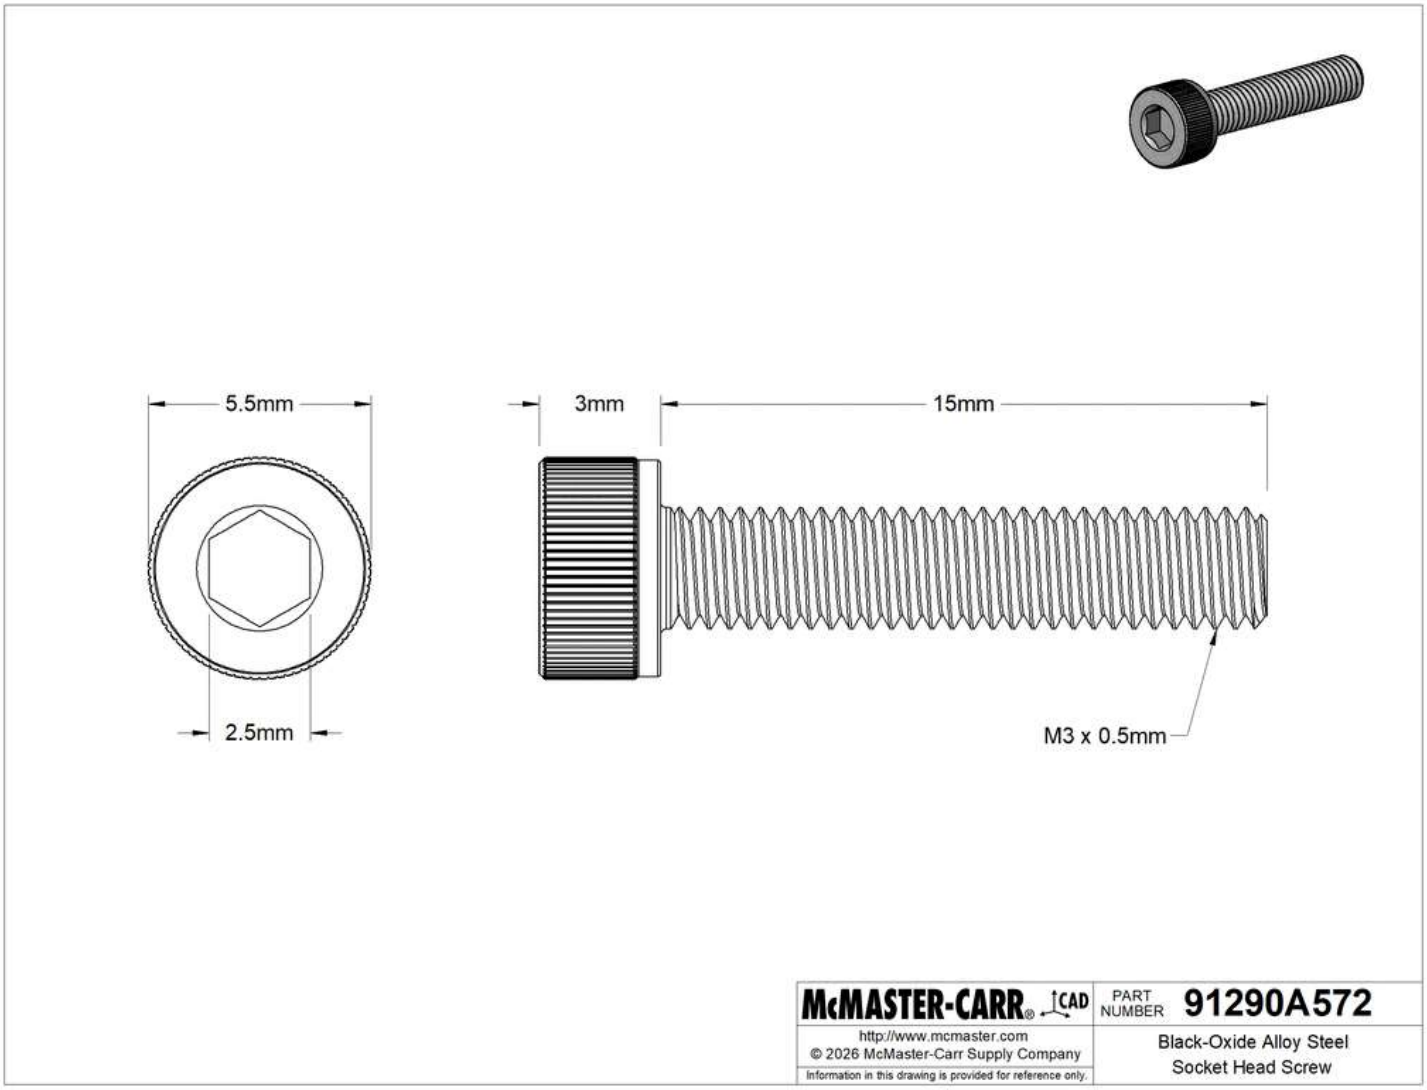

The information in this 3-D model is provided for reference only.