

Ansys Fluent Simulation Report

Analyst	FungKC
Date	3/17/2022 10:51 AM

Table of Contents

[1 System Information](#)

[2 Geometry and Mesh](#)

[2.1 Mesh Size](#)

[2.2 Mesh Quality](#)

[2.3 Orthogonal Quality](#)

[3 Simulation Setup](#)

[3.1 Physics](#)

[3.1.1 Models](#)

[3.1.2 Material Properties](#)

[3.1.3 Cell Zone Conditions](#)

[3.1.4 Boundary Conditions](#)

[3.1.5 Reference Values](#)

[3.2 Solver Settings](#)

[4 Run Information](#)

[5 Solution Status](#)

[6 Report Definitions](#)

[7 Plots](#)

System Information

Application	Fluent
Settings	3d, double precision, pressure-based, standard k-epsilon
Version	21.2.0-10201
Source Revision	fcb749f05e
Build Time	May 28 2021 13:54:12 EDT
CPU	Intel(R) Core(TM) i5-6500
OS	Windows

Geometry and Mesh


Mesh Size

Cells	Faces	Nodes
227299	462362	41686

Mesh Quality

Name	Type	Min Orthogonal Quality	Max Aspect Ratio
solid	Mixed Cell	0.10738016	36.278179

Orthogonal Quality

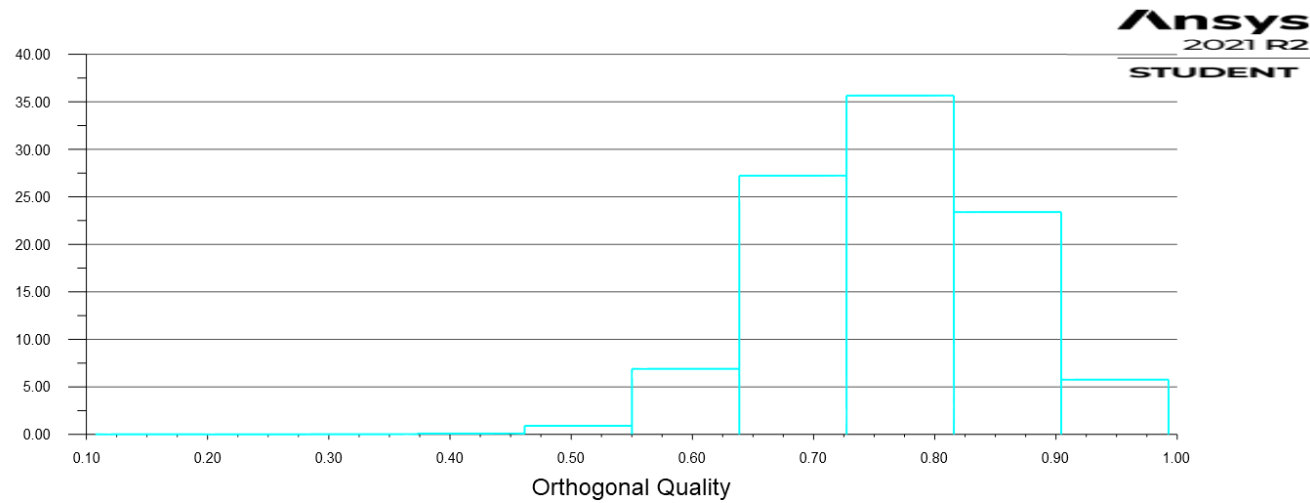

Simulation Setup

Physics

Models

Model	Settings
Space	3D
Time	Steady
Viscous	Standard k-epsilon turbulence model
Wall Treatment	Standard Wall Functions

Material Properties

— Fluid	
— air	
Density	1.225 kg/m^3
Cp (Specific Heat)	1006.43 J/(kg K)
Thermal Conductivity	0.0242 W/(m K)
Viscosity	1.7894e-05 kg/(m s)
Molecular Weight	28.966 kg/kmol
Thermal Expansion Coefficient	0

Speed of Sound	none
— Solid	
— aluminum	
Density	2719 kg/m^3
Cp (Specific Heat)	871 J/(kg K)
Thermal Conductivity	202.4 W/(m K)

Cell Zone Conditions

— Fluid	
— solid	
Material Name	air
Specify source terms?	no
Specify fixed values?	no
Frame Motion?	no
Laminar zone?	no
Porous zone?	no
3D Fan Zone?	no

Boundary Conditions

— Inlet	
— inlet	
Velocity Specification Method	Magnitude, Normal to Boundary
Reference Frame	Absolute
Velocity Magnitude [m/s]	15
Supersonic/Initial Gauge Pressure [Pa]	0
Turbulent Specification Method	Intensity and Viscosity Ratio
Turbulent Intensity [%]	5
Turbulent Viscosity Ratio	10
— Outlet	
— outlet	
Backflow Reference Frame	Absolute
Gauge Pressure [Pa]	0
Pressure Profile Multiplier	1
Backflow Direction Specification Method	Normal to Boundary
Turbulent Specification Method	Intensity and Viscosity Ratio
Backflow Turbulent Intensity [%]	5
Backflow Turbulent Viscosity Ratio	10
Backflow Pressure Specification	Total Pressure
Build artificial walls to prevent reverse flow?	no
Radial Equilibrium Pressure Distribution	no
Average Pressure Specification?	no
Specify targeted mass flow rate	no
— Symmetry	
symmetry	symmetry
— Wall	

— wall-13	
Wall Motion	Stationary Wall
Shear Boundary Condition	No Slip
Wall Roughness Height [m]	0
Wall Roughness Constant	0.5
— wall-12	
Wall Motion	Stationary Wall
Shear Boundary Condition	No Slip
Wall Roughness Height [m]	0
Wall Roughness Constant	0.5
— walls	
Wall Motion	Stationary Wall
Shear Boundary Condition	No Slip
Wall Roughness Height [m]	0
Wall Roughness Constant	0.5
— plane	
Wall Motion	Stationary Wall
Shear Boundary Condition	No Slip
Wall Roughness Height [m]	0
Wall Roughness Constant	0.5

Reference Values

Area	1 m^2
Density	1.225 kg/m^3
Enthalpy	0 J/kg
Length	1 m
Pressure	0 Pa
Temperature	288.16 K
Velocity	1 m/s
Viscosity	1.7894e-05 kg/(m s)
Ratio of Specific Heats	1.4
Yplus for Heat Tran. Coef.	300

Solver Settings

— Equations	
Flow	True
Turbulence	True
— Numerics	
Absolute Velocity Formulation	True
— Under-Relaxation Factors	
Pressure	0.3
Density	1
Body Forces	1

Momentum	0.7
Turbulent Kinetic Energy	0.8
Turbulent Dissipation Rate	0.8
Turbulent Viscosity	1
— Pressure-Velocity Coupling	
Type	SIMPLE
— Discretization Scheme	
Pressure	Second Order
Momentum	Second Order Upwind
Turbulent Kinetic Energy	Second Order Upwind
Turbulent Dissipation Rate	Second Order Upwind
— Solution Limits	
Minimum Absolute Pressure [Pa]	1
Maximum Absolute Pressure [Pa]	5e+10
Minimum Temperature [K]	1
Maximum Temperature [K]	5000
Minimum Turb. Kinetic Energy [m^2/s^2]	1e-14
Minimum Turb. Dissipation Rate [m^2/s^3]	1e-20
Maximum Turb. Viscosity Ratio	100000

Run Information

Number of Machines	1
Number of Cores	4
Case Read	19.813 seconds
Iteration	401.218 seconds
AMG	111.081 seconds
Virtual Current Memory	0.819405 GB
Virtual Peak Memory	0.965122 GB
Memory Per M Cell	3.00075

Solution Status

Iterations: 1000

	Value	Absolute Criteria	Convergence Status
continuity	0.006275103	1e-06	Not Converged
x-velocity	9.465269e-08	1e-06	Converged
y-velocity	1.218611e-07	1e-06	Converged


	Value	Absolute Criteria	Convergence Status
z-velocity	1.91523e-07	1e-06	Converged
k	0.002970145	1e-06	Not Converged
epsilon	0.0001033837	1e-06	Not Converged

Report Definitions


lift	15.06475
drag	2.424199

Plots

Residuals

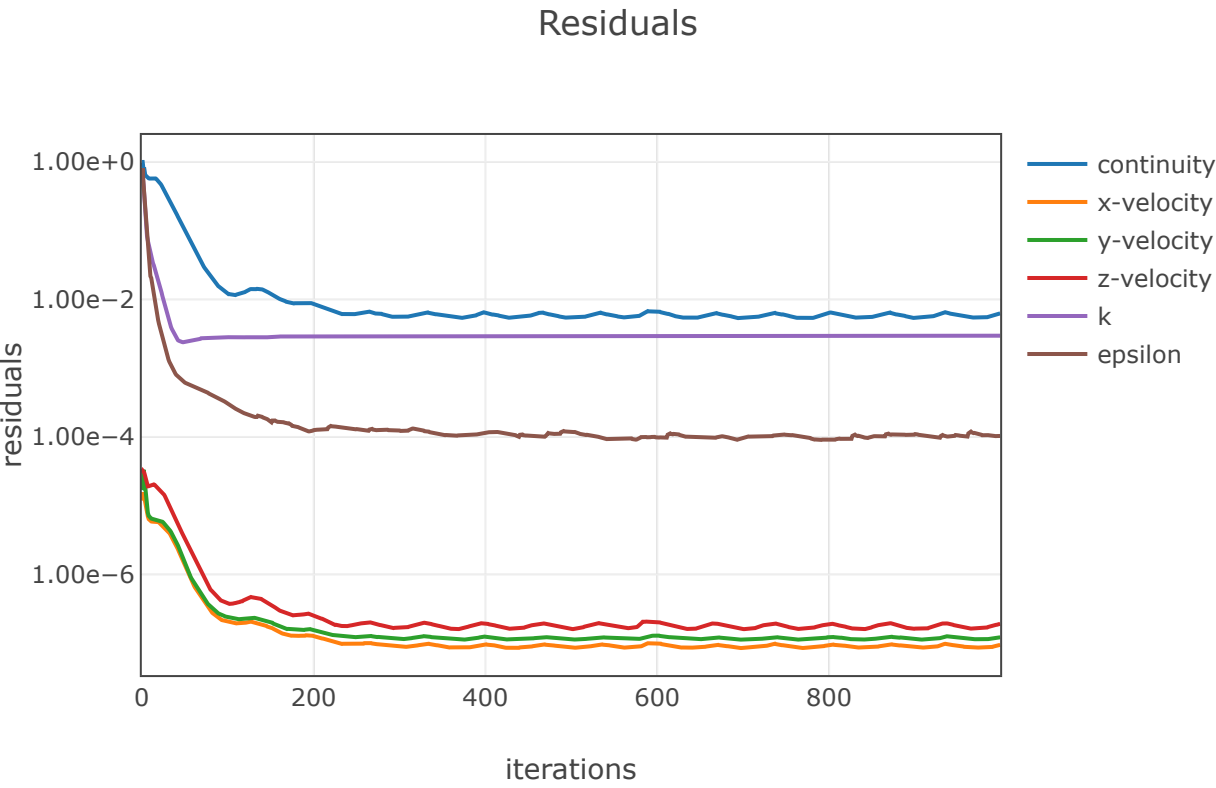

lift-rplot

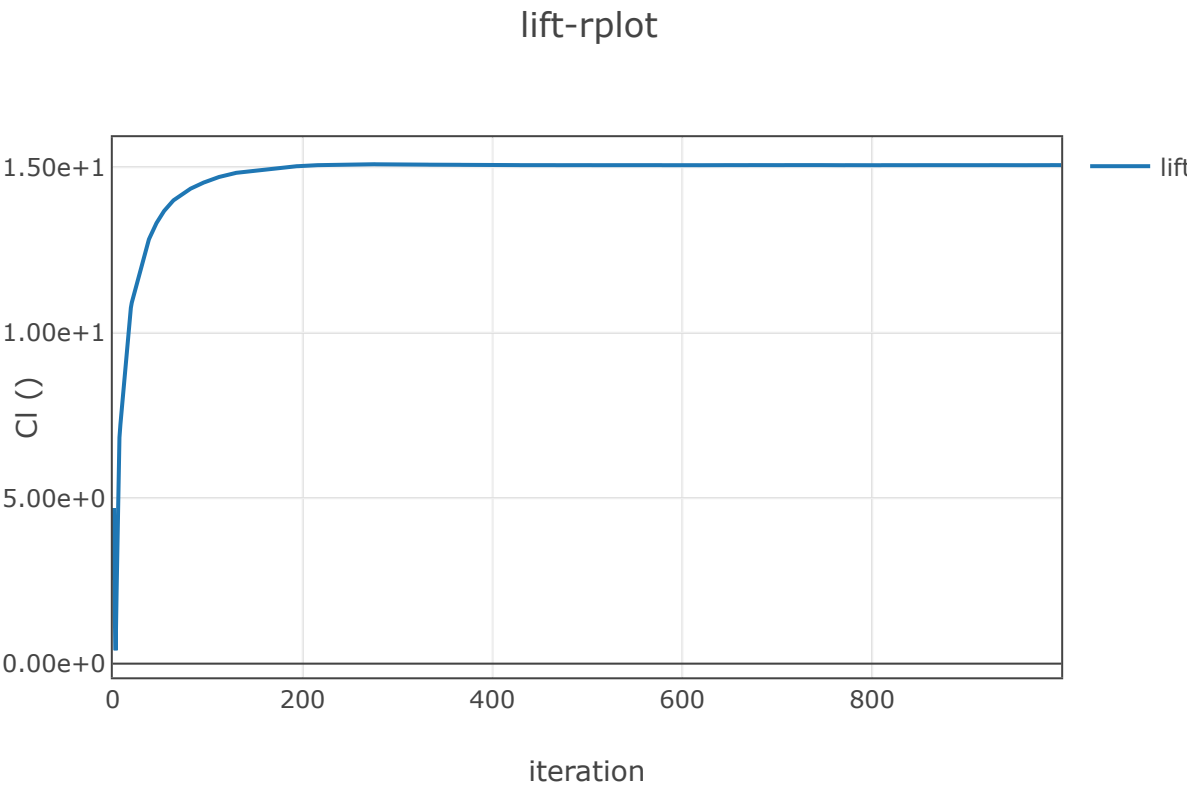

drag-rplot

drag-rplot

