


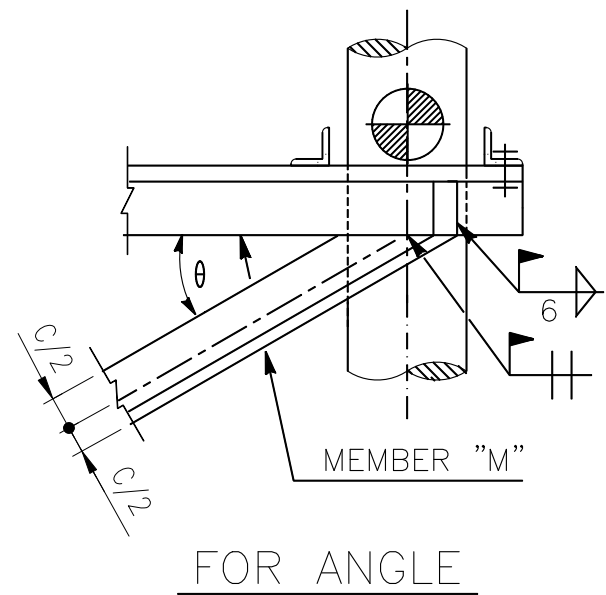

MEMBER "M"	C	D	H (MAX.)	$\theta = 30^\circ$	$\theta = 45^\circ$
				G	G
L75X75X9	75	75	950	1.155H+ 92	1.414H+ 80
C100X50X5	100	50	950	1.155H+115	1.414H+100
C125X65X6	125	65	1750	1.155H+144	1.414H+125
C150X75X9	150	75	1750	1.155H+173	1.414H+150
C180X75X7	180	75	1750	1.155H+208	1.414H+180
C200X90X8	200	90	1750	1.155H+231	1.414H+200

LINE SIZE "A"	E	TRUNNION SIZE "B"
2"	85	1 1/2"
3"	100	2"
4"	113	2"
6"	140	3"
8"	165	4"
10"	195	6"
12"	215	8"
14"	230	10"
16"	255	10"
18"	280	12"
20"	305	12"
24"	355	14"

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

_____ MODIFY DIMENSION "E"(IN mm) IF ANY
 _____ SEE NOTE 4
 _____ DENOTE DIMENSION "H"(IN mm)
 _____ DENOTE MEMBER "M"
 _____ DENOTE SUPPORTED LINE SIZE "A"
 _____ DENOTE TYPE NO.

2. THE TRUNNION SIZE SHALL BE CHECKED BY SH'TS D-72,73 & 74.

$$3. \quad H = F - \sqrt{R^2 - E^2}$$

4. A: FOR $\theta = 30^\circ$, B: FOR $\theta = 45^\circ$

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
DETAIL OF PIPE SUPPORT TYPE-42						D-50	
						REV. 1	