


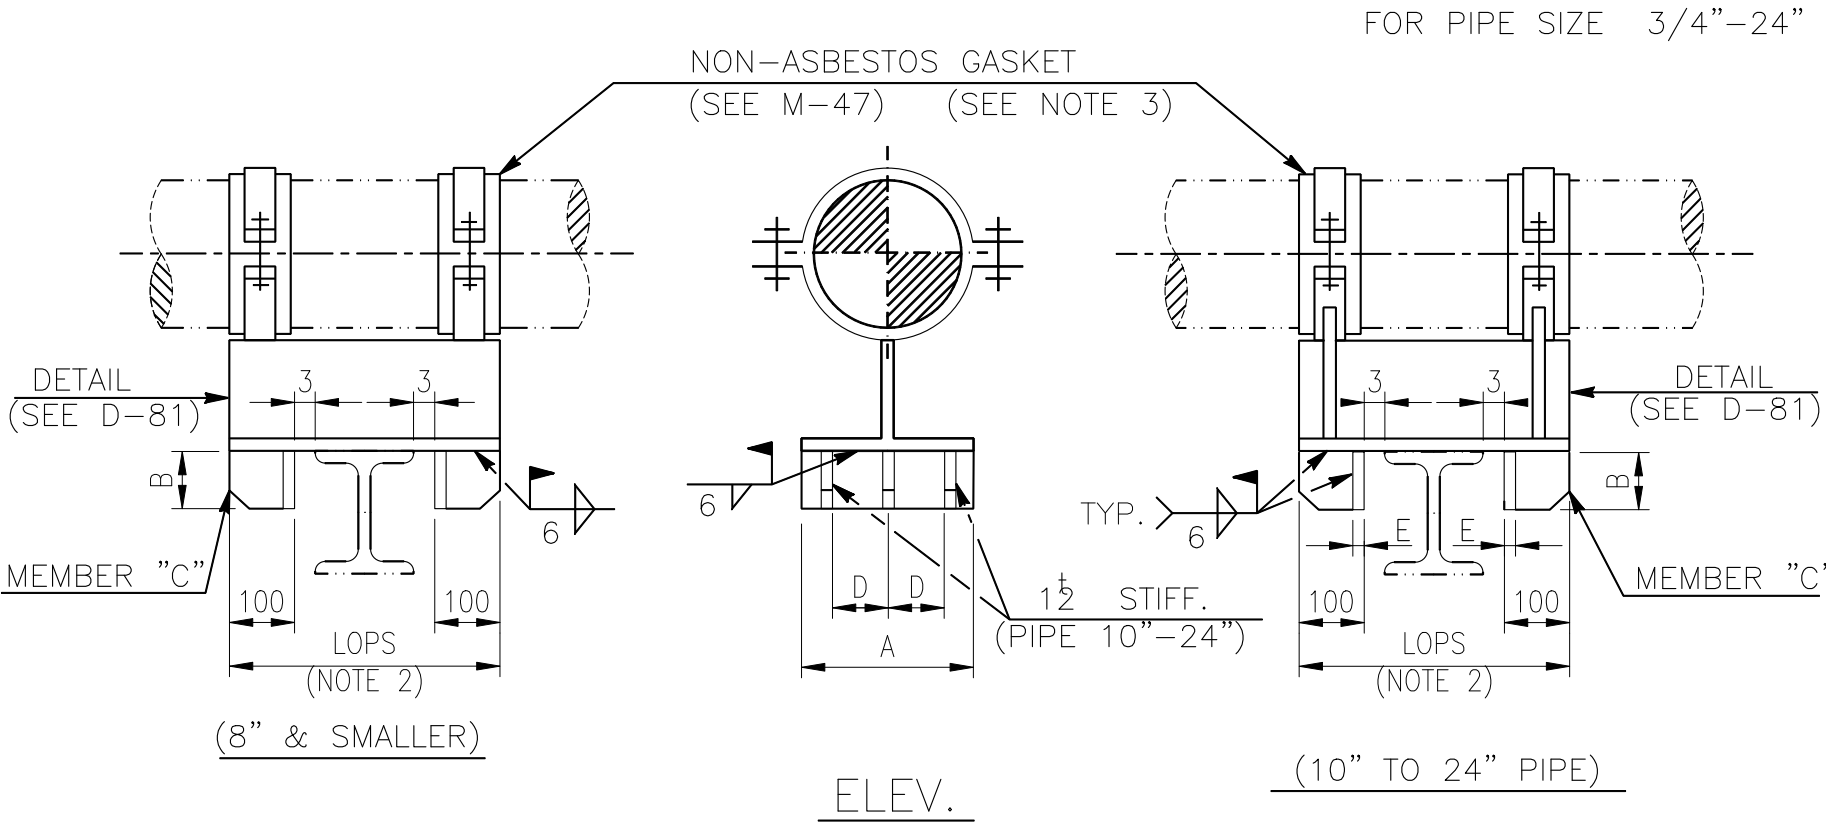


DIMENSIONS (mm)

LINE SIZE	A	B	C	D	E
3/4"	100	100	CUT FROM H200X100X5.5X8	-	-
1"	100	100		-	-
1 1/2"	100	100		-	-
2"	100	100		-	-
2 1/2"	100	100		-	-
3"	100	100		-	-
4"	100	100		-	-
5"	100	100		-	-
6"	100	100		-	-
8"	100	100		-	-
10"	200	200	CUT FROM H200X200X8X12	70	-
12"	200	200		70	-
14"	200	200		70	-
16"	300	250	FAB. FROM 12 ^t	100	12
18"	300	250		100	12
20"	300	250		100	12
24"	350	250		100	12

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS:

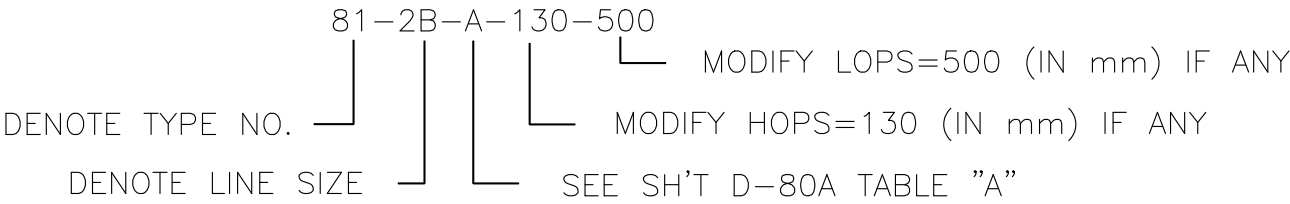

2. PIPE SHOE LENGTH (SAY LOPS) TO SUIT BEAM WIDTH IN FIELD.

3. THIS TYPE IS USUALLY USED FOR ALLOY STEEL AND STAINLESS STEEL LINES (MAX. LINE TEMP. : 750°F).

4. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.

FILE: D-97M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-97	
DATE	7/15/'24		APPR.	CHEN			
DETAIL OF PIPE SUPPORT TYPE-81 (1 OF 2)						REV. 1	