


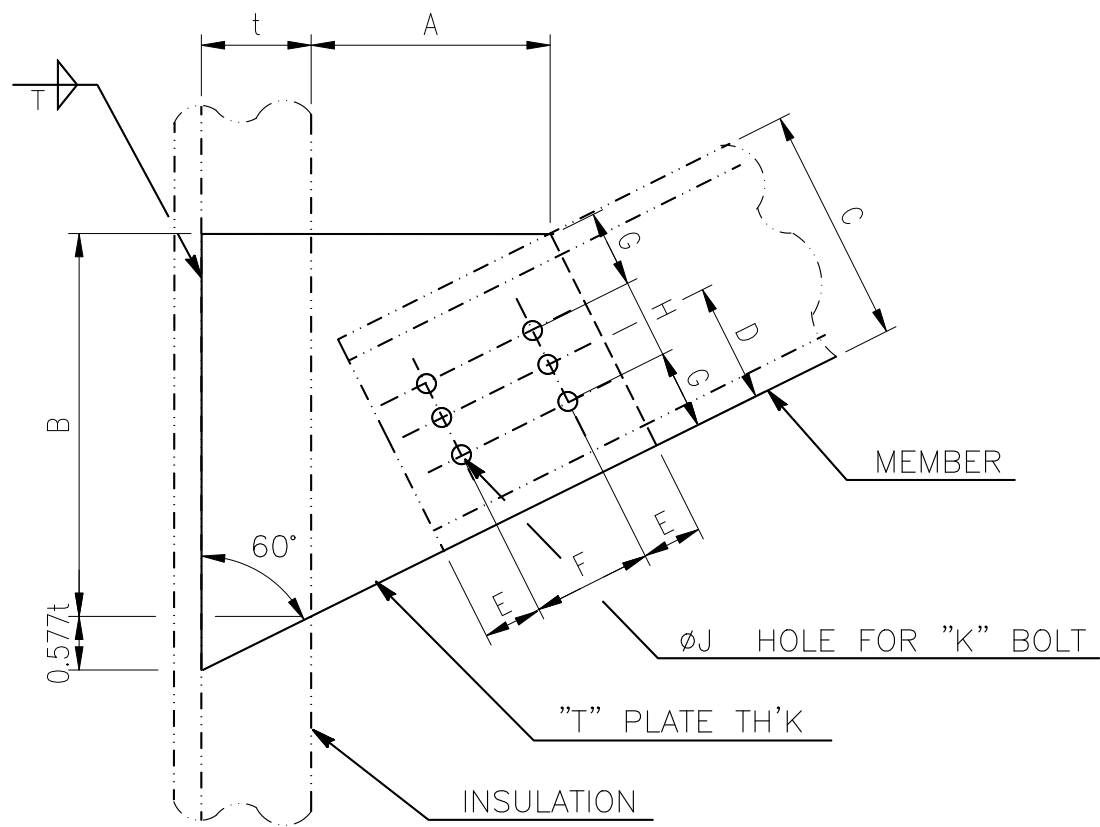

DIMENSION (mm)

TYPE	MEMBER	A	B	C	D	E	F	G	H	ØJ	K	T
LGP-E-1	L50X50X6	125	130	50	30	30	60	—	—	19	5/8"	9
LGP-E-2	L65X65X6	135	155	65	35	30	70	—	—	22	3/4"	9
LGP-E-3	L75X75X9	135	165	75	40	30	70	—	—	22	3/4"	9
LGP-E-4	C100X50X5	145	200	100	50	30	80	—	—	22	3/4"	10
LGP-E-5	C125X65X6	145	230	125	—	30	80	35	55	22	3/4"	10
LGP-E-6	C150X75X9	165	270	150	—	30	100	40	70	22	3/4"	12
LGP-E-7	C180X75X7	185	315	180	—	35	110	45	90	22	3/4"	12
LGP-E-8	C200X90X8	195	345	200	—	35	120	50	100	22	3/4"	12
LGP-E-9	C250X90X9	220	415	250	—	40	140	60	130	25	7/8"	16

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :



2. MATERIAL: SAME AS THE METAL TO WHICH IT IS CONNECTED

3. IF REINFORCING PAD IS ADDED, NOTE THAT THE PAD THICKNESS IS INCLUDED IN THE DIMENSION A OR A+t.

FILE: M-36M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
BY	SHIH		CHK.	YANG		HP6-DSD-A4-500-001	
DATE	7/15/'24		APPR.	CHEN		M-36	REV. 1

LUG PLATE
TYPE-E