


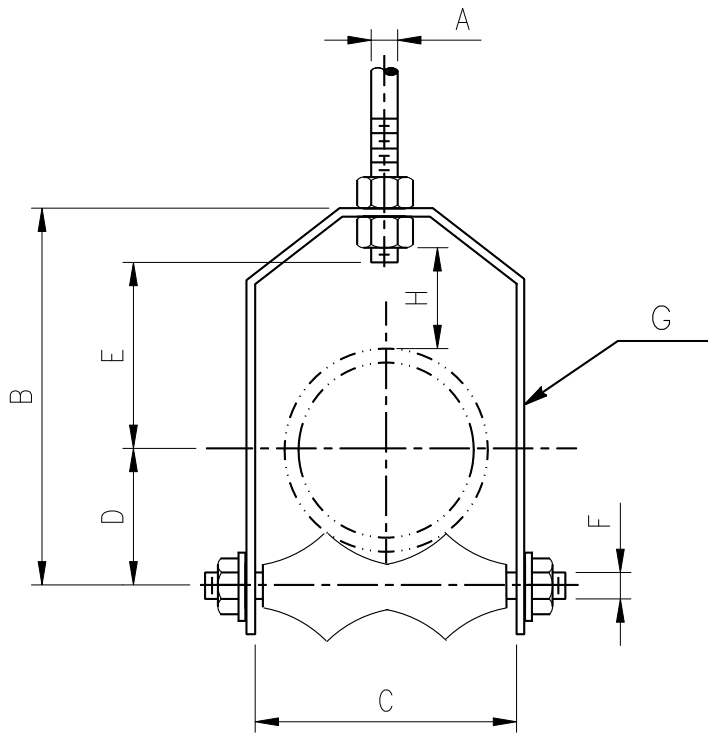


DIMENSIONS (mm)

TYPE	PIPE ROLL SIZE	MAX. OD OF COVERING	MAX. RECOM. LOAD (kg)	A	B	C	D	E	F	G	H
PR-A-2?B	2.5"	3"	100	1/2"	146	83	49	73	1/2"	5X32	43
PR-A- 3B	3"	3.5"	140	1/2"	162	98	57	79	1/2"	5X32	41
PR-A-3?B	3.5"	4.5"	175	5/8"	178	111	65	89	5/8"	6X32	43
PR-A- 4B	4"	4.5"	215	5/8"	192	125	71	92	5/8"	6X38	41
PR-A- 5 B	5"	5.5"	310	3/4"	232	152	87	114	3/4"	9X51	49
PR-A- 6 B	6"	6.5"	355	3/4"	262	181	102	127	3/4"	9X64	48
PR-A- 8 B	8"	9"	355	3/4"	322	235	130	156	3/4"	9X64	51
PR-A-10B	10"	11"	435	7/8"	383	286	162	184	7/8"	9X64	52
PR-A-12B	12"	13"	545	7/8"	443	337	189	213	7/8"	12X64	57
PR-A-14B	14"	14.5"	545	1"	479	368	213	222	1"	12X64	51
PR-A-16B	16"	16.5"	545	1"	529	419	238	246	1"	12X64	49
PR-A-18B	18"	18.5"	635	1"	603	470	265	291	1"	12X76	71
PR-A-20B	20"	20.5"	725	1.5"	660	521	295	311	1.5"	16X76	64

NOTES:

1. DESIGNATION NUMBER DENOTE AS FOLLOWS:

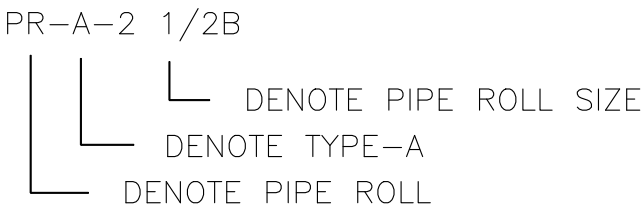

2. MATERIAL: CAST IRON ROLL; CARBON STEEL YOKE, ROLL ROD AND HEX NUTS.

3. REF. GRINNELL FIG. 181 OR EQ.

FILE: M-13M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						PIPE ROLL TYPE-A		ENGINEERING STANDARD	
								HP6-DSD-A4-500-001	
								REV. 1	
BY	SHIH		CHK.	YANG				M-13	
DATE	7/15/'24		APPR.	CHEN					